

# **Caterpillar Performance Handbook**

---

**Edition 31**

**CATERPILLAR<sup>®</sup>**

# CONTENTS

	Page
Preface .....	4
Operator and Machine Protection .....	5
Operator Training .....	5
Machine Modifications .....	6
Equipment Options .....	6
Machine Protection .....	6
Fire Prevention .....	6
Safety Regulations .....	7
Sound Suppression .....	7
Replacement Parts Warning .....	7
Nomenclature .....	8

<b>TRACK-TYPE TRACTORS</b>	<b>1</b>
<b>AGRICULTURAL EQUIPMENT</b>	<b>2</b>
<b>MOTOR GRADERS</b>	<b>3</b>
<b>SKID STEER LOADERS</b>	<b>4</b>
<b>EXCAVATORS</b>	<b>5</b>
<b>BACKHOE LOADERS</b>	<b>6</b>
<b>FOREST PRODUCTS</b>	<b>7</b>
<b>PIPELAYERS</b>	<b>8</b>
<b>WHEEL TRACTOR-SCRAPERS</b>	<b>9</b>
<b>CONSTRUCTION &amp; MINING TRUCKS/TRACTORS</b>	<b>10</b>
<b>ARTICULATED TRUCKS</b>	<b>11</b>
<b>WHEEL TRACTORS • SOIL COMPACTORS</b>	<b>12</b>
<b>WHEEL LOADERS</b>	<b>13</b>
<b>TRACK LOADERS</b>	<b>14</b>
<b>INTEGRATED TOOLCARRIERS</b>	<b>15</b>
<b>TELESCOPIC HANDLERS</b>	<b>16</b>
<b>PAVING PRODUCTS</b>	<b>17</b>
<b>ELPHINSTONE UNDERGROUND MINING MACHINES</b>	<b>18</b>

# CATERPILLAR® PERFORMANCE HANDBOOK

a CAT® publication by Caterpillar Inc., Peoria, Illinois, U.S.A.

OCTOBER 2000

Performance information in this booklet is intended for estimating purposes only. Because of the many variables peculiar to individual jobs (including material characteristics, operator efficiency, underfoot conditions, altitude, etc.), neither Caterpillar Inc. nor its dealers warrant that the machines described will perform as estimated.

Materials and specifications are subject to change without notice.

<b>HYDROMECHANICAL WORK TOOLS</b>	<b>19</b>
<b>ENGINES</b>	<b>20</b>
<b>FORMER MODELS</b>	<b>21</b>
<b>OWNING &amp; OPERATING COSTS</b>	<b>22</b>
<b>TIRES</b>	<b>23</b>
<b>MINING AND EARTHMOVING</b>	<b>24</b>
<b>STOCKPILE COAL HANDLING</b>	<b>25</b>
<b>LAND CLEARING</b>	<b>26</b>
<b>WASTE DISPOSAL</b>	<b>27</b>
<b>TABLES</b>	<b>28</b>
<b>INDEX</b>	<b>29</b>

# PREFACE

Machine performance must ultimately be measured in unit cost of material moved, a measure that includes both production and costs. Factors bearing directly on productivity include such things as weight to horsepower ratio, capacity, type of transmission, speeds and operating costs. The Performance Handbook considers these factors in detail. There are other less direct machine performance factors for which no tables, charts or graphs are possible. Serviceability, parts availability and operator convenience are examples. In comparing machine performance, all factors should be considered. This Handbook is intended as an aid which, when coupled with experience and a good knowledge of local conditions, can assist in estimating true machine performance.

Many sections of the Handbook include tables or curves showing cycle times or hourly production figures for Caterpillar machines under certain conditions. Statements of conditions always accompany or precede the curves or tables. Before using any performance information in this Handbook, a complete understanding of the qualifying conditions is essential. The data is based on field testing, computer analysis, laboratory research and experience; and every effort has been made to assure their correctness.

However, all such data is based upon 100% efficiency in operation — a status which cannot be achieved continuously even under ideal conditions. Thus, in using such performance and production data, it is necessary to correct the results indicated in the handbook tables by appropriate factors. This allows for the anticipated actual job efficiency, operator efficiency, material characteristics, haul road conditions, altitude and other factors which may reduce performance or production on a particular job.

Methods for estimating machine owning and operating costs vary widely, depending on locality, industry practices, owner preferences and other factors. One method is suggested in the Handbook section on Owning and Operating Costs. When used with good judgment, it has provided reasonably accurate estimates in the past. Included in the Owning and Operating Section are guidelines, based on working conditions, to assist in estimating consumption of fuel and lubricants, tire life and repair costs for Caterpillar machines. However, what one Handbook user regards as “excellent” conditions, another may consider “severe” or “average”, depending on his own experience and basis of comparison. Therefore, these guidelines should be considered only approximations.

Caterpillar Inc. has made every effort to assure that the information contained in this Handbook is accurate and is a fair statement of the results to be achieved in the circumstances indicated. However, because of the many variables involved in estimating the production or performance of earthmoving machinery, their consumption of fuel and lubricants, tire life and repair costs, and the possibility of inadvertent errors or omissions in assembling this data, Caterpillar cannot and does not imply that all data in this book are complete nor that this level of performance will be achieved on a given job.

Specifications shown in this Handbook were current at time of printing. However, due to Caterpillar’s many machine improvement programs, specifications and materials may change without notice. For current specifications relating to a machine’s performance, please refer to the most recent Caterpillar product specification sheet.

**Caterpillar Inc.**

# OPERATOR AND MACHINE PROTECTION

A well trained operator, working under suitable conditions, utilizing a modern, properly-equipped machine provides a machine-operator team capable of giving maximum production. These factors, along with appropriate job site rules and communication procedures, are essential to coordinate people and machines working together. Appropriately protected and maintained machines are less likely to suffer premature component failure or damage, and give operators the confidence and assurance they need to carry out their work. Furthermore, training is not complete until the operator reads, understands and agrees to follow the instructions provided in the Operation and Maintenance Manual included with every Caterpillar machine.

Employers have a duty to provide a safe work place for their employees. The purchaser of a Caterpillar machine has a duty to review his/her particular application and job site for the machine to identify potential hazards inherent to that application or job site. Based on the results of this hazard analysis, the appropriate operator and machine protection configuration can be determined.

Caterpillar designs, builds, and tests its products to ensure the safety of operators, maintenance persons, service persons, and bystanders. Caterpillar provides as standard equipment the appropriate operator and machine protection for most applications. However, particular applications may require additional operator and/or machine protection. Caterpillar offers related options for most such applications. However, there may be very special applications where the Caterpillar Dealer or the Purchaser may want to fabricate, or request Caterpillar to provide, custom or special guarding. Your Caterpillar Dealer can help you with this hazard analysis and guarding configuration process.

## I. Operator Training and Protection Practices

*Remember that any kind of machine or mechanical device can be hazardous if not kept in good condition, or if operated by careless or improperly trained operators, or if operated in an irresponsible manner.*

Listed below are some recommended basic steps that can be broadly applied to most work environments:

- Train operators for the job they are assigned to do. The length and type of training must comply with governmental and local regulations wherever they apply. As an example, machine operators in mining activities must be trained in accordance with Mine Safety and Health Administration (MSHA) regulations. Where specific regulations do not apply, no operator should be assigned to a job until he or she meets the following minimum requirements:
  - Completes proper training to operate the assigned machine and understands that seat belts must be worn whenever seated in operator's compartment.
  - Reads and understands the Operation & Maintenance manual for that machine, and knows that a copy of that manual is stored in the operator's compartment.
  - Reads and understands the EMI (Equipment Manufacturer's Institute), CIMA (Construction Industry Manufacturers Association), or any other furnished manual related to rules for safe machine operation and identification of hazards.
  - Has appropriate personal safety equipment and knows how to use it. This includes such things as hard hat, gloves, safety glasses, hearing protection and safety shoes.
  - Knows what the job requirements are, what other machines are working in the area, and is aware of any hazardous conditions that may arise.
- Be sure operators are alert and in proper physical and mental condition to perform their work assignments safely. No machine should be operated by a person who is drowsy, under the affect of medicines or drugs, suffers blackouts, or is suffering from any physical or mental distraction that could contribute to unsafe operation.

- Maintain proper job conditions and working procedures. Check the job for possible hazards, both above and below ground level. Look for all possible sources of danger to the operator and others in the area. Pay particular attention to conditions which may be hazardous or near the operating limits of the machine: e.g., side slopes, steep grades, potential overloads, etc. Examine the work site for restricted traffic patterns, obstructed views, congestion, etc. Hazardous work conditions should be corrected wherever possible and adequate warnings should be posted when applicable.
- Provide the correct machine to handle the job and equip it properly for the job to provide the necessary operator protection. Check for compliance with all applicable governmental and local regulations. It is the machine owner's or employer's legal responsibility to see that his equipment complies with, and is operated in accordance with, all such requirements.
- Make sure the machine is properly maintained. A walk-around inspection should be performed at the beginning of each shift before the machine is placed in operation. If this inspection reveals any problems that could affect safety, the machine must not be operated until these problems are corrected. Some examples include:
  - Loose, bent or missing grab irons, railings or steps;
  - Worn, cut or missing seat belts (any seat belt over three (3) years old must be replaced regardless of condition);
  - Damaged windows in the operator's compartment;
  - Worn, rubbing or abraded electrical insulation and hoses;
  - Any fluid leaks; and
  - Missing or damaged guards.

It is the machine owner's or employer's responsibility to ensure the machine is properly maintained. Your Caterpillar Dealer will be glad to assist you in selecting and equipping the machine best suited for your job and in providing maintenance for your machines.

## II. Machine Modifications

Modifications must not be made to the machine that:

- Interfere with operator visibility;
- Interfere with ingress, egress from the machine;
- Exceed the rated payload or gross combination weight of the machine resulting in overloading the braking and/or steering system or the roll-over protective structure (ROPS) capacity rating (shown on a plate affixed to the ROPS); or
- Place objects in the cab that intrude into the operator's space or that are not firmly fixed into place.

## III. Operator-related Equipment Options

Each job presents unique conditions that must be taken into account. Consider direct dangers to the operator as well as all possible sources of distraction that could reduce operator efficiency and increase the chances of costly and dangerous mistakes. Climate-controlled, sound-suppressed cabs, and special exterior lighting are options available from Caterpillar that can address requirements of special working environments.

"Flexible" machines include hydraulic excavators (track-type, wheel-type, and compact), skid-steer loaders, backhoe loaders and integrated tool-carriers. Work tools or any tool used in hazardous applications like demolition and logging, can create a need for special operator guarding. When flying debris from impact, cutting, shearing or sweeping attachments is present, additional protective devices such as a front screen, Falling Object Guarding System (FOGS, includes top & front guarding), thick polycarbonate windshields or a combination of these is recommended by Caterpillar. Contact your Caterpillar Dealer for operator guarding options on your machine.

## IV. Machine Protection

Check the job for unusually demanding conditions that could cause premature failure or excessive wear of machine components. Additional protective devices such as heavy-duty radiator guards, crankcase guards, engine enclosures, track roller guards and/or brake shields may be needed. Also, consider the use of anti-vandalism devices, such as cap locks and instrument panel guards. Contact your Caterpillar dealer for machine-protection and vandalism-prevention options for your machine.

## V. Fire Prevention

***Remember that most fluids on your machine are flammable!***

To minimize the risk of fire, Caterpillar recommends following these basic steps:

- Remove trash (leaves, twigs, papers, etc.) that may accumulate in the engine compartment.
- Do not operate a machine if leakage of flammable fluids is noticed. Repair leaks before resuming machine operation. Most fluids used in Caterpillar machines should be considered flammable.
- Keep access doors to major machine compartments in working order to permit the use of fire fighting equipment, should a fire occur.
- Avoid attaching electrical wiring to hoses and tubes that contain flammable or combustible fluids.

- Replace any rubbing, damaged, frayed, kinked or leaking hydraulic hoses or fittings.
- Follow safe fueling practices as described in Caterpillar Operation & Maintenance Manuals, EMI or CIMA Safety Manuals, and local regulations.

As an additional safety measure, keep a 10-pound (4.5 kg) minimum fire extinguisher on the machine in a location as specified in the Operator and Maintenance Manual.

## VI. Safety Regulations

Regulations vary from country to country and often within country. Your Caterpillar dealer can assist you in properly equipping your machine to meet applicable requirements. **Note: The general summaries given below are not substitutes for reading and being familiar with the appropriate local laws.**

### (a) United States (US)

With a few exceptions, all machine operations in the United States are covered by federal and/or state regulations. If the machine is used in mining activities, the regulations are administered by the Mine Safety and Health Administration (MSHA). Other activities, including construction, are under regulations administered by the Occupational Safety and Health Administration (OSHA). These agencies require employers to provide a safe working environment for employees. Caterpillar has the same objective.

OSHA and MSHA have adopted criteria for ROPS, Falling Object Protective Structures (FOPS), seat belts, warning horns, back-up alarms, operator sound levels, steering systems, and braking systems. Additional operator's compartment protection may be required for machines engaged in logging, demolition and other special applications.

### (b) European Union (EU)

The EU Machinery Safety Directive applies to Caterpillar machines and most work tools. It requires that the "CE mark" be applied to the product and that a manufacturer's declaration be provided. The "CE mark" indicates that safety issues have been addressed by applying the appropriate safety standards in the design and manufacture of the machine. The objective of the Safety Directive is to protect operators, spectators and maintenance personnel. Caterpillar fully supports this objective.

## VII. Sound Suppression

Different marketing areas have different noise emission requirements. Noise regulations usually specify limits for operators and spectators.

### (a) United States

OSHA and MSHA noise-control regulations set permissible noise-exposure limits for machine operators and employees. Operator protection from machine noise can be achieved by use of factory-built cabs as offered in the Caterpillar Price List. These cabs, when properly maintained and operated with the doors and windows closed, reduce the operator sound level for an eight-hour operating period to meet the OSHA and MSHA noise-exposure limits in effect at the date of manufacture. Variables that may be encountered on the job site, such as other nearby noise sources or noise-reflecting surfaces, may reduce the allowable work hours. If this occurs, ear protective devices may be required.

### (b) European Union

Operator sound-exposure requirements for machines in Europe are very similar to the OSHA and MSHA regulations mentioned above. In addition to operator sound-exposure requirements, certain types of Caterpillar machines are subject to European Commission regulations for exterior sound levels. Caterpillar ensures its products sold in the EU comply with the applicable noise regulations.

## VIII. Replacement Parts for your Caterpillar Machine

## WARNING

When replacement parts are required for this product, Caterpillar recommends using Caterpillar replacement parts or parts with equivalent specifications including, but not limited to, physical dimensions, type, strength and material. Failure to heed this warning can lead to premature failures, product damage, personal injury or death.



## Nomenclature

# THE CATERPILLAR PRODUCT LINE

### TRACK-TYPE TRACTORS

Flywheel power 52 to 634 kW (70 to 850 hp)

◀Brazilian Domestic Only

### \*Waste Handling Arrangements (WHA)

available for sanitary landfill applications



D3C Series III  
D3C XL Series III  
D3C LGP Series III



D4C Series III  
D4C XL Series III  
D4C LGP Series III



D5C Series III  
D5C XL Series III  
D5C LGP Series III



D5M XL  
D5M LGP



D5E◀



D6M XL  
D6M LGP



D6G



D6R\*  
D6R XL  
D6R XR  
D6R LGP



D7G



D7R\*  
D7R XR  
D7R LGP



D8R\*  
D8R LGP



D9R\*



D10R\*



D11R  
D11R CD

### AGRICULTURAL EQUIPMENT

\*Variable Horsepower arrangements available.

(SR) Super Rural



Challenger 35



Challenger 45



Challenger 55



Challenger 65E



Challenger 75E



Challenger 85E\*



Challenger 95E



Lexion 450



Lexion 460/465



Lexion 470



Lexion 480/485



D4E SR\*



D6G SR\*

### MOTOR GRADERS

Flywheel power 104 to 373 kW (140 to 500 hp)

\*All Wheel Drive.



120H  
120H NA  
120H ES



135H  
135H NA



12H  
12H NA  
12H ES



140H  
140H NA  
140H ES



143H NA\*



160H  
160H NA  
160H ES



163H NA\*



14H



16H



24H

## SKID STEER LOADERS

Operating Weight 2600 to 3565 kg (5710 to 7840 lb)



216/226



236/246



228/248

## HYDRAULIC EXCAVATORS

Operating Weight 1650 to 316 600 kg (3640 to 698,000 lb)

### Track Models



301.5  
301.6  
301.8



302.5  
303.5  
304.5



307B  
307B SB



311B



312B  
312B L



313B CR



315B  
315B L



317B L  
317B LN



318B L  
318B LN



320C  
320C L  
320C LN  
320C S



322B  
322B L  
322B LN



325B  
325B L  
325B LN



330B  
330B L  
330B LN



345B Series II  
345B L Series II – FIX  
345B L Series II – VG  
345B L – VG



365B L



375  
375 L



5110B ME



5130B ME



5230 ME

### Front Shovels

Operating Weight 83 800 to 318 500 kg (184,600 to 702,000 lb)



5080 FS



5130B FS



5230 FS

### Wheel Models



M312



M315



M318



M320

## BACKHOE LOADERS

Digging depth 4420 to 6528 mm (14'6" to 21'5")



416C



426C



428C



436C



438C



446B

## FOREST PRODUCTS

### Harvesters



550  
570  
580

### Forwarders



554  
574

### Wheel Skidders



525B  
535B  
545

### Track Skidders



517 Cable  
527 Cable



517 Grapple  
527 Grapple

### Knuckleboom Loaders



539

### Harvesting Heads



HH45  
HH55  
HH65  
HH75

## PIPELAYERS

Lifting capacity 18 145 to 104 330 kg (40,000 to 230,000 lb)



561M



572R



583R



589

## WHEEL TRACTOR-SCRAPERS

\*Available in auger scraper version

### Standard Models

Heaped capacity 11 to 33.6 m<sup>3</sup> (15 to 44 yd<sup>3</sup>)



611



621G\*



631E Series II\*



651E\*

### Tandem Powered Scrapers

Heaped capacity 15.3 to 33.6 m<sup>3</sup> (20 to 44 yd<sup>3</sup>)



627G\*



637E Series II\*



657E\*

### Elevating Scrapers

Heaped capacity 8.4 to 26 m<sup>3</sup> (11 to 34 yd<sup>3</sup>)



613C Series II



615C Series II



623G

### Push-Pull Scrapers

Heaped capacity 15.3 to 33.6 m<sup>3</sup> (20 to 44 yd<sup>3</sup>)



627G



637E Series II



657E

## CONSTRUCTION & MINING TRUCKS/TRACTORS

### Construction & Mining Trucks

Capacity 37 to 326 metric ton — 41 to 359 U.S. tons



769D

771D Quarry Truck



773D

775D Quarry Truck



777D



785C



789C

### Construction & Mining Tractors

Flywheel power 699 to 962 kW (938 to 1290 hp)



793C



797



776D



784C

## ARTICULATED TRUCKS

Capacity 22.7 to 36.3 metric tons (25 to 40 U.S. tons)



D25D



D30D



725



730



D350E Series II



D400E Series II  
D400E Series II Ejector

## WHEEL TRACTORS

Flywheel power 164 to 597 kW (220 to 800 hp)



814F



824G



834G



844



854G

## LANDFILL COMPACTORS

Flywheel power 164 to 358 kW (220 to 480 hp)



816F



826G



836G



815F



825G

## WHEEL LOADERS

Bucket Capacity (Heaped) 0.6 to 30 m<sup>3</sup> (0.78 to 40 yd<sup>3</sup>)

\* High lift arrangement available.

† Waste handling arrangement available.



902



906



908



914G



924Gz



924G Pin On



928G



938G\*†



950G†



962G†



966G†



972G†



980G\*†



988G\*



990 Series II\*



992G\*



994D\*

## TRACK LOADERS

Bucket Capacity (Heaped)\*\* 1.0 to 3.6 m<sup>3</sup> (1.3 to 4.2 yd<sup>3</sup>)

\*Wide track arrangements available.

\*\*General Purpose Bucket.

†Waste handling arrangement available.



933C\*



939C



953C\*†



963C\*†



973C\*†

## INTEGRATED TOOLCARRIERS

Bucket Capacity (Heaped)\* 1.3 to 3.1 m<sup>3</sup> (1.7 to 4.0 yd<sup>3</sup>)

\*General Purpose Bucket.

†Waste handling arrangement available.



IT14G



924G Hook On



IT28G



IT38G†



IT62G†

---

## TELESCOPIC HANDLERS



TH62



TH63



TH82



TH83



TH103

---

## PAVING PRODUCTS

### Cold Planers

Cutting widths 1905 & 2100 mm (6'3" & 6'11")  
Flywheel Power 343 & 466 kW (460 & 625 hp)



PM-465



PM-565B

### Reclaimer Mixers/Stabilizer Mixers

Flywheel power 250-321 kW (335-430 hp)  
Cutting width 2438 mm (8'0")



RR-250B



SS-250B



RM-350B

### Windrow Elevators

Operating weight 5897 kg (13,000 lb)



BG-650

### Asphalt Pavers

Paving width 914 to 9754 mm (3 to 32 ft)



AP-200B



AP-800C



AP-900B



AP-1000B



AP-650B



AP-1050B



AP-1055B



BG-210B



BG-230



BG-240C



BG-260C



BG-225C



BG-245C



BG-2455C

### Road Wideners

Laydown width to 3048 mm (to 10'0")



BG-730

## PAVING PRODUCTS (Continued)

### Vibratory and Pneumatic Tire Compactors

#### Single Drum Smooth

Drum width 1270 mm to 2130 mm (4'2" to 7'0")



CS-323C



CS-431C



CS-433C



CS-531D



CS-533D



CS-563D



CS-583D

#### Single Drum, Padded

Drum width 1270 to 2130 mm (4'2" to 7'0")



CP-323C



CP-433C



CP-533D



CP-563D

#### Double Drum and Combi

Drum width 1000 to 2130 mm (3'3.4" to 7'0")



CB-214D



CB-224D



CB-225D



CB-334D



CB-335D



CB-434C



CB-534C



CB-535B



CB-544



CB-545



CB-634C

### Pneumatic Tire Asphalt Compactors

Wheel loads 1134 to 5000 kg (2500 to 11,020 lb)



PS-150B



PS-200B



PF-290B PS-360B



PF-300B PS-300B



PS-500

## UNDERGROUND MINING (ELPHINSTONE)

### Load-Haul-Dump

Bucket sizes 2.8-8.8 m<sup>3</sup> (3.7-15 yd<sup>3</sup>)



R1300



R1600



R1700G  
R1700G SUPA 14



R2900  
R2900 SUPA 20

### Articulated Trucks

40-55 t (44-61 T) capacity



AE40 Series II



AD45  
AD55



69D Dump

38 t (42 T)



69D Ejector

36.2 t (40 T)



73D

52.2 t (58 T)

### Rigid Frame Trucks

## ENGINES

Application configurations include: On and off highway trucks, stationary and mobile industrial, marine, electrical power generation and petroleum. Spark-ignited (SI) available as noted. Generator set kW shown is 60 Hertz.

### 1.1 L Family

- 104 to 224 kW (140 to 300 hp) Diesel Engine



### 3200 Family

- 93 to 317 kW (125 to 425 hp) Diesel Engine
- 160 to 200 kW Diesel Generator Sets



### 3500 Family

- 448 to 1641 kW (600 to 2200 hp) Diesel Engine
- 715 to 2000 kW Diesel Generator Sets
- 392 to 858 kW (525 to 1150 hp) SI Engine
- 360 to 800 kW SI Generator Sets



### 3300 Family

- 64 to 265 kW (85 to 355 hp) Diesel Engine
- 65 to 250 kW Diesel Generator Sets
- 62 to 164 kW (83 to 220 hp) SI Engine
- 85 to 150 kW SI Generator Sets



### 3600 Family

- 1560 to 5420 kW (2090 to 7270 hp) Diesel Engine
- 1375 to 4910 kW Diesel Generator Sets



### 3400 Family

- 186 to 746 kW (250 to 1000 hp) Diesel Engine
- 210 to 800 kW Diesel Generator Sets
- 336 kW (450 hp) SI Engine
- 270 to 470 kW SI Generator Sets



# TRACK-TYPE TRACTORS

## Hydraulic Controls

## Bulldozers

## Rippers & Winches

## Towed Scrapers

### CONTENTS

#### TRACK-TYPE TRACTORS

Features .....	1-2
Specifications .....	1-3
Power shift drawbar pull vs. ground speed curves .....	1-11
Power shift travel speeds .....	1-18
Direct drive travel speeds and drawbar pull .....	1-19
Ground pressures .....	1-21
Extreme slope operation .....	1-22

#### HYDRAULIC CONTROLS

Features .....	1-23
Specifications .....	1-24

#### BULLDOZERS

Features .....	1-27
Summary of blade options .....	1-28
Blade selection .....	1-29
General dimensions (Tractor and Blade) .....	1-32
Blade specifications .....	1-33
Estimating production off-the-job .....	1-41
Job condition correction factors .....	1-45
Measuring production on-the-job .....	1-46
Work tools .....	1-46

#### RIPPERS

Features .....	1-49
Ripper Specification Diagrams	
Adjustable Parallelogram Ripper .....	1-50
Radial Ripper .....	1-52
Fixed Parallelogram Ripper .....	1-52
Specifications	
Track-Type Tractors .....	1-53
Tip selection .....	1-59
Estimating ripping production .....	1-59
Seismic wave velocity charts .....	1-62
Estimating ripper production graphs .....	1-67

#### WINCHES

Features .....	1-69
Physical specifications .....	1-70
Operating specifications .....	1-73

#### TOWED SCRAPERS

Estimated production .....	1-75
Waste Handling	
Track-Type Tractors .....	See Section 27



## TRACK-TYPE TRACTORS

### Features:

- **Cat Diesel Engines** provide power, high torque rise, reliability and performance you can depend on.
- **Hydraulic Electronic Unit Injection** on D9R and D10R increases fuel efficiency, reduces smoke, improves cold starting and enhances diagnostic capabilities.
- **Electronic Unit Injection (EUI)** on D11R. The Electronic Control Module (ECM) performs much like a mechanical governor, but has no moving parts. The ECM signals the injectors regulating the fuel supply thus controlling engine speed and power. EUI provides: Reduced exhaust smoke, automatic altitude compensation and cold start protection.
- **Oil cooled steering clutches and brakes** standard on all models except the D8R. Improves reliability and component life.
- **Finger Tip Controls (FTC)** of transmission, steering clutches and brakes optional on D5M, D6M, standard on D6R, D7R, D10R and D11R.
- **Differential steering** allows infinitely variable turning radius. Standard on the D8R and optional on the D6R, D7R and D9R, allows the tractor to make a “power turn” keeping both tracks working for more traction and higher performance.
- **Hydrostatic Power Train System** on D3C Series III thru D5C Series III allows power turns, stepless speed range, smooth modulation, dynamic hydrostatic braking, superior maneuverability and excellent controllability.
- **Combined hand lever steering** located left of operator provides easier operation on D5M XL, D6M XL and D9R.
- **Standard Tractors** designed for heavy dozing and general grading.
- **XL Tractors** offer higher horsepower and longer roller frames for increased finish grading capability, flotation and productivity. Wider gauge available on D6R XL through Caterpillar Custom Products.
- **Sealed and Lubricated Track** reduces pin and bushing wear for lower undercarriage repair costs. Heavy duty track chain available on D5M, D6M, D6R and D7R improves wear life and reduces pin/bore stretching and cracking.
- **Elevated sprockets** on D5M XL and up eliminate final drive stress induced by roller frame movement and ground impact loads. Final drives pull chain only. Seals moved up out of dirt, sand and water for longer life. Blade visibility improved because operator sits higher.
- **Resilient mounted bogie undercarriage** on D8R, D9R, D10R and D11R reduces shock transmitted to tractor.
- **Solid mounted undercarriage** standard on D3C Series III through D7R and optional on the D8R provides stable platform for low impact, high abrasion applications like finish grading and stockpiling.
- **Accessible modular design** on D5M XL and up greatly reduces drive train removal and installation time resulting in reduced repair costs.
- **Tag link** on D7R and up; L-shaped push arms on D6M through D6R. Both designs allow closer mounting of dozer blades. This reduces total tractor length, improves maneuverability, balance, blade penetration and pryout.



MODEL	D3C Series III Hystat		D3C XL Series III Hystat		D3C LGP Series III Hystat		D4C Series III Hystat	
Flywheel Power	52 kW	<b>70 hp</b>	52 kW	<b>70 hp</b>	52 kW	<b>70 hp</b>	60 kW	<b>80 hp</b>
Operating Weight*	7112 kg	<b>15,680 lb</b>	7304 kg	<b>16,103 lb</b>	7713 kg	<b>17,004 lb</b>	7326 kg	<b>16,150 lb</b>
Engine Model	<b>3046</b>		<b>3046</b>		<b>3046</b>		<b>3046</b>	
Rated Engine RPM	<b>2400</b>		<b>2400</b>		<b>2400</b>		<b>2400</b>	
No. of Cylinders	<b>6</b>		<b>6</b>		<b>6</b>		<b>6</b>	
Bore	94 mm	<b>3.7"</b>	94 mm	<b>3.7"</b>	94 mm	<b>3.7"</b>	94 mm	<b>3.7"</b>
Stroke	120 mm	<b>4.7"</b>	120 mm	<b>4.7"</b>	120 mm	<b>4.7"</b>	120 mm	<b>4.7"</b>
Displacement	5 L	<b>305 in<sup>3</sup></b>	5 L	<b>305 in<sup>3</sup></b>	5 L	<b>305 in<sup>3</sup></b>	5 L	<b>305 in<sup>3</sup></b>
Track Rollers (Each Side)	<b>5</b>		<b>6</b>		<b>6</b>		<b>6</b>	
Width of Standard Track Shoe	406 mm	<b>16"</b>	406 mm	<b>16"</b>	635 mm	<b>2'1"</b>	406 mm	<b>16"</b>
Length of Track on Ground	1899 mm	<b>6'2.8"</b>	2055 mm	<b>6'8.9"</b>	2055 mm	<b>6'8.9"</b>	2055 mm	<b>6'8.9"</b>
Ground Contact Area (W/Std. Shoe)	1.55 m <sup>2</sup>	<b>2390 in<sup>2</sup></b>	1.67 m <sup>2</sup>	<b>2586 in<sup>2</sup></b>	2.61 m <sup>2</sup>	<b>4045 in<sup>2</sup></b>	1.67 m <sup>2</sup>	<b>2586 in<sup>2</sup></b>
Track Gauge	1448 mm	<b>4'9"</b>	1448 mm	<b>4'9"</b>	1676 mm	<b>5'6"</b>	1499 mm	<b>4'11"</b>
GENERAL DIMENSIONS:								
Height (Stripped Top)**	1.70 m	<b>5'7"</b>	1.70 m	<b>5'7"</b>	1.70 m	<b>5'7"</b>	1.75 m	<b>5'9"</b>
Height (To Top of ROPS)	2.73 m	<b>8'11"</b>	2.73 m	<b>8'11"</b>	2.73 m	<b>8'11"</b>	2.73 m	<b>8'11"</b>
Overall Length (With P Blade)	3.98 m	<b>13'1"</b>	3.98 m	<b>13'1"</b>	3.95 m	<b>13'0"</b>	3.99 m	<b>13'1"</b>
(Without Blade)	2.96 m	<b>9'8"</b>	2.96 m	<b>9'8"</b>	2.96 m	<b>9'8"</b>	2.96 m	<b>9'8"</b>
Width (Over Trunnion)	—		—		—		—	
Width (W/O Trunnion — Std. Shoe)	1.85 m	<b>6'1"</b>	1.85 m	<b>6'1"</b>	2.31 m	<b>7'7"</b>	1.91 m	<b>6'3"</b>
Ground Clearance	374 mm	<b>14.7"</b>	374 mm	<b>14.7"</b>	374 mm	<b>14.7"</b>	374 mm	<b>14.7"</b>
Blade Types and Widths:								
Straight	—		—		—		—	
Angle	—		—		—		—	
Angle Straight	—		—		—		—	
Universal	—		—		—		—	
Semi-U	—		—		—		—	
"P" Straight	2.55 m	<b>8'4"</b>	2.55 m	<b>8'4"</b>	3.19 m	<b>10'6"</b>	2.74 m	<b>9'0"</b>
Angled	2.31 m	<b>7'6"</b>	2.31 m	<b>7'6"</b>	2.90 m	<b>9'5"</b>	2.49 m	<b>8'2"</b>
Fuel Tank Refill Capacity	165 L	<b>43.6 U.S. gal</b>	165 L	<b>43.6 U.S. gal</b>	165 L	<b>43.6 U.S. gal</b>	157 L	<b>41.4 U.S. gal</b>

\*Operating Weight includes ROPS canopy, operator, lubricants, coolant, full fuel tank, hydraulic controls and fluids, back-up alarm, seat belts, lights, rigid drawbar, front pull device and standard service crankcase guard.

\*\*Height (stripped top) — without ROPS, exhaust, seat back or other easily removed encumbrances.



**D4C XL  
Series III  
Hystat**

**D4C LGP  
Series III  
Hystat**

**D5C  
Series III  
Hystat**

**D5C XL  
Series III  
Hystat**

MODEL	D4C XL Series III Hystat		D4C LGP Series III Hystat		D5C Series III Hystat		D5C XL Series III Hystat	
Flywheel Power	60 kW	<b>80 hp</b>	60 kW	<b>80 hp</b>	67.1 kW	<b>90 hp</b>	67.1 kW	<b>90 hp</b>
Operating Weight*	7518 kg	<b>16,573 lb</b>	7785 kg	<b>17,163 lb</b>	8487 kg	<b>18,711 lb</b>	8821 kg	<b>19,447 lb</b>
Engine Model	<b>3046</b>		<b>3046</b>		<b>3046T</b>		<b>3046T</b>	
Rated Engine RPM	<b>2400</b>		<b>2400</b>		<b>2400</b>		<b>2400</b>	
No. of Cylinders	<b>6</b>		<b>6</b>		<b>6</b>		<b>6</b>	
Bore	94 mm	<b>3.7"</b>	94 mm	<b>3.7"</b>	94 mm	<b>3.7"</b>	94 mm	<b>3.7"</b>
Stroke	120 mm	<b>4.7"</b>	120 mm	<b>4.7"</b>	120 mm	<b>4.7"</b>	120 mm	<b>4.7"</b>
Displacement	5 L	<b>305 in<sup>3</sup></b>	5 L	<b>305 in<sup>3</sup></b>	5 L	<b>305 in<sup>3</sup></b>	5 L	<b>305 in<sup>3</sup></b>
Track Rollers (Each Side)	<b>7</b>		<b>6</b>		<b>6</b>		<b>7</b>	
Width of Standard Track Shoe	457 mm	<b>18"</b>	635 mm	<b>2'1"</b>	457 mm	<b>18"</b>	508 mm	<b>1'8"</b>
Length of Track on Ground	2210 mm	<b>7'3"</b>	2055 mm	<b>6'8.9"</b>	2145 mm	<b>7'0.4"</b>	2316 mm	<b>7'7.2"</b>
Ground Contact Area (W/Std. Shoe)	2.02 m <sup>2</sup>	<b>3131 in<sup>2</sup></b>	2.61 m <sup>2</sup>	<b>4045 in<sup>2</sup></b>	1.96 m <sup>2</sup>	<b>3039 in<sup>2</sup></b>	2.35 m <sup>2</sup>	<b>3547 in<sup>2</sup></b>
Track Gauge	1499 mm	<b>4'11"</b>	1676 mm	<b>5'6"</b>	1549 mm	<b>5'1"</b>	1549 mm	<b>5'1"</b>
GENERAL DIMENSIONS:								
Height (Stripped Top)**	1.75 m	<b>5'9"</b>	1.75 m	<b>5'9"</b>	1.75 m	<b>5'9"</b>	1.75 m	<b>5'9"</b>
Height (To Top of ROPS)	2.73 m	<b>8'11"</b>	2.73 m	<b>8'11"</b>	2.74 m	<b>9'0"</b>	2.74 m	<b>9'0"</b>
Overall Length (With P Blade)	3.99 m	<b>13'1"</b>	3.99 m	<b>13'1"</b>	4.07 m	<b>13'4"</b>	4.32 m	<b>14'2"</b>
(Without Blade)	3.04 m	<b>10'0"</b>	2.96 m	<b>9'8"</b>	3.00 m	<b>9'10"</b>	3.18 m	<b>10'5"</b>
Width (Over Trunnion)	—		—		—		—	
Width (W/O Trunnion — Std. Shoe)	1.96 m	<b>6'5"</b>	2.31 mm	<b>7'6"</b>	2.00 m	<b>6'7"</b>	2.06 m	<b>6'9"</b>
Ground Clearance	374 mm	<b>14.7"</b>	374 mm	<b>14.7"</b>	384 mm	<b>15.1"</b>	384 mm	<b>15.1"</b>
Blade Types and Widths:								
Straight	—		—		—		—	
Angle	—		—		—		—	
Angle Straight	—		—		—		—	
Universal	—		—		—		—	
Semi-U	—		—		—		—	
"P" Straight	2.74 m	<b>9'0"</b>	3.34 m	<b>10'11"</b>	2.75 m	<b>9'0"</b>	2.69 m	<b>8'10"</b>
Angled	2.49 m	<b>8'2"</b>	3.03 m	<b>9'11"</b>	2.50 m	<b>8'2"</b>	2.50 m	<b>8'2"</b>
Fuel Tank Refill Capacity	157 L	<b>41.4 U.S. gal</b>	157 L	<b>41.4 U.S. gal</b>	157 L	<b>41.4 U.S. gal</b>	157 L	<b>41.4 U.S. gal</b>

\*Operating Weight includes ROPS canopy, operator, lubricants, coolant, full fuel tank, hydraulic controls and fluids, back-up alarm, seat belts, lights, rigid drawbar, front pull device and standard service crankcase guard.

\*\*Height (stripped top) — without ROPS, exhaust, seat back or other easily removed encumbrances.


**D5C LGP  
Series III  
Hystat**
**D5M XL**
**D5M LGP**

MODEL	D5C LGP Series III Hystat		D5M XL		D5M LGP	
Flywheel Power: Power Shift Direct Drive†	67.1 kW	<b>90 hp</b>	82 kW	<b>110 hp</b>	82 kW	<b>110 hp</b>
	—	—	—	—	78 kW	<b>105 hp</b>
Operating Weight:* Power Shift Direct Drive†	8972 kg	<b>19,780 lb</b>	12 250 kg	<b>27,000 lb</b>	13 175 kg	<b>29,045 lb</b>
	—	—	—	—	12 145 kg	<b>26,775 lb</b>
Engine Model	<b>3046T</b>		<b>3116T</b>		<b>3116T</b>	
Rated Engine RPM	<b>2400</b>		<b>2100</b>		<b>2100</b>	
No. of Cylinders	<b>6</b>		<b>6</b>		<b>6</b>	
Bore	94 mm	<b>3.7"</b>	105 mm	<b>4.1"</b>	105 mm	<b>4.1"</b>
Stroke	120 mm	<b>4.7"</b>	127 mm	<b>5"</b>	127 mm	<b>5"</b>
Displacement	5 L	<b>305 in<sup>3</sup></b>	6.6 L	<b>403 in<sup>3</sup></b>	6.6 L	<b>403 in<sup>3</sup></b>
Track Rollers (Each Side)	<b>6</b>		<b>7</b>		<b>8</b>	
Width of Standard Track Shoe	660 mm	<b>2'2"</b>	560 mm	<b>1'10"</b>	760 mm	<b>2'6"</b>
Length of Track on Ground	2145 mm	<b>7'0.4"</b>	2388 mm	<b>7'10"</b>	2604 mm	<b>8'7"</b>
Ground Contact Area (W/Std. Shoe)	2.83 m <sup>2</sup>	<b>4389 in<sup>2</sup></b>	2.67 m <sup>2</sup>	<b>4144 in<sup>2</sup></b>	3.96 m <sup>2</sup>	<b>6133 in<sup>2</sup></b>
Track Gauge	1727 mm	<b>5'8"</b>	1770 mm	<b>5'10"</b>	2000 mm	<b>6'7"</b>
<b>GENERAL DIMENSIONS:</b>						
Height (Stripped Top)**	1.75 m	<b>5'9"</b>	2.22 m	<b>7'3"</b>	2.26 m	<b>7'5"</b>
Height (To Top of ROPS Canopy)	2.74 m	<b>9'0"</b>	3.00 m	<b>9'10"</b>	3.04 m	<b>10'0"</b>
Height (To Top of ROPS Cab)	—	—	3.00 m	<b>9'10"</b>	3.05 m	<b>10'0"</b>
Overall Length (With P Blade)***	4.07 m	<b>13'4"</b>	4.59 m	<b>14'11"</b>	4.90 m	<b>16'10"</b>
(Without Blade)	3.00 m	<b>9'10"</b>	3.54 m	<b>11'8"</b>	3.70 m	<b>12'3"</b>
Width (W/O Trunnion & Blade Std. Shoe)	2.39 m	<b>7'10"</b>	2.33 m	<b>7'8"</b>	2.76 m	<b>9'1"</b>
Ground Clearance	384 mm	<b>15.1"</b>	385 mm	<b>15.2"</b>	437 mm	<b>17.2"</b>
<b>Blade Types and Widths:</b>						
Straight	—	—	—	—	—	—
Angle	—	—	—	—	—	—
"P" Straight	3.30 m	<b>10'10"</b>	—	—	—	—
Angled	3.00 m	<b>9'10"</b>	—	—	—	—
VPAT	—	—	3.08 m	<b>10'1"</b>	3.36 m	<b>11'0"</b>
Fuel Tank Refill Capacity	157 L	<b>41.4 U.S. gal</b>	218 L	<b>58 U.S. gal</b>	218 L	<b>58 U.S. gal</b>

\* Operating Weight includes ROPS canopy, operator, lubricants, coolant, full fuel tank, hydraulic controls and fluids, P blade (VPAT on D5M), rigid drawbar, front towing device, standard service crankcase guards, engine enclosures and suspension seat.

\*\* Height (stripped top) — without ROPS canopy, exhaust, pre-cleaner, seat back or other easily removed encumbrances.

\*\*\* D5M XL, D5M LGP with VPAT blade (Variable Pitch, Angle and Tilt).

† Power Shift Direct Drive transmission available in Japan only.



MODEL	D5E▶		D6M XL		D6M LGP		D6G	
Flywheel Power: Power Shift	78 kW	<b>105 hp</b>	104 kW	<b>140 hp</b>	104 kW	<b>140 hp</b>	116 kW	<b>155 hp</b>
Operating Weight:* Power Shift	—	—	15 530 kg	<b>34,240 lb</b>	16 930 kg	<b>37,320 lb</b>	15 432 kg	<b>34,028 lb</b>
Direct Drive	11 702 kg	<b>25,800 lb</b>	—	—	—	—	—	—
Engine Model	<b>3306</b>		<b>3116T</b>		<b>3116T</b>		<b>3306T</b>	
Rated Engine RPM: Power Shift	—		<b>2200</b>		<b>2200</b>		<b>1900</b>	
Direct Drive	<b>1750</b>		—		—		—	
No. of Cylinders	<b>6</b>		<b>6</b>		<b>6</b>		<b>6</b>	
Bore	121 mm	<b>4.75"</b>	105 mm	<b>4.1"</b>	105 mm	<b>4.1"</b>	121 mm	<b>4.75"</b>
Stroke	152 mm	<b>6"</b>	127 mm	<b>5"</b>	127 mm	<b>5"</b>	152 mm	<b>6"</b>
Displacement	10.5 L	<b>638 in<sup>3</sup></b>	6.6 L	<b>403 in<sup>3</sup></b>	6.6 L	<b>403 in<sup>3</sup></b>	10.5 L	<b>638 in<sup>3</sup></b>
Track Rollers (Each Side)	<b>6</b>		<b>7</b>		<b>8</b>		<b>7</b>	
Width of Standard Track Shoe	457 mm	<b>18"</b>	600 mm	<b>2'0"</b>	860 mm	<b>2'10"</b>	508 mm	<b>1'8"</b>
Length of Track on Ground	2.21 m	<b>7'3"</b>	2.55 m	<b>8'4"</b>	3.10 m	<b>10'1"</b>	2.67 m	<b>8'9"</b>
Ground Contact Area (W/Std. Shoe)	2.05 m <sup>2</sup>	<b>3154 in<sup>2</sup></b>	3.06 m <sup>2</sup>	<b>4743 in<sup>2</sup></b>	5.34 m <sup>2</sup>	<b>8217 in<sup>2</sup></b>	2.72 m <sup>2</sup>	<b>4216 in<sup>2</sup></b>
Track Gauge	1.52 m	<b>5'0"</b>	1.89 m	<b>6'2"</b>	2.16 m	<b>7'1"</b>	1.88 m	<b>6'2"</b>
GENERAL DIMENSIONS:								
Height (Stripped Top)**	1.90 m	<b>6'6"</b>	2.30 m	<b>7'6.5"</b>	2.41 m	<b>7'11"</b>	2.10 m	<b>6'11"</b>
Height (To Top of ROPS Canopy)	—	—	3.02 m	<b>9'11"</b>	3.14 m	<b>10'4"</b>	—	—
Height (To Top of ROPS)	2.95 m	<b>9'8"</b>	—	—	—	—	3.20 m	<b>10'5"</b>
Height (To Top of Cab ROPS)	—	—	3.08 m	<b>10'1"</b>	3.19 m	<b>10'6"</b>	—	—
Overall Length (With VPAT Blade)	—	—	4.80 m	<b>15'9"</b>	5.37 m	<b>17'8"</b>	—	—
(Without Blade)	—	—	3.74 m	<b>12'3"</b>	4.15 m	<b>13'7"</b>	—	—
Overall Length (With S Blade)†	—	—	4.92 m	<b>16'2"</b>	—	—	5.00 m	<b>16'4"</b>
(Without Blade)	3.88 m	<b>12'8"</b>	3.74 m	<b>12'3"</b>	4.15 m	<b>13'7"</b>	3.94 m	<b>12'9"</b>
Width (Over Trunnion)	—	—	3.19 m	<b>10'6"</b>	—	—	—	—
Width (W/O Trunnion — Std. Shoe)	2.03 m	<b>6'8"</b>	2.49 m	<b>8'2"</b>	3.02 m	<b>9'11"</b>	2.39 m	<b>7'10"</b>
Ground Clearance	277 mm	<b>10.9"</b>	424 mm	<b>16.7"</b>	538 mm	<b>1'9.2"</b>	310 mm	<b>12.2"</b>
Blade Types and Widths:								
Straight	—	—	—	—	—	—	3.20 m	<b>10'6"</b>
Angle	3.34 m	<b>10'11"</b>	—	—	—	—	3.90 m	<b>12'9"</b>
Semi-U	—	—	3.17 m	<b>10'6"</b>	—	—	3.20 m	<b>10'6"</b>
"P" Straight	—	—	—	—	—	—	—	—
VPAT (Variable pitch, angle & tilt)	—	—	3.27 m	<b>10'9"</b>	4.08 m	<b>13'5"</b>	—	—
Fuel Tank Refill Capacity	295 L	<b>78 U.S. gal</b>	311 L	<b>82.2 U.S. gal</b>	311 L	<b>82.2 U.S. gal</b>	300 L	<b>80 U.S. gal</b>

\* Operating Weight includes ROPS canopy, operator, lubricants, coolant, full fuel tank, hydraulic controls and fluids, straight dozer with tilt (VPAT on D6M) rigid drawbar, front towing device, engine enclosures and suspension seat.

\*\* Height (stripped top) — without ROPS canopy, exhaust, pre-cleaner, seat back or other easily removed encumbrances.

† SU blade on D6M.

▶ Brazilian Domestic only.



MODEL	D6R		D6R XL		D6R XL (IG)▶		D6R XR	
Flywheel Power	123 kW	<b>165 hp</b>	130 kW	<b>175 hp</b>	138 kW	<b>185 hp</b>	130 kW	<b>175 hp</b>
Operating Weight:*								
Power Shift	18 000 kg	<b>39,700 lb</b>	19 000 kg	<b>41,900 lb</b>	19 780 kg	<b>43,600 lb</b>	18 780 kg	<b>41,400 lb</b>
Direct Drive	18 053 kg**	<b>39,800 lb</b>	—	—	—	—	—	—
Power Shift Differential Steer	18 200 kg	<b>40,000 lb</b>	19 200 kg	<b>42,300 lb</b>	19 960 kg	<b>44,000 lb</b>	18 910 kg	<b>41,700 lb</b>
Engine Model	<b>3306T</b>		<b>3306T</b>		<b>3306T</b>		<b>3306T</b>	
Rated Engine RPM	<b>1900</b>		<b>1900</b>		<b>1900</b>		<b>1900</b>	
No. of Cylinders	<b>6</b>		<b>6</b>		<b>6</b>		<b>6</b>	
Bore	121 mm	<b>4.75"</b>	121 mm	<b>4.75"</b>	121 mm	<b>4.75"</b>	121 mm	<b>4.75"</b>
Stroke	152 mm	<b>6"</b>	152 mm	<b>6"</b>	152 mm	<b>6"</b>	152 mm	<b>6"</b>
Displacement	10.5 L	<b>638 in<sup>3</sup></b>	10.5 L	<b>638 in<sup>3</sup></b>	10.5 L	<b>638 in<sup>3</sup></b>	10.5 L	<b>638 in<sup>3</sup></b>
Track Rollers (Each Side)	<b>6</b>		<b>7</b>		<b>7</b>		<b>7</b>	
Width of Standard Track Shoe	560 mm	<b>1'10"</b>	560 mm	<b>1'10"</b>	762 mm	<b>2'6"</b>	560 mm	<b>1'10"</b>
Length of Track on Ground	2.61 m	<b>8'7"</b>	2.82 m	<b>9'3"</b>	2.82 m	<b>9'3"</b>	2.75 m	<b>9'0"</b>
Ground Contact Area (W/Std. Shoe)	2.92 m <sup>2</sup>	<b>4523 in<sup>2</sup></b>	3.16 m <sup>2</sup>	<b>4888 in<sup>2</sup></b>	4.3 m <sup>2</sup>	<b>6661 in<sup>2</sup></b>	3.08 m <sup>2</sup>	<b>4771 in<sup>2</sup></b>
Track Gauge	1.88 m	<b>6'2"</b>	1.88 m	<b>6'2"</b>	2.03 m	<b>6'8"</b>	1.88 m	<b>6'2"</b>
GENERAL DIMENSIONS:								
Height (Stripped Top)***	2.38 m	<b>7'5"</b>	2.38 m	<b>7'5"</b>	2.38 m	<b>7'5"</b>	2.38 m	<b>7'5"</b>
Height (To Top of ROPS)	3.19 m	<b>10'5"</b>	3.19 m	<b>10'5"</b>	3.19 m	<b>10'5"</b>	3.19 m	<b>10'5"</b>
Height (To Top of Cab ROPS)	3.19 m	<b>10'5"</b>	3.19 m	<b>10'5"</b>	3.19 m	<b>10'5"</b>	3.19 m	<b>10'5"</b>
Height (To Top of ROPS Canopy)	—	—	—	—	—	—	—	—
Overall Length (With S Blade)	5.11 m	<b>16'9"</b>	—	—	—	—	5.26 m	<b>17'3"</b>
(Without Blade)	4.08 m	<b>13'4"</b>	4.08 m	<b>13'4"</b>	—	—	4.22 m	<b>13'10"</b>
Width (Over Trunnion)	2.64 m	<b>8'8"</b>	2.64 m	<b>8'8"</b>	2.95 m	<b>9'8"</b>	2.64 m	<b>8'8"</b>
Width (W/O Trunnion — Std. Shoe)	2.44 m	<b>8'0"</b>	2.44 m	<b>8'0"</b>	2.74 m	<b>9'0"</b>	2.44 m	<b>8'0"</b>
Ground Clearance	383 mm	<b>14.8"</b>	383 mm	<b>14.8"</b>	383 mm	<b>14.8"</b>	383 mm	<b>14.8"</b>
Blade Types and Widths:								
Straight	3.35 m	<b>11'0"</b>	—	—	—	—	3.36 m	<b>11'0"</b>
Angle	—	—	—	—	—	—	—	—
Angle Straight	4.16 m	<b>13'7.8"</b>	4.16 m	<b>13'8"</b>	—	—	4.16 m	<b>13'8"</b>
Full Angle	3.78 m	<b>12'4.7"</b>	3.78 m	<b>12'5"</b>	—	—	3.78 m	<b>12'5"</b>
PAT	—	—	3.62 m	<b>11'10"</b>	—	—	—	—
Universal	—	—	—	—	—	—	—	—
Semi-U	3.26 m	<b>10'8"</b>	3.26 m	<b>10'8"</b>	3.56 m	<b>11'8"</b>	3.26 m	<b>10'8"</b>
Fuel Tank Refill Capacity	383 L	<b>101 U.S. gal</b>	383 L	<b>101 U.S. gal</b>	383 L	<b>101 U.S. gal</b>	383 L	<b>101 U.S. gal</b>

\* Operating Weight includes ROPS canopy, operator, lubricants, coolant, full fuel tank, hydraulic controls and fluid, straight dozer with tilt, horn, back-up alarm, retrieval hitch and front pull hook.

\*\* Japan only.

\*\*\* Height (stripped top) — without ROPS canopy, exhaust, seat back or other easily removed encumbrances.

▶ Intermediate Gauge offered as custom product.



MODEL	D6R LGP		D7G		D7R		D7R XR	
Flywheel Power	138 kW	<b>185 hp</b>	149 kW	<b>200 hp</b>	171 kW	<b>230 hp</b>	171 kW	<b>230 hp</b>
Operating Weight:*								
Power Shift	20 500 kg	<b>45,200 lb</b>	20 094 kg	<b>44,300 lb</b>	24 778 kg	<b>54,600 lb</b>	25 193 kg	<b>55,600 lb</b>
Direct Drive	—		20 502 kg	<b>45,200 lb</b>	—		—	
Power Shift Differential Steer	20 680 kg	<b>45,600 lb</b>	—		25 077 kg	<b>55,300 lb</b>	25 492 kg	<b>56,200 lb</b>
Engine Model	<b>3306T</b>		<b>3306T</b>		<b>3306TA</b>		<b>3306TA</b>	
Rated Engine RPM	<b>1900</b>		<b>2000</b>		<b>2100</b>		<b>2100</b>	
No. of Cylinders	<b>6</b>		<b>6</b>		<b>6</b>		<b>6</b>	
Bore	121 mm	<b>4.75"</b>	121 mm	<b>4.75"</b>	121 mm	<b>4.75"</b>	121 mm	<b>4.75"</b>
Stroke	152 mm	<b>6"</b>	152 mm	<b>6"</b>	152 mm	<b>6"</b>	152 mm	<b>6"</b>
Displacement	10.5 L	<b>638 in<sup>3</sup></b>	10.5 L	<b>638 in<sup>3</sup></b>	10.5 L	<b>638 in<sup>3</sup></b>	10.5 L	<b>638 in<sup>3</sup></b>
Track Rollers (Each Side)	<b>8</b>		<b>6</b>		<b>7</b>		<b>8</b>	
Width of Standard Track Shoe	915 mm	<b>3'0"</b>	508 mm	<b>1'8"</b>	560 mm	<b>1'10"</b>	610 mm	<b>2'0"</b>
Length of Track on Ground	3.25 m	<b>10'8"</b>	2.72 m	<b>8'11"</b>	2.89 m	<b>9'6"</b>	3.05 m	<b>10'0"</b>
Ground Contact Area (W/Std. Shoe)	5.93 m <sup>2</sup>	<b>9254 in<sup>2</sup></b>	2.76 m <sup>2</sup>	<b>4280 in<sup>2</sup></b>	3.24 m <sup>2</sup>	<b>5016 in<sup>2</sup></b>	3.72 m <sup>2</sup>	<b>5760 in<sup>2</sup></b>
Track Gauge	2.23 m	<b>7'3"</b>	1.98 m	<b>6'6"</b>	1.98 m	<b>6'6"</b>	1.98 m	<b>6'6"</b>
GENERAL DIMENSIONS:								
Height (Stripped Top)**	2.43 m	<b>7'7"</b>	2.27 m	<b>7'5"</b>	2.56 m	<b>8'5"</b>	2.56 m	<b>8'5"</b>
Height (To Top of ROPS)	3.24 m	<b>10'5"</b>	3.20 m	<b>10'6"</b>	3.35 m	<b>10'11"</b>	3.35 m	<b>10'11"</b>
Height (To Top of Cab ROPS)	3.24 m	<b>10'5"</b>	—		3.43 m	<b>11'2"</b>	3.43 m	<b>11'2"</b>
Height (To Top of ROPS Canopy)	3.24 m	<b>10'5"</b>	—		—		—	
Overall Length (With S Blade)	—		5.28 m	<b>17'4"</b>	5.69 m	<b>18'8"</b>	5.81 m	<b>19'1"</b>
(Without Blade)	—		4.19 m	<b>13'9"</b>	4.67 m	<b>15'4"</b>	4.67 m	<b>15'4"</b>
Width (Over Trunnion)	3.43 m	<b>11'3"</b>	—		2.87 m	<b>9'5"</b>	2.87 m	<b>9'5"</b>
Width (W/O Trunnion — Std. Shoe)	3.14 m	<b>10'3.6"</b>	2.55 m	<b>8'5"</b>	2.54 m	<b>8'4"</b>	2.59 m	<b>8'6"</b>
Ground Clearance	433 mm	<b>17"</b>	347 mm	<b>13.7"</b>	416 mm	<b>16.4"</b>	416 mm	<b>16.4"</b>
Blade Types and Widths:								
Straight	3.99 m	<b>13'1"</b>	3.66 m	<b>12'0"</b>	3.52 m	<b>11'7"</b>	3.32 m	<b>11'7"</b>
Angle	—		4.27 m	<b>14'0"</b>	4.50 m	<b>14'9"</b>	4.50 m	<b>14'9"</b>
Angle Straight	—		—		—		—	
Full Angle	—		—		—		—	
Universal	—		—		3.98 m	<b>13'1"</b>	3.98 m	<b>13'1"</b>
Semi-U	—		—		3.69 m	<b>12'2"</b>	3.69 m	<b>12'2"</b>
Fuel Tank Refill Capacity	383 L	<b>101 U.S. gal</b>	435 L	<b>115 U.S. gal</b>	479 L	<b>127 U.S. gal</b>	479 L	<b>127 U.S. gal</b>

\*Operating Weight includes ROPS canopy, operator, lubricants, coolant, full fuel tank, hydraulic controls and fluid, straight dozer with tilt, horn, back-up alarm, retrieval hitch and front pull hook.

— D7G includes end track guiding guards.

\*\*Height (stripped top) — without ROPS canopy, exhaust, seat back or other easily removed encumbrances.



MODEL	D7R LGP		D8R		D8R LGP		D9R	
Flywheel Power	179 kW	<b>240 hp</b>	228 kW	<b>305 hp</b>	228 kW	<b>305 hp</b>	302 kW	<b>405 hp</b>
Operating Weight:*								
Power Shift	27 065 kg	<b>59,700 lb</b>	—	—	—	—	48 440 kg	<b>106,790 lb</b>
Power Shift Differential Steer	27 364 kg	<b>60,300 lb</b>	37 580 kg	<b>82,850 lb</b>	33 730 kg	<b>74,360 lb</b>	48 840 kg	<b>107,670 lb</b>
Engine Model	<b>3306TA</b>		<b>3406CTA</b>		<b>3406CTA</b>		<b>3408ETA</b>	
Rated Engine RPM	<b>2100</b>		<b>2100</b>		<b>2100</b>		<b>1900</b>	
No. of Cylinders	<b>6</b>		<b>6</b>		<b>6</b>		<b>8</b>	
Bore	121 mm	<b>4.75"</b>	137 mm	<b>5.4"</b>	137 mm	<b>5.4"</b>	137 mm	<b>5.4"</b>
Stroke	152 mm	<b>6"</b>	165 mm	<b>6.5"</b>	165 mm	<b>6.5"</b>	152 mm	<b>6"</b>
Displacement	10.5 L	<b>638 in<sup>3</sup></b>	14.6 L	<b>893 in<sup>3</sup></b>	14.6 L	<b>893 in<sup>3</sup></b>	18 L	<b>1099 in<sup>3</sup></b>
Track Rollers (Each Side)	<b>7</b>		<b>8</b>		<b>8</b>		<b>8</b>	
ERF†	<b>9</b>		—		—		—	
Width of Standard Track Shoe	914 mm	<b>3'0"</b>	560 mm	<b>1'10"</b>	965 mm	<b>3'2"</b>	610 mm	<b>2'0"</b>
Length of Track on Ground	3.16 m	<b>10'5"</b>	3.21 m	<b>10'6"</b>	3.20 m	<b>10'6"</b>	3.47 m	<b>11'5"</b>
Ground Contact Area (W/Std. Shoe)	5.78 m <sup>2</sup>	<b>8960 in<sup>2</sup></b>	3.57 m <sup>2</sup>	<b>5544 in<sup>2</sup></b>	6.2 m <sup>2</sup>	<b>9576 in<sup>2</sup></b>	4.24 m <sup>2</sup>	<b>6569 in<sup>2</sup></b>
Track Gauge	2.24 m	<b>7'4"</b>	2.08 m	<b>6'10"</b>	2.34 m	<b>7'8"</b>	2.25 m	<b>7'5"</b>
GENERAL DIMENSIONS:								
Height (Stripped Top)**	2.74 m	<b>9'0"</b>	2.67 m	<b>8'9"</b>	2.67 m	<b>8'9"</b>	3.00 m	<b>9'10"</b>
Height (To Top of ROPS)	3.43 m	<b>11'3"</b>	3.51 m	<b>11'6"</b>	3.51 m	<b>11'6"</b>	3.99 m	<b>13'1"</b>
Height (To Top of ROPS Canopy)	3.52 m	<b>11'6"</b>	3.51 m	<b>11'6"</b>	3.51 m	<b>11'6"</b>	3.99 m	<b>13'1"</b>
Height (To Top of Cab ROPS)	3.58 m	<b>11'9"</b>	3.45 m	<b>11'3"</b>	3.45 m	<b>11'3"</b>	—	—
Overall Length (With SU Blade)***	—	—	6.39 m	<b>21'0"</b>	6.39 m	<b>21'0"</b>	6.84 m	<b>22'5"</b>
(Without Blade)	—	—	4.93 m	<b>16'2"</b>	4.93 m	<b>16'2"</b>	5.18 m	<b>17'0"</b>
Overall Length (With S Blade)	5.78 m	<b>19'0"</b>	—	—	—	—	—	—
(Without Blade)	4.67 m	<b>15'4"</b>	—	—	—	—	—	—
Width (Over Trunnions)	3.37 m	<b>11'1"</b>	3.05 m	<b>10'0"</b>	3.55 m	<b>11'7"</b>	3.30 m	<b>10'10"</b>
Width (W/O Trunnions — Std. Shoe)	3.15 m	<b>10'4"</b>	2.7 m	<b>8'8"</b>	—	—	2.93 m	<b>9'8"</b>
Width (With Standard Shoe)	—	—	—	—	3.37 m	<b>10'10"</b>	—	—
Ground Clearance	496 mm	<b>1'7.5"</b>	606 mm	<b>1'11"</b>	574 mm	<b>1'10.6"</b>	591 mm	<b>1'11"</b> ■
Blade Types and Widths:								
Straight	4.50 m	<b>14'9"</b>	—	—	—	—	—	—
Angle Straight	—	—	4.99 m	<b>16'4"</b>	—	—	—	—
Universal	—	—	4.26 m	<b>14'0"</b>	3.94 m	<b>12'11"</b>	4.65 m	<b>15'3"</b>
Semi-U	—	—	3.94 m	<b>12'11"</b>	4.52 m	<b>14'10"</b>	4.32 m	<b>14'2"</b>
Fuel Tank Refill Capacity	479 L	<b>127 U.S. gal</b>	625 L	<b>165 U.S. gal</b>	625 L	<b>165 U.S. gal</b>	818 L	<b>216 U.S. gal</b>

\* Operating Weight includes ROPS canopy, operator, lubricants, coolant, full fuel tank, hydraulic controls and fluids, semi universal blade with tilt, back-up alarm, seat belts, lights, rigid drawbar and front towing device.

— D8R and D9R equipped with track guides, ROPS/FOPS cab, single shank ripper and SU blade.

\*\* Height (stripped top) — without ROPS canopy, exhaust, seat back or other easily removed encumbrances.

\*\*\* Includes drawbar.

■ SAE J1234.

† ERF — Extended Track Roller Frame. Extends frame 366 mm (14.4"), adds 3 track sections and 2 rollers/side.





MODEL	D10R		D11R		D11R CD	
Flywheel Power	425 kW	<b>570 hp</b>	634 kW	<b>850 hp</b>	634 kW	<b>850 hp</b>
Operating Weight*	65 400 kg	<b>144,200 lb</b>	104 600 kg	<b>230,100 lb</b>	113 000 kg	<b>248,600 lb</b>
Engine Model	<b>3412TA</b>		<b>3508BTA</b>		<b>3508BTA</b>	
Rated Engine RPM	<b>1900</b>		<b>1800</b>		<b>1800</b>	
No. of Cylinders	<b>12</b>		<b>8</b>		<b>8</b>	
Bore	137 mm	<b>5.4"</b>	170 mm	<b>6.7"</b>	170 mm	<b>6.7"</b>
Stroke	152 mm	<b>6"</b>	190 mm	<b>7.5"</b>	190 mm	<b>7.5"</b>
Displacement	27 L	<b>1649 in<sup>3</sup></b>	34.5 L	<b>2105 in<sup>3</sup></b>	34.5 L	<b>2105 in<sup>3</sup></b>
Track Rollers (Each Side)	<b>8</b>		<b>8</b>		<b>8</b>	
Width of Standard Track Shoe	610 mm	<b>2'0"</b>	710 mm	<b>2'4"</b>	915 mm	<b>3'0"</b>
Length of Track on Ground	3.88 m	<b>12'9"</b>	4.44 m	<b>14'7"</b>	4.44 m	<b>14'7"</b>
Ground Contact Area (W/Std. Shoe)	4.74 m <sup>2</sup>	<b>7347 in<sup>2</sup></b>	6.31 m <sup>2</sup>	<b>9781 in<sup>2</sup></b>	8.13 m <sup>2</sup>	<b>12,605 in<sup>2</sup></b>
Track Gauge	2.55 m	<b>8'4"</b>	2.89 m	<b>9'6"</b>	2.89 m	<b>9'6"</b>
GENERAL DIMENSIONS:						
Height (Stripped Top)**	3.267 m	<b>10'6"</b>	3.61 m	<b>11'10"</b>	3.61 m	<b>11'10"</b>
Height (To Top of ROPS Canopy)	—	—	—	—	—	—
Height (To Top of ROPS)	4.36 m	<b>14'3"</b>	4.66 m	<b>15'3"</b>	4.66 m	<b>15'3"</b>
Overall Length (With Blade & Ripper)	9.39 m	<b>30'10"</b>	10.68 m	<b>35'0"</b>	10.50 m	<b>34'5"</b>
(Without Blade & Ripper)	5.33 m	<b>17'6"</b>	6.16 m	<b>20'3"</b>	6.16 m	<b>20'3"</b>
Width (Over Trunnions)	3.72 m	<b>12'2"</b>	4.37 m	<b>14'4"</b>	4.37 m	<b>14'4"</b>
Width (W/O Trunnions — Std. Shoe)	3.16 m	<b>10'4"</b>	3.60 m	<b>11'10"</b>	3.60 m	<b>11'10"</b>
Ground Clearance	615 mm	<b>2'0.2"■</b>	623 mm	<b>2'0.5"■</b>	623 mm	<b>2'0.5"■</b>
Blade Types and Widths:						
Straight	—	—	—	—	6.71 m	<b>22'0"</b>
Angle Straight/Angled	—	—	—	—	—	—
Universal	5.26 m	<b>17'3"</b>	6.35 m	<b>20'10"</b>	—	—
Semi-U	4.86 m	<b>15'11"</b>	5.60 m	<b>18'4"</b>	—	—
"P" Straight/Angled	—	—	—	—	—	—
Fuel Tank Refill Capacity	1109 L	<b>293 U.S. gal</b>	1609 L	<b>425 U.S. gal</b>	1609 L	<b>425 U.S. gal</b>

\* Operating Weight includes operator, lubricants, coolant, full fuel tank, hydraulic controls and fluids, SU blade with tilt, back-up alarm, seat belts, lights, rigid drawbar and front towing device.

— D10R includes 10 SU blade single shank ripper and ROPS cab.


— D11R includes 11U ABR Dual Tilt Bulldozer, single shank ripper with pin puller, ROPS cab, fast fuel fill and engine doors.

— D11R CD includes 11D Dual Tilt Bulldozer, single shank ripper with pin puller, ROPS cab, fast fuel fill and engine doors.


\*\* Height (stripped top) — without ROPS canopy, exhaust, seat back or other easily removed encumbrances.

■ SAE J1234.


**D3C Series III**  
**D3C XL Series III**  
**D3C LGP Series III**

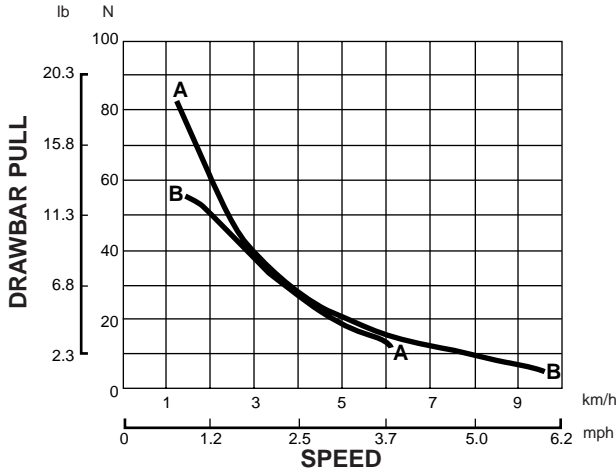

**D4C Series III**  
**D4C XL Series III**  
**D4C LGP Series III**

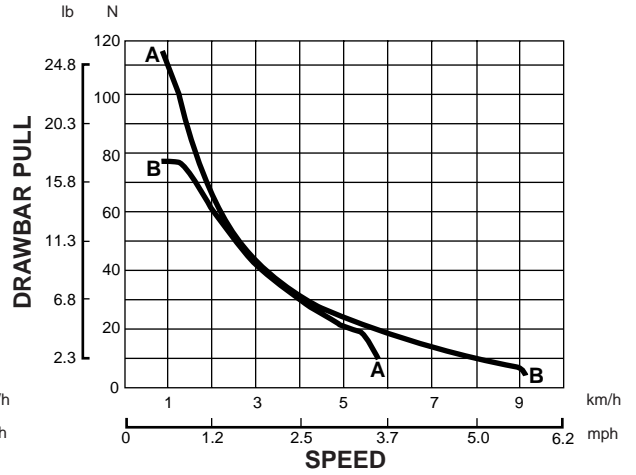

**D5C Series III**  
**D5C XL Series III**  
**D5C LGP Series III**

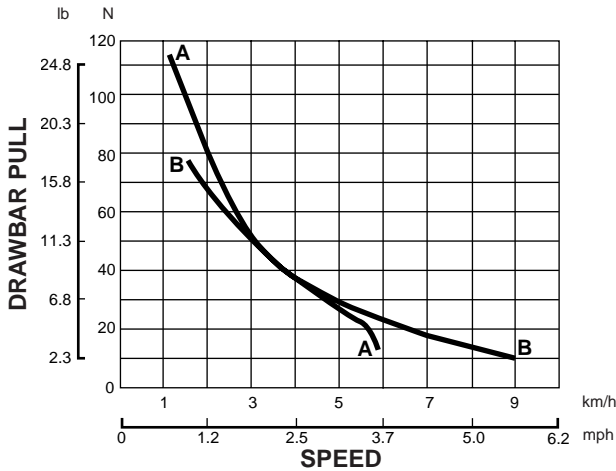


**KEY**


- A — Lo Speed
- B — Hi Speed

**NOTE:** Usable pull will depend upon weight and traction of equipped tractor.


D5M XL  
 D5M LGP

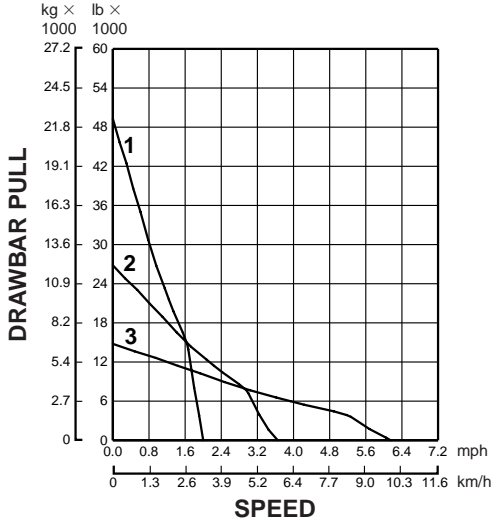


D5M LGP PSDD (available in Japan only)

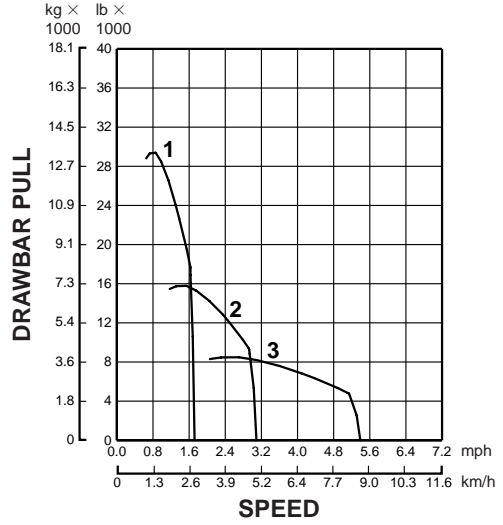

D6M XL  
 D6M LGP

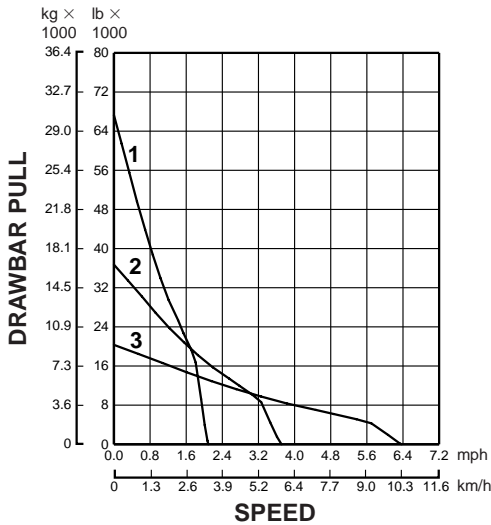

D6G

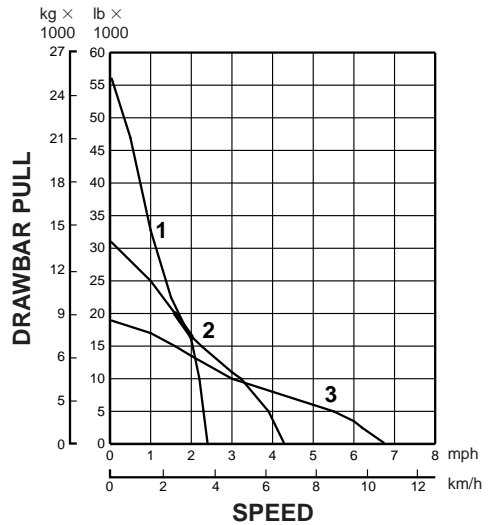


KEY


- 1 — 1st Gear
- 2 — 2nd Gear
- 3 — 3rd Gear

NOTE: Usable pull will depend upon weight and traction of equipped tractor.


**D6R Standard  
 Steering Clutches & Brakes (FTC)**

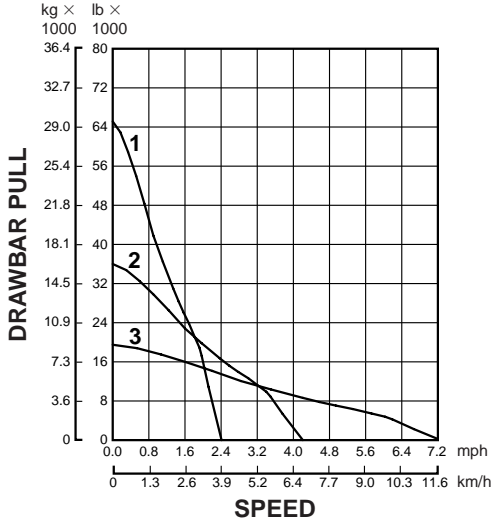


**D6R Standard  
 Differential Steering**

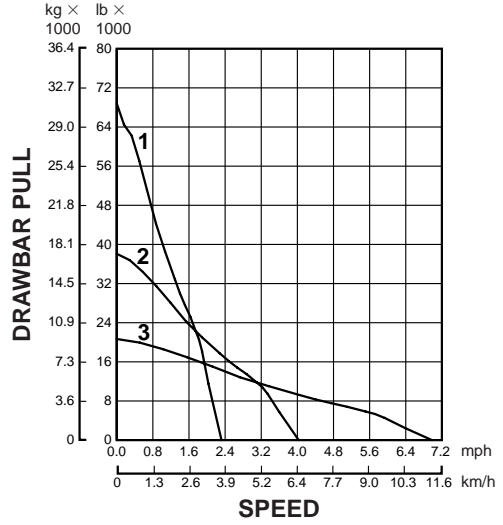

**D6R XL/XR  
 Steering Clutches & Brakes (FTC)**

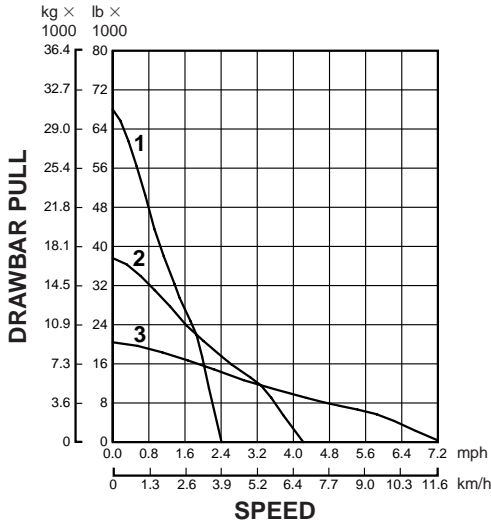

**D6R IG  
 Steering Clutches & Brakes (FTC)**

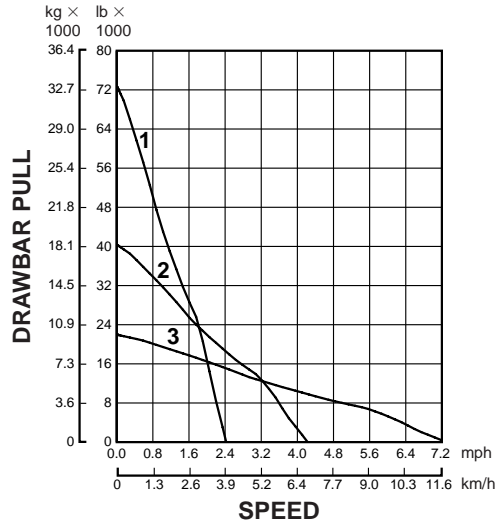


**KEY**


- 1 — 1st Gear
- 2 — 2nd Gear
- 3 — 3rd Gear

**NOTE:** Usable pull will depend upon weight and traction of equipped tractor.


**D6R IG**  
 Differential Steering

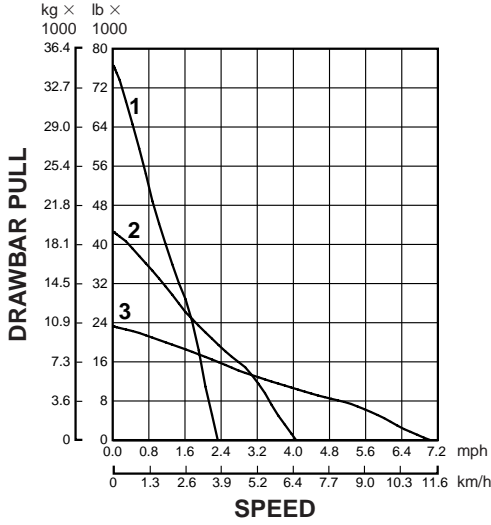


**D6R XL/XR**  
 Differential Steering

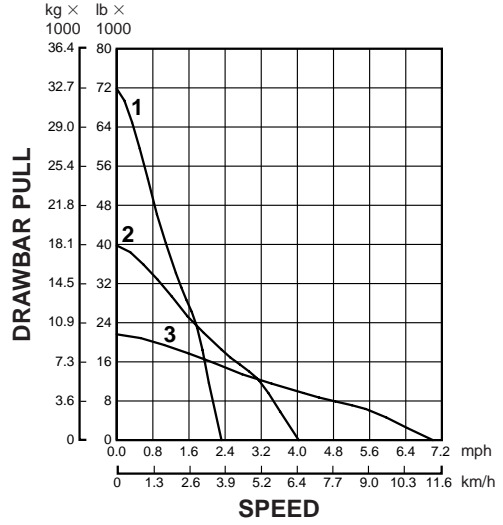

**D6R LGP**  
 Steering Clutches & Brakes (FTC)

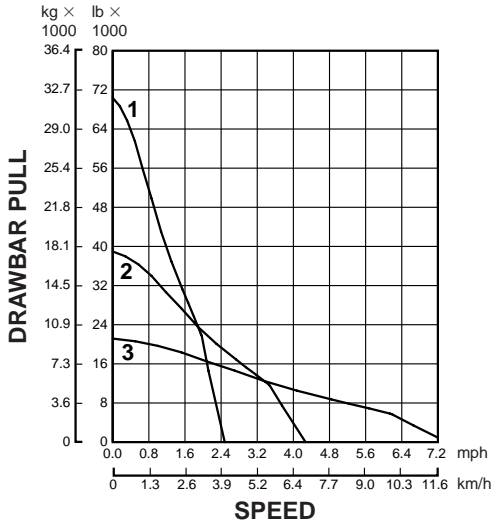

**D6R LGP**  
 Differential Steering

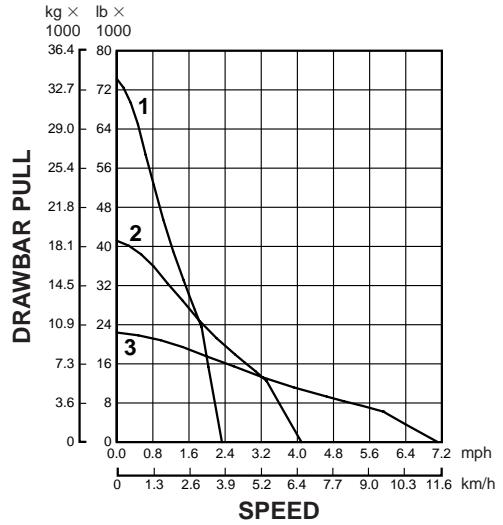


**KEY**  
 \_\_\_\_\_  
 1 — 1st Gear  
 2 — 2nd Gear  
 3 — 3rd Gear

**NOTE:** Usable pull will depend upon weight and traction of equipped tractor.


- Power Shift, Direct Drive
- Power Shift

**D6R**

Power Shift, Direct Drive (available in Japan only)

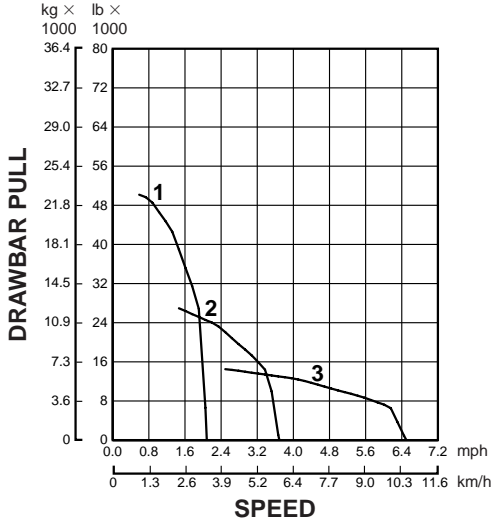


**D7G**

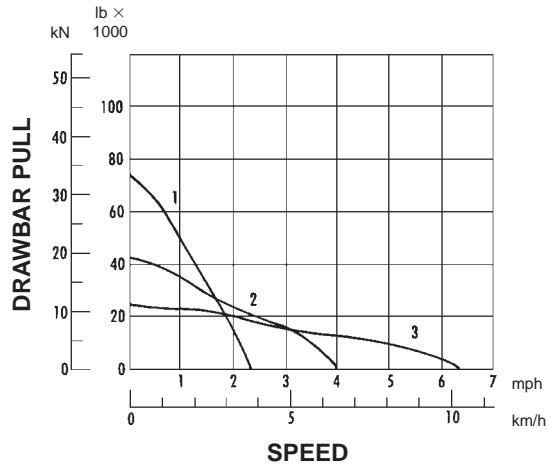


**D7R Standard/XR**

Steering Clutches & Brakes

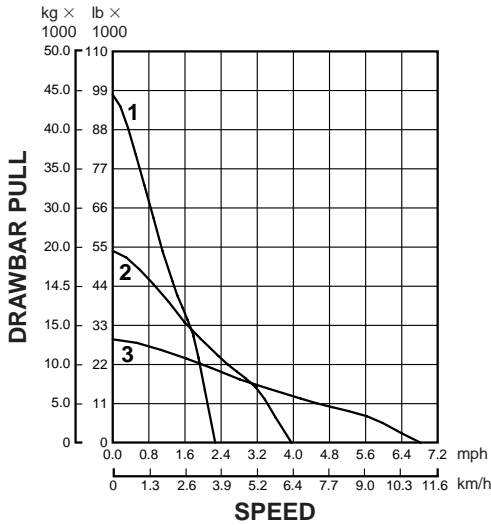

**D7R LGP**

Steering Clutches & Brakes

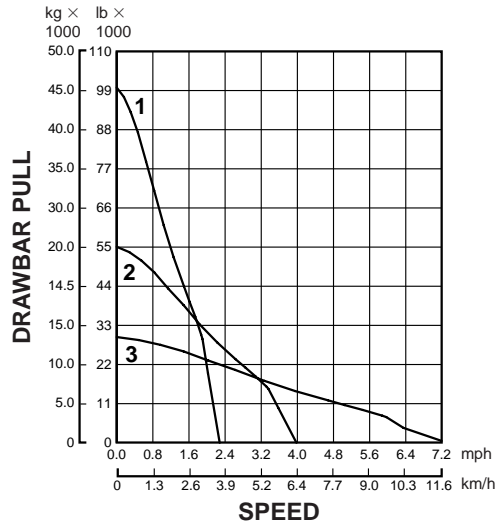


**KEY**


- 1 — 1st Gear
- 2 — 2nd Gear
- 3 — 3rd Gear

**NOTE:** Usable pull will depend upon weight and traction of equipped tractor.


**D7R Standard/XR**  
**Differential Steering**

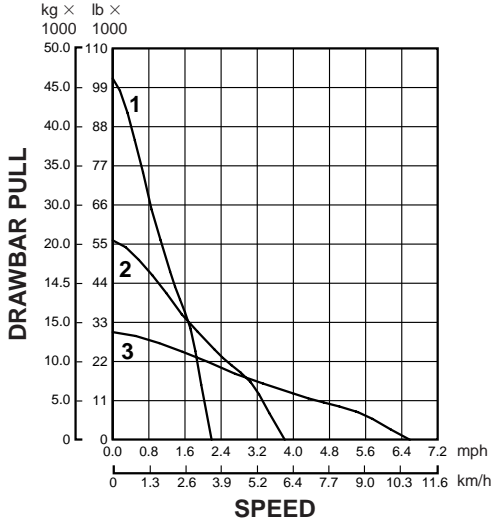


**D7R LGP**  
**Differential Steering**

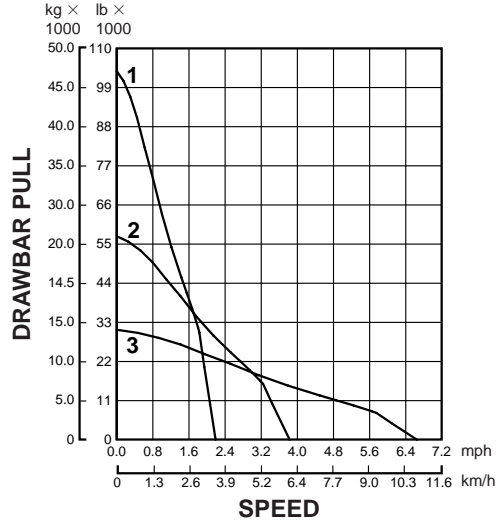

**D8R**  
**D8R LGP**

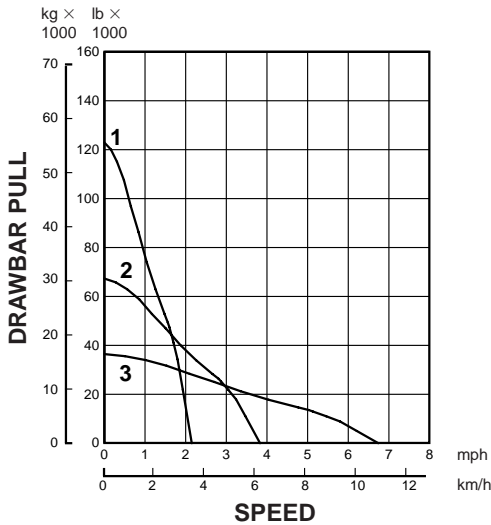

**D9R Power Shift with**  
**Steering Clutches & Brakes**

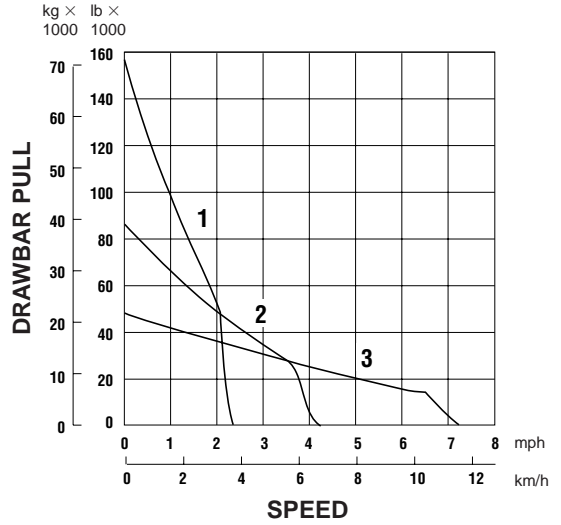


**KEY**


- 1 — 1st Gear
- 2 — 2nd Gear
- 3 — 3rd Gear

**NOTE:** Usable pull will depend upon weight and traction of equipped tractor.


**D9R Differential Steering**

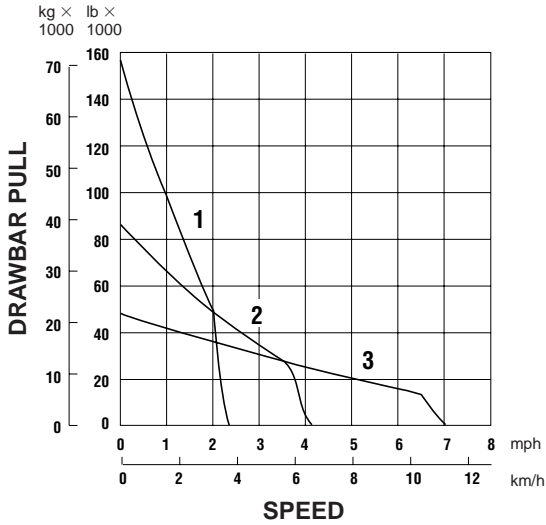

**D10R**

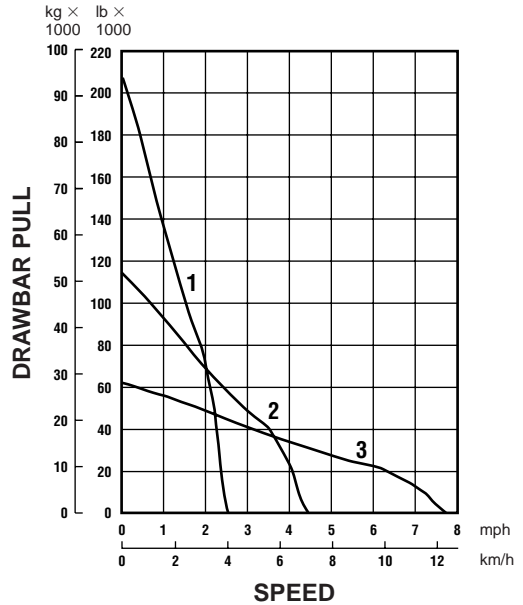

**D11R/D11R CD**

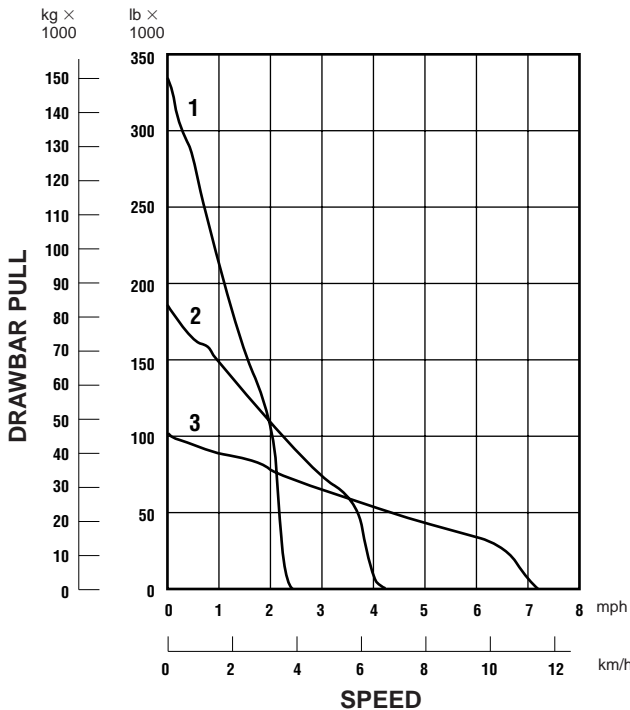

**KEY**

- 1 — 1st Gear
- 2 — 2nd Gear
- 3 — 3rd Gear

**NOTE:** Usable pull will depend upon weight and traction of equipped tractor. Tractors with suspended undercarriage can provide up to 15% more tractive effort than tractors with non-suspended undercarriage.



**TRAVEL SPEED**

POWER SHIFT MODEL	D3C Series III All Models		D4C Series III All Models		D5C Series III All Models		D5M LGP*				D6M XL			
	km/h	mph	km/h	mph	km/h	mph	D5M XL		D5M LGP		PS DD			
FORWARD														
1	—	—	—	—	—	—	3.3	2.0	3.3	2.0	2.8	1.7	3.4	2.1
2	—	—	—	—	—	—	5.8	3.6	5.8	3.6	5.0	3.1	6.0	3.7
3	—	—	—	—	—	—	9.9	6.2	9.9	6.2	8.7	5.4	10.2	6.4
REVERSE														
1	—	—	—	—	—	—	4.0	2.5	4.0	2.5			4.2	2.6
2	—	—	—	—	—	—	7.1	4.4	7.1	4.4	**		7.5	4.6
3	—	—	—	—	—	—	12.1	7.5	12.1	7.5			12.8	7.9
HYDROSTATIC FORWARD/ REVERSE	0-9.0	0-5.6	0-9.0	0-5.6	0-9.0	0-5.6	—	—	—	—	—	—	—	—

POWER SHIFT MODEL	D6M LGP		D6E		D6R (FTC) All Models		Differential Steer D6R All Models			D7R (FTC) All Models		Differential Steer D7R All Models		
	km/h	mph	km/h	mph	km/h	mph	km/h	mph	km/h	mph	km/h	mph		
FORWARD														
1	3.4	2.1	4.0	2.5	4.0	2.5	3.9	2.4	3.7	2.3	3.7	2.3	3.7	2.3
2	6.0	3.7	6.9	4.3	7.1	4.4	6.8	4.2	6.6	4.1	6.9	4.3	6.9	4.3
3	10.2	6.4	10.8	6.7	12.4	7.7	11.9	7.6	10.0	6.2	11.1	6.9	11.1	6.9
REVERSE														
1	4.2	2.6	4.8	3.0	5.2	3.2	4.8	3.0	4.5	2.8	4.8	3.0	4.8	3.0
2	7.5	4.6	8.4	5.2	9.0	5.6	8.7	5.4	7.9	4.9	8.3	5.2	8.3	5.2
3	12.8	7.9	12.9	8.0	16.1	10.0	15.3	9.5	12.2	7.6	14.2	8.8	14.2	8.8

POWER SHIFT MODEL	D8R D8R LGP		D9R		D10R		D11R		D11R CD	
	km/h	mph	km/h	mph	km/h	mph	km/h	mph	km/h	mph
FORWARD										
1	3.5	2.2	3.9	2.4	4.0	2.5	3.9	2.4	3.9	2.4
2	6.2	3.9	6.8	4.2	7.1	4.4	6.8	4.2	6.8	4.2
3	10.8	6.7	11.8	7.3	12.5	7.7	11.8	7.3	11.7	7.3
REVERSE										
1	4.7	2.9	4.8	3.0	5.0	3.1	4.7	2.9	4.7	2.9
2	8.1	5.0	8.4	5.2	8.9	5.5	8.2	5.1	8.2	5.1
3	13.9	8.6	14.7	9.1	15.6	9.7	14.0	8.7	14.0	8.7

\*Power Shift direct drive transmission available for Japan domestic market only.

\*\*Not available at time of printing.

**TRAVEL SPEED**

DIRECT DRIVE MODEL	D5E Std. Trans.		D6R Std. Trans.	
	km/h	mph	km/h	mph
FORWARD				
1	2.7	1.7	3.4	2.1
2	4.2	2.6	5.9	3.7
3	5.8	3.6	10.4	6.5
4	8.0	5.0		—
5	11.1	6.9		—
6		—		—
REVERSE				
1	3.4	2.1	4.3	2.7
2	5.3	3.3	7.5	4.7
3	7.4	4.6	13.3	8.3
4	10.1	6.3		—
5		—		—
6		—		—

**DRAWBAR PULL FORWARD\***

FORWARD	At Rated RPM			At Rated RPM		
	kN	kg	lb	kN	kg	lb
1	86.1	8770	19,340	122.5	12 500	27,530
2	54.0	5500	12,130	93.2	9520	20,960
3	36.8	3750	8270	70.0	7140	15,740
4	24.9	2540	5600		—	—
5	16.3	1660	3660		—	—
6		—	—		—	—
	Max. at Lug			Max. at Lug		
1	109.2	11 130	24,540	159.0	16 220	35,750
2	69.1	7040	15,525	121.6	12 410	27,340
3	47.6	4850	10,695	91.9	9370	20,650
4	32.9	3350	7385		—	—
5		—	—		—	—
6		—	—		—	—

\*Specified pull is based on nominal engine performance derated for transmission lube, control and optional implement hydraulic pumps, with corrections made for drive-line mechanical efficiency and rolling resistance on firm level ground. Usable pull will depend on particular attachments, weight and traction of equipped tractor.  
**NOTE:** For Variable Horsepower Tractor Information, see the Agricultural Tractor section in this handbook.

**TRAVEL SPEED**

DIRECT DRIVE MODEL	D6R LGP		D7G		D7G	
	Std. Trans.		Std. Trans.		Opt. Trans.	
FORWARD	km/h	mph	km/h	mph	km/h	mph
1	2.7	1.7	2.6	1.6	3.5	2.2
2	3.5	2.2	3.7	2.3	4.8	3.0
3	4.6	2.9	5.3	3.3	5.6	3.5
4	5.8	3.6	7.9	4.9	6.4	4.0
5	7.6	4.7	10.3	6.4	7.2	4.5
6	10.0	6.2		—	8.2	5.1
REVERSE						
1	3.3	2.1	3.1	1.9	4.0	2.5
2	4.3	2.7	4.3	2.7	5.6	3.5
3	5.6	3.5	6.3	3.9	6.8	4.2
4	7.1	4.4	9.3	5.8	7.6	4.7
5	9.2	5.7		—		—
6	12.2	7.6		—		—

**DRAWBAR PULL FORWARD\***

FORWARD	At Rated RPM			At Rated RPM			At Rated RPM		
	kN	kg	lb	kN	kg	lb	kN	kg	lb
1	126.9	12 930	28,520	163.0	16 610	36,630	118.4	12 560	27,680
2	96.7	9850	21,730	109.9	11 200	24,690	83.5	8700	19,190
3	72.7	7410	16,330	73.4	7480	16,500	69.1	7110	15,680
4	55.4	5650	12,460	46.9	4780	10,540	60.5	6170	13,600
5	40.9	4170	9190	34.5	3510	7750	51.7	5190	11,450
6	28.8	2940	6480		—		45.1	4460	9840
		<b>Max. at Lug</b>			<b>Max. at Lug</b>			<b>Max. at Lug</b>	
1	168.8	17 200	37,930	209.8	21 390	47,150	153.0	16 080	35,440
2	129.2	13 170	29,030	142.2	14 500	31,960	108.7	11 260	24,830
3	97.7	9960	21,960	95.9	9770	21,550	90.4	9270	20,440
4	95.1	7660	16,880	62.1	6330	13,950	79.5	8040	17,840
5	56.1	5710	12,600	46.3	4710	10,400	68.3	6870	15,150
6	40.3	4100	9050		—		59.9	5960	13,130

\*Specified pull is based on nominal engine performance derated for transmission lube, control and optional implement hydraulic pumps, with corrections made for drive-line mechanical efficiency and rolling resistance on firm level ground. Usable pull will depend on particular attachments, weight and traction of equipped tractor.

**NOTE:** For Variable Horsepower Tractor Information, see the Agricultural Tractor section in this handbook.

## GROUND PRESSURES

Pressures computed from operating weights given earlier in this section in the specifications tables.

MODEL	SHOE WIDTH		CONTACT AREA		GROUND PRESSURE	
	mm	in	m <sup>2</sup>	in <sup>2</sup>	kPa	psi
D3C Hystat	406	16	1.54	2390	45.2	6.56
D3C XL Hystat	406	16	1.67	2586	42.9	6.23
D3C LGP Hystat	635	25	2.61	4045	29.0	4.20
D4C Hystat	406	16	1.67	2586	43.0	6.25
D4C XL Hystat	457	18	2.02	3131	36.5	5.29
D4C LGP Hystat	635	25	2.61	4045	29.2	4.24
D5C Hystat	457	18	1.96	3039	42.4	6.16
D5C XL Hystat	508	20	2.35	3547	36.7	5.33
D5C LGP Hystat	660	26	2.83	4389	31.1	4.51
D5M XL	510	20	2.44	3782	48.6	7.05
◀	560	22	2.67	4132	45.3	6.51
D5M LGP	610	24	3.18	4929	39.7	5.76
◀	760	30	3.96	6138	32.4	4.70
◀	770	30	4.01	6215	32.9	4.77
D5E	406	16	1.80	2790	62	9.00
◀	457	18	1.99	3085	55	7.98
D6M XL	560	22	2.86	4427	53.3	7.73
◀	600	24	3.06	4743	49.7	7.21
D6M LGP	710	28	4.40	6820	37.6	5.46
◀	860	34	5.34	8277	31.0	4.51
◀	865	34	5.37	8324	30.9	4.48
D6G	457	18	2.43	3766	60	8.70
◀	508	20	2.71	4200	54	7.83
◀	560	22	2.98	4619	49	7.10
◀	610	24	3.25	5040	45	6.54
D6R	560	22	2.92	4518	61	8.82
◀	610	24	3.18	4930	56	8.14

◀ Standard Shoe.

MODEL	SHOE WIDTH		CONTACT AREA		GROUND PRESSURE	
	mm	in	m <sup>2</sup>	in <sup>2</sup>	kPa	psi
D6R XL	560	22	3.16	4888	60	8.60
◀	610	24	3.44	5332	55	7.93
D6R XL (IG)	762	30	4.30	6696	44	6.50
D6R XR	560	22	3.08	4770	60	8.68
◀	610	24	3.36	5203	56	8.01
D6R LGP	760	30	4.93	7662	41	5.80
◀	915	36	5.93	9194	35	4.94
◀	1000	39	6.49	9961	32	4.55
D7G	508	20	2.76	4280	73	10.60
◀	559	22	3.04	4708	66	9.60
◀	610	24	3.31	5136	60	8.80
D7R	510	20	2.94	4560	82	11.71
◀	560	22	3.24	5016	75	10.69
◀	610	24	3.53	5472	69	9.87
◀	660	26	3.82	5928	64	9.17
D7R XR	560	22	3.43	5315	71.5	10.16
◀	610	24	3.75	5808	65.9	9.37
◀	660	26	4.06	6282	61.2	8.70
D7R LGP	760	30	4.80	7504	54	7.74
◀	915	36	5.82	9029	46	6.55
D7R LGP ERF*	915	36	6.49	10,060	42	6.09
D8R	560	22	3.59	5565	101.1	14.67
◀	610	24	3.91	6062	92.8	13.47
◀	660	26	4.23	6559	85.9	12.47
◀	710	28	4.55	7056	79.7	11.57
D8R LGP	965	38	6.20	9576	58.6	8.50
D9R	560	22	3.86	6009	121.1	17.58
◀	610	24	4.24	6569	110.8	16.08
◀	685	27	4.74	7374	98.7	14.32
◀	760	30	5.26	8194	88.8	12.89
D10R	610	24	4.74	7321	135.7	19.63
◀	710	28	5.52	8551	116.2	16.86
◀	800	31.5	6.22	9635	103.1	14.97
D11R	710	28	6.31	9781	162.4	23.57
◀	810	32	7.20	11,159	142.4	20.66
◀	915	36	8.13	12,605	126.0	18.29
D11R CD	810	32	7.20	11,159	153.8	22.32
◀	915	36	8.13	12,594	136.7	19.76

\* Extended track roller frame.

◀ Standard shoe.

**NOTE:** Ground contact area = width of track shoe  
× length of track on ground × 2.

$$\text{Ground pressure} = \frac{\text{operating weight}}{\text{ground contact area}}$$

## EXTREME SLOPE OPERATION

The following table gives the MAXIMUM fore and aft slope on which each tractor will have proper lubrication. Consult Operation & Maintenance Manual (if applicable) for POWER TRAIN fluid level overfill requirements for operation on extreme slopes. Extreme slope operation is anytime the slope exceeds 25° (47%).

The ENGINE should never be overfilled with oil. This may lead to rapid overheating. For extreme slope operation, engine oil should be maintained at the full mark.

**NOTE:** Both ENGINE and POWER TRAIN fluid levels should be checked on level ground before working sidehills and slopes.

Tractor	D3C Series III	D4C Series III	D5C Series III	D5M	D5E & D6M	
Percent Grade or Degrees Slope	100 45	100 45	100 45	100 45	100 45	

Tractor	D6G & D6R	D7G & D7R	D8R	D9R	D10R	D11R/ D11R CD
Percent Grade or Degrees Slope	100 45	100 45*	100 45	100 45	100 45	100 45

Pipelayer	561M	572R	583R	589
Percent Grade or Degrees Slope	100 45	100 45	100 45	100 45

When working sidehills and slopes, consideration should be given to the following important points:

- Speed of travel — At higher speeds, inertia forces tend to make the tractor less stable.
- Roughness of terrain or surface — Ample allowance should be made where the terrain or surface is uneven.
- Mounted equipment — Bulldozers, sidebooms, winches, and other mounted equipment cause the tractor to balance differently.
- Nature of surface — New earthen fills may give way with the weight of the tractor. Rocky surfaces may promote side slipping of tractor.
- Track slippage due to excessive loads — This may cause downhill track to “dig in,” increasing angle of tractor.

- Implements hitched to the drawbar — This may decrease weight on uphill track, e.g., logging arch, two-wheel wagon.
- Height of hitch on tractor — When a high drawbar is used the tractor is less stable than with the standard drawbar.
- Width of shoes — Wide track shoes tend to decrease “digging in”, hence tractor is more stable.
- Operated equipment — Be aware of the stability and other performance features of the equipment operated by the tractor.
- Keep all attachments or pulled loads low to the ground for optimum stability.

\*The D7G requires a 23 L (6 gal) transmission overfill for acceptable operation on slopes above 25° (47%).

**NOTE:** Safe operation on steep slopes may require special machine maintenance as well as excellent operator skill and proper equipment for the specific application. Consult Operation & Maintenance Manual (if applicable) for proper fluid level requirements.

# HYDRAULIC CONTROLS

## CONTENTS

Features .....	1-23
Specifications .....	1-24

### Features:

- **Designed and built for specific tractor applications.** Valves and components sized for exacting quality and performance.
- **Job requirements matched** through various arrangements.
- **Pressure compensated control valves** for ease of operation on D6R thru D9R. Pilot operated on D10R except for dozer lift which is pressure compensated and manually operated. D11R and D11R Carry Dozer have electro hydraulic controls for all blade and ripper functions.
- **Full flow filters\***... all oil completely filtered.
- **Dual tilt** — standard on D11R, optional on D9R and D10R.

\*Exception — D8R 2-pump.

MODEL	D3C Series III Hystat	D4C Series III Hystat	D5C Series III Hystat
Mounting Point	Fender	Fender	Fender
Number of Valves	3 or 4	3 or 4	3 or 4
Flow at 6890 kPa (1000 psi)	66.6 L/min      17.6 gpm @ 2400 RPM	66.6 L/min      17.6 gpm @ 2400 RPM	66.6 L/min      17.6 gpm @ 2400 RPM
Tank Capacity (Oil)	57 L              15 U.S. gal	57 L              15 U.S. gal	57 L              15 U.S. gal
Lift Relief Valve Setting	17 241 kPa      2500 psi	17 241 kPa      2500 psi	17 241 kPa      2500 psi
Weight Installed	16 kg            36 lb* (Four Valves)	16 kg            36 lb* (Four Valves)	16 kg            36 lb* (Four Valves)

MODEL	D5M	D6M
Mounting Point	Right Rear Fender	Right Rear Fender
Number of Valves	3 or 4	3 or 4
Flow at 6890 kPa (1000 psi)	95 L/min          25 gpm @ 2200 RPM	119 L/min        31.5 gpm @ 2200 RPM
Tank Capacity (Oil)	32 L              8.5 U.S. gal	29 L              7.5 U.S. gal
Lift Relief Valve Setting XL & LGP	20 685 kPa      3000 psi	24 800 kPa      3600 psi
Weight Installed: 3 Valve	216 kg          440 lb	295 kg          650 lb
4 Valve	232 kg          475 lb	314 kg          703 lb

MODEL	D6G	D6R	D6R (Differential Steer)
Mounting Point	Dash	Under Operators Platform	Under Operators Platform
Number of Valves	1, 2 or 3	2 or 3	3 or 4
Flow at 6890 kPa (1000 psi)	167 L/min        44 gpm @ 1900 RPM	193 L/min        51 gpm @ 1900 RPM	196 L/min        51.8 gpm @ 2000 RPM
Tank Capacity (Oil)	49 L              13 U.S. gal	47.3 L            12.5 U.S. gal	45.4 L            12 U.S. gal
Lift Relief Valve Setting	15 500 kPa      2250 psi	19 305 kPa      2800 psi	19 305 kPa      2800 psi
Weight Installed	318 kg           700 lb (Two Valves)	311 kg           685 lb (Two Valves)	311 kg           686 lb (Two Valves)

MODEL	D7G (173B)	D7R	D7R (Differential Steer)
Mounting Point	Fender	Under Operators Platform	Under Operators Platform
Number of Valves	1, 2 or 3	2 or 3	2 or 3
Flow at 6890 kPa (1000 psi)	227 L/min        60 gpm @ 2080 RPM	175 L/min        46.2 gpm @ 2100 RPM (ENG.)	275 L/min        72.7 gpm @ 2100 RPM (ENG.)
Tank Capacity (Oil)	91 L              24 U.S. gal	66.2 L            17.5 U.S. gal	54 L              14.3 U.S. gal
Lift Relief Valve Setting	15 500 kPa      2250 psi	22 750 kPa      3300 psi	22 750 kPa      3300 psi
Weight Installed	458 kg           1010 lb (Two Valves)	358 kg           789 lb (Two Valves)	273.2 kg        602.5 lb (Two Valves)

\*Hydraulic tank not included.

NOTE: Weight installed, two valves, includes pump, tank with filters, valves, lines, linkage, oil cooler and control levers. D3C Series II weight does not include hydraulic tank.

MODEL	D8R	D9R	D10R
Mounting Point	Under Operators Platform	Under Operators Platform	Under Operators Platform
Number of Valves	3 Ripper◀ Requires optional electronic diverter	4 + Dual Tilt (Attach.) Radiator Guard	2 At Rear Under Fuel Tank 1◀ + Dual Tilt (Attach.) Radiator Guard
Flow at 6890 kPa (1000 psi)	239 L/min      63 gpm @ 2100 RPM	235 L/min      62.1 gpm @ 1900 RPM	408 L/min      107.8 gpm @ 1900 RPM
Tank Capacity (Oil)	70 L      18.5 U.S. gal	77.2 L      20.4 U.S. gal	108 L      28.6 U.S. gal
Lift Relief Valve Setting	27 600 kPa      4000 psi	26 200 kPa      3800 psi	18 616 kPa      2700 psi
Weight Installed	Included in Std. Tractor (Two Valves)	Included in Std. Tractor (Two Valves)	Included in Std. Tractor (Two Valves)

MODEL	D11R	D11R CD
Mounting Point	Under Operators Platform	Under Operators Platform
Number of Valves	2 At Rear Under Fuel Tank 1◀ + Dual Tilt (Attach.) Radiator Guard	2 At Rear Under Fuel Tank 1◀ Dual Tilt Standard Quick Dump Valve Standard Both on Radiator Guard
Flow at 6890 kPa (1000 psi)	620 L/min      164 gpm @ 1890 RPM	655 L/min      173 gpm @ 1890 RPM
Tank Capacity (Oil)	205 L      54 U.S. gal	205 L      54 U.S. gal
Lift Relief Valve Setting	22 750 kPa      3300 psi	24 115 kPa      3500 psi
Weight Installed	Included in Std. Tractor (Two Valves)	Included in Std. Tractor (Two Valves)

◀ Ripper valve.

**NOTE:** Weight installed, two valves, includes pump, tank with filters, valves, lines, linkage, oil cooler and control levers.





# BULLDOZERS

## CONTENTS

Features .....	1-27
Summary of blade options .....	1-28
Blade selection .....	1-29
General dimensions (Tractor and Blade) .....	1-32
SAE blade capacity definition .....	1-32
Blade specifications .....	1-33
Estimating production off-the-job .....	1-41
Job condition correction factors .....	1-45
Measuring production on-the-job .....	1-46
Work tools .....	1-46

## Features:

- **Straight Bulldozers** — adjustable pitch angle controls blade penetration.
- **Variable cutting edge Power Angle and Tilt (VPAT)** — blade is available on the D3C Series III, D4C Series III, D5C Series III, D5M and D6M. The blade can be mechanically tipped forward for improved penetration or back for more productivity and easier finish grading.
- **Power Angle and Tilt (PAT)** — blade is available for D6R as a custom product. Provides greater versatility for finish grading, V ditching, windrowing and medium to heavy dozing in dirt, clay, sand and other non-rock materials. Not intended for land clearing.
- **Angling Bulldozers** — 25° right/left angling; C-frame allows mounting other tools.
- **Universal Bulldozers** — 25° wings provide increased capacity, less spillage.
- **Semi-Universal Bulldozers** — combines penetration ability of straight blade with increased load capacity provided by short 25° wings.
- **Wheel Dozer blades** are straight design, with hydraulic pitch and tilt control.
- **Box-section construction** on blades adds rigidity and strength.
- **Cutting edges** are heat treated and reversible for extra life.

**CATERPILLAR BLADES**

**SPECIAL BLADES**

MODEL	S	U	SU	A	FS	LFS	P	VP	RC	WC	CL	HU	LF	TW	CU	CPB	CB	VR	WCB	CS	WCS	W	
D3C Series III							●	●						●									
D4C Series III							●	●						●									
D3C LGP Series III							●	●						●									
D4C LGP Series III							●	●						●									
D4E SR				●				●						●									
D5C Series III							●	●						●									
D5C LGP Series III							●							●									
D5M XL								●						●									
D5M LGP								●						●									
D5E				●										●									
D6M XL			●					●						●									
D6M LGP								●						●									
D6R	●		●	●			●			●	●	●	●	●					●				
D6R XL			●	●			●							●									
D6R LGP	●									●	●		●	●									
D6R IG			●	●										●									
D6G	●			●							●		●	●					●				
D7R	●	●	●	●						●	●	●	●	●					●				
D7R LGP	●												●	●					●				
D7G	●	●		●						●	●	●	●	●	●	●			●				
D8R		●	●	●					●	●	●	●	●		●	●	●	●	●				
D8R LGP																							
D9R		●	●							●	●		●		●	●			●	●			
D10R		●	●						●	●	●				●	●	●	●	●				
D11R		●	●						●		●								●				
814F	●				●					●	●	●									●	●	
815F					●																		
816F						●							●										●
824G	●									●	●	●									●	●	
825G					●																		
826G						●							●										●
834B	●	●								●	●										●	●	
836													●										●

**CATERPILLAR SUPPLIED**

- S — Straight
- U — Universal
- SU — Semi-Universal
- A — Angling
- FS — Fill Spreading
- LFS — Landfill Spreading
- P — Power Angle Tilt
- VP — Variable Pitch, Lower, Angle & Tilt (VPAT)

**SPECIAL SUPPLIED**

- RC — Reclamation U
- WC — Woodchips
- CL — Coal
- HU — Heavy U
- LF — Landfill
- TW — Two-Way Dozer
- CU — Cushion Dozer
- CPB — Cushion Push Block
- CB — Coal Bowldozer
- VR — Variable Radius
- WCB — Wood Chip Bowldozer
- CS — Coal Scoop
- WCS — Wood Chip Scoop
- W — W-Blade

**NOTE:** This chart suggests a range of blade options for Caterpillar built machines. It is not totally inclusive of all blades available. For additional information consult your Caterpillar Dealer.

## BLADE SELECTION

Properly matching tractor and dozer is a basic requirement for maximizing production. First consider the kind of work the tractor will be doing most of its life. Then evaluate:

- Material to be moved.
- Tractor limitations.

### Materials to be moved.

Most materials are dozeable. However, dozer performance will vary with material characteristics such as:

**Particle Size & Shape** — The larger the individual particle size, the harder it is for a cutting edge to penetrate. Particles with sharp edges resist the natural rolling action of a dozer blade. These particles require more horsepower to move than a similar volume of material with rounded edges.

**Voids** — Few voids or the absence of voids means the individual particles have most or all of their surface area in contact with other particles. This forms a bond which must be broken. A well graded material, which lacks voids, is generally heavy, and will be hard to remove from the bank state.

**Water Content** — In most materials the lack of moisture increases the bond between particles and makes the material difficult to remove from the bank state. A high moisture content makes dozing difficult because the material is heavy and requires more force to move. Optimum moisture reduces dust and offers the best condition for dozing ease and operator comfort.

The effect of freezing depends on the moisture content. When frozen, the material's bond strengthens as moisture content increases and temperature decreases. However, freezing a completely dry material does not change its characteristics.


An indication of a blade's ability to penetrate and obtain a blade load is kW per meter (or horsepower per foot) of cutting edge. The higher the kW/meter (HP/foot), the more aggressive the blade. Kilowatt per  $Lm^3$  (horsepower per loose cubic yard) indicates a blade's ability to push material. The higher the kW/ $Lm^3$  (HP/LCY), the greater the blade's potential capability for carrying material at a greater speed.

### Tractor Limitations

The weight and horsepower of the machine determines its ability to push. No tractor can exert more pounds push than the machine itself weighs and its power train can develop. Various terrain and underfoot conditions on the job limit the tractor's ability


to use its weight and horsepower. The "approximate coefficient of traction factors" chart in the Tables Section presents these traction factors for common materials. To use the chart, take the total tractor weight (with attachments) times the factor to arrive at the maximum usable push the dozer can exert.

### Production Dozing Tools



**“U”** — Universal blade — the large wings on this blade include one end bit and at least one section of cutting edge which make it efficient for moving big loads over long distances as in land reclamation, stockpile

work, charging hoppers and trapping for loaders. As this blade has a lower kW/meter (HP/foot) of cutting edge than an “S” or “SU”, penetration should not be a prime objective. With a lower kW/ $Lm^3$  (HP/LCY) than an “S” or “SU”, this blade is best for lighter or relatively easily dozed material. If equipped with tilt cylinder(s), it has some of the versatility of the S-blade. Tilt cylinder(s) improve its ability to ditch, pry out, and level. This extends its use to many utility tasks.




**“SU”** — The Semi-U blade combines the desirable characteristics of S and U-blades into one package. It has increased capacity by the addition of short wings

which include only the dozer end bits. The wings provide improved load retention capabilities while maintaining the blade's ability to penetrate and load quickly in tightly packed materials and to handle a wide variety of materials in production oriented applications. Tilt cylinder(s) increase both the productivity and versatility of this dozer. Equipped with a push plate, it is effectively used for push load-ing scrapers.

## Bulldozers

### Blade Selection


- Production Dozing Tools
- General Purpose Dozing Tools
- Special Attachments “VR Blades”
- Special Application Dozing Tools



“CD” — The CD or Carrydozer Blade is available for the D11R Carrydozer only. It is built to the same high standard of structural integrity as the “U” and “SU” Dozers. The CD Blade has

a unique “bucket” shape that allows it to carry several cubic yards or cubic meters of material in the blade. This acts as a disposable counterweight that allows the Carrydozer to push more material per pass than a standard D11R. The Carrydozer will not be as effective as the “U” or “SU” dozer in tightly packed or poorly shot material. It is also more sensitive to the carry-back in sticky materials.

### General Purpose Dozing Tools



“S” — The Straight blade provides excellent versatility. Since it is physically smaller than the SU or U-blade, it is easier to maneuver and can handle a wider range of materials. It has a higher kW/meter (HP/foot) of cutting

edge than the SU or U-blade; consequently, the “S” is more aggressive in penetrating and obtaining a blade load. A tilt cylinder increases both the productivity and versatility of this dozer. With a high kW/Lm<sup>3</sup> (HP/LCY), the S-blade can handle heavy material easily.




**Power Angle and Tilt blade** — Versatility is its key feature with its ability to perform a variety of site development to general dozing work as well as heavy-

duty applications. Angle and tilt control is with 2 levers on some machines, 1 lever on others.

Variable Power Angle and Tilt (VPAT) blade can be mechanically tipped forward for improved penetration or shedding sticky material and backward for finish grading and improved productivity.

### “VR Blades” (Variable Radius)



The Variable Radius Semi-U-Blade combines the benefits of a semi-U-blade such as “cutting” ability and ground penetration with U-blade characteristics of better

load retention and less side spill.

This is achieved with the variable radius moldboard. The variable radius moldboard causes dirt to move to the center of the blade creating more rolling action. The extended side plates retain the load and increase capacities.

The variable radius semi-U-blade is an excellent tool for land improvement, soil conservation, site development, or general construction.


### Special Application Dozing Tools

Caterpillar and other blade manufacturers provide specialty bulldozers for specific applications. The blades are designed to increase production while performing certain tasks. However, specialization may reduce the blade versatility. Following are the most popular special applications blades.




“A” — Or Angling blade can be positioned straight or angled 25 degrees to either side. It is designed for side-casting, pioneering

roads, backfilling, cutting ditches and other similar tasks. It can reduce the amount of maneuvering required to do these jobs. Its “C” frame can be used for attachments such as pushing, land clearing, or snow removal tools. A-blades are not recommended for rock or severe applications.



“C” — The Cushion blade is used for on-the-go push-loading. Rubber cushions allow the dozer to absorb the impact of contacting a scraper push block. When not push-loading, the dozer can be used for cut maintenance


and other general dozing jobs. The narrow width of the C-blade increases machine maneuverability in congested cuts and reduces the possibility of cutting tires associated with SU and U-blades.



**“U-Blades”** — Provide high volume movement of light non-cohesive materials such as coal and wood-chips. Heavier U-blades are also offered for production dozing and reclamation work.


**“Landfill”** — Designed to handle refuse and cover material. Open trash screen on top of blade allows good visibility and protects radiator. Curved mold-board keeps cover material rolling evenly.

**“Two-Way Dozer”** — Designed for use inside ship holds to move cargo such as grain, salt, iron ore, coal and chips. These blades can scrape material off walls and doze to center of hold. They can doze material forward or pull material.




**“V-Tree Cutter”** — Rimco and Rome offer this clearing blade for shearing trees, stumps and brush at ground level. A sharp angle or “V”, formed by two cutting blades, utilizes tractor weight and horsepower through the center-

line of the cutter. Utilization of tractor force allows most growth to be cut at a steady pace and cast to the sides.



**“Rakes”** — Caterpillar, Rimco and Rome offer a variety of rakes for use in land clearing applications. They handle vegetation up to tree size, and offer good soil penetration for removal of small stumps, rocks and roots. In most cases rake tines are replaceable.





**“K/G”** — Offered by Rimco and Rome, the K/G-blade is used in many land clearing applications. In addition to cutting trees this versatile blade can pile vegetation, cut v-type drainage ditches and build woods roads and firebreaks. Weldco-Beales offers a blade of similar design called the One-Way Brush Cutter.

## Bulldozers


### General Dimensions Key

- Tractor and Blade
- SAE Blade Capacity Definition

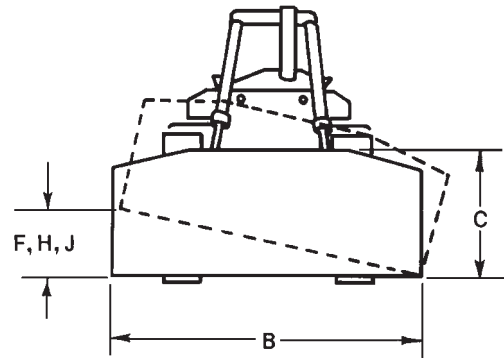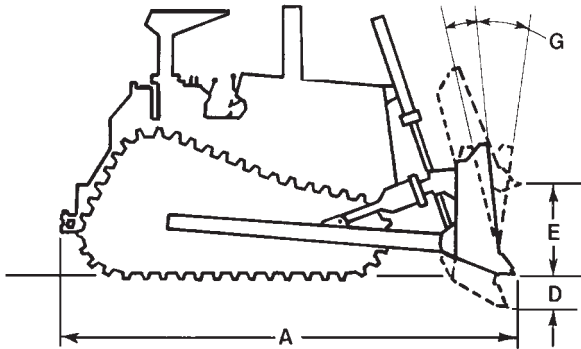

### KEY

- A Length (Blade Straight)  
Blade:
- B Width (including standard end bits)  
C Height  
D Maximum Digging Depth  
E Ground Clearance @ Full Lift  
F Maximum Tilt (Manual)  
G Maximum Pitch Adjustment  
H Maximum Hydraulic Tilt  
J Hydraulic Tilt (manual brace centered)  
K Push Arm Trunnion Width (to Ball Centers)

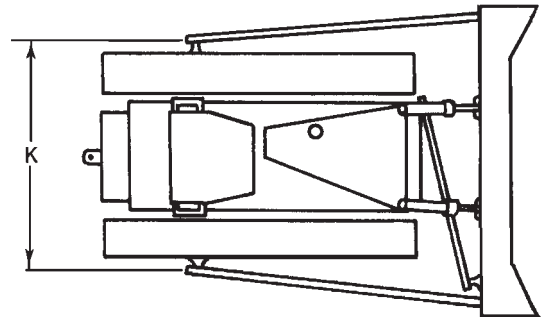

Blade capacities on the following pages are as determined by SAE recommended practice J1265. Capacities are defined as:

$$V_s = 0.8 WH^2.$$

$$V_u = V_s + ZH(W-Z) \tan X.$$

Where:  $V_s$  = Capacity of straight or angling blade.

$V_u$  = Capacity of semi-U or full U-blade.

W = Blade width exclusive of end bits.

H = Effective blade height considering tapered top corners, etc.

Z = Wing length measured parallel to blade width @ ground line of cutting edges.

X = Wing angle.

- Blade Specifications**
- D3C Series III Hystat
  - D4C Series III Hystat
  - D5C Series III Hystat

MODEL	D3C Series III, D3C LGP Series III Hystat			
	3P		3P LGP	
Type	<b>Variable Power Angling and Tilt</b>		<b>Variable Power Angling and Tilt</b>	
Blade Capacities*	1.26 m <sup>3</sup>	<b>1.64 yd<sup>3</sup></b>	1.31 m <sup>3</sup>	<b>1.70 yd<sup>3</sup></b>
Weight Shipping** (Dozer)	1126 kg	<b>2482 lb</b>	1213 kg	<b>2674 lb</b>
Tractor & Dozer Dimensions:				
A Length (Blade Straight)	3.98 m	<b>13'1"</b>	3.95 m	<b>13'0"</b>
Length (Blade Angled)	4.26 m	<b>14'0"</b>	4.63 m	<b>15'2"</b>
Width (Blade Angled)	2.31 m	<b>7'7"</b>	2.90 m	<b>9'6"</b>
Width (with C-Frame only)	—		—	
Blade Dimensions:				
B Width (including std. end bits)	<b>(inside mounted)</b>		<b>(inside mounted)</b>	
C Height	2.55 m	<b>8'4"</b>	3.19 m	<b>10'6"</b>
D Max. Digging Depth	836 mm	<b>2'8.9"</b>	746 mm	<b>2'5.4"</b>
E Ground Clearance @ Full Lift	418 mm	<b>16.5"</b>	398 mm	<b>15.7"</b>
G Pitch Adjustment	761 mm	<b>2'6"</b>	761 mm	<b>2'6"</b>
J Hydraulic Tilt	<b>50°–55°</b>		<b>50°–55°</b>	
Blade Angle	356 mm	<b>14"</b>	490 mm	<b>1'7.3"</b>
	<b>25°</b>		<b>25°</b>	

MODEL	D4C Series III, D4C LGP Series III Hystat D5C Series III, D5C LGP Series III Hystat							
	4P		4P LGP		5P		5P LGP	
Type	<b>Variable Power Angling and Tilt</b>		<b>Variable Power Angling and Tilt</b>		<b>Power Angling and Tilt</b>		<b>Power Angling and Tilt</b>	
Blade Capacities*	1.68 m <sup>3</sup>	<b>2.18 yd<sup>3</sup></b>	1.70 m <sup>3</sup>	<b>2.21 yd<sup>3</sup></b>	1.93 m <sup>3</sup>	<b>2.51 yd<sup>3</sup></b>	2.06 m <sup>3</sup>	<b>2.70 yd<sup>3</sup></b>
Weight Shipping** (Dozer)	1202 kg	<b>2650 lb</b>	1284 kg	<b>2831 lb</b>	1355 kg	<b>2987 lb</b>	1376 kg	<b>3027 lb</b>
Tractor & Dozer Dimensions:								
A Length (Blade Straight)	3.99 m	<b>13'1"</b>	3.99 m	<b>13'1"</b>	4.07 m	<b>13'4"</b>	4.07 m	<b>13'4"</b>
Length (Blade Angled)	4.42 m	<b>14'6"</b>	4.54 m	<b>14'11"</b>	4.51 m	<b>14'10"</b>	4.631 m	<b>15'2"</b>
Width (Blade Angled)	2.49 m	<b>8'2"</b>	3.03 m	<b>9'11"</b>	2.50 m	<b>8'2"</b>	3.00 m	<b>9'10"</b>
Width (with C-Frame only)	—		—		—		—	
Blade Dimensions:								
B Width (including std. end bits)	<b>(inside mounted)</b>		<b>(inside mounted)</b>		<b>(inside mounted)</b>		<b>(inside mounted)</b>	
C Height	2.70 m	<b>10'10"</b>	3.34 m	<b>10'11"</b>	2.75 m	<b>9'0"</b>	3.30 m	<b>10'10"</b>
D Max. Digging Depth	928 mm	<b>3'0.5"</b>	837 mm	<b>2'9"</b>	999 mm	<b>3'3.3"</b>	929 mm	<b>3'0.6"</b>
E Ground Clearance @ Full Lift	448 mm	<b>17.6"</b>	443 mm	<b>17.4"</b>	479 mm	<b>18.9"</b>	452 mm	<b>17.8"</b>
G Pitch Adjustment	775 mm	<b>2'6.5"</b>	775 mm	<b>2'6.5"</b>	809 mm	<b>2'7.9"</b>	835 mm	<b>2'8.9"</b>
J Hydraulic Tilt	<b>50°–55°</b>		<b>50°–55°</b>		<b>50°–55°</b>		<b>50°–55°</b>	
Blade Angle	406 mm	<b>16"</b>	495 mm	<b>1'7.5"</b>	412 mm	<b>16.2"</b>	490 mm	<b>1'7.3"</b>
	<b>25°</b>		<b>25°</b>		<b>25°</b>		<b>25°</b>	

\*Blade capacities as determined by SAE J1265.

\*\*Shipping Weight — Total Bulldozer Arrangement includes: Blade, push arms or C-frame, braces, cylinders, lines, trunnions and lift cylinder mountings.



# Bulldozers

## Blade Specifications

- D5M XL    ● D5M LGP
- D6M XL    ● D6M LGP

MODEL	D5M XL		D5M LGP		D6M XL			
	5VPAT		5VPAT LGP		6SU		6VPAT	
Type	Variable Pitch Power Angling and Tilt		Variable Pitch Power Angling and Tilt		Semi-U		Variable Pitch Power Angling and Tilt	
Blade Capacities*	2.59 m <sup>3</sup>	3.39 yd <sup>3</sup>	2.03 m <sup>3</sup>	2.66 yd <sup>3</sup>	4.28 m <sup>3</sup>	5.60 yd <sup>3</sup>	3.18 m <sup>3</sup>	4.14 yd <sup>3</sup>
Weight, Shipping** (Dozer)	1932 kg	4250 lb	2000 kg	4400 lb	2427 kg	5351 lb	2372 kg	5229 lb
Tractor & Dozer Dimensions:								
A Length (Blade Straight)	4.56 m	14'11"	5.12 m	16'10"	4.92 m	16'2"	4.80 m	15'9"
Length (Blade Angled)	5.09 m	16'8"	5.56 m	19'0"	—	—	5.53 m	17'10"
Width (Blade Angled)	2.79 m	9'2"	3.10 m	10'0"	—	—	2.96 m	9'9"
Width (with C-Frame only)	—	—	—	—	—	—	—	—
Blade Dimensions:								
	(inside mounted)		(inside mounted)		(outside mounted)		(inside mounted)	
B Width (including std. end bits)	3.08 m	10'1"	3.36 m	11'0"	3.14 m	10'4"	3.27 m	10'9"
C Height	1109 mm	3'7.6"	910 mm	2'11.8"	1244 mm	4'1"	1195 mm	3'11"
D Max. Digging Depth	441 mm	17.4"	491 mm	1'7.3"	520 mm	1'8.5"	444 mm	17.5"
E Ground Clearance @ Full Lift	916 mm	3'0.1"	923 mm	3'0.3"	983 mm	3'2.7"	925 mm	3'0.4"
G Max. Pitch	+2°–6°		+2°–6°		±5°		+2°–6°	
H Max. Hydraulic Tilt	—		—		665 mm	2'2.2"	—	
J Hydraulic Tilt	460 mm	18.1"	491 mm	1'7.3"	372 mm	14.6"	497 mm	1'7.6"
Blade Angle	25°		25°		—		25°	

\*Blade capacities as determined by SAE J1265.

\*\*Shipping Weight — Total bulldozer arrangement includes: Blade, push arms or C-frame, braces, cylinders, lines, trunnions and lift cylinder mountings.

MODEL	D6M LGP	
	6VPAT LGP	
Type	Variable Pitch Power Angling and Tilt	
Blade Capacities*	3.16 m <sup>3</sup>	4.11 yd <sup>3</sup>
Weight, Shipping** (Dozer)	2819 kg	6215 lb
Tractor & Dozer Dimensions:		
A Length (Blade Straight)	5.39 m	17'8"
Length (Blade Angled)	6.20 m	20'4"
Width (Blade Angled)	3.70 m	12'2"
Width (with C-Frame only)	—	
Blade Dimensions:		
	(inside mounted)	
B Width (including std. end bits)	4.08 m	13'5"
C Height	1025 mm	3'4.4"
D Max. Digging Depth	433 mm	17.0"
E Ground Clearance @ Full Lift	1024 mm	3'4.3"
G Max. Pitch	+2°–6°	
H Max. Hydraulic Tilt	598 mm	1'11.5"
J Hydraulic Tilt	—	
Blade Angle	25°	

\*Blade capacities as determined by SAE J1265.

Notice that the capacity of the U-blade is the volume carried by a straight blade of the same dimensions plus the volume included in the "cup" of the U-blade. It is intended for **relative comparisons of dozer sizes**, and not for predicting capacities or productivities in actual field conditions.

\*\*Shipping Weight — Total Bulldozer Arrangement includes: Blade, push arms or C-frame, braces, cylinders, lines, trunnions and lift cylinder mountings.

MODEL	D6R, D6R XL & D6R LGP							
	6A		6A Heavy Duty		6A XL		6PAT XL	
Type	Angling		Angling		Angling		PAT	
Blade Capacities*	3.18 m <sup>3</sup>	<b>4.16 yd<sup>3</sup></b>	3.93 m <sup>3</sup>	<b>5.14 yd<sup>3</sup></b>	3.93 m <sup>3</sup>	<b>5.14 yd<sup>3</sup></b>	3.83 m <sup>3</sup>	<b>5 yd<sup>3</sup></b>
Weight, Shipping** (Dozer)	2727 kg	<b>5999 lb</b>	3218 kg	<b>7079 lb</b>	3109 kg	<b>6839 lb</b>	3246 kg	<b>7150 lb</b>
Tractor & Dozer Dimensions:								
A Length (Blade Straight)	5.22 m	<b>17'1"</b>	5.22 m	<b>17'1"</b>	5.43 m	<b>17'10"</b>	5.44 m	<b>17'10"</b>
Length (Blade Angled)	6.05 m	<b>19'10"</b>	6.05 m	<b>19'10"</b>	6.26 m	<b>20'6"</b>	5.94 m	<b>19'6"</b>
Width (Blade Angled)	3.78 m	<b>12'5"</b>	3.78 m	<b>12'5"</b>	3.78 m	<b>12'5"</b>	3.29 m	<b>10'9"</b>
Width (with C-Frame only)	2.91 m	<b>9'7"</b>	2.91 m	<b>9'7"</b>	2.98 m	<b>9'10"</b>	2.49 m	<b>8'2"</b>
Blade Dimensions:								
B Width (including std. end bits)	4.16 m	<b>13'8"</b>	4.16 m	<b>13'8"</b>	4.16 m	<b>13'8"</b>	3.62 m	<b>11'10"</b>
C Height	1033 mm	<b>3'4.7"</b>	1155 mm	<b>3'9.5"</b>	1155 mm	<b>3'9.5"</b>	1207 mm	<b>4'0"</b>
D Max. Digging Depth	506 mm	<b>1'7.9"</b>	506 mm	<b>1'7.9"</b>	524 mm	<b>1'8.6"</b>	732 mm	<b>2'5"</b>
E Ground Clearance @ Full Lift	1141 mm	<b>3'8.9"</b>	1141 mm	<b>3'8.9"</b>	1205 mm	<b>3'11.4"</b>	1190 mm	<b>47"</b>
F Manual Tilt	408 mm	<b>16.1"</b>	408 mm	<b>16.1"</b>	408 mm	<b>16.1"</b>	203 mm	<b>8"</b>
G Max. Pitch	—	—	—	—	—	—	—	—
H Max. Hydraulic Tilt Blade Angle	408 mm	<b>16.1"◀</b>	408 mm	<b>16.1"◀</b>	408 mm	<b>16.1"</b>	560 mm	<b>22"</b>
J Hydraulic Tilt (Manual Brace Centered)	—	—	—	—	—	—	—	—

MODEL	D6R, D6R XL & D6R LGP					
	6S		6SU		6SU XL	
Type	Straight		Semi Universal		Semi Universal	
Blade Capacities*	3.89 m <sup>3</sup>	<b>5.09 yd<sup>3</sup></b>	5.61 m <sup>3</sup>	<b>7.34 yd<sup>3</sup></b>	5.61 m <sup>3</sup>	<b>7.34 yd<sup>3</sup></b>
Weight, Shipping** (Dozer)	2599 kg	<b>5717 lb</b>	2699 kg	<b>5937 lb</b>	2973 kg	<b>6540 lb</b>
Tractor & Dozer Dimensions:						
A Length (Blade Straight)	5.12 m	<b>16'9"</b>	5.31 m	<b>17'5"</b>	5.55 m	<b>18'2"</b>
Length (Blade Angled)	—	—	—	—	—	—
Width (Blade Angled)	—	—	—	—	—	—
Width (with C-Frame only)	—	—	—	—	—	—
Blade Dimensions:						
B Width (including std. end bits)	3.36 m	<b>11'0"</b>	3.26 m	<b>10'8"</b>	3.26 m	<b>10'8"</b>
C Height	1257 mm	<b>4'1.5"</b>	1411 mm	<b>4'7.6"</b>	1411 mm	<b>4'7.6"</b>
D Max. Digging Depth	473 mm	<b>18.6"</b>	473 mm	<b>18.6"</b>	459 mm	<b>18.1"</b>
E Ground Clearance @ Full Lift	1104 mm	<b>3'7.5"</b>	1104 mm	<b>3'7.5"</b>	1195 mm	<b>3'11.1"</b>
F Manual Tilt	689 mm	<b>2'3.1"</b>	670 mm	<b>2'2.4"</b>	670 mm	<b>2'2.4"</b>
G Max. Pitch	<b>+5.3°–4.8°</b>		<b>+5.3°–4.8°</b>		<b>+5.3°–4.8°</b>	
H Max. Hydraulic Tilt Blade Angle	764 mm	<b>2'6.1"</b>	743 mm	<b>2'5.3"</b>	743 mm	<b>2'5.3"</b>
J Hydraulic Tilt (Manual Brace Centered)	420 mm	<b>16.5"</b>	408 mm	<b>16.1"</b>	408 mm	<b>16.1"</b>

\* Blade capacities as determined by SAE J1265.

Notice that the capacity of the U-blade is the volume carried by a straight blade of the same dimensions plus the volume included in the "cup" of the U-blade. It is intended for **relative comparisons of dozer sizes**, and not for predicting capacities or productivities in actual field conditions.

\*\* Shipping Weight — Total Bulldozer Arrangement includes: Blade, push arms or C-frame, braces, cylinders, lines, trunnions and lift cylinder mountings. Differential steer on D6R XL PAT.

◀ Attachment includes two cylinders.

# Bulldozers

## Blade Specifications

- D6R   ● D6R XL   ● D6R LGP
- D7R   ● D7R LGP

MODEL	D6R, D6R XL & D6R LGP					
	6S LGP		6A (IG)		6SU (IG)	
Type	Straight		Angling		Semi Universal	
Blade Capacities*	3.70 m <sup>3</sup>	<b>4.83 yd<sup>3</sup></b>	4.3 m <sup>3</sup>	<b>5.63 yd<sup>3</sup></b>	5.62 m <sup>3</sup>	<b>7.4 yd<sup>3</sup></b>
Weight, Shipping** (Dozer)	2801 kg	<b>6162 lb</b>	3260 kg	<b>7180 lb</b>	2950 kg	<b>6500 lb</b>
Tractor & Dozer Dimensions:						
A Length (Blade Straight)	5.71 m	<b>18'9"</b>	—		—	
Blade Dimensions:						
B Width (including std. end bits)	3.99 m	<b>13'1"</b>	4.20 m	<b>13'9"</b>	3.56 m	<b>11'8"</b>
C Height	1101 mm	<b>3'7.3"</b>	1169 mm	<b>3'10"</b>	1412 mm	<b>4'8"</b>
D Max. Digging Depth	655 mm	<b>2'1.2"</b>	500 mm	<b>1'7.7"</b>	459 mm	<b>18.1"</b>
E Ground Clearance @ Full Lift	1083 mm	<b>3'6.6"</b>	1242 mm	<b>4'1"</b>	1195 mm	<b>3'11"</b>
F Manual Tilt	632 mm	<b>2'0.9"</b>	408 mm	<b>16.1"</b>	670 mm	<b>2'2.4"</b>
G Max. Pitch	<b>+5.3°–4.8°</b>		<b>+5.3°–4.8°</b>		<b>+5.3°–4.8°</b>	
H Max. Hydraulic Tilt	701 mm	<b>2'3.6"</b>	408 mm	<b>16.1"</b>	743 mm	<b>2'5.3"</b>
J Hydraulic Tilt (Manual Brace Centered)	385 mm	<b>15.2"</b>	408 mm	<b>16.1"</b>	743 mm	<b>2'5.3"</b>

\* Blade capacities as determined by SAE J1265.

Notice that the capacity of the U-blade is the volume carried by a straight blade of the same dimensions plus the volume included in the "cup" of the U-blade. It is intended for **relative comparisons of dozer sizes**, and not for predicting capacities or productivities in actual field conditions.

\*\* Shipping Weight — Total Bulldozer Arrangement includes: Blade, push arms or C-frame, braces, cylinders, lines, trunnions and lift cylinder mountings.

MODEL	D7R & D7R LGP									
	7A		7S		7SU		7U		7S LGP ERF†	
Type	Angling		Straight		Semi Universal		Universal		Straight	
Blade Capacities*	3.89 m <sup>3</sup>	<b>5.08 yd<sup>3</sup></b>	5.16 m <sup>3</sup>	<b>6.75 yd<sup>3</sup></b>	6.86 m <sup>3</sup>	<b>8.98 yd<sup>3</sup></b>	8.34 m <sup>3</sup>	<b>10.91 yd<sup>3</sup></b>	5.89 m <sup>3</sup>	<b>7.7 yd<sup>3</sup></b>
Weight, Shipping** (Dozer)	3527 kg	<b>7750 lb</b>	3500 kg	<b>7716 lb</b>	3593 kg	<b>7904 lb</b>	3920 kg	<b>8624 lb</b>	3732 kg	<b>8210 lb</b>
General Dimensions (Tractor & Dozer)										
A Length (Blade Straight)	6.10 m	<b>20'0"</b>	5.81 m	<b>19'1"</b>	6.03 m	<b>19'9"</b>	6.27 m	<b>20'7"</b>	5.81 m	<b>19'1"</b>
Length (Blade Angled)	6.98 m	<b>22'11"</b>	—		—		—		—	
Width (Blade Angled)	4.12 m	<b>13'6"</b>	—		—		—		—	
Width (with C-Frame only)	3.09 m	<b>10'1"</b>	—		—		—		—	
Blade Dimensions:										
B Width (including std. end bits)	4.50 m	<b>14'9"</b>	3.90 m	<b>12'10"</b>	3.69 m	<b>12'1"</b>	3.98 m	<b>13'1"</b>	4.50 m	<b>14'9"</b>
C Height	1111 mm	<b>3'7.7"</b>	1363 mm	<b>4'5.7"</b>	1524 mm	<b>5'0"</b>	1553 mm	<b>5'1.1"</b>	1343 mm	<b>4'4.9"</b>
D Max. Digging Depth	669 mm	<b>2'2.3"</b>	527 mm	<b>1'8.7"</b>	527 mm	<b>1'8.7"</b>	527 mm	<b>1'8.7"</b>	668 mm	<b>2'2.3"</b>
E Ground Clearance @ Full Lift	1115 mm	<b>3'7.9"</b>	1145 mm	<b>3'9.1"</b>	1145 mm	<b>3'9.1"</b>	1145 mm	<b>3'9.1"</b>	1153 mm	<b>3'9.4"</b>
F Manual Tilt	466 mm	<b>18.3"</b>	—		—		—		—	
G Max. Pitch Adjustment	—		<b>+3.1°–3.9°</b>		<b>+3.1°–3.9°</b>		<b>+3.1°–3.9°</b>		<b>+3.0°–3.9°</b>	
Blade Angle (either side)	<b>25°</b>		—		—		—		—	
H Max. Hydraulic Tilt	627 mm	<b>2'0.7"</b> ◀	845 mm	<b>2'9.3"</b>	799 mm	<b>2'7.4"</b>	861 mm	<b>2'9.9"</b>	686 mm	<b>2'3"</b>
J Hydraulic Tilt (Manual Brace Centered)	—		501 mm	<b>1'7.7"</b>	474 mm	<b>18.6"</b>	511 mm	<b>1'8.1"</b>	426 mm	<b>16.8"</b>

\* Blade capacities as determined by SAE J1265.

Notice that the capacity of the U-blade is the volume carried by a straight blade of the same dimensions plus the volume included in the "cup" of the U-blade. It is intended for **relative comparisons of dozer sizes**, and not for predicting capacities or productivities in actual field conditions.

\*\* Shipping Weight — Total Bulldozer Arrangement includes: Blade, push arms or C-frame, braces, cylinders, lines, trunnions and lift cylinder mountings.

† Extended track roller frame.

◀ Attachment includes two cylinders.

MODEL	D8R			D9R		
	8A	8SU	8U	9SU	9U	
Type	<b>Angling</b>		<b>Semi-U</b>		<b>Universal</b>	
Blade Capacities*	4.66 m <sup>3</sup> <b>6.09 yd<sup>3</sup></b>	8.68 m <sup>3</sup> <b>11.4 yd<sup>3</sup></b>	11.70 m <sup>3</sup> <b>15.3 yd<sup>3</sup></b>	13.5 m <sup>3</sup> <b>17.7 yd<sup>3</sup></b>	16.4 m <sup>3</sup> <b>21.4 yd<sup>3</sup></b>	
Weight, Shipping** (Dozer)	5459 kg <b>12,009 lb</b>	4930 kg <b>10,846 lb</b>	5495 kg <b>12,089 lb</b>	6543 kg <b>14,425 lb</b>	7134 kg <b>15,727 lb</b>	
General Dimensions (Tractor & Dozer)						
<b>A</b> Length (Blade Straight)	6.57 m <b>21'7"</b>	6.39 m <b>21'0"</b>	6.79 m <b>22'3"</b>	6.84 m <b>22'5"</b>	7.18 m <b>23'7"</b>	
Length (Blade Angled)	7.62 m <b>25'0"</b>	—	—	—	—	
Width (Blade Angled)	4.52 m <b>14'10"</b>	—	—	—	—	
Width (with C-Frame only)	3.38 m <b>11'1"</b>	—	—	—	—	
Blade Dimensions:						
<b>B</b> Width (including std. end bits)	4.99 m <b>16'4"</b>	3.94 m <b>12'11"</b>	4.26 m <b>14'0"</b>	4.31 m <b>14'2"</b>	4.65 m <b>15'3"</b>	
<b>C</b> Height	1174 mm <b>3'10.2"</b>	1690 mm <b>5'6.5"</b>	1740 mm <b>5'8.5"</b>	1934 mm <b>6'4.1"</b>	1934 mm <b>6'4.1"</b>	
<b>D</b> Max. Digging Depth	628 mm <b>2'0.7"</b>	582 mm <b>1'10.9"</b>	582 mm <b>1'10.9"</b>	606 mm <b>1'11.9"</b>	606 mm <b>1'11.9"</b>	
<b>E</b> Ground Clearance @ Full Lift	1308 mm <b>4'3.5"</b>	1231 mm <b>4'0.5"</b>	1231 mm <b>4'0.5"</b>	1422 mm <b>4'8"</b>	1422 mm <b>4'8"</b>	
<b>G</b> Max. Pitch Adjustment Blade Angle (either side)	— <b>25°</b>	<b>+3.0°–2.9°</b> —	<b>+3.0°–2.9°</b> —	<b>+3.4°–2.9°</b> —	<b>+3.4°–2.9°</b> —	
<b>H</b> Max. Hydraulic Tilt	729 mm <b>2'4.7"◀</b>	951 mm <b>3'1.4"</b>	1028 mm <b>3'4.5"</b>	940 mm <b>3'1"</b>	1014 mm <b>3'3.9"</b>	
<b>J</b> Hydraulic Tilt (Manual Brace Centered)	—	650 mm <b>2'1.6"</b>	703 mm <b>2'3.7"</b>	570 mm <b>1'10.4"</b>	616 mm <b>2'0.3"</b>	
<b>K</b> Push Arm Trunnion Width (to Ball Centers)	2.98 m <b>9'9"</b>	2.98 m <b>9'9"</b>	2.98 m <b>9'9"</b>	3.17 m <b>10'3"</b>	3.17 m <b>10'3"</b>	
Maximum Track Width Permitted	712 mm <b>2'4"</b>	711 mm <b>2'4"</b>	711 mm <b>2'4"</b>	762 mm <b>2'6"</b>	762 mm <b>2'6"</b>	
Dual Tilt Option						
<b>G</b> Dual Pitch Adj.	—	—	—	<b>+4.8°–5.2°</b>	<b>+4.8°–4.9°</b>	
<b>H</b> Dual Max. Hyd. Tilt	—	—	—	1139 mm <b>3'8.8"</b>	1231 mm <b>4'0.5"</b>	

\* Blade capacities as determined by SAE J1265.

Notice that the capacity of the U-blade is the volume carried by a straight blade of the same dimensions plus the volume included in the "cup" of the U-blade. It is intended for **relative comparisons of dozer sizes**, and not for predicting capacities or productivities in actual field conditions.

\*\* Shipping Weight — Total Bulldozer Arrangement includes: Blade, push arms or C-frame, braces, cylinders, lines, trunnions and lift cylinder mountings.

◀ Attachment includes two cylinders.

MODEL	D10R				D11R					
	10SU		10U		11SU		11U		11 CD	
Type	Semi-U		Universal		Semi-U		Universal		Universal	
Blade Capacities*	18.5 m <sup>3</sup>	24.2 yd <sup>3</sup>	22.0 m <sup>3</sup>	28.7 yd <sup>3</sup>	27.2 m <sup>3</sup>	35.5 yd <sup>3</sup>	34.4 m <sup>3</sup>	45.0 yd <sup>3</sup>	43.6 m <sup>3</sup>	57.0 yd <sup>3</sup>
Weight, Shipping**										
Standard Dozer	10 229 kg	22,550 lb	10 784 kg	23,775 lb	14 813 kg	32,658 lb	17 296 kg	38,131 lb	22 070 kg	48,660 lb
Abrasion Dozer	11 069 kg	24,403 lb	12 413 kg	27,366 lb	16 192 kg	35,698 lb	18 823 kg	41,498 lb	—	
General Dimensions (Tractor & Dozer)										
A Length	7.76 m	25'5"	8.01 m	26'3"	8.38 m	27'6"	8.83 m	28'11"	8.34 m	26'8"
Width	4.86 m	15'11"	5.26 m	17'3"	5.60 m	18'4"	6.35 m	20'10"	6.71 m	22'0"
Blade Dimensions:										
B Width (including std. end bits)	4.86 m	15'11"	5.26 m	17'3"	5.60 m	18'4"	6.35 m	20'10"	6.71 m	22'0"
C Height	2.12 m	6'11"	2.12 m	6'11"	2.37 m	7'9"	2.37 m	7'9"	3.26 m	10'8"
D Max. Digging Depth	674 mm	2'2.5"	674 mm	2'2.5"	766 mm	2'6.2"	766 mm	2'6.2"	766 mm	2'6.2"
E Ground Clearance @ Full Lift	1497 mm	4'10.9"	1497 mm	4'10.9"	1533 mm	5'0.4"	1533 mm	5'0.4"	1533 mm	5'0.4"
G Max. Pitch Adjustment	+1.7°–2.3°		+1.7°–2.3°		+2.1°–2.2°		+2.1°–2.2°		—	
H Max. Hydraulic Tilt	993 mm	3'3.1"	1074 mm	3'6.3"	1184 mm	3'10.6"	1344 mm	4'4.9"	1344 mm	4'4.9"
J Hydraulic Tilt (Manual Brace Centered)	722 mm	2'4.4"	782 mm	2'6.8"	886 mm	2'10.9"	1006 mm	3'3.6"	—	
K Push Arm Trunnion Width (to Ball Centers)	3.60 m	11'10"	3.60 m	11'10"	4.18 m	13'9"	4.18 m	13'9"	4.18 m	13'9"
Maximum Track Width Permitted	762 mm	2'6"	762 mm	2'6"	914 mm	3'0"	914 mm	3'0"	914 mm	3'0"
Dual Tilt Option					+7.5°–7.6° or		+7.5°–7.6° or		—	
G Dual Pitch Adj.	+5.2°–5.5°		+5.2°–5.5°		+0°–13°		+0°–13°		+47.8°–10.4°	
H Dual Max. Hyd. Tilt	1441 mm	4'8.7"	1560 mm	5'1.4"	1706 mm	5'7.2"	1938 mm	6'4.3"	—	

\*Blade capacities as determined by SAE J1265.

Notice that the capacity of the U-blade is the volume carried by a straight blade of the same dimensions plus the volume included in the "cup" of the U-blade. It is intended for **relative comparisons of dozer sizes**, and not for predicting capacities or productivities in actual field conditions.

\*\*Shipping Weight — Total Bulldozer Arrangement includes: Blade, push arms or C-frame, braces, cylinders, lines, trunnions and lift cylinder mountings.

MODEL	D4E SR		D5E	
	4A		5A	
Type	Angling		Angling	
Blade Capacities	1.28 m <sup>3</sup>	<b>1.65 yd<sup>3</sup></b>	1.95 m <sup>3</sup>	<b>2.55 yd<sup>3</sup></b>
Weight, Shipping* (Dozer)	1395 kg	<b>3075 lb</b>	1543 kg	<b>3402 lb</b>
General Dimensions (Tractor & Dozer)				
A Length (Blade Straight)	3.87 m	<b>12'9"</b>	4.60 m	<b>15'1"</b>
Length (Blade Angled)	4.50 m	<b>14'9"</b>	5.26 m	<b>17'3"</b>
Width (Blade Angled)	2.84 m	<b>9'4"</b>	2.95 m	<b>9'8"</b>
Width (with C-frame only)	2.39 m	<b>7'10"</b>	2.36 m	<b>7'9"</b>
Blade Dimensions:				
B Width (including std. end bits)	3.12 m	<b>10'3"</b>	3.41 m	<b>11'2"</b>
C Height	706 mm	<b>2'3.8"</b>	859 mm	<b>2'9.8"</b>
D Max. Digging Depth	240 mm	<b>9.4"</b>	396 mm	<b>16"</b>
E Ground Clearance @ Full Lift	811 mm	<b>2'7.9"</b>	937 mm	<b>3'0.9"</b>
F Manual Tilt	475 mm	<b>18.7"</b>	338 mm	<b>13.3"</b>
G Max. Pitch Adjustment	—		—	
Blade Angle (either side)	<b>25°</b>		<b>25°</b>	
H Max. Hydraulic Tilt	330 mm	<b>13"</b>	—	
J Hydraulic Tilt (Manual Brace Centered)	—		—	

MODEL	D6G					
	6A		6S		6SU▶	
Type	Angling		Straight		Semi-U	
Blade Capacities	2.40 m <sup>3</sup>	<b>3.14 yd<sup>3</sup></b>	3.27 m <sup>3</sup>	<b>4.28 yd<sup>3</sup></b>	3.80 m <sup>3</sup>	<b>4.96 yd<sup>3</sup></b>
Weight, Shipping* (Dozer)	2325 kg	<b>5126 lb</b>	1998 kg	<b>4405 lb</b>	2460 kg	<b>5423 lb</b>
General Dimensions (Tractor & Dozer)						
A Length (Blade Straight)	5.15 m	<b>16'11"</b>	5.07 m	<b>16'8"</b>	5.13 m	<b>16'10"</b>
Length (Blade Angled)	5.91 m	<b>19'5"</b>	—		—	
Width (Blade Angled)	3.52 m	<b>11'6"</b>	—		—	
Width (with C-frame only)	2.85 m	<b>9'4"</b>	—		—	
Blade Dimensions:						
B Width (including std. end bits)	3.88 m	<b>12'9"</b>	3.23 m	<b>10'7"</b>	3.20 m	<b>10'6"</b>
C Height	924 mm	<b>3'0.4"</b>	1126 mm	<b>3'8.3"</b>	1235 mm	<b>4'0.6"</b>
D Max. Digging Depth	444 mm	<b>17.5"</b>	474 mm	<b>18.7"</b>	472 mm	<b>18.6"</b>
E Ground Clearance @ Full Lift	908 mm	<b>35.7"</b>	907 mm	<b>2'11.7"</b>	915 mm	<b>3'0"</b>
F Manual Tilt	367 mm	<b>14.4"</b>	679 mm	<b>2'2.7"</b>	680 mm	<b>2'2.8"</b>
G Max. Pitch Adjustment	—		—		—	
Blade Angle (either side)	<b>25°</b>		—		—	
H Max. Hydraulic Tilt	—		810 mm	<b>2'8"</b>	810 mm	<b>2'7.9"</b>
J Hydraulic Tilt (Manual Brace Centered)	—		467 mm	<b>18.4"</b>	465 mm	<b>18.3"</b>

\*Shipping Weight — Total Bulldozer Arrangement includes: Blade, push arms or C-frame, braces, cylinders, lines, trunnions and lift cylinder mountings. Notice that the capacity of the SU-blade is the volume carried by a straight blade of the same dimensions plus the volume included in the "cup" of the SU-blade. It is intended for **relative comparisons of dozer sizes**, and not for predicting capacities or productivities in actual field conditions.

▶ Caterpillar Custom Product.

MODEL	D7G			
	7A		7S	
Type	<b>Angling</b>		<b>Straight</b>	
Blade Capacities*	2.9 m <sup>3</sup>	<b>3.8 yd<sup>3</sup></b>	4.2 m <sup>3</sup>	<b>5.5 yd<sup>3</sup></b>
Weight, Shipping** (Dozer)	3227 kg	<b>7115 lb</b>	3475 kg	<b>7660 lb</b>
General Dimensions (Tractor & Dozer)				
<b>A</b> Length (Blade Straight)	5.49 m	<b>18'0"</b>	5.30 m	<b>17'5"</b>
Length (Blade Angled)	6.35 m	<b>20'10"</b>	—	—
Width (Blade Angled)	3.86 m	<b>12'8"</b>	—	—
Width (with C-Frame only)	3.12 m	<b>10'3"</b>	—	—
Blade Dimensions:				
<b>B</b> Width (including std. end bits)	4.26 m	<b>14'0"</b>	3.65 m	<b>12'0"</b>
<b>C</b> Height	960 mm	<b>3'1.8"</b>	1274 mm	<b>4'2.1"</b>
<b>D</b> Max. Digging Depth	468 mm	<b>18.4"</b>	438 mm	<b>17.2"</b>
<b>E</b> Ground Clearance @ Full Lift	1206 mm	<b>3'11.5"</b>	1188 mm	<b>3'10.8"</b>
<b>F</b> Manual Tilt	—	—	—	—
<b>G</b> Max. Pitch Adjustment Blade Angle (either side)	—	<b>25°</b>	<b>+5.2°–3.0°</b>	—
<b>H</b> Max. Hydraulic Tilt	300 mm	<b>11.8"◀</b>	721 mm	<b>2'4.4"</b>
<b>J</b> Hydraulic Tilt (Manual Brace Centered)	—	—	505 mm	<b>1'7.9"</b>

\* Blade capacities as determined by SAE J1265.

\*\* Shipping Weight — Total Bulldozer Arrangement includes: Blade, push arms or C-frame, braces, cylinders, lines, trunnions and lift cylinder mountings.

◀ Attachment includes two cylinders.

## BULLDOZER PRODUCTION OFF-THE-JOB

You can estimate bulldozer production using the production curves that follow and the correction factors that are applicable. Use this formula:

$$\text{Production (Lm}^3\text{/hr)} = \frac{\text{Maximum production}}{\text{(LCY/hr)}} \times \frac{\text{Correction factors}}$$

The bulldozer production curves give maximum uncorrected production for universal, semi-universal, and straight blades and are based on the following conditions:

1. 100% efficiency (60 minute hour — level cycle).
2. Power shift machines with 0.05 min. fixed times.
3. Machine cuts for 15 m (50 feet), then drifts blade load to dump over a high wall. (Dump time — 0 sec.)
4. Soil density of 1370 kg/Lm<sup>3</sup> (2300 lb/LCY).
5. Coefficient of traction:\*
  - a. Track machines — 0.5 or better
  - b. Wheel machines — 0.4 or better
6. Hydraulic controlled blades used.
7. Dig 1F\*\*  
Carry 2F\*\*  
Return 2R\*\*

To obtain estimated production in bank cubic meters or bank cubic yards, appropriate load factor from the Tables section should be applied to the corrected production as calculated above.


$$\text{Production Bm}^3\text{/hr} = \frac{\text{Lm}^3\text{/hr} \times \text{LF}}{\text{(BCY/h)}} = \frac{\text{(LCY/h)} \times \text{LF}}$$

\*Coefficient of traction assumed to be at least 0.4. While poor traction affects both track and wheel vehicles, causing them to take smaller blade loads, wheeled units are affected more severely and production falls much more rapidly. While no fixed rules can predict this production loss, a rough rule of thumb is that wheel dozer production falls off 4% for each one-hundredth decrease in coefficient of traction below 0.40. If, for example, coefficient of traction is 0.30, the difference is ten-hundredths (0.10), and production is 60% (10 × 4% = 40% decrease).

\*\*This gear sequence is based on level to downhill terrain, light to medium density material, and no blade extensions such as spill plates, rock guards, etc. Exceeding these conditions may require carry in 1F, but productivity should equal or exceed “standard conditions” due to the larger loads that can be carried in 1F.



**ESTIMATED DOZING PRODUCTION • Universal Blades • D7G through D11R**

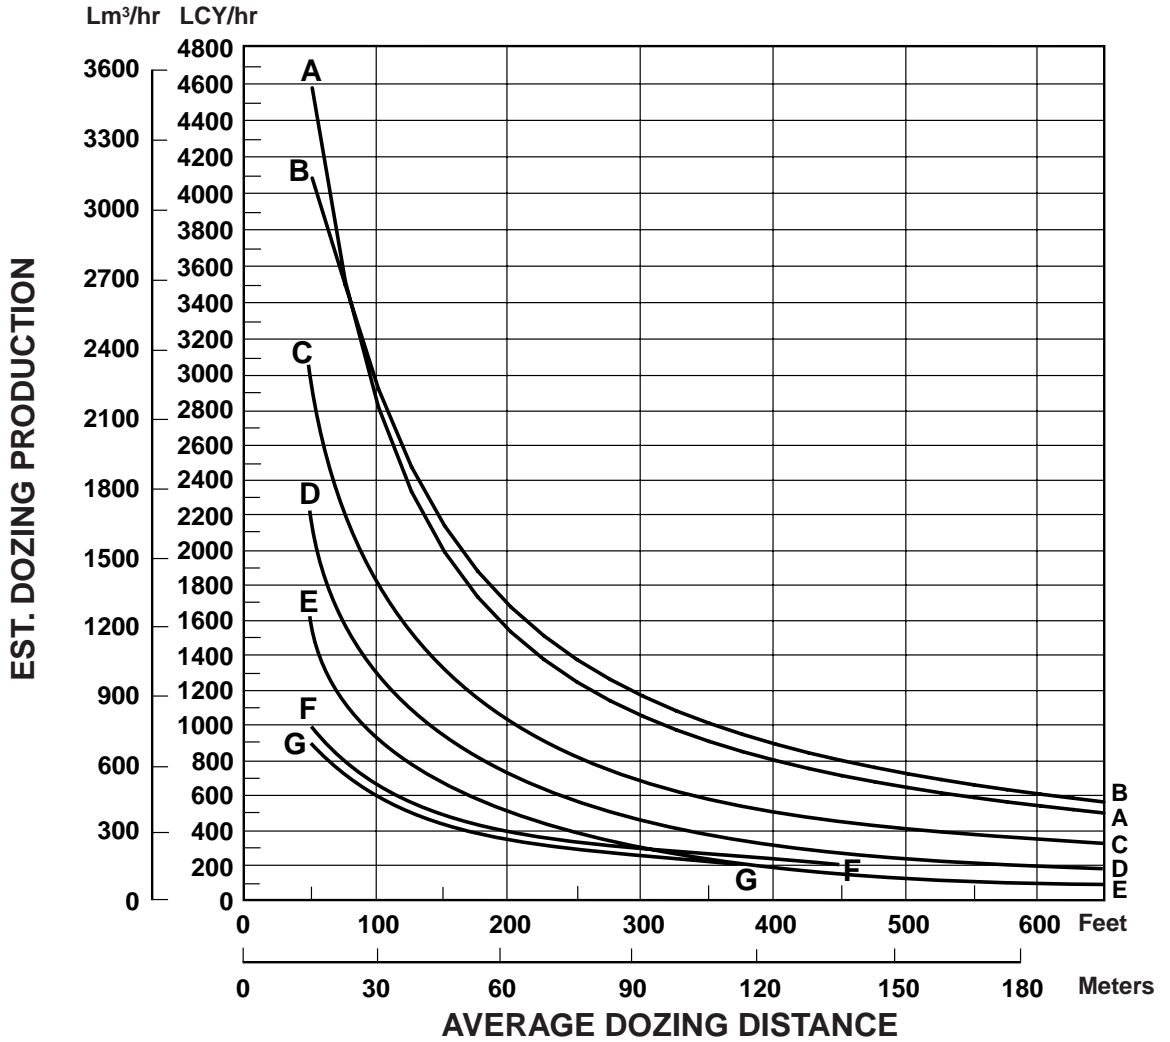


**KEY**

- A — D11R-11U
- B — D11R CD
- C — D10R-10U
- D — D9R-9U
- E — D8R-8U
- F — D7R-7U
- G — D7G-7U

**NOTE:** This chart is based on numerous field studies made under varying job conditions. Refer to correction factors following these charts.

ESTIMATED DOZING PRODUCTION • Semi-Universal Blades • D6M through D11R

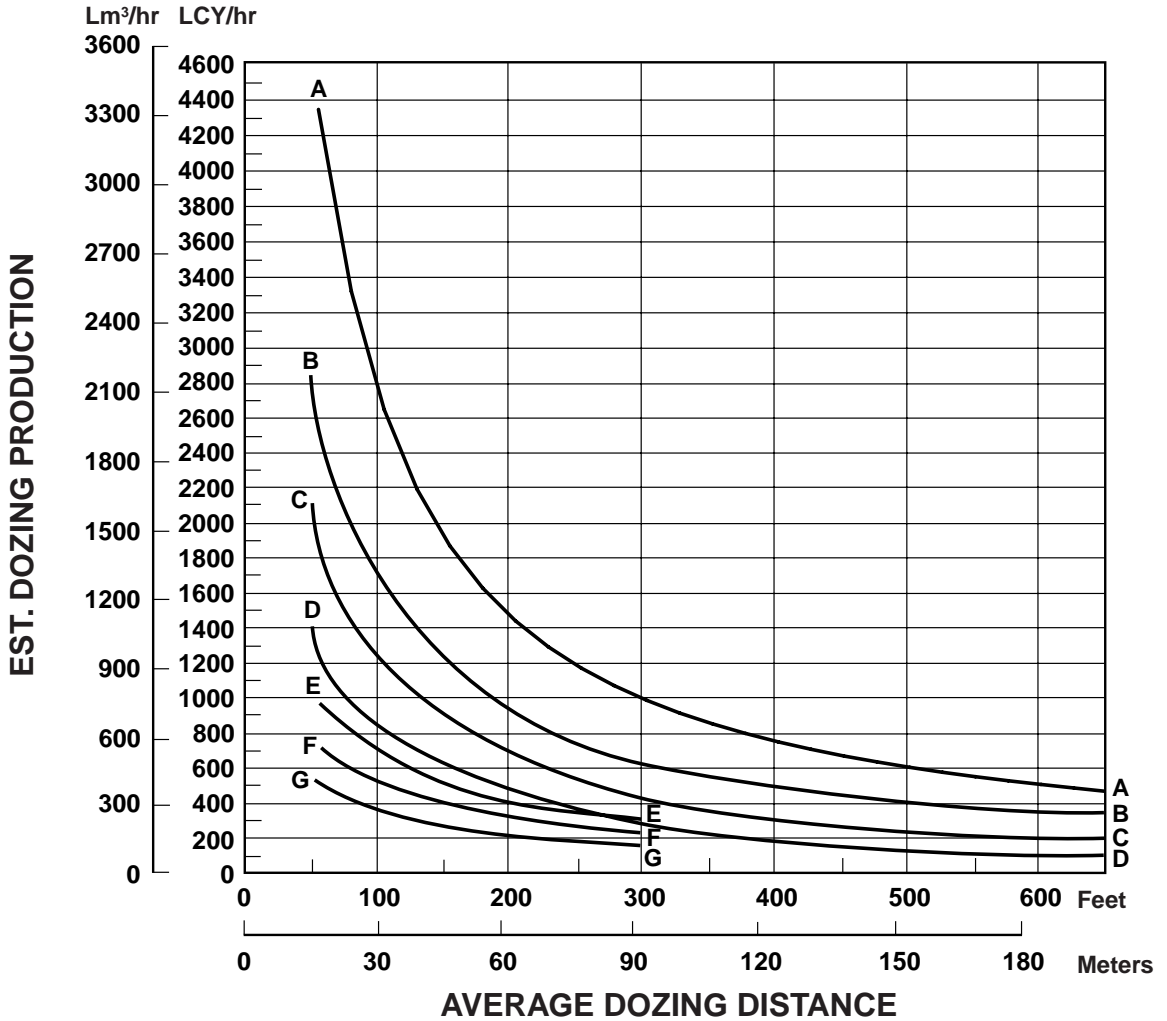


KEY

- A — D11R-11SU
- B — D10R-10SU
- C — D9R-9SU
- D — D8R-8SU
- E — D7R-7SU
- F — D6R-6SU
- G — D6M-6SU

NOTE: This chart is based on numerous field studies made under varying job conditions. Refer to correction factors following these charts.

**ESTIMATED DOZING PRODUCTION**  
 Straight Blades ● D3, D6, D7, 814, 824, 834

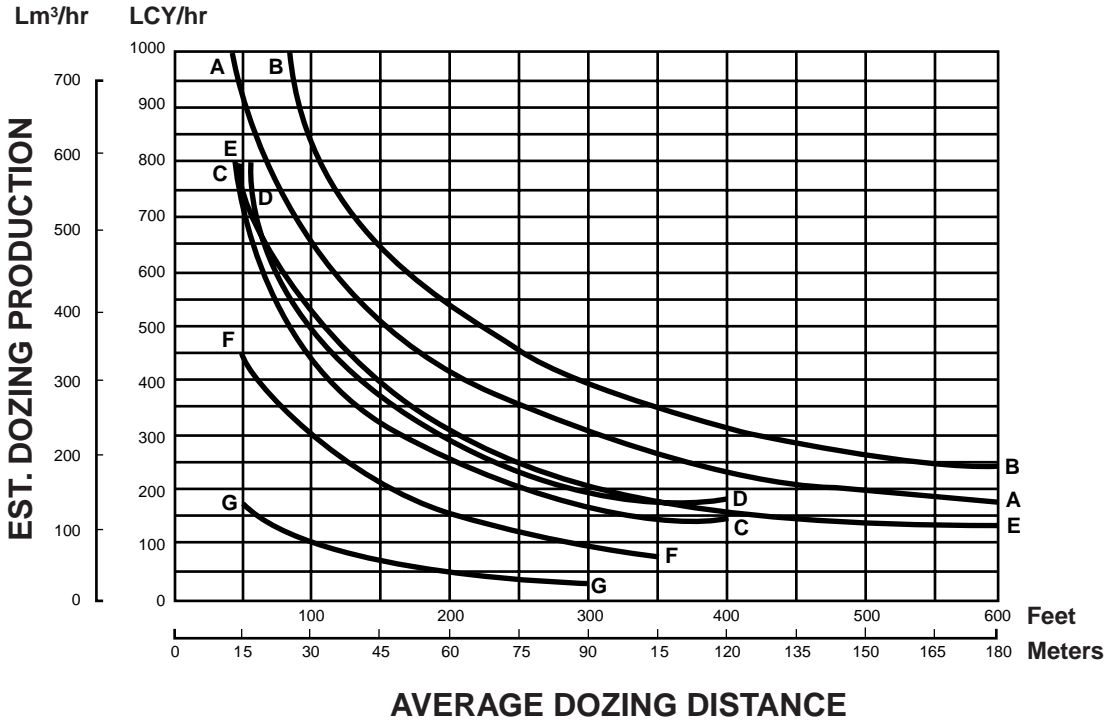

**NOTE:** This chart is based on numerous field studies made under varying job conditions. Refer to correction factors on the next page.  
 \*The 3S represented is for the D3C LGP Series II.

Estimated production of the 834B with U-blade can be found in the Coal Handling section of this handbook.

**KEY**

- A — 824-S
- B — 834-S
- C — D7G-7S
- D — D7R-7S
- E — 814-S
- F — D6R-6S
- G — D3C LGP


**JOB CONDITION CORRECTION FACTORS**

	TRACK- TYPE TRACTOR	WHEEL- TYPE TRACTOR
<b>OPERATOR —</b>		
Excellent	1.00	1.00
Average	0.75	0.60
Poor	0.60	0.50
<b>MATERIAL —</b>		
Loose stockpile	1.20	1.20
Hard to cut; frozen —		
with tilt cylinder	0.80	0.75
without tilt cylinder	0.70	—
cable controlled blade	0.60	—
Hard to drift; “dead” (dry, non-cohesive material) or very sticky material	0.80	0.80
Rock, ripped or blasted	0.60-0.80	—
<b>SLOT DOZING</b>	1.20	1.20
<b>SIDE BY SIDE DOZING</b>	1.15-1.25	1.15-1.25
<b>VISIBILITY —</b>		
Dust, rain, snow, fog or darkness	0.80	0.70
<b>JOB EFFICIENCY —</b>		
50 min/hr	0.83	0.83
40 min/hr	0.67	0.67
<b>BULLDOZER*</b>		
Adjust based on SAE capacity relative to the base blade used in the Estimated Dozing Production graphs.		
<b>GRADES —</b> See following graph.		

\*NOTE: Angling blades and cushion blades are not considered production dozing tools. Depending on job conditions, the A-blade and C-blade will average 50-75% of straight blade production.

**% Grade vs. Dozing Factor**

(-) Downhill  
 (+) Uphill

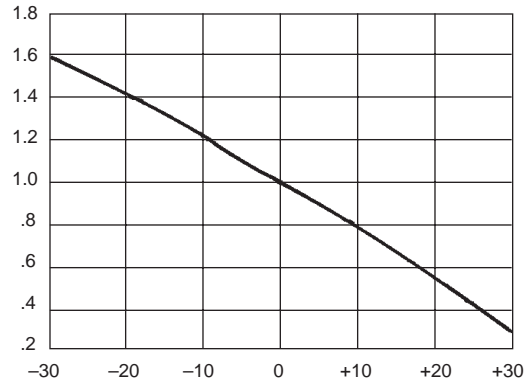

**ESTIMATING DOZER PRODUCTION OFF-THE-JOB**

*Example problem:*

Determine average hourly production of a D8R/8SU (with tilt cylinder) moving hard-packed clay an average distance of 45 m (150 feet) down a 15% grade, using a slot dozing technique.

Estimated material weight is 1600 kg/Lm<sup>3</sup> (2650 lb/LCY). Operator is average. Job efficiency is estimated at 50 min/hr.

Uncorrected Maximum Production — 458 Lm<sup>3</sup>/h (600 LCY/hr) (example only)

Applicable Correction Factors:

- Hard-packed clay is “hard to cut” material -0.80
- Grade correction (from graph) . . . . . -1.30
- Slot dozing . . . . . -1.20
- Average operator . . . . . -0.75
- Job efficiency (50 min/hr) . . . . . -0.83
- Weight correction . . . . . (2300/2650) -0.87

$$\begin{aligned}
 \text{Production} &= \text{Maximum Production} \times \text{Correction Factors} \\
 &= (600 \text{ LCY/hr}) (0.80) (1.30) (1.20) \\
 &\quad (0.75) (0.83) (0.87) \\
 &= 405.5 \text{ LCY/hr}
 \end{aligned}$$

To obtain production in metric units, the same procedure is used substituting maximum uncorrected production in Lm<sup>3</sup>.


$$\begin{aligned}
 &= 458 \text{ Lm}^3/\text{h} \times \text{Factors} \\
 &= 309.6 \text{ Lm}^3/\text{h}
 \end{aligned}$$

**MEASURING PRODUCTION ON-THE-JOB**


Three generally accepted methods of measuring bulldozer production are listed below. The third method is empirical, but is the simplest to conduct.

1. Employing Surveying Techniques
  - a. Conduct time study and then cross-section the cut to determine the volume of material removed. (Production in  $Bm^3$  or BCY per unit of time)
  - b. Conduct time study and then cross-section the fill to determine the volume of fill material. (Production in  $Lm^3$  or LCY per unit of time)
2. Weighing Blade Loads  
Conduct time study and weigh material moved by bulldozer by weighing the loader bucket loads.
3. Measuring Blade Loads
  - a. Dozer operation
    - (1) Pick up and carry load onto a level area and stop.
    - (2) Raise the blade directly over the pile pulling forward slightly as blade comes up, leaving a nearly symmetrical pile.
    - (3) Reverse to clear the pile.
  - b. Measurements
    - (1) The average *height* (H) of the pile in feet. Hold the tape vertically at the inside edge of each grouser mark. Sight along top of the pile to obtain the correct measurement.

**TOP VIEW**



**SIDE VIEW**



**GROUSER MARKS**

- (2) The average *width* (W) of the pile in feet. Hold the tape horizontally over the pile and sight at the inside edge of each grouser mark and the corresponding opposite side of the pile.
- (3) The greatest *length* (L) of the pile in feet. Hold the tape horizontally over the pile and sight at each end of the pile.
- c. With the above measurements, now compute the blade load.
  - (1) Average the height measurement (H)
  - (2) Average the width measurement (W)
  - (3) Load ( $Lm^3$  or LCY) =  $0.0138 \times (HWL)$
  - (4) Load ( $Bm^3$  or BCY) =  $Lm^3$  or  $LCY \times LF$
- d. Combine the calculated blade load with time study to figure production.

**WORK TOOLS**

**VARIABLE RADIUS (VR)  
SEMI-U BLADES**

	<b>D6R</b>		<b>D7R</b>		<b>D8R</b>	
Capacity	5.81 m <sup>3</sup>	<b>7.6 yd<sup>3</sup></b>	7.84 m <sup>3</sup>	<b>10.25 yd<sup>3</sup></b>	11.28 m <sup>3</sup>	<b>14.75 yd<sup>3</sup></b>
Width	3349 mm	<b>11'0"</b>	3912 mm	<b>12'10"</b>	4369 mm	<b>14'4"</b>
Height	1473 mm	<b>4'10"</b>	1626 mm	<b>5'4"</b>	1778 mm	<b>5'10"</b>
Weight	1360 kg	<b>3000 lb</b>	2000 kg	<b>4400 lb</b>	3010 kg	<b>6640 lb</b>

**LANDFILL BLADES**

	<b>D6R</b>		<b>D7R</b>		<b>D8R</b>		<b>D9R</b>	
Capacity	12.5 m <sup>3</sup>	<b>16.4 yd<sup>3</sup></b>	18.1 m <sup>3</sup>	<b>23.7 yd<sup>3</sup></b>	24.4 m <sup>3</sup>	<b>32 yd<sup>3</sup></b>	38.5 m <sup>3</sup>	<b>50.3 yd<sup>3</sup></b>
Width	3886 mm	<b>12'9"</b>	4267 mm	<b>14'0"</b>	4928 mm	<b>16'2"</b>	5442 mm	<b>17'10"</b>
Height	1796 mm	<b>5'10.7"</b>	2083 mm	<b>6'10"</b>	2286 mm	<b>7'6"</b>	2178 mm	<b>7'1.75"</b>
Weight	1450 kg	<b>3200 lb</b>	2608 kg	<b>5750 lb</b>	3175 kg	<b>7000 lb</b>	4900 kg	<b>10,800 lb</b>

This list is not all inclusive. Contact your Caterpillar Dealer for special attachment needs.

- Special Attachments
- Cushion Dozers
  - Coal U-Blades
  - Woodchip Dozers
  - Reclamation U-Blades

## Bulldozers

1

COAL U-BLADES			D6R		D7R		D8R		D9R	
Capacity			9.7 m <sup>3</sup>	<b>12.63 yd<sup>3</sup></b>	16.1 m <sup>3</sup>	<b>21.0 yd<sup>3</sup></b>	21.4 m <sup>3</sup>	<b>28 yd<sup>3</sup></b>	36.5 m <sup>3</sup>	<b>47.8 yd<sup>3</sup></b>
Width			4267 mm	<b>14'0"</b>	4953 mm	<b>16'3"</b>	5537 mm	<b>18'2"</b>	5940 mm	<b>18'10"</b>
Height			1473 mm	<b>4'10"</b>	1829 mm	<b>6'0"</b>	1930 mm	<b>6'4"</b>	2540 mm	<b>8'4"</b>
Weight			1452 kg	<b>3200 lb</b>	2405 kg	<b>5300 lb</b>	3200 kg	<b>7050 lb</b>	4490 kg	<b>9900 lb</b>

COAL U-BLADES			D10R			D11R		
Capacity			46.1 m <sup>3</sup>		<b>60.3 yd<sup>3</sup></b>	74.9 m <sup>3</sup>		<b>98.0 yd<sup>3</sup></b>
Width			6191 mm		<b>20'1"</b>	7416 mm		<b>24'4"</b>
Height			2794 mm		<b>9'2"</b>	3330 mm		<b>10'11"</b>
Weight			6670 kg		<b>14,700 lb</b>	11 340 kg		<b>25,000 lb</b>

WOODCHIP DOZERS			D6R		D7R		D8R		D9R		D10R	
Capacity	14.4 m <sup>3</sup>	<b>18.9 yd<sup>3</sup></b>	19.9 m <sup>3</sup>	<b>26 yd<sup>3</sup></b>	28.3 m <sup>3</sup>	<b>37 yd<sup>3</sup></b>	45.9 m <sup>3</sup>	<b>60 yd<sup>3</sup></b>	72.6 m <sup>3</sup>	<b>95 yd<sup>3</sup></b>		
Width	4267 mm	<b>14'0"</b>	4826 mm	<b>16'8"</b>	5486 mm	<b>18'0"</b>	5486 mm	<b>18'0"</b>	6300 mm	<b>20'8"</b>		
Height	1880 mm	<b>6'2"</b>	2083 mm	<b>6'10"</b>	2337 mm	<b>7'8"</b>	3086 mm	<b>10'1.5"</b>	3480 mm	<b>11'5"</b>		
Weight	1724 kg	<b>3800 lb</b>	2765 kg	<b>6100 lb</b>	2903 kg	<b>6400 lb</b>	5080 kg	<b>11,200 lb</b>	7575 kg	<b>16,700 lb</b>		

RECLAMATION U-BLADES			D8R		D9R		D10R	
Capacity			16.4 m <sup>3</sup>	<b>21.5 yd<sup>3</sup></b>	20.9 m <sup>3</sup>	<b>27.3 yd<sup>3</sup></b>	30.6 m <sup>3</sup>	<b>40 yd<sup>3</sup></b>
Width			4877 mm	<b>16'0"</b>	5182 mm	<b>17'0"</b>	5664 mm	<b>18'7"</b>
Height			1880 mm	<b>6'2"</b>	2032 mm	<b>6'8"</b>	2388 mm	<b>7'10"</b>
Weight			3810 kg	<b>8400 lb</b>	5220 kg	<b>11,500 lb</b>	6440 kg	<b>14,200 lb</b>

CUSHION DOZERS			D8R		D9R		D10R		D11R	
Width			2889 mm	<b>9'5.75"</b>	3048 mm	<b>10'0"</b>	3505 mm	<b>11'6"</b>		
Height			1499 mm	<b>4'11"</b>	1575 mm	<b>5'2"</b>	1676 mm	<b>5'6"</b>		*
Weight			3185 kg	<b>7020 lb</b>	4310 kg	<b>9500 lb</b>	6440 kg	<b>14,200 lb</b>		
Rear Cushion Push Block			*		2175 kg	<b>4800 lb</b>	3105 kg	<b>6850 lb</b>		*

\*Available upon request.

This list is not all inclusive. Contact your Caterpillar Dealer.



# RIPPERS

## CONTENTS

Features .....	1-49
Ripper Specification Diagrams	
Adjustable Parallelogram Ripper .....	1-50
Radial Ripper .....	1-52
Fixed Parallelogram Ripper .....	1-52
Specifications	
Track-Type Tractors .....	1-53
Tip selection .....	1-59
Estimating ripping production .....	1-59
Seismic wave velocity charts .....	1-62
Estimating ripper production graphs .....	1-67

## Features:

- **Parallelogram linkage with hydraulically variable pitch** on D8R, D9R, D10R and D11R. Operator can adjust angle of ripper tip to the material for penetration at all ripping depths to increase production.
- **Fixed Parallelogram linkage design** used on D5E, D6M, D6G, D6R, D7G, D6R XR, D6R XL, D7R and D7R XR. This design holds tooth angle constant at all ripping depths.
- **Fixed Radial rippers** are Multishank with wide beam coverage for utility ripping close to walls, footings and embankments. Ripper tooth angle changes as ripper is raised or lowered. Five shanks available on the D3C Series III, D4C Series III, D5C Series III. Three shanks available for the D5M.
- **Adjustable Single shank** arrangements available for D8R, D9R, D10R and D11R for tough ripping applications and deep ripping requirements.
- **Hydraulically Variable Pitch Multishank** arrangements available on D8R, D9R, D10R and D11R allow wide-beam coverage in easier-to-rip materials.




**DEFINITION OF FORCES SHOWN IN TABLES THAT FOLLOW**

“Pryout,” (Breakout) newtons (and pounds) — the maximum sustained upward force, generated by the lift cylinders measured at the ripper tip. Breakout force is measured with the shank in the top hole, shank vertical and ripper full down. Breakout force may be hydraulically or balance limited.

“Penetration force,” kilonewtons (and pounds) — the maximum sustained downward force, generated by the ripper lift cylinders measured at the ripper tip, which is required to raise the back end of the vehicle with the tip on ground and the shank (pinned in the top hole) vertical.


**Adjustable Parallelogram Ripper**

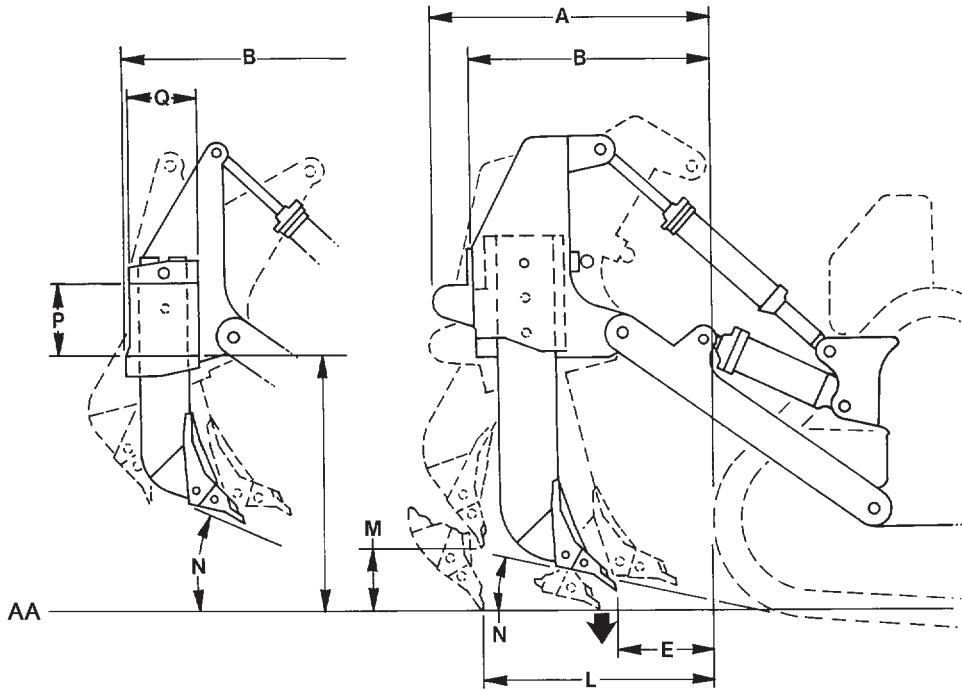

NOTE: Letters correspond to ripper specifications on pages that follow.

KEY  
 AA — Ground Line

Adjustable Parallelogram Ripper

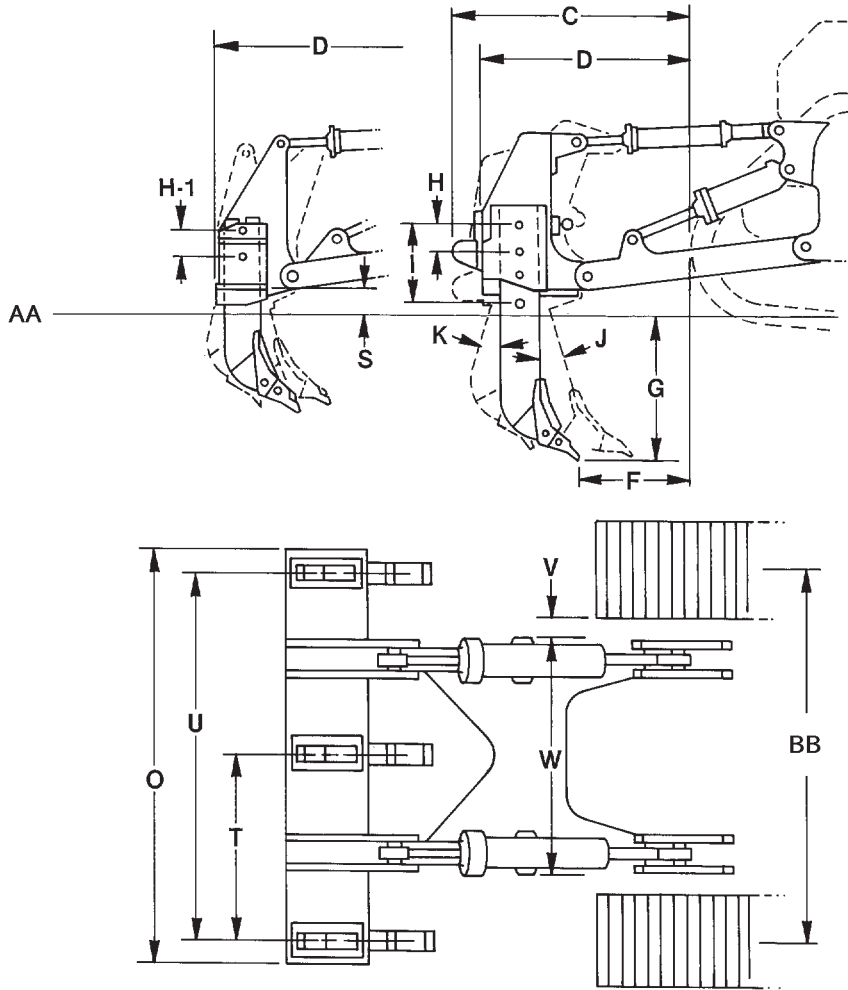

NOTE: Letters correspond to ripper specifications on pages that follow.

KEY


- AA — Ground Line
- BB — Track Gauge

# Rippers


## Specification Diagrams

- Radial Ripper
- Fixed Parallelogram Ripper

### Radial Ripper\*

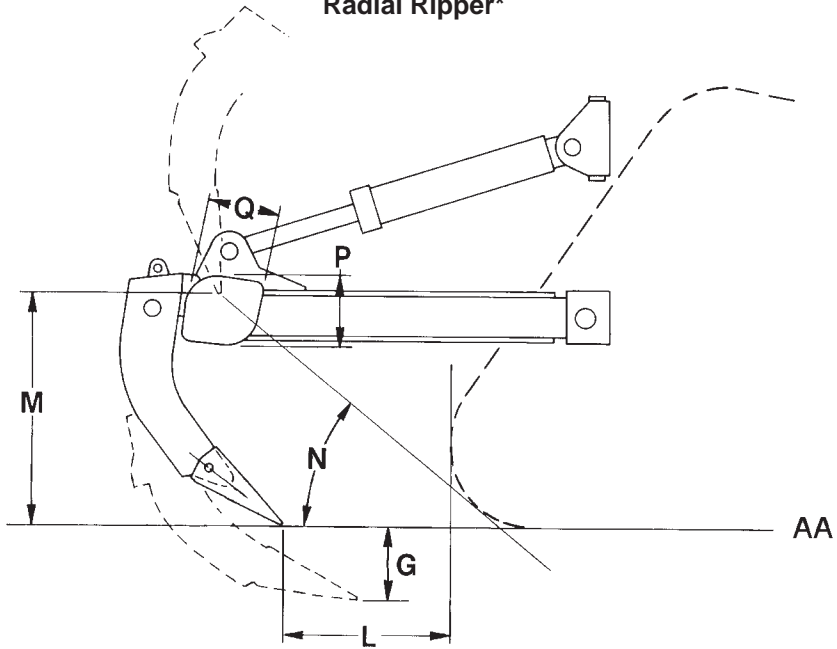

### Fixed Parallelogram Ripper

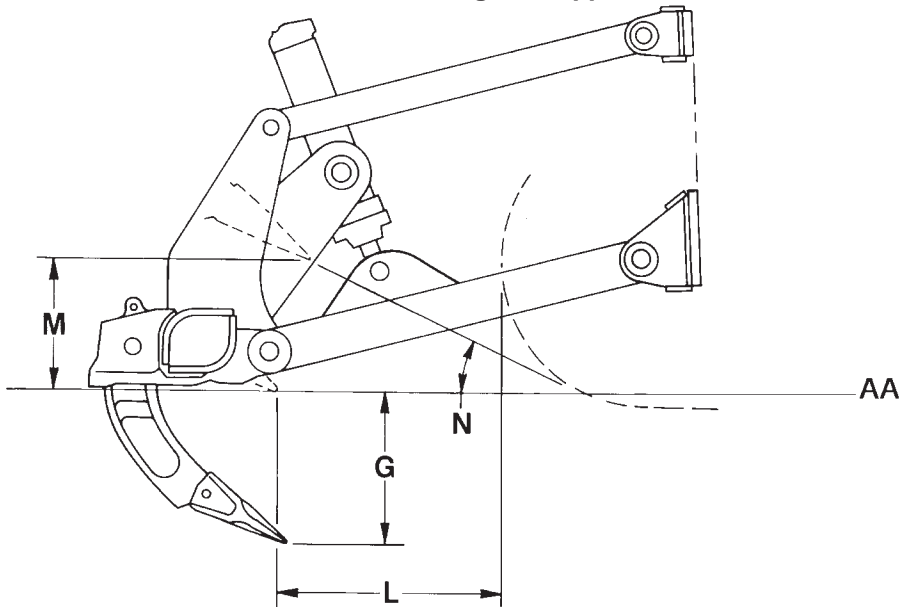

NOTE: Letters correspond to ripper specifications on pages that follow.

#### KEY

- AA — Ground Line
- \* — Tip Standard

TRACTOR/RIPPER	D3C Series III Hystat		D4C Series III Hystat		D5C Series III Hystat		D5M XL**	
Ripper Type	Radial		Radial		Radial		Radial	
Dimensions:								
<b>Ripper Shank</b>								
<b>G</b> Maximum digging depth	284 mm	11.2"	231 mm	9.1"	220 mm	8.7"	350 mm	13.8"
<b>L</b> Maximum reach at ground line	702 mm	2'3.6"	543 mm	1'9.4"	527 mm	1'8.7"	668 mm	2'2.3"
<b>M</b> Maximum ground clearance under tip (shank pinned in bottom hole)	513 mm	1'8.2"	567 mm	1'10.3"	577 mm	1'10.7"	482 mm	1'7"
<b>N</b> Maximum ramp angle, ripper up (shank pinned in bottom hole)	25°		30.5°		31°		25.2°	
Shank section	36 × 76 mm (1.4" × 3")				36 × 76 mm (1.4" × 3")		58 × 139 mm (2.3" × 5.5")	
<b>Ripper Beam</b>								
<b>O</b> Overall width	1.58 m	5'2"	1.58 m	5'2"	1.58 m	5'2"	1.95 m	6'5"
<b>P</b> Height	130 mm	5.1"	130 mm	5.1"	130 mm	5.1"	165 mm	6.5"
<b>Q</b> Length	140 mm	5.5"	140 mm	5.5"	140 mm	5.5"	211 mm	8.3"
Number of Pockets	5		5		5		3	
<b>T</b> Pocket Spacing	356 mm	14"	356 mm	14"	356 mm	14"	896 mm	2'11.3"
<b>U</b> Shank Gauge	1.42 m	4'8"	1.42 m	4'8"	1.42 m	4'8"	1.79 m	5'10"
<b>V</b> Track clearance with standard shoe	151 mm	5.9"	151 mm	5.9"	151 mm	5.9"	108 mm	4.3"
Installed weights:								
Ripper with standard shank	250 kg	550 lb	250 kg	550 lb	250 kg	550 lb	758 kg	1671 lb
Each additional shank	11 kg	24 lb			11 kg	24 lb	34 kg	74 lb
<b>Ripper Forces:*</b>								
Penetration Force	2460 kg	5424 lb	2735 kg	6031 lb	3025 kg	6670 lb	4010 kg	8840 lb
Pryout Force	5265 kg	11,610 lb	5265 kg	11,610 lb	5265 kg	11,600 lb	19 126 kg	42,165 lb

\*This value may vary slightly with various vehicle configurations.

\*\*D5M XL Penetration and pryout forces are for machines equipped with VPAT-Blade and Power Shift Transmission.

**NOTE:** Letters correspond to ripper dimension drawings.

# Rippers

## Specifications

- D5M LGP
- D6M XL ● D6M LGP

TRACTOR/RIPPER	D5M LGP		D6M XL		D6M LGP	
Ripper Type	Radial		Parallelogram		Parallelogram	
Dimensions:						
<b>Ripper Shank</b>						
<b>G</b> Maximum digging depth	298 mm	<b>11.7"</b>	474 mm	<b>18.6"</b>	360 mm	<b>14.2"</b>
<b>L</b> Maximum reach at ground line	696 mm	<b>2'3.4"</b>	516 mm	<b>1'8.3"</b>	453 mm	<b>17.8"</b>
<b>M</b> Maximum ground clearance under tip (shank pinned in bottom hole)	536 mm	<b>1'9.1"</b>	392 mm	<b>15.4"</b>	506 mm	<b>17.3"</b>
<b>N</b> Maximum ramp angle, ripper up (shank pinned in bottom hole)	<b>25.9°</b>		<b>34.4°</b>		<b>49.5°</b>	
Shank section	<b>58 × 139 mm (2.3" × 5.5")</b>		<b>73 × 176 mm (2.9" × 6.9")</b>		<b>73 × 176 mm (2.9" × 6.9")</b>	
<b>Ripper Beam</b>						
<b>O</b> Overall width	1.95 m	<b>6'5"</b>	2.20 m	<b>7'3"</b>	2.20 m	<b>7'3"</b>
<b>P</b> Height	165 mm	<b>6.5"</b>	216 mm	<b>8.5"</b>	216 mm	<b>8.5"</b>
<b>Q</b> Length	211 mm	<b>8.3"</b>	254 mm	<b>10"</b>	254 mm	<b>10"</b>
Number of Pockets	<b>3</b>		<b>3</b>		<b>3</b>	
<b>T</b> Pocket Spacing	896 mm	<b>2'11.3"</b>	1000 mm	<b>3'3.4"</b>	1000 mm	<b>3'3.4"</b>
<b>U</b> Shank Gauge	1.79 m	<b>5'10"</b>	2 m	<b>6'7"</b>	2 m	<b>6'7"</b>
<b>V</b> Track clearance with standard shoe	124 mm	<b>4.9"</b>	99 mm	<b>3.9"</b>	104 mm	<b>4.1"</b>
Installed weights:						
Ripper with standard shank	758 kg	<b>1671 lb</b>	1406 kg	<b>3100 lb</b>	1406 kg	<b>3100 lb</b>
Each additional shank	34 kg	<b>74 lb</b>	78 kg	<b>172 lb</b>	78 kg	<b>172 lb</b>
<b>Ripper Forces:*</b>						
Penetration Force	4669 kg	<b>10,293 lb</b>	6023 kg	<b>13,278 lb</b>	7198 kg	<b>15,869 lb</b>
Pryout Force	19 260 kg	<b>42,461 lb</b>	12 600 kg	<b>27,778 lb</b>	12 600 kg	<b>27,778 lb</b>

\*This value may vary slightly with various vehicle configurations. D5M LGP and D6M LGP equipped with VPAT-blade and Power Shift Transmission.

**NOTE:** Letters correspond to ripper dimension drawings.

TRACTOR/RIPPER	D6R		D6R XL		D7R	
Ripper Type	Parallelogram		Parallelogram		Parallelogram	
Dimensions:						
<b>Ripper Shank</b>						
<b>G</b> Maximum digging depth	500 mm	1'7.7"	500 mm	1'7.7"	748 mm	2'5.4"
<b>L</b> Maximum reach at ground line	729 mm	2'4.7"	729 mm	2'4.7"	1.07 m	3'6.1"
<b>M</b> Maximum ground clearance under tip (shank pinned in bottom hole)	520 mm	1'8.5"	520 mm	1'8.5"	638 mm	2'1.1"
<b>N</b> Maximum ramp angle, ripper up (shank pinned in bottom hole)	26°		26°		26.6°	
Shank section	74 × 175 mm (2.9" × 6.9")		74 × 175 mm (2.9" × 6.9")		72 × 228 mm (2.8" × 6.9")	
<b>Ripper Beam</b>						
<b>O</b> Overall width	2.20 m	7'3"	2.20 m	7'3"	2.21 m	7'3"
<b>P</b> Height	216 mm	8.5"	216 mm	8.5"	279 mm	11"
<b>Q</b> Length	254 mm	10"	254 mm	10"	343 mm	13.5"
Number of Pockets	3		3		3	
<b>T</b> Pocket Spacing	1000 mm	3'3.4"	1000 mm	3'3.4"	991 mm	3'3"
<b>U</b> Shank Gauge	2 m	6'7"	2 m	6'7"	1.98 m	6'6"
<b>V</b> Track clearance with standard shoe	120 mm	4.7"	120 mm	4.7"	95 mm	3.7"
Installed weights:						
Ripper with standard shank	1456 kg	3203 lb	1456 kg	3203 lb	3277 kg	7225 lb
Each additional shank	70 kg	154 lb	70 kg	154 lb	138 kg	305 lb
<b>Ripper Forces:*</b>						
Penetration Force	6558 kg	14,428 lb	7485 kg	16,505 lb	8664 kg	19,104 lb
Pryout Force	9155 kg	20,140 lb	9155 kg	20,140 lb	18 007 kg	39,705 lb

\*Tractor equipped with ripper, OROPS, SU dozer and heavy duty track. Values may vary slightly with various configurations.

**NOTE:** Letters correspond to ripper dimension drawings.

TRACTOR/RIPPER

D8R

D9R

Ripper Type	Adjustable Parallelogram		Adjustable Parallelogram	
	Single Shank	Multishank	Single Shank	Multishank
Dimensions:				
<b>Ripper to Track</b>				
Ripper length behind track, shank vertical, ripper up				
A With Pushblock	NA	NA	NA	NA
B Without Pushblock	1.58 m 5'2"	1.46 m 4'9"	1.57 m 5'2"	1.33 m 4'4"
Ripper length behind track, shank vertical, ripper down				
C With Pushblock	NA	NA	NA	NA
D Without Pushblock	1.84 m 6'0"	1.71 m 5'7"	1.88 m 6'2"	1.71 m 5'7"
Tip to track distance, shank vertical				
E Ripper Up	694 mm 2'3.3"	640 mm 2'1.2"	689 mm 2'3.2"	510 mm 1'8.1"
F Ripper Down	950 mm 3'1.4"	899 mm 2'11.4"	944 mm 3'1.2"	890 mm 2'11"
<b>Ripper Shank*</b>				
G Maximum digging depth	1130 mm 3'8.5"	780 mm 2'6.7"	1231 mm 4'0.6"	798 mm 2'7.6"
H Dig adjustment per hole	305 mm 12"	250 mm 10"	295 mm 12"	250 mm 10"
I Total dig adjustment	610 mm 2'0"	250 mm 10"	590 mm 1'11.2"	250 mm 10"
Pitch Adjustment, ripper down:				
J Forward	15°	14.9°	10.6°	10°
K Backward	9.9°	10°	15.2°	15.1°
L Maximum reach at ground line	1.32 m 4'3"	1.17 m 3'10"	1.25 m 4'1"	1.16 m 3'10"
M Maximum ground clearance under tooth (shank pinned in bottom hole)	636 mm 2'1"	593 mm 1'11.3"	882 mm 2'10.9"	885 mm 2'10.7"
N Maximum ramp angle, ripper up (shank pinned in bottom hole)	28.2°	28.4°	36.9°	37.5°
Shank Section				
	75 × 333 mm 2.9" × 13.1"	75 × 333 mm 2.9" × 13.1"	90 × 355 mm 3.5" × 14"	75 × 333 mm 2.9" × 13.1"
<b>Ripper Beam</b>				
O Overall width	NA	2.46 m 8'1"	NA	2.64 m 8'8"
P Height	NA	334 mm 13.1"	NA	380 mm 15"
Q Length	NA	457 mm 18"	NA	457 mm 18"
Clearance under beam, shank vertical				
R Ripper Up	NA	1.55 m 5'1"	NA	1.77 m 5'10"
S Ripper Down	NA	449 mm 17.7"	NA	378 mm 14.9"
Number of Pockets				
	1	3	1	3
T Pocket Spacing	NA	1092 mm 3'7"	NA	1180 mm 3'10.4"
U Shank Gauge	NA	2.17 m 7'1"	NA	2.35 m 7'8"
V Track Clearance with standard shoe	76 mm 3"	76 mm 3"	71 mm 2.8"	71 mm 2.8"
W Width across widest part of lift cylinders	1.37 m 4'5"	1.37 m 4'5"	1.50 m 4'11"	1.50 m 4'11"
Installed Weights:				
Ripper with standard shank				
	4085 kg 9005 lb	4213 kg 9287 lb	4854 kg 10,700 lb	4885 kg 10,770 lb
Each additional tooth group				
	NA	332 kg 730 lb	NA	332 kg 733 lb
<b>Ripper Forces:**</b>				
Penetration Force, shank vertical				
	127 400 N 28,620 lb	124 200 N 27,920 lb	153 885 N 34,581 lb	147 958 N 33,249 lb
Pryout Force, shank vertical				
	222 800 N 50,070 lb	227 900 N 51,230 lb	320 511 N 72,025 lb	324 680 N 74,639 lb

\*Deep Ripping Shank is available for D8R and D9R single shank rippers. Hydraulic pin puller is standard with deep ripping shank. Deep Ripping Arrangement maximum digging depth is 1.57 m (5'2") for D8R and 1.66 m (5'5") for D9R.

\*\*Forces are for a ripper on a tractor equipped with EROPS, U-Dozer and performance track. Forces will vary slightly with other vehicle configurations.

NOTE: Letters correspond to ripper dimension drawings.

NA — Not Applicable.

TRACTOR/RIPPER	D10R		D11R		D11R CD		D11R/D11R CD					
	Adjustable Parallelogram		Adjustable Parallelogram		Single Shank	Single Shank	Multishank					
Ripper Type	Single Shank	Multishank	Single Shank	Single Shank			Single Shank	Multishank	Multishank	Multishank		
Dimensions:												
<b>Ripper to Track</b>												
Ripper length behind track, shank vertical, ripper up (A)												
A With Pushblock	2.08 m	6'10"	NA	2.19 m	7'2"	NA	NA	NA				
B Without Pushblock	1.76 m	5'9"	1.56 m	5'1"	1.85 m	6'1"	2.04 m	6'8"	1.92 m	6'4"		
Ripper length behind track, shank vertical, ripper down (A)												
C With Pushblock	2.48 m	8'2"	NA	2.59 m	8'6"	NA	NA	NA				
D Without Pushblock	2.16 m	7'1"	1.96 m	6'5"	2.29 m	7'6"	2.48 m	8'2"	1.92 m	6'4"		
Tip to track distance, shank vertical (A)												
E Ripper Up	730 mm	2'4.7"	651 mm	2'1.6"	622 mm	2'0.5"	622 mm	2'0.5"	651 mm	2'1.6"		
F Ripper Down	1130 mm	3'8.5"	1050 mm	3'5.3"	1041 mm	3'5"	1041 mm	3'5"	1030 mm	3'4.6"		
<b>Ripper Shank*</b>												
G Maximum digging depth	1370 mm	4'5.9"	876 mm	2'10.5"	1612 mm	5'3.5"	1612 mm	5'3.5"	1070 mm	3'6.1"		
H Dig adjustment per hole	355 mm	14"	250 mm	10"	280 mm	11"	280 mm	11"	280 mm	11"		
I Total dig adjustment	710 mm	2'4"	250 mm	10"	840 mm	2'9.1"	840 mm	2'9.1"	280 mm	11"		
Pitch Adjustment, ripper down:												
J Forward	15.7°		18°		15°		15°		15°			
K Backward	23.5°		19.7°		18.3°		18.3°		18.5°			
L Maximum reach at ground line	1.50 m	4'11"	1.36 m	4'6"	1.73 m	5'8"	1.73 m	5'8"	1.57 m	5'2"		
M Maximum ground clearance under tooth (shank pinned in bottom hole)	1058 mm	3'5.7"	1045 mm	3'5.1"	1115 mm	3'7.9"	1115 mm	3'7.9"	1137 mm	3'8.8"		
N Maximum ramp angle, ripper up (shank pinned in bottom hole)	36.9°		37.5°		33.9°		33.9°		37.1°			
Shank Section												
	100 × 400 mm 4" × 15.75"		90 × 355 mm 3.5" × 14"		110 × 450 mm 4.3" × 17.7"		110 × 450 mm 4.3" × 17.7"		100 × 400 mm 3.9" × 15.7"			
<b>Ripper Beam</b>												
O Overall width	NA		2.92 m		9'7"		NA		3.33 m		10'11"	
P Height	NA		460 mm		18.1"		NA		560 mm		1'10"	
Q Length	NA		485 mm		1'7.1"		NA		560 mm		1'10"	
Clearance under beam, shank vertical												
R Ripper Up	NA		2.03 m		6'8"		NA		2.06 m		6'9"	
S Ripper Down	NA		380 mm		15"		NA		282 mm		11.1"	
Number of Pockets												
	1		3		1		1		3			
T Pocket Spacing	NA		1320 mm		4'4"		NA		1500 mm		5'9"	
U Shank Gauge	NA		2.63 m		8'8"		NA		2.99 m		9'10"	
V Track Clearance with standard shoe	97 mm	4"	97 mm	4"	141 mm	5.6"	141 mm	5.6"	166 mm	5.6"		
W Width across widest part of lift cylinders	1.75 m	5'9"	1.75 m	5'9"	1.90 m	6'3"	1.90 m	6'3"	1.90 m	6'3"		
Installed Weights:												
Ripper with standard shank												
	7117 kg	15,690 lb	6919 kg	15,253 lb	9643 kg	21,215 lb	13 584 kg	29,885 lb	12 970 kg	28,600 lb		
Each additional tooth group												
	NA		524 kg		1155 lb		NA		671 kg		1489 lb	
<b>Ripper Forces:**</b>												
Penetration Force, shank vertical												
	205 000 N	45,980 lb	205 000 N	45,980 lb	279 860 N	62,890 lb	318 440 N	71,560 lb	300 520 N	67,560 lb		
Pryout Force, shank vertical												
	429 000 N	96,360 lb	429 000 N	96,360 lb	657 840 N	147,830 lb	619 260 N	139,160 lb	602 600 N	135,470 lb		

\*Deep Ripping Shank is available for D10R and D11R single shank rippers. Hydraulic pin puller is standard with deep ripping shank. Deep Ripping Arrangement maximum digging depth is 1.86 m (6'3") for D10R and 2.18 m (7'2") for D11R.

\*\*Forces are for a ripper on a tractor equipped with an EROPS, U-Dozer and performance track. Forces will vary slightly with other vehicle configurations.

NA — Not Applicable.



TRACTOR/RIPPER	D6G/No. 6		D7G/No. 7	
Ripper Type	Parallelogram		Parallelogram	
Dimensions:				
<b>Ripper Shank</b>				
<b>G</b> Maximum digging depth	530 mm	<b>1'8.9"</b>	737 mm	<b>2'5"</b>
<b>L</b> Maximum reach at ground line	551 mm	<b>1'9.7"</b>	994 mm	<b>3'3.1"</b>
<b>M</b> Maximum ground clearance under tip (shank pinned in bottom hole)	218 mm	<b>8.6"</b>	462 mm	<b>18.2"</b>
<b>N</b> Maximum ramp angle, ripper up (shank pinned in bottom hole)	<b>16°</b>		<b>21°</b>	
Shank Section	76 × 178 mm <b>3" × 7"</b>		72 × 228 mm <b>2.8" × 9"</b>	
<b>Ripper Beam</b>				
<b>O</b> Overall width	2.34 m	<b>7'8"</b>	2.21 m	<b>7'3"</b>
<b>P</b> Height	214 mm	<b>8.4"</b>	279 mm	<b>11"</b>
<b>Q</b> Length	254 mm	<b>10"</b>	343 mm	<b>13.5"</b>
Number of Pockets	<b>5</b>		<b>3</b>	
<b>T</b> Pocket Spacing	536 mm	<b>1'9.1"</b>	991 mm	<b>3'3"</b>
<b>U</b> Shank Gauge	2.15 m	<b>7'1"</b>	1.98 m	<b>6'6"</b>
<b>V</b> Track clearance with standard shoe	213 mm	<b>8.4"</b>	185 mm	<b>7.3"</b>
Installed weights:				
Ripper with standard shank	1500 kg	<b>3300 lb</b>	2429 kg	<b>5344 lb</b>
Each additional shank	64 kg	<b>141 lb</b>	155 kg	<b>341 lb</b>

**NOTE:** Letters correspond to ripper dimension drawings.

**TIP SELECTION FOR THE D8R, D9R, D10R AND D11R RIPPERS**

Three tip configurations (short, intermediate and long) in two styles (centerline and penetration) are available for economical operation in a variety of conditions.

**RECOMMENDED TIP USAGE**

*Short* — Use in high impact conditions where breakage problems occur. The shorter the tip, the more it resists breakage.

*Intermediate* — Most effective in moderate impact conditions where abrasion is not excessive.

*Long* — Use in loose, abrasive materials where breakage is not a problem. Generally offers the most wear material.

**Centerline vs Penetration**

The materials being ripped and the tractor doing the ripping will both have an effect on which tip will do the best job. High density material requires a “penetration” tip. High impact material requires a “centerline” tip. The following is a general guide to tip application.

Ripping Condition	Tips to use		
	D8R/ D9R	D10R	D11R
Tandem Tractors . . . . .	Short	Short	Short
Single Shank & Multi-Shank			
Extreme Duty . . . . .	Int.	Short	Short
Medium Duty . . . . .	Long	Int.	Int.
Abrasive Duty . . . . .	Long	Long	Long

Always use the longest tip that will wear without excessive breakage. Different tips should be tried to determine the most economical.

**ESTIMATING RIPPING PRODUCTION**

Ripping costs must be compared to other methods of loosening the material — usually drilling and blasting — on a cost per ton or bank cubic yard basis. Thus, an accurate estimation of ripper production is needed to determine unit ripping costs.

There are three general methods of estimating ripping production:

1. The best method is to record the time spent ripping, then remove (using scrapers or loaders and trucks) and weigh the ripped material. The total weight divided by the time spent will give hourly production. If the contractor is paid by volume, then a density must be used and the accuracy is only as good as the density used. For payment by volume removed, method 2 may be desirable. Some care will be needed to assure that only ripped material is removed.
2. Another method is to cross-section the area and then record the time spent ripping. After the material has been removed, cross-section the area again to determine the volume of rock removed. The volume divided by the time spent ripping gives the ripping rate per minute or hour.
3. Timing the ripper over a measured distance is the least accurate method, but valuable for quick estimating on the job. An average cycle time should be determined from a number of timed cycles. Turn-around or back-up time must be included. Measure the average rip distance, rip spacing and depth of penetration. This data will give the volume per cycle from which the production in bank cubic yards can be calculated. Experience has shown results obtained from this method are about 10 to 20% higher than the more accurate method of cross-sectioning.

An example of the measured distance method for calculating ripper production is:

*Data* — D10R — No. 10 with one shank.  
910 mm (36 in) between passes.  
1.6 km/h (1 mph) average speed (including slippage and stalls).

Every 91 m (300 ft) requires 0.25 min to raise, pivot, turn, and lower again: 91 m (300 ft) = 1 pass.

610 mm (24 in) penetration.  
Full time ripping (no pushing or dozing assignment).

Example of Estimating Production (Metric)

Time per pass:

1.6 km/h = 26.7 m/min. Then  $\frac{91 \text{ m}}{26.7 \text{ m/min}} = 3.41 \text{ min};$

3.41 min + 0.25 min (turn time) = 3.66 min/pass.

If the operator works an average of 45 min per h, it is possible to make  $= \frac{45}{3.66} = 12.3$  passes per h

Volume ripped:  $91 \text{ m} \times 0.9 \text{ m} \times 0.6 \text{ m} = 49.1 \text{ BCM}$  per pass

Production =  $49.1 \times 12.3 = 604 \text{ BCM}$  per h

Remember the results from this method are usually 10 to 20 per cent higher than the actual production that can be expected on the job.

•••

Example of Estimating Production (English)

Time per pass:

MPH = 88 fpm. Then  $\frac{300 \text{ ft}}{88 \text{ fpm}} = 3.41 \text{ min};$

3.41 min + 0.25 min. (turn time) = 3.66 min/pass.

If the operator works an average of 45 min per h, it is possible to make  $\frac{45}{3.66} = 12.3$  passes per hr

Volume ripped:  $\frac{300 \times 3 \times 2}{27} = 66.7 \text{ BCY}$  per pass

Production =  $66.7 \times 12.3 = 820 \text{ BCY}$  per hr

•••

**NOTE:** The demands of heavy ripping will increase the normal owning and operating costs of the tractor.

These costs should be increased no less than 30-40% in heavy ripping applications to estimate rock loosening costs.

There is no ready answer or rule-of-thumb solution to predict ripping production. Even if everything is known about the seismic velocity of the material, its composition, job conditions, equipment and operator, only a "guesstimate" can be given. The final answer must come from a production study obtained on the job site.

Sample problem (Metric)

Determine the loosening costs in the following situation:

Machine	— D10R Tractor with No. 10 Single Shank Ripper
Rip Spacing	— 915 mm
Ripper Penetration	— 610 mm
Rip Distance	— 91 m
Rip Time	— 3.41 minutes
Maneuver Time	— 0.25 minutes
Seismic Velocity	— 1830 meters per second
Assume	60 min. hour

*Solution:*

- Total Cycle Time =  $3.41 + 0.25 = 3.66 \text{ min}$   
Cycles/hour =  $\frac{60 \text{ min/hr}}{3.66 \text{ min/cycle}} = 16.4$
- Production per cycle =  $91 \text{ m} \times 0.9 \text{ m} \times 0.6 \text{ m} = 49.1 \text{ BCM/cycle}$
- Production =  $49.1 \text{ BCM/cycle} \times 16.4 \text{ cycles/h} = 805 \text{ BCM/h}$
- Remember results of this method are usually 10 to 20% high.  
Actual Production = 80% of 805 BCM/h = 644 BCM/h  
Or 90% of 805 BCM/h = 725 BCM/h
- Owning and Operating Costs  
A D10R (ripping only) could have a \$115.00/h O & O costs including \$30/h operator.
- Loosening Costs  
 $\$115.00/\text{hr} \div 644 \text{ BCM/h} = \$0.179/\text{BCM}$   
 $\$115.00/\text{hr} \div 725 \text{ BCM/h} = \$0.159/\text{BCM}$   
The loosening cost should range from 15.9¢ to 17.9¢/BCM

•••

Sample problem (English)

Determine the loosening costs in the following situation:

Machine	— D10R Tractor with No. 10 Single Shank Ripper
Rip Spacing	— 3 feet
Ripper Penetration	— 2 feet
Rip Distance	— 300 feet
Rip Time	— 3.41 minutes
Maneuver Time	— 0.25 minutes
Seismic Velocity	— 6000 feet per second
Assume	60 min. hour

*Solution:*

1. Total Cycle Time =  $3.41 + 0.25 = 3.66$  min  
Cycles/hour =  $\frac{60 \text{ min/hr}}{3.66 \text{ min/cycle}} = 16.4$
2. Production per cycle =  $\frac{300 \times 3 \times 2}{27} = 66.7$  BCY/cycle
3. Production =  $66.7 \text{ BCY/cycle} \times 16.4 \text{ cycles/hr} = 1094 \text{ BCY/hour}$
4. Remember results of this method are usually 10 to 20% high.  
Actual Production =  $80\% \times 1094 = 875 \text{ BCY/hr}$   
or  $90\% \times 1094 = 984 \text{ BCY/hr}$
5. Owning and Operating Costs  
AD10R (ripping only) could have a \$115.00/hr  
O & O costs including \$30/hr operator
6. Loosening Costs  
 $\$115.00/\text{hr} \div 875 \text{ BCY/hr} = \$0.131/\text{BCY}$   
 $\$115.00/\text{hr} \div 984 \text{ BCY/hr} = \$0.117/\text{BCY}$   
The loosening cost should range from 11.7¢ to 13.1¢/BCY



## USE OF SEISMIC VELOCITY CHARTS

The charts of ripper performance estimated by seismic wave velocities have been developed from field tests conducted in a variety of materials. Considering the extreme variations among materials and even among rocks of a specific classification, the charts must be recognized as being at best only one indicator of rippability.

Accordingly, consider the following precautions when evaluating the feasibility of ripping a given formation:


- Tooth penetration is often the key to ripping success, regardless of seismic velocity. This is particularly true in homogeneous materials such as mudstones and claystones and the fine-grained caliches. It is also true in tightly cemented formations such as conglomerates, some glacial tills and caliches containing rock fragments.

- Low seismic velocities of sedimentaries can indicate probable rippability. However, if the fractures and bedding joints do not allow tooth penetration, the material may not be ripped effectively.
- Pre-blasting or “popping” may induce sufficient fracturing to permit tooth entry, particularly in the caliches, conglomerates and some other rocks; but the economics should be checked carefully when considering popping in the higher grades of sandstones, limestones and granites.

Ripping is still more art than science, and much will depend on operator skill and experience. Ripping for scraper loading may call for different techniques than if the same material is to be dozed away. Cross-ripping requires a change in approach. The number of shanks used, length and depth of shank, tooth angle, direction, throttle position — all must be adjusted according to field conditions. Ripping success may well depend on the operator finding the proper combination for those conditions.


**D8R**

- Multi or Single Shank No. 8 Ripper
- Estimated by Seismic Wave Velocities

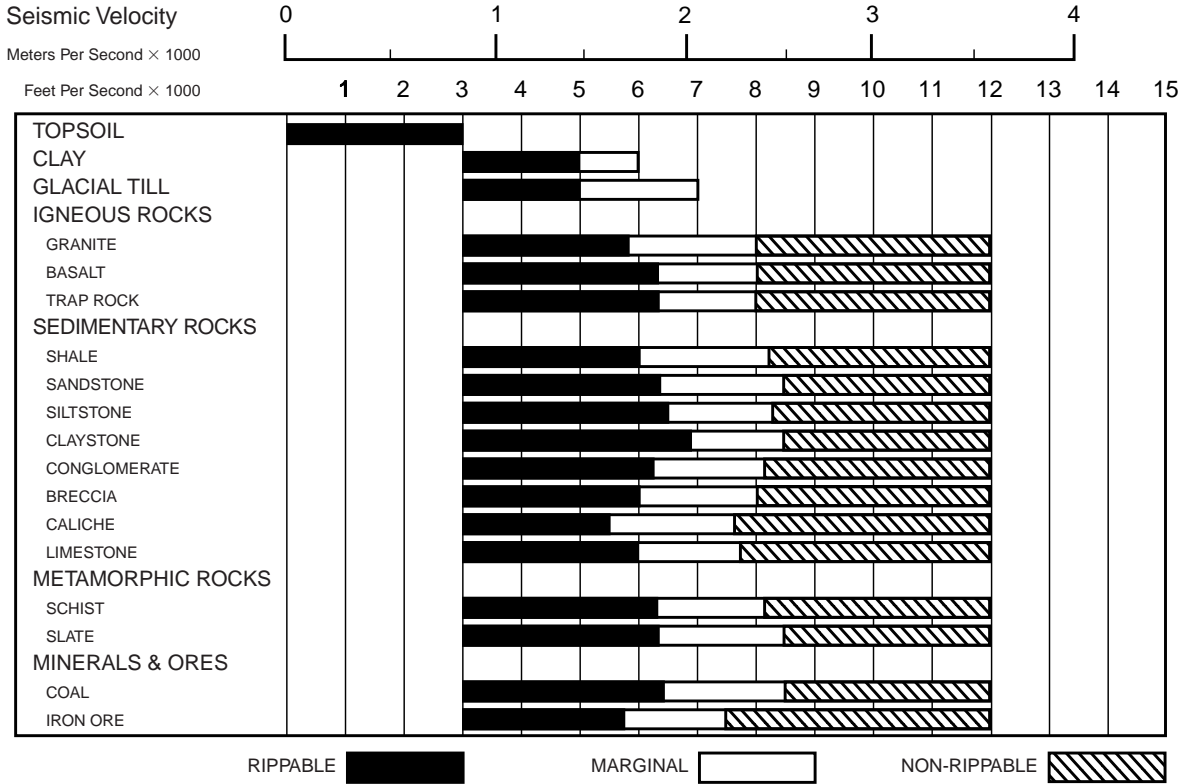



**D9R**

- Multi or Single Shank No. 9 Ripper
- Estimated by Seismic Wave Velocities

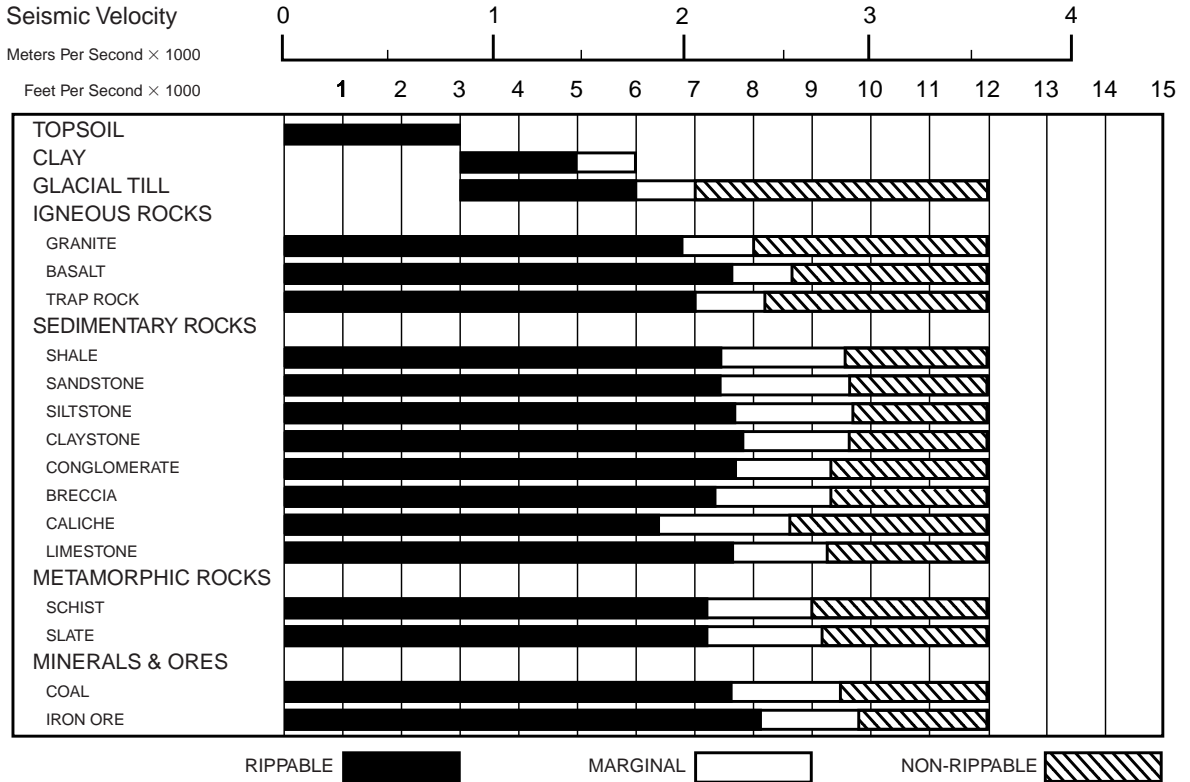


**D10R**

- Multi or Single Shank No. 10 Ripper
- Estimated by Seismic Wave Velocities

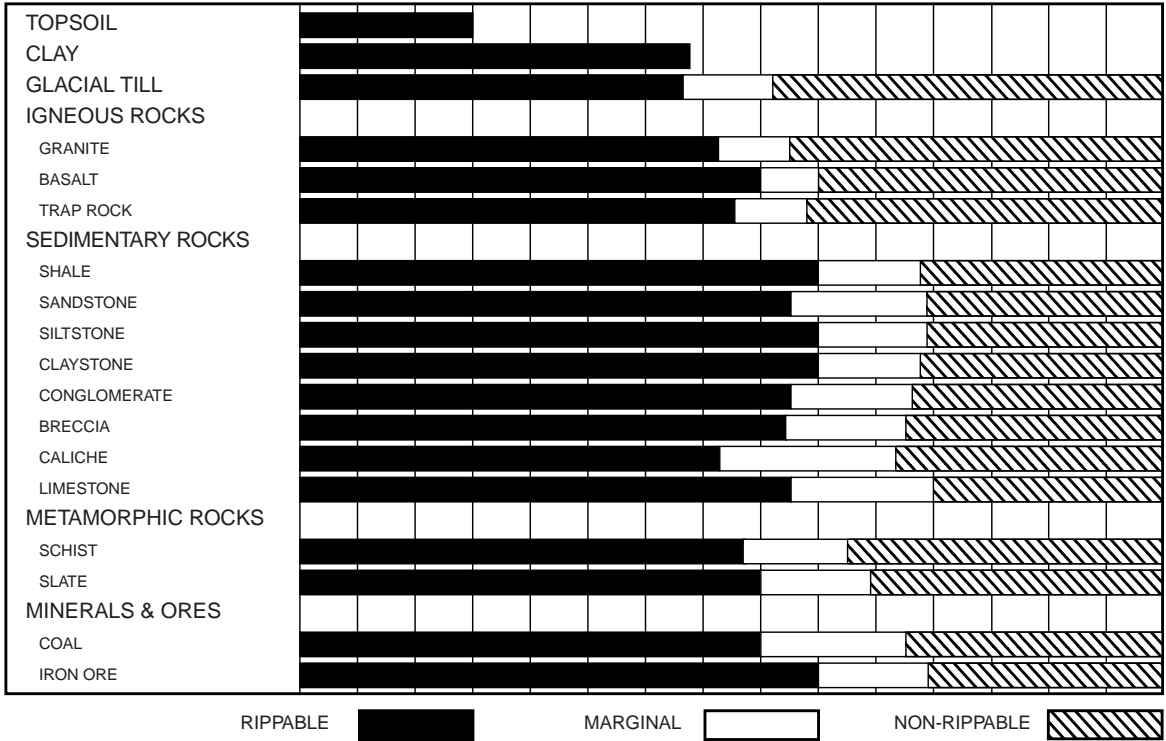

**D11R**


- Multi or Single Shank No. 11 Ripper
- Estimated by Seismic Wave Velocities

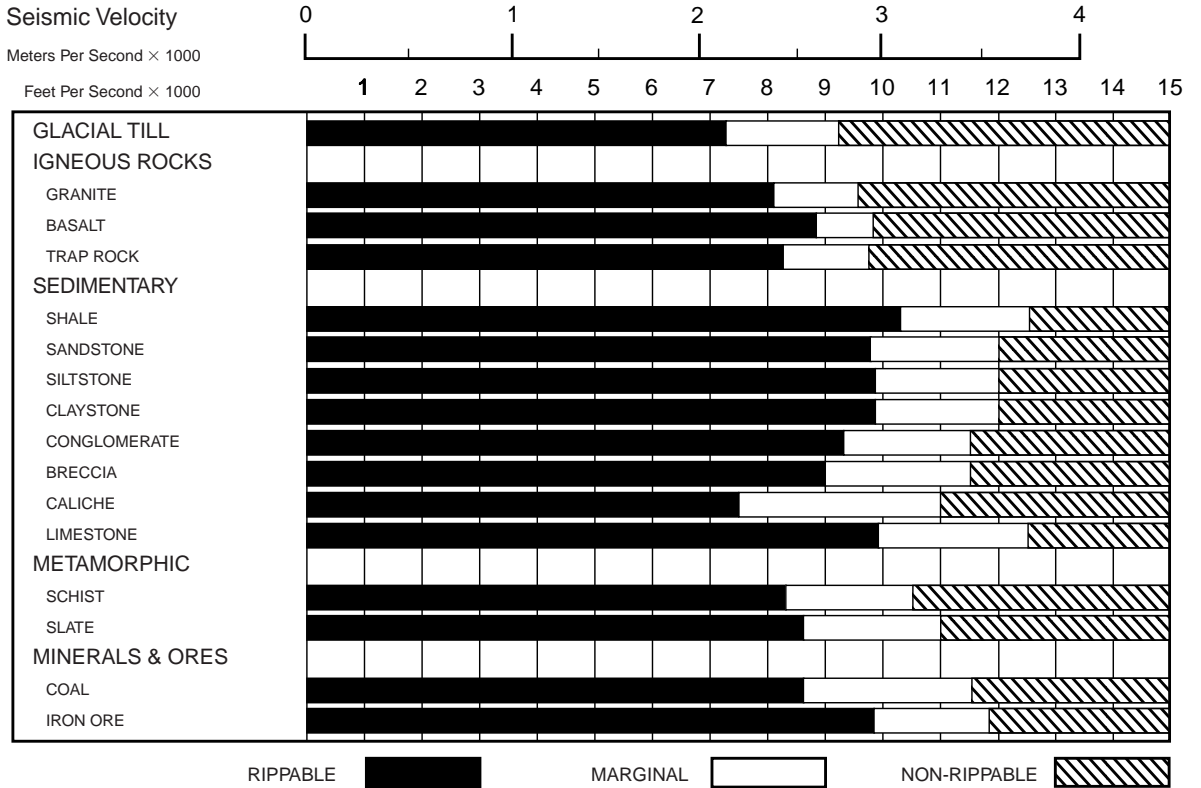



**D11R CD**


- Single Shank No. 11 Ripper
- Estimated by Seismic Wave Velocities

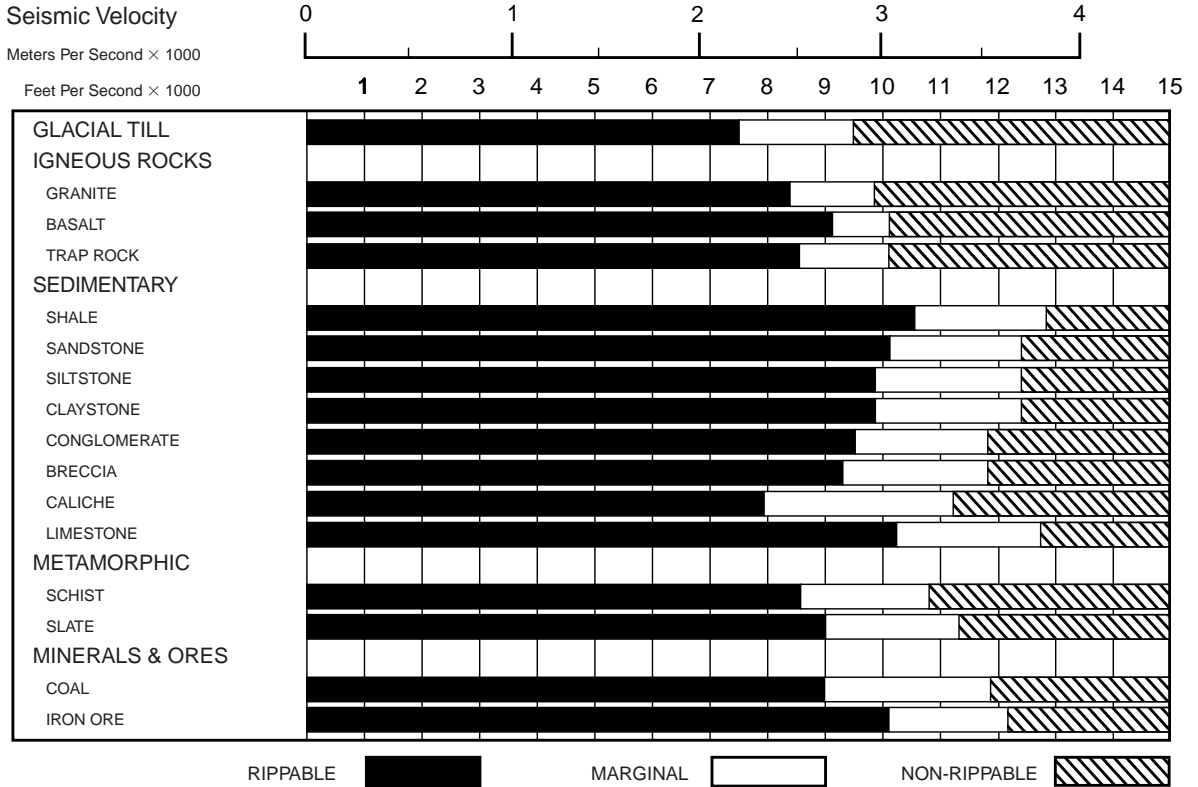

**CONSIDERATIONS FOR USING PRODUCTION ESTIMATED GRAPHS:**


- Machine rips full-time — no dozing.
- Power shift tractors with single shank rippers.
- 100% efficiency (60 min hour).
- Charts are for all classes of material.
- In igneous rock with seismic velocity of 8000 fps (2450 mps) or higher for the D11R, and 6000 fps (1830 mps) or higher for the D10R, D9R and D8R, the production figures shown should be reduced by 25%.
- Upper limit of charts reflect ripping under ideal conditions only. If conditions such as thick lamination, vertical lamination or any factor which would adversely affect production are present, the lower limit should be used.

**D9R WITH SINGLE SHANK**

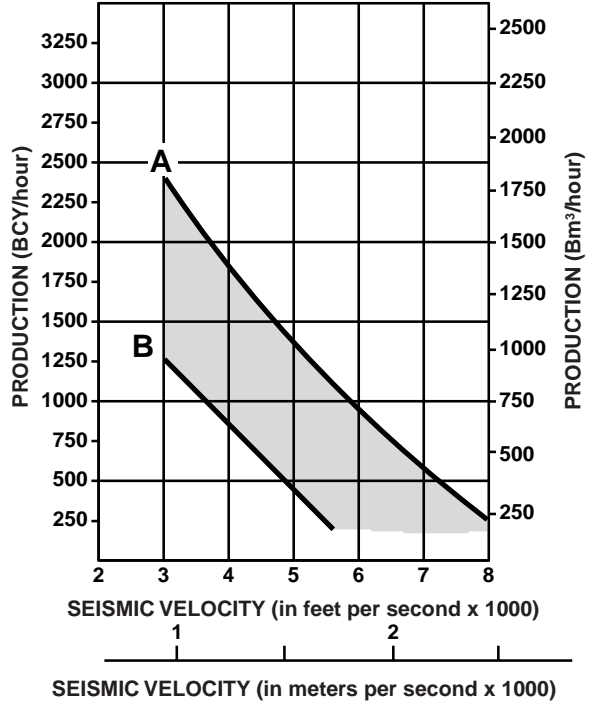


**KEY**  
 A — IDEAL  
 B — ADVERSE


**D8R WITH SINGLE SHANK**

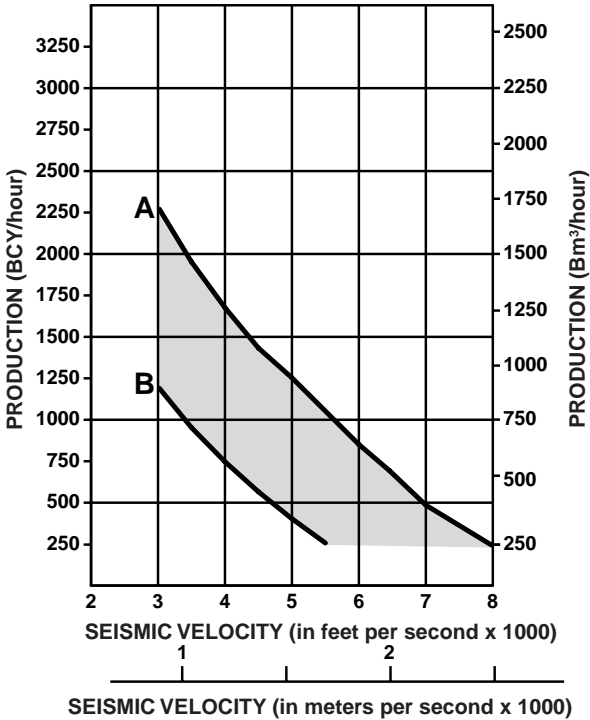


D10R WITH SINGLE SHANK

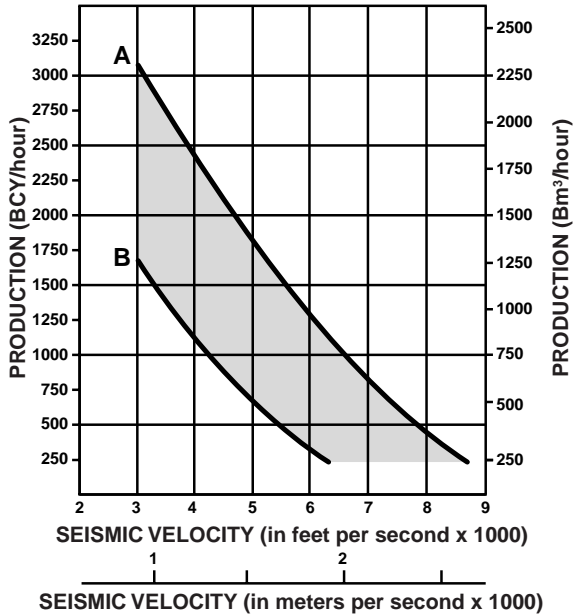

D11R WITH SINGLE SHANK

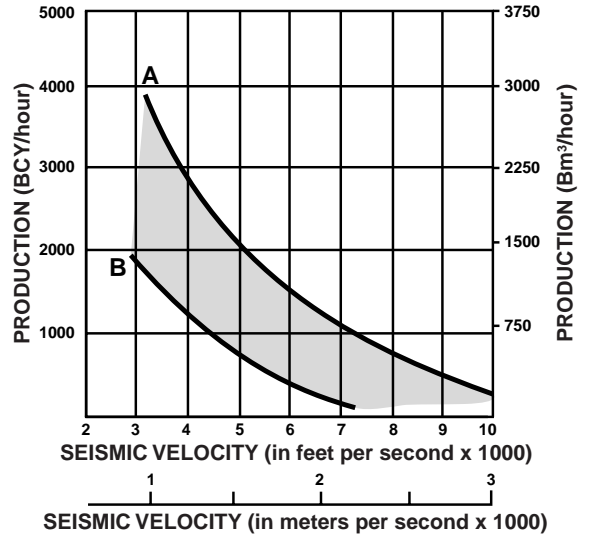

D11R CD WITH SINGLE SHANK

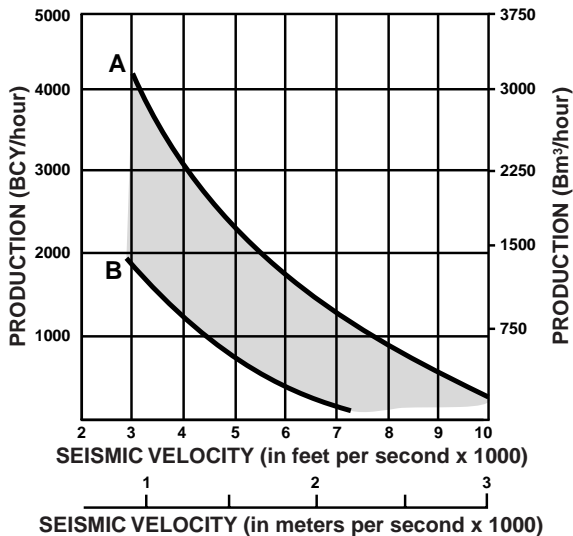

KEY

- A — IDEAL
- B — ADVERSE

# WINCHES

## CONTENTS

Features .....	1-69
Physical specifications .....	1-70
Operating specifications .....	1-73

### PA55 & PA56 Standard Features:

- **Rigid cast ductile case** with integral fairlead mounting lugs and heavy duty drawbar provides durable construction for long life and maximum resale value.
- **Internal Hydraulic System** with gear pump and maintenance free spring type accumulator for easy installation and maintenance.
- **Equal speed gearing** in forward and reverse to provide smooth and predictable performance.
- **Single lever control**, electronic on PA56 or cable control on PA55 for hydraulically actuated multiple disc clutches, brake, and freespool for ease of operation.
- **Freespool with drag adjustment** so the operator can easily pull wire rope from the drum by hand, permitting fast one man operation.


### PA57G & Cat 59 Standard Features:

- **Adjust-free oil-disc clutches** in winch assure reliable performance day-in, day-out.
- **Input clutch** reduces parasitic horsepower loss for improved fuel efficiency.
- **Single-lever actuation** of both clutch and brake functions ... automatic synchronization of input and directional clutch engagement for smooth control.
- **Equal speed gearing** in reel-in and reel-out to provide smooth and predictable performance.

### PA57VS, PA58VS & PA59VS Standard Features:


- **Variable** line pull and line speed.
- **Hydraulically driven winch** for precise load control in reel-in or reel-out.
- **Inching control** through modulation of variable displacement pump and motor.
- **Dual braking system** provides a static brake with a sprag clutch to eliminate fall back and a brake valve for dynamic braking.
- **Single lever joy stick control** for ease of operation and reliable performance with no cable nor linkage adjustments.
- **Three roller fairlead** is standard for improved wire rope life during side pulls.

PA55 & PA56

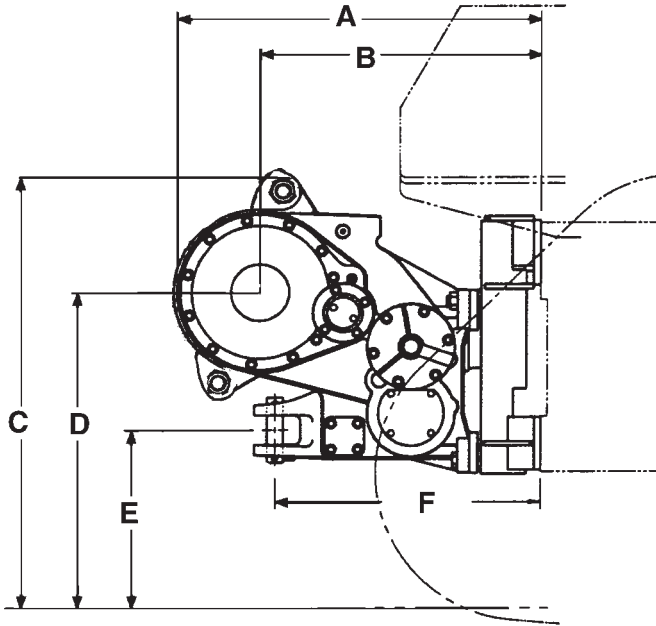


WINCH MODEL	PA55							
TRACTOR MODEL	D5M XL		D5M LGP		D6M XL		D6M LGP	
Transmission	PS		PS & DD					
A Tractor to rear of winch	1120 mm	3'8.1"	1120 mm	3'8.1"	1120 mm	3'8.1"	1120 mm	3'8.1"
B Tractor to drum centerline	866 mm	2'10.1"	866 mm	2'10.1"	866 mm	2'10.1"	866 mm	2'10.1"
C Ground to top of winch	1328 mm	4'4.3"	1380 mm	4'6.3"	1396 mm	4'7"	1511 mm	4'11.5"
D Ground to drum centerline	960 mm	3'1.8"	1012 mm	3'3.8"	1028 mm	3'4.5"	1142 mm	3'9"
E Ground to center of hitch	526 mm	1'8.7"	578 mm	1'10.7"	594 mm	1'11.4"	708 mm	2'3.9"
F Tractor to pin centerline	818 mm	2'8.2"	818 mm	2'8.2"	818 mm	2'8.2"	818 mm	2'8.2"
Overall width (not shown)	1080 mm	3'6.5"	1080 mm	3'6.5"	1080 mm	3'6.5"	1080 mm	3'6.5"
Drum diameter (not shown)	254 mm	10"	254 mm	10"	254 mm	10"	254 mm	10"
Weight*	1140 kg	2500 lb	1140 kg	2500 lb	1140 kg	2500 lb	1140 kg	2500 lb
Oil refill capacity	74 L	19.5 U.S. gal	74 L	19.5 U.S. gal	74 L	19.55 U.S. gal	74 L	19.55 U.S. gal
Wire rope diameter:								
Recommended	16 mm	0.63"	16 mm	0.63"	19 mm	0.75"	19 mm	0.75"
Optional	19 mm	0.75"	19 mm	0.75"	22 mm	0.87"	22 mm	0.87"
Drum capacity:								
Recommended rope	177 m	580'	177 m	580'	122 m	400'	122 m	400'
Optional rope	122 m	400'	122 m	400'	88 m	289'	88 m	289'
Wire rope ferrule size (OD × length)	54 × 65 mm	2.13 × 2.56"	54 × 65 mm	2.13 × 2.56"	54 × 65 mm	2.13 × 2.56"	54 × 65 mm	2.13 × 2.56"

\*Includes pump, operator controls, oil, mounting brackets and spacers.

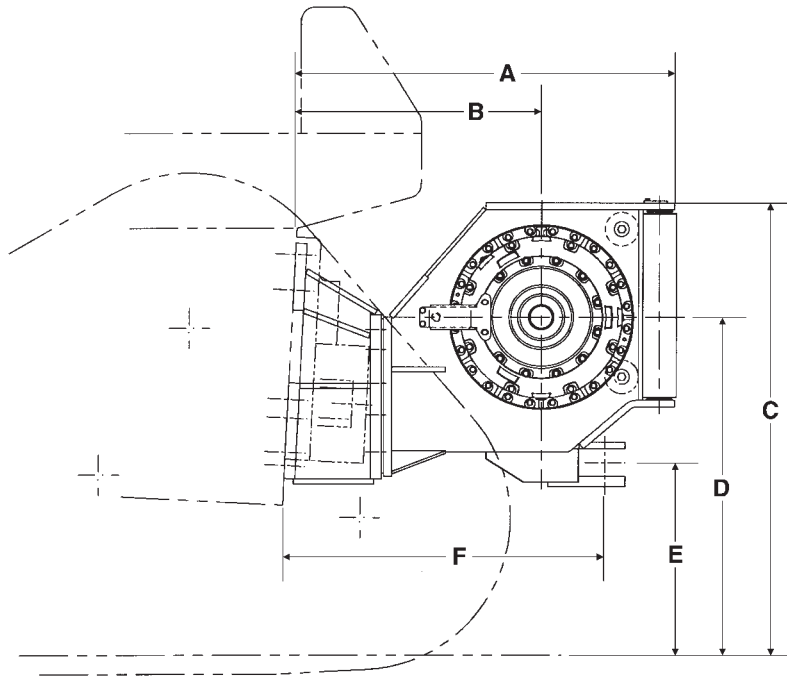

WINCH MODEL	PA56		PA57G		PA57VS	
TRACTOR MODEL	D6R		D7G		D7R	
A Tractor to rear of winch	1200 mm	<b>3'11.2"</b>	973 mm	<b>3'2.3"</b>	1435 mm	<b>4'8.5"</b>
B Tractor to drum centerline	945 mm	<b>3'1.2"</b>	693 mm	<b>2'3.3"</b>	924 mm	<b>3'0.3"</b>
C Ground to top of winch	1475 mm	<b>4'10.1"</b>	1570 mm	<b>5'1.7"</b>	1719 mm	<b>5'7.5"</b>
D Ground to drum centerline	1110 mm	<b>3'7.6"</b>	1176 mm	<b>3'10.3"</b>	1274 mm	<b>4'2.2"</b>
E Ground to center of hitch	680 mm	<b>2'2.7"</b>	610 mm	<b>2'0"</b>	723 mm	<b>2'4.5"</b>
F Tractor to pin centerline	915 mm	<b>3'0"</b>	752 mm	<b>2'5.6"</b>	1220 mm	<b>4'</b>
Overall width (not shown)	975 mm	<b>3'2.3"</b>	1148 mm	<b>3'9.2"</b>	1158 mm	<b>3'9.6"</b>
Drum diameter (not shown)	254 mm	<b>10"</b>	305 mm	<b>12"</b>	318 mm	<b>12.5"</b>
Weight*	1180 kg	<b>2600 lb</b>	1727 kg	<b>3800 lb</b>	1790 kg	<b>3950 lb</b>
Oil refill capacity	67 L	<b>17.75 U.S. gal</b>	75 L	<b>20 U.S. gal</b>	15 L	<b>4 U.S. gal</b>
Wire rope diameter:						
Recommended	22 mm	<b>0.88"</b>	25 mm	<b>1"</b>	29 mm	<b>1.13"</b>
Optional	25 mm	<b>1"</b>	29 mm	<b>1.13"</b>	32 mm	<b>1.25"</b>
Drum capacity:						
Recommended rope	88 m	<b>290'0"</b>	73 m	<b>239'0"</b>	84 m	<b>276'0"</b>
Optional rope	67 m	<b>220'0"</b>	58 m	<b>190'0"</b>	59 m	<b>193'0"</b>
Wire rope ferrule size (OD × length)	54 × 67 mm	<b>2.10 × 2.63"</b>	60 × 70 mm	<b>2.38 × 2.75"</b>	60 × 70 mm	<b>2.38 × 2.75"</b>

\*Operating weight includes pump and operator controls.

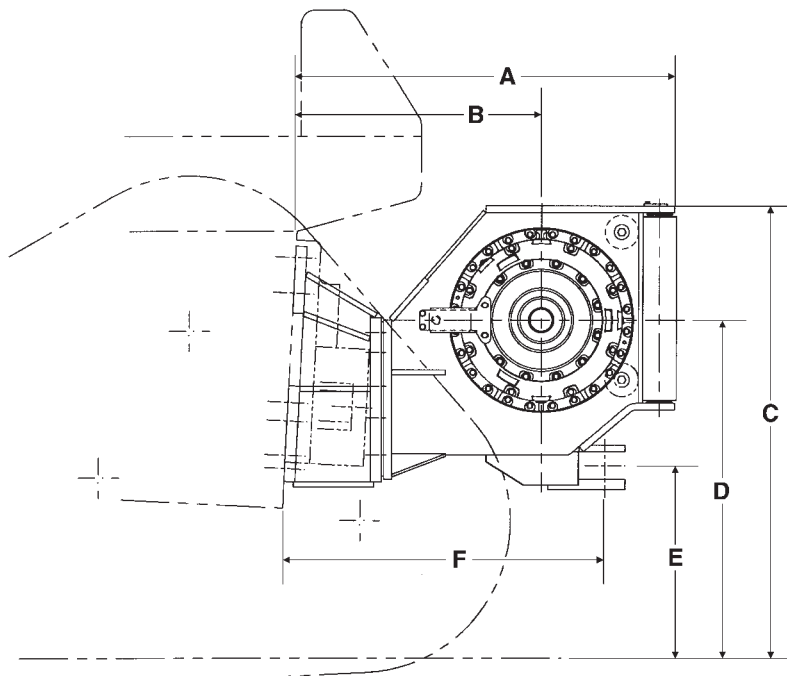

WINCH MODEL	PA58VS		PA59VS		59	
TRACTOR MODEL	D8R		D9R		D10R	
A Tractor to rear of winch	1435 mm	4'8.5"	1552 mm	5'1.1"	1247 mm	4'1.1"
B Tractor to drum centerline	940 mm	3'1"	1041 mm	3'5"	942 mm	3'1.1"
C Ground to top of winch	1712 mm	5'7.4"	1738 mm	5'8.4"	1787 mm	5'10.4"
D Ground to drum centerline	1273 mm	4'2.1"	1298 mm	4'3.1"	1480 mm	4'10.3"
E Ground to center of hitch	721 mm	2'4.4"	747 mm	2'5.4"	892 mm	2'11.1"
F Tractor to pin centerline	1216 mm	3'11.9"	1282 mm	4'2.5"	1000 mm	3'3.4"
Overall width (not shown)	1158 mm	3'9.6"	1158 mm	3'9.6"	1564 mm	5'1.6"
Drum diameter (not shown)	318 mm	12.5"	318 mm	12.5"	330 mm	13"
Weight*	1790 kg	3950 lb	1860 kg	4100 lb	2184 kg	4805 lb
Oil refill capacity	15 L	4 U.S. gal	15 L	4 U.S. gal	70 L	18.5 U.S. gal
Wire rope diameter:						
Recommended	29 mm	1.13"	29 mm	1.13"	29 mm	1.13"
Optional	32 mm	1.25"	32 mm	1.25"	32 mm	1.25"
Drum capacity:						
Recommended rope	84 m	276'0"	84 m	276'	69 m	226'
Optional rope	59 m	193'0"	59 m	193'	55 m	180'
Wire rope ferrule size (OD 3 length)	60 × 70 mm	2.38 × 2.75"	60 × 70 mm	2.38 × 2.75"	60 × 70 mm	2.38 × 2.75"

\*Operating weight includes pump and operator controls.

WINCH MODEL		PA55		PA56	PA57G
TRACTOR MODEL		D5M	D6M	D6R	D7G
<b>British Units of Measure</b> <i>Standard speed gearing</i>					
Winch Drive		PTO	PTO	PTO	PTO
Bare Drum	Rated linepull . . . . .lbs	26,720	37,510	54,180	53,939
	Maximum linepull* . . . . .lbs	51,200	69,200	89,800	103,794
	Rated linespeed . . . . .fpm	97	94	78	89
	Maximum linespeed . . . . .fpm	151	143	122	159
Full Drum	Rated linepull . . . . .lbs	15,020	21,080	31,570	33,712
	Maximum linepull . . . . .lbs	36,760	53,590	64,970	64,871
	Rated linespeed . . . . .fpm	173	168	134	143
	Maximum linespeed . . . . .fpm	269	254	209	254
<i>Slow/Low speed gearing</i>					
Bare Drum	Rated linepull . . . . .lbs	51,200	69,200	89,800	113,000
	Maximum linepull* . . . . .lbs	51,200	69,200	89,800	113,000
	Rated linespeed . . . . .fpm	41	39	35	37
	Maximum linespeed . . . . .fpm	63	60	55	66
Full Drum	Rated linepull . . . . .lbs	36,020	50,570	69,340	81,429
	Maximum linepull* . . . . .lbs	51,200	69,200	89,800	113,000
	Rated linespeed . . . . .fpm	72	70	61	59
	Maximum linespeed . . . . .fpm	112	106	95	105
Tractor rating		110 hp @ 2100 rpm	140 hp @ 2200 rpm	165 hp @ 1800 rpm	200 hp @ 2000 rpm

**Metric Units of Measure**  
*Standard speed gearing*

Bare Drum	Rated linepull . . . . .kg	12 120	17 014	24 576	24 446
	Maximum linepull* . . . . .kg	23 245	31 417	40 733	47 080
	Rated linespeed . . . . .mpm	30	29	24	27
	Maximum linespeed . . . . .mpm	46	44	37	48
Full Drum	Rated linepull . . . . .kg	6813	9562	14 320	15 292
	Maximum linepull . . . . .kg	16 674	24 471	29 470	29 425
	Rated linespeed . . . . .mpm	53	51	41	44
	Maximum linespeed . . . . .mpm	82	77	64	77
<i>Slow/Low speed gearing</i>					
Bare Drum	Rated linepull . . . . .kg	23 245	31 417	40 733	51 256
	Maximum linepull* . . . . .kg	23 245	31 417	40 733	51 256
	Rated linespeed . . . . .mpm	12	12	11	11
	Maximum linespeed . . . . .mpm	19	18	17	20
Full Drum	Rated linepull . . . . .kg	16 338	22 938	31 453	36 935
	Maximum linepull* . . . . .kg	23 245	31 417	40 733	51 256
	Rated linespeed . . . . .mpm	22	21	19	18
	Maximum linespeed . . . . .mpm	34	32	29	32
Tractor rating		82 kW @ 2100 rpm	104 kW @ 2200 rpm	123 kW @ 1800 rpm	149 kW @ 2000 rpm

\*Maximum linepull limited by breaking strength of the optional (larger diameter) wire rope.  
 Winch linepull and linespeed ratings are based on gear train mechanical efficiency of 90%.



# Winches

## Operating Specifications

- British Units of Measure
- Metric Units of Measure

WINCH MODEL		PA57VS		PA58VS	PA59VS	59
TRACTOR MODEL		D7R Diff. Steer	D7R Power Shift	D8R	D9R	D10
<b>British Units of Measure</b> <i>Standard speed gearing</i>						
Winch Drive		HYD	HYD	HYD	HYD	PTO
Bare Drum	Rated linepull . . . . . lbs	35,960	—	—	—	122,110
	Maximum linepull . . . . . lbs	109,657	—	—	—	139,000*
	Rated linespeed . . . . . fpm	132	—	—	—	116
	Maximum linespeed . . . fpm	167	—	—	—	149
Full Drum	Rated linepull . . . . . lbs	22,820	—	—	—	82,620
	Maximum linepull . . . . . lbs	69,587	—	—	—	139,000*
	Rated linespeed . . . . . fpm	208	—	—	—	171
	Maximum linespeed . . . fpm	264	—	—	—	221
<i>Slow/Low speed gearing</i>						
Bare Drum	Rated linepull . . . . . lbs	110,000	101,200	109,700	120,200	139,000*
	Maximum linepull . . . . . lbs	110,000	101,200	109,700	120,200	139,000*
	Rated linespeed . . . . . fpm	32	22	30	33	63
	Maximum linespeed . . . fpm	95	63	61	62	81
Full Drum	Rated linepull . . . . . lbs	69,700	65,500	71,000	72,400	139,000*
	Maximum linepull . . . . . lbs	69,700	65,500	71,000	72,400	139,000*
	Rated linespeed . . . . . fpm	49	35	46	55	97
	Maximum linespeed . . . fpm	147	79	95	104	121
Tractor rating		240 hp @ 2100 rpm	240 hp @ 2100 rpm	305 hp @ 2100 rpm	405 hp @ 1900 rpm	570 hp @ 1900 rpm

### Metric Units of Measure

*Standard speed gearing*

Bare Drum	Rated linepull . . . . . kg	16 326	—	—	—	55 389
	Maximum linepull . . . . . kg	49 784	—	—	—	63 106*
	Rated linespeed . . . . . mpm	40	—	—	—	35
	Maximum linespeed . . . mpm	51	—	—	—	46
Full Drum	Rated linepull . . . . . kg	10 360	—	—	—	37 476
	Maximum linepull . . . . . kg	31 592	—	—	—	63 106*
	Rated linespeed . . . . . mpm	63	—	—	—	52
	Maximum linespeed . . . mpm	81	—	—	—	67
<i>Slow/Low speed gearing</i>						
Bare Drum	Rated linepull . . . . . kg	48 941	45 945	49 804	54 571	63 106*
	Maximum linepull . . . . . kg	48 941	45 945	49 804	54 571	63 106*
	Rated linespeed . . . . . mpm	10	7	9	10	19
	Maximum linespeed . . . mpm	29	16	19	19	25
Full Drum	Rated linepull . . . . . kg	31 644	29 737	32 234	32 870	63 106*
	Maximum linepull . . . . . kg	31 644	29 737	32 234	32 870	63 106*
	Rated linespeed . . . . . mpm	15	11	14	17	30
	Maximum linespeed . . . mpm	45	24	29	32	37
Tractor rating		179 kW @ 2100 rpm	197 kW @ 2100 rpm	228 kW @ 2100 rpm	302 kW @ 1900 rpm	425 kW @ 1900 rpm

\*Maximum linepull limited by breaking strength of the optional (larger diameter) wire rope.  
Winch linepull and linespeed ratings are based on gear train mechanical efficiency of 90%.

# TOWED SCRAPERS

## PRODUCTION BASIS FOR ALL TABLES IN THIS SECTION:

- Material 1780 kg/m<sup>3</sup> (3000 lb/yd<sup>3</sup>).
- 60 minute hour.
- Total resistance 100 kg/metric ton ~ (200 lb/U.S. ton).
- Scraper load per trip estimated at rated struck capacity.

- All hydraulic
- Manufactured by Rome Industries

SCRAPER & TRACTOR	Struck Capacity		Haul 120 m 400'		Haul 180 m 600'		Haul 250 m 800'		Haul 300 m 1000'	
	m <sup>3</sup>	yd <sup>3</sup>	m <sup>3</sup>	yd <sup>3</sup>	m <sup>3</sup>	yd <sup>3</sup>	m <sup>3</sup>	yd <sup>3</sup>	m <sup>3</sup>	yd <sup>3</sup>
<b>Push Loaded</b>			<b>Estimated Hourly Production</b>							
<b>R56H</b>	<b>m<sup>3</sup></b>	<b>yd<sup>3</sup></b>	<b>m<sup>3</sup></b>	<b>yd<sup>3</sup></b>	<b>m<sup>3</sup></b>	<b>yd<sup>3</sup></b>	<b>m<sup>3</sup></b>	<b>yd<sup>3</sup></b>	<b>m<sup>3</sup></b>	<b>yd<sup>3</sup></b>
D6M (Power Shift)	6.9	<b>9.0</b>	107	<b>140</b>	88	<b>115</b>	75	<b>98</b>	66	<b>86</b>
D6M (Direct Drive)	6.9	<b>9.0</b>	101	<b>132</b>	83	<b>109</b>	71	<b>93</b>	61	<b>80</b>
D5B (Power Shift)	6.9	<b>9.0</b>	105	<b>138</b>	86	<b>113</b>	74	<b>96</b>	63	<b>83</b>
D5B (Direct Drive)	6.9	<b>9.0</b>	104	<b>136</b>	87	<b>114</b>	75	<b>98</b>	65	<b>85</b>
D6R (Power Shift)	6.9	<b>9.0</b>	125	<b>164</b>	102	<b>133</b>	86	<b>113</b>	75	<b>98</b>
D6R (Direct Drive)	6.9	<b>9.0</b>	128	<b>168</b>	108	<b>141</b>	93	<b>121</b>	82	<b>107</b>
D6D (Power Shift)	6.9	<b>9.0</b>	123	<b>161</b>	99	<b>130</b>	84	<b>110</b>	73	<b>95</b>
D6D (Direct Drive)	6.9	<b>9.0</b>	125	<b>163</b>	104	<b>136</b>	89	<b>116</b>	78	<b>102</b>
<b>Self Loaded</b>										
D6M (Power Shift)	6.9	<b>9.0</b>	95	<b>124</b>	80	<b>104</b>	69	<b>90</b>	61	<b>80</b>
D6M (Direct Drive)	6.9	<b>9.0</b>	89	<b>117</b>	75	<b>98</b>	64	<b>84</b>	57	<b>75</b>
D5B (Power Shift)	6.9	<b>9.0</b>	93	<b>122</b>	78	<b>102</b>	67	<b>88</b>	59	<b>77</b>
D5B (Direct Drive)	6.9	<b>9.0</b>	92	<b>121</b>	79	<b>103</b>	68	<b>89</b>	60	<b>79</b>
D6R (Power Shift)	6.9	<b>9.0</b>	112	<b>147</b>	93	<b>122</b>	80	<b>105</b>	70	<b>92</b>
D6R (Direct Drive)	6.9	<b>9.0</b>	114	<b>149</b>	98	<b>128</b>	85	<b>111</b>	76	<b>100</b>
D6D (Power Shift)	6.9	<b>9.0</b>	110	<b>144</b>	91	<b>119</b>	78	<b>102</b>	68	<b>89</b>
D6D (Direct Drive)	6.9	<b>9.0</b>	111	<b>145</b>	94	<b>123</b>	82	<b>107</b>	73	<b>95</b>

Load time (average):

	Push Loaded	Self Loaded
D5	1.0 min	1.5 min
D6	0.8 min	1.2 min

Dump and turn time: D5 1.2 min

D6 1.0 min

Shift time: P.S. 0.0 min

D.D. 0.2 min

SCRAPER & TRACTOR	Struck Capacity		Haul 120 m 400'		Haul 180 m 600'		Haul 250 m 800'		Haul 300 m 1000'	
	m <sup>3</sup>	yd <sup>3</sup>	m <sup>3</sup>	yd <sup>3</sup>	m <sup>3</sup>	yd <sup>3</sup>	m <sup>3</sup>	yd <sup>3</sup>	m <sup>3</sup>	yd <sup>3</sup>
<b>Push Loaded</b>			<b>Estimated Hourly Production</b>							
<b>R67H</b>										
D6R (Power Shift)	9.2	12	161	210	130	170	109	142	93	121
D6R (Direct Drive)	9.2	12	144	188	119	156	102	133	86	113
D6D (Power Shift)	9.2	12	152	200	122	160	100	132	85	112
D6D (Direct Drive)	9.2	12	140	183	114	150	97	127	82	108
D7R (Power Shift)	9.2	12	208	272	169	221	140	183	118	154
D7R (Direct Drive)	9.2	12	206	270	172	225	145	190	126	165
D7G (Power Shift)	9.2	12	198	260	159	208	131	172	110	144
D7G (Power Shift)	10.7	14	222	291	177	232	151	198	126	165
D7G (Direct Drive)	10.7	14	215	281	168	221	146	191	123	162
D8R (Power Shift)	10.7	14	238	312	191	250	159	208	137	180
D8K (Power Shift)	10.7	14	238	312	191	250	159	208	137	180
D8K (Direct Drive)	10.7	14	228	298	181	238	152	200	132	173
<b>R89H</b>										
D7R (Power Shift)	13.8	18	257	336	206	269	170	222	147	192
D7R (Direct Drive)	13.8	18	240	314	194	254	160	209	141	185
D7G (Power Shift)	13.8	18	245	320	193	253	158	207	136	178
D7G (Direct Drive)	13.8	18	229	299	184	240	150	196	131	171
D8R (Power Shift)	13.8	18	275	360	213	278	176	230	151	198
D8K (Power Shift)	13.8	18	275	360	213	278	176	230	151	198
D8K (Direct Drive)	13.8	18	257	336	203	266	170	222	145	190
D8L (Power Shift)	13.8	18	325	425	155	328	207	271	179	234

Load time (average):

	Push	Self		Push	Self
<b>R67H</b>	Loaded	Loaded	<b>R89H</b>	Loaded	Loaded
D6	0.8 min	1.2 min	D7	0.8 min	1.2 min
D7	0.6 min	1.0 min	D8	0.6 min	1.0 min
D8	0.5 min	0.8 min	D8	0.5 min	0.8 min

Dump and turn time: D6 — 1.0 min  
 All others — 0.8 min  
 Shift time: Power Shift — 0.0 min  
 Direct Drive — 0.2 min

SCRAPER & TRACTOR	Struck Capacity		Haul 120 m 400'		Haul 180 m 600'		Haul 250 m 800'		Haul 300 m 1000'	
	m <sup>3</sup>	yd <sup>3</sup>	m <sup>3</sup>	yd <sup>3</sup>	m <sup>3</sup>	yd <sup>3</sup>	m <sup>3</sup>	yd <sup>3</sup>	m <sup>3</sup>	yd <sup>3</sup>
<b>Self Loaded</b>			<b>Estimated Hourly Production</b>							
<b>R67H</b>										
D6R (Power Shift)	9.2	12	143	187	119	156	101	132	88	115
D6R (Direct Drive)	9.2	12	134	175	112	147	95	124	82	107
D6D (Power Shift)	9.2	12	136	178	112	147	94	123	81	107
D6D (Direct Drive)	9.2	12	129	170	107	141	90	118	77	102
D7R (Power Shift)	9.2	12	187	244	151	197	128	168	109	142
D7R (Direct Drive)	9.2	12	174	227	136	178	113	148	97	129
D7G (Power Shift)	9.2	12	177	232	142	186	120	158	100	132
D7G (Direct Drive)	9.2	12	174	228	137	180	114	150	99	130
D7G (Power Shift)	10.7	14	194	255	160	210	137	180	116	152
D7G (Direct Drive)	10.7	14	189	248	156	205	133	175	113	149
D8R (Power Shift)	10.7	14	214	280	175	230	147	193	128	168
D8K (Power Shift)	10.7	14	214	280	175	230	147	193	128	168
D8K (Direct Drive)	10.7	14	206	270	168	220	143	180	123	162
<b>R89H</b>										
D7R (Power Shift)	13.8	18	229	299	189	247	156	204	129	169
D7R (Direct Drive)	13.8	18	216	283	179	234	151	198	128	168
D7G (Power Shift)	13.8	18	218	285	178	232	145	190	129	169
D7G (Direct Drive)	13.8	18	206	270	169	221	141	185	119	156
D8R (Power Shift)	13.8	18	238	312	192	251	162	212	141	184
D8K (Power Shift)	13.8	18	238	312	192	251	162	212	141	184
D8K (Direct Drive)	13.8	18	229	300	184	241	157	206	136	178
D8L (Power Shift)	13.8	18	281	368	226	296	191	250	166	217

Load time (average):

	Push	Self		Push	Self
<b>R67H</b>	Loaded	Loaded	<b>R89H</b>	Loaded	Loaded
D6	0.8 min	1.2 min	D7	0.8 min	1.2 min
D7	0.6 min	1.0 min	D8	0.6 min	1.0 min
D8	0.5 min	0.8 min	D8	0.5 min	0.8 min

Dump and turn time: D6 — 1.0 min  
 All others — 0.8 min  
 Power Shift — 0.0 min  
 Direct Drive — 0.2 min  
 Shift time:

SCRAPER & TRACTOR	Struck Capacity		Haul 100 m 330'		Haul 200 m 650'		Haul 300 m 1000'		Haul 400 m 1300'	
	m <sup>3</sup>	yd <sup>3</sup>	m <sup>3</sup>	yd <sup>3</sup>	m <sup>3</sup>	yd <sup>3</sup>	m <sup>3</sup>	yd <sup>3</sup>	m <sup>3</sup>	yd <sup>3</sup>
<b>Agricultural</b>			<b>Estimated Hourly Production</b>							
2 × 6C + D4E DD	4.6	6	160	209	110	144	90	118	80	105
2 × 14C + D6D DD	10.7	14	380	497	270	353	210	275	175	229
<b>Industrial</b>										
1 × R89H + D8L	27.5	36	325	425	251	328	207	271	179	234



# AGRICULTURAL EQUIPMENT

## Challenger® Tractors

### Versatile Flotation System Trailers

## Lexion® Combines

### Super Rural Tractors (SR)

## CONTENTS

Features	
Challenger Tractors	2-1
Versatile Flotation System	2-4
Lexion Combines	2-4
Super Rural Tractors	2-5
Specifications	
Challenger Tractors	2-6
Versatile Flotation System	2-8
Lexion Combines	2-9
Super Rural Tractors	2-11
Horsepower Ratings	
Challenger Tractors	2-12
Super Rural Tractors	2-12
Travel Speeds	
Challenger Tractors	2-13
Super Rural Tractors	2-13
Lexion Combines	2-13
Drawbar Pull Forward	
Challenger Tractors	2-14
Super Rural Tractors	2-14
Row-Crop Gauge (Track) Spacing Guide	2-16
Belt Selection	2-17
Attachments	2-18
Drawbar Power and Tillage	2-20
Estimated Draft or Drawbar Pull	2-21

## CHALLENGER TRACTORS

### Challenger Mid-Size Tractors

The Challenger 35, 45 and 55 tractors signal a new direction in row-crop versatility, with row spacing and horsepower to match most every cultivation, planting and tillage requirement.

### Patented Mobil-trac™ Undercarriage:

- Exclusive Cat track design is industry's most advanced.
- Weight is spread across five axles, improving traction, flotation and lowering compaction.
- Translates more power to the ground for added performance, improved efficiency.
- Hardbar elastomerically mounted for reduced vibration and smooth ride.
- Two locations allow convenient chemical tank mounting.
- Proven roller frame features an in-line design, all belt tensioning stresses are contained within the unitized system.

### Exclusive Belt Design:

- Broadest belt choice available: five standard widths — 406 to 813 mm (16-32") — special application, side hill and extreme service versions also available.
- Inside, patented arrangement of heavy-duty steel cables delivers maximum lateral resistance.
- Belt components are vulcanized, not molded, for excellent durability.

**Gauge (Track) Spacing:**

- Choice of two chassis (standard and wide-track) for maximum flexibility.
- Standard is adjustable from 1524 to 2286 mm (60-90"); wide-track from 2032 to 3048 mm (80-120").
- Adjustable in even, two-inch increments with solid, exacting settings and 100% true alignment.
- Track spacing changes made on-farm in a few hours and no special tools required.

**Engines:**

- Challenger 35, 45 feature Cat 3116 engine: 6.6 L (403 in<sup>3</sup>) displacement.
- Challenger 55 features Cat 3126 engine: 7.2 L (442 in<sup>3</sup>) displacement.
- Excellent torque rise minimizes downshifting:
  - Challenger 35, 68% PTO torque rise.
  - Challenger 45, 57% PTO torque rise.
  - Challenger 55, 46% PTO torque rise.
- Engine iso-mounted to tractor mainframe for simplified service and reduced vibration.

**16x9 Powershift Transmission:**

- Programmable electronic powershift includes sequential shift, shuttle shift, auto-shift, programmable downshift/upshift, speed matching.
- Speed range from zero to 31.37 km/h (19.5 mph).
- Optional creeper gears allow for ultra slow-speed applications.
- Final drives feature inboard planetaries.

**Patented Differential Steering:**

- Hydraulic/mechanical design delivers smooth, reliable steering.
- Stronger and more durable than conventional electronic systems.
- Turning under load exceeds wheel tractor's ability, particularly at 3048 mm (120") setting.

**Responsive Hydraulics:**

- Ample hydraulic flow at each coupler of 118 L/min (31.2 gpm), 163 L/min (43 gpm) from pump.
- Hydraulic flow levers give comforting feeling of control.
- In-cab flow controls allow convenient fine-tuning.

**Comfortable Cab:**

- Excellent visibility all-around.
- Eight-way adjustable air-ride suspension seat for comfort.
- Patented rubber isolation mounts reduce shock loads, smooth operator ride and reduce noise levels.
- Movable control console allows adjustment for individual comfort (Deluxe cab only).
- Remote, lever actuated hydraulic couplers for easy connections.
- Lower cab sound levels than competitive track tractors.

**Challenger High-Horsepower Tractors**

The Challenger E-Series tractors take performance in the high-horsepower category to new levels. Worthy successors to the rugged Caterpillar D-Series, and the fifth generation to the original Challenger 65 introduced 14 years ago.

**Patented Mobil-trac™ Undercarriage:**

- Exclusive Cat track design is industry's most advanced.
- Weight is spread across six axles, improving traction, flotation and lowering compaction.
- Translates more power to the ground for added performance and improved efficiency.
- Designed as an integral part of the Challenger tractor, not an "add-on."
- Bogie undercarriage system absorbs shock loads, follows ground contours and smoothes ride.
- Choice of two drive wheels (chevron or heavy-duty slotted cast-iron).

**Exclusive Belt Design:**

- Widest belt choice available: four belt widths — 635 mm, 698 mm, 762 mm and 889 mm (25", 27.5", 30", 35") — in standard, special application, reinforced and side-hill versions.
- Inside, patented arrangement of heavy-duty steel cables delivers maximum lateral resistance.
- Belt components are vulcanized, not molded, for excellent durability.

**Gauge (Track) Spacing:**

- Standard 2286 mm (90") spacing provides superior debris rejection and stability.

**Engines:**

- Challenger 65E, 75E: Cat 3176C engine: 10.3 L (629 in<sup>3</sup>) displacement.
- Challenger 85E, 95E: Cat 3196 engine: 12 L (732 in<sup>3</sup>) displacement.
- Excellent torque rise minimizes downshifting:
  - Challenger 65E, 37% PTO torque rise.
  - Challenger 75E, 41% PTO torque rise.
  - Challenger 85E, 42% PTO torque rise.
  - Challenger 95E, 43% PTO torque rise.
- PTO power reserve of 10% at 1900 rpm on 95E allows exceptional pull-through in tough spots.
- Engine iso-mounted to tractor mainframe for simplified service and reduced vibration.

**10x2 Full Powershift Transmission:**

- Dependable and proven; single in-line lever provides smooth on-the-go shifting in all gears.
- Speed range from zero to 31.7 km/h (19.7 mph).
- Inching pedal permits tight-quarter maneuvers; no need for high-maintenance master clutch.
- Fully hydraulic brake control reduces pedal effort.

**Patented Differential Steering:**

- Hydraulic/mechanical design delivers smooth, reliable steering.
- Effortless full-power turns under load.
- "Straight-line" tracking allows straight forward pulling with minimal operator input.

**Responsive Hydraulics:**

- Ample hydraulic flow at couplers of 151 L/min (40 gpm).
- Power-beyond ports (standard) allows flow directly to implement orbital motors or fans.
- Remote, lever-actuated hydraulic couplers for easy connections.
- In-cab flow controls allow convenient fine-tuning.
- Hydraulic levers on the cab console positioned for easy control.

**Comfortable Cab:**

- Excellent visibility all-around — roomier, brighter, quieter cab improves productivity.
- Eight-way adjustable air-ride suspension seat.
- Fully padded trainer seat with retractable seat-belt.
- Isolation mounts absorb shock loads for smoother ride.
- Exclusive Caterpillar Information Display (optional) provides on-going log of maintenance data, field totals and fuel consumption.



## VERSATILE FLOTATION SYSTEM (VFS)

The heavy-duty VFS trailer system offers an extremely flexible hauling and spreading platform for grain wagons, spray tanks and other equipment.

### Solid Construction:

- Six axles per track roller frame spread out axle loads, lower rolling resistance.
- VFS 50 — four pressed high-strength low-alloy (HSLA) steel midwheels, two steel idlers.
- VFS 70 — ductile-iron midwheels; an additional layer of steel on idlers' outer diameter increases strength and load-carrying capacity.
- Dual tapered roller bearings on idlers and midwheels improve performance.
- Air-spring tensioning system allows recoil for material flow between belt and idlers.
- Exclusive 762 mm (30") belts feature 96 tread bars and a 40-degree tread-bar pattern for traction, low vibration. Circumferential rib configuration belts also available in 762 mm (30") or 635 mm (25") widths. Grooves in belt are 22 mm (0.86") deep and provide smooth, vibration free operation.

### Adaptable:

- VFS 50 and 70 available in three configurations: hitch and frame, wide axle, or narrow axle.
- VFS 70 wide- and narrow-axle configurations include bracket-mounting location for weight scale.
- Each roller assembly oscillates up to 17 degrees, independent of the other, for a smooth ride.
- No lubrication required: special seals eliminate need for periodic greasing of midwheel and idler bearings.

### Applications:

- Include but are not limited to the following:
  - Grain transport.
  - Sugar cane, vegetable or sugar beet hauling.
  - Lime spreading.
  - Anhydrous ammonia injection.
  - Sludge hauling.
  - Herbicide spreading.
  - Side-dump carts.
  - Air seeding.
  - Manure spreading.
- Construction uses include rear dump boxes and waste haulers.

## LEXION® COMBINES

After years of research, development and field testing, Caterpillar is pleased to offer the Lexion line of combines. This line represents the most significant advancement in combine technology and performance in more than two decades.

### Headers:

- Auto-Contour automatically adjusts header height and tilt when traveling over uneven terrain.
- Automatic reel control synchronizes reel speed to travel speed and reel height to crop height.
- Auto-Pilot guidance system on corn heads offers "hands-free" steering control by sensing row location.
- Retractable fingers across the full length of the auger ensures that crop flows evenly into the feederhouse.
- Hydraulic header reverser for positive high-torque back-up of header and feederhouse to clear blockages.
- Multi-Link connector provides quick and simple hydraulic and electrical hook-up with just one connection point.

**Threshing:**

- Exclusive Accelerated Pre-Separation (APS) system separates out up to 30% of the grain before it moves to the threshing cylinder and ensures constant, even crop flow to the main threshing cylinder.
- At 1700 mm (67") the threshing cylinder is the widest in the industry (460, 465, 480 and 485).

**Separation:**

- Lexion 460 and 465 combines have six high-performance straw walkers, the 450 has five.
- Lexion 470, 480 and 485 combines use dual-rotor separation — a gentle, centrifugal-force system that produces high quality grain.

**Cleaning:**

- The long preparation pan, dual ventilation, and optional remote electric adjustment of the upper and lower sieves are exclusive to the Lexion.
- The optional 3-D sieve system compensates for slopes of up to 20%.
- Turbine fans are sectional, providing even air flow across the entire width of the cleaning area.

**Engines:**

- Lexion 450, 460, 465 and 470 combines feature the Cat 3126 engine — a 7.2 liter (439 cu. in.) engine producing 186 kW (250 hp) on the 450 and 216 kW (290 hp) on the 460/465.
- Lexion 480 and 485 combines are powered by the Cat 3176C engine — a 10.3 liter (629 cu. in.) engine producing 272 kW (365 hp).

**Tracks and Tires:**

- Lexion 465 and 485 combines feature Caterpillar's exclusive Mobil-trac™ undercarriage that provides greater flotation, sidehill stability and reduced soil compaction.
- Lexion 450, 460, 470 and 480 combines are available with a number of different tire options to fit all applications.
- A powered rear axle is available on all six combines.

**SUPER RURAL TRACTORS**

- **Cat diesel Engines** with large piston displacement and individual adjustment-free fuel pumps and valves. High drawbar power for all day hard work, season after season.
- **Sealed and Lubricated Track** greatly reduces internal pin and bushing wear for lower undercarriage maintenance costs.
- **Direct drive transmission** helps deliver maximum engine power to the drawbar. Closely spaced speeds match implement requirements.
- **Excellent balance** with weight forward and low center of gravity.
- **Easy maintenance** with spin-on fuel filter, two-piece master link, hydraulic track adjusters. Power train oil dipstick and filler spout are within easy reach from ground level.
- **Variable horsepower arrangements** are available for increased production in high speed tillage operations.



MODEL	Challenger 35		Challenger 45		Challenger 55	
Gross Horsepower	165 kW	<b>221 hp</b>	181 kW	<b>243 hp</b>	213 kW	<b>285 hp</b>
PTO Horsepower	131 kW	<b>175 hp</b>	149 kW	<b>200 hp</b>	168 kW	<b>225 hp</b>
Drawbar Horsepower	112 kW	<b>150 hp</b>	127 kW	<b>170 hp</b>	142 kW	<b>191 hp</b>
Operating Weight Range*	9838- 12 133 kg	<b>21,690- 26,750 lb</b>	9838- 12 133 kg	<b>21,690- 26,750 lb</b>	9838- 12 133 kg	<b>21,690- 26,750 lb</b>
Engine Model	<b>3116</b>		<b>3116</b>		<b>3126</b>	
Rated Engine RPM	<b>2100</b>		<b>2100</b>		<b>2100</b>	
No. of Cylinders/Aspiration	<b>6 ATAAC</b>		<b>6 ATAAC</b>		<b>6 ATAAC</b>	
Bore	105 mm	<b>4.13"</b>	105 mm	<b>4.13"</b>	110 mm	<b>4.33"</b>
Stroke	127 mm	<b>5"</b>	127 mm	<b>5"</b>	127 mm	<b>5"</b>
Displacement	6.6 L	<b>403 in<sup>3</sup></b>	6.6 L	<b>403 in<sup>3</sup></b>	7.2 L	<b>442 in<sup>3</sup></b>
Max. Torque Rise (standard)	<b>68%**</b>		<b>57%**</b>		<b>46%**</b>	
Track Rollers (each side)	<b>3</b>		<b>3</b>		<b>3</b>	
Width of Standard Track Belt▲	457 mm	<b>18"</b>	457 mm	<b>18"</b>	457 mm	<b>18"</b>
Length of Track on Ground	2.18 m	<b>7'2"</b>	2.18 m	<b>7'2"</b>	2.18 m	<b>7'2"</b>
Ground Contact Area (with std. belt)	2 m <sup>2</sup>	<b>3096 in<sup>2</sup></b>	2 m <sup>2</sup>	<b>3096 in<sup>2</sup></b>	2 m <sup>2</sup>	<b>3096 in<sup>2</sup></b>
Grouser Height (std. belt)▼	63.5 mm	<b>2.5"</b>	63.5 mm	<b>2.5"</b>	63.5 mm	<b>2.5"</b>
Track Gauge:						
1.52 m ( <b>60"</b> ) base	1.47 m	<b>60"</b>	1.47 m	<b>60"</b>	1.47 m	<b>60"</b>
2.03 m ( <b>80"</b> ) base	2.03 m	<b>80"</b>	2.03 m	<b>80"</b>	2.03 m	<b>80"</b>
GENERAL DIMENSIONS:						
Wheelbase	2184 mm	<b>7'2"</b>	2184 mm	<b>7'2"</b>	2184 mm	<b>7'2"</b>
Height (to top of ROPS)	3.05 m	<b>10'0"</b>	3.05 m	<b>10'0"</b>	3.05 m	<b>10'0"</b>
Overall Length	5.36 m	<b>17'7"</b>	5.36 m	<b>17'7"</b>	5.36 m	<b>17'7"</b>
Width with Standard Belt:						
1.52 m ( <b>60"</b> ) base	2.31 m	<b>7'7"</b>	2.31 m	<b>7'7"</b>	2.31 m	<b>7'7"</b>
2.03 m ( <b>80"</b> ) base	2.82 m	<b>9'3"</b>	2.82 m	<b>9'3"</b>	2.82 m	<b>9'3"</b>
Ground Clearance	480 mm	<b>18.9"</b>	480 mm	<b>18.9"</b>	480 mm	<b>18.9"</b>
Drawbar Height	508 mm	<b>1'8"</b>	508 mm	<b>1'8"</b>	508 mm	<b>1'8"</b>
Fuel Tank Refill Capacity	473 L	<b>125 U.S. gal</b>	473 L	<b>125 U.S. gal</b>	473 L	<b>125 U.S. gal</b>

\*Operating weight includes lubricants, coolants, standard belt, ROPS cab, full fuel tank and operator.

\*\*Maximum PTO torque rise.

▲ Optional belt widths: 457 mm (**18"**), 508 mm (**20"**), 624 mm (**25"**), 762 mm (**30"**), 813 mm (**32"**).

▼ Heavy Duty 38 mm (**1.5"**) extra wide grousers available for all belts.

Specifications  
● Challenger Tractors

Agricultural Equipment



MODEL	Challenger 65E		Challenger 75E		Challenger 85E		Challenger 95E	
Gross Horsepower	231 kW	<b>310 hp</b>	254 kW	<b>340 hp</b>	280 kW	<b>375 hp</b>	306 kW	<b>410 hp</b>
Power Reserve	<b>6%</b>		<b>6%</b>		<b>6%</b>		<b>6%</b>	
PTO Horsepower	206 kW	<b>277 hp****</b>	224 kW	<b>301 hp****</b>	253 kW	<b>339 hp****</b>	279 kW	<b>375 hp****</b>
Drawbar Horsepower (firm ground)	175 kW	<b>235 hp</b>	198 kW	<b>266 hp</b>	217 kW	<b>291 hp</b>	236 kW	<b>317 hp</b>
Operating Weight*	15 186 kW	<b>33,480 lb</b>	15 186 kg	<b>33,480 lb</b>	15 413 kg	<b>33,980 lb</b>	15 413 kg	<b>33,980 lb</b>
Engine Model	<b>3176C</b>		<b>3176C</b>		<b>3196</b>		<b>3196</b>	
Rated Engine RPM	<b>2100</b>		<b>2100</b>		<b>2100</b>		<b>2100</b>	
No. of Cylinders/Aspiration	<b>6 ATAAC</b>		<b>6 ATAAC</b>		<b>6 ATAAC</b>		<b>6 ATAAC</b>	
Bore	125 mm	<b>4.92"</b>	125 mm	<b>4.92"</b>	130 mm	<b>5.1"</b>	130 mm	<b>5.1"</b>
Stroke	140 mm	<b>5.5"</b>	140 mm	<b>5.5"</b>	150 mm	<b>5.9"</b>	150 mm	<b>5.9"</b>
Displacement	10.3 L	<b>629 in<sup>3</sup></b>	10.3 L	<b>629 in<sup>3</sup></b>	12.0 L	<b>732 in<sup>3</sup></b>	12.0 L	<b>732 in<sup>3</sup></b>
Max. Torque Rise (standard)	<b>37%****</b>		<b>40%****</b>		<b>41% in high hp****</b>		<b>43% in high hp****</b>	
Midwheels (each side)	<b>4</b>		<b>4</b>		<b>4</b>		<b>4</b>	
Width of Standard Track Belt**	635 mm	<b>25"</b>	635 mm	<b>25"</b>	635 mm	<b>25"</b>	635 mm	<b>25"</b>
Length of Track on Ground	2.72 m	<b>8'11"</b>	2.72 m	<b>8'11"</b>	2.72 m	<b>8'11"</b>	2.72 m	<b>8'11"</b>
Ground Contact Area (w/std. belt)	3.45 m <sup>2</sup>	<b>5355 in<sup>2</sup></b>	3.45 m <sup>2</sup>	<b>5355 in<sup>2</sup></b>	3.45 m <sup>2</sup>	<b>5355 in<sup>2</sup></b>	3.45 m <sup>2</sup>	<b>5355 in<sup>2</sup></b>
Grouser Height (std. belt)***	63.5 mm	<b>2.5"</b>	63.5 mm	<b>2.5"</b>	63.5 mm	<b>2.5"</b>	63.5 mm	<b>2.5"</b>
Track Gauge	2.29 m	<b>90"</b>	2.29 m	<b>90"</b>	2.29 m	<b>90"</b>	2.29 m	<b>90"</b>
GENERAL DIMENSIONS:								
Wheel Base	2721 mm	<b>8'11"</b>	2721 mm	<b>8'11"</b>	2721 mm	<b>8'11"</b>	2721 mm	<b>8'11"</b>
Height (to top of ROPS)	3.4 m	<b>11'2"</b>	3.4 m	<b>11'2"</b>	3.4 m	<b>11'2"</b>	3.4 m	<b>11'2"</b>
Overall Length	5.94 m	<b>19'6"</b>	5.94 m	<b>19'6"</b>	5.94 m	<b>19'6"</b>	5.94 m	<b>19'6"</b>
Width with Standard Belt	2.92 m	<b>9'7"</b>	2.92 m	<b>9'7"</b>	2.92 m	<b>9'7"</b>	2.92 m	<b>9'7"</b>
Ground Clearance	394 mm	<b>15.5"</b>	394 mm	<b>15.5"</b>	394 mm	<b>15.5"</b>	394 mm	<b>15.5"</b>
Drawbar Height	457 mm	<b>18"</b>	457 mm	<b>18"</b>	457 mm	<b>18"</b>	457 mm	<b>18"</b>
Fuel Tank Refill Capacity	1060 L	<b>280 U.S. gal</b>	1060 L	<b>280 U.S. gal</b>	1060 L	<b>280 U.S. gal</b>	1060 L	<b>280 U.S. gal</b>

\*Operating weight includes lubricants, coolants, standard belt, ROPS cab, full fuel tank and operator.

\*\*Optional belt widths: 635 mm (25") std., 699 mm (27.5"), 762 mm (30"), 889 mm (35").

\*\*\*Heavy Duty 38 mm (1.5") extra wide grousers available for all belt widths.

\*\*\*\*Measured at University of Nebraska tractor test lab.

<b>MODEL</b>	<b>VFS50</b>		<b>VFS70</b>	
<b>GENERAL DIMENSIONS:</b>				
Track Gauge				
Wide Axle	3175 mm	<b>10'5"</b>	3175 mm	<b>10'5"</b>
Narrow Axle	2692 mm	<b>8'10"</b>	2692 mm	<b>8'10"</b>
Hitch and Frame	2260 mm	<b>7'5"</b>	2260 mm	<b>7'5"</b>
Track Length CL to CL	3023 mm	<b>9'11"</b>	3023 mm	<b>9'11"</b>
Track Height	940 mm	<b>3'1"</b>	940 mm	<b>3'1"</b>
Overall Length	6261 mm	<b>20'7"</b>	6261 mm	<b>20'7"</b>
Hitch and Frame				
Frame Length	4597 mm	<b>15'1"</b>	4597 mm	<b>15'1"</b>
Frame Width	864 mm	<b>2'10"</b>	864 mm	<b>2'10"</b>
Ground Clearance	462 mm	<b>18"</b>	462 mm	<b>18"</b>
Hitch Height	368 mm	<b>15"</b>	368 mm	<b>15"</b>
Hitch to Undercarriage Pivot	4115 mm	<b>13'6"</b>	4115 mm	<b>13'6"</b>
Front of Frame to Undercarriage Pivot	2438 mm	<b>8'0"</b>	2438 mm	<b>8'0"</b>
Weight				
Undercarriage with Hitch and Frame	4589 kg	<b>10,118 lb</b>	5121 kg	<b>11,290 lb</b>
Narrow Axle	3689 kg	<b>8132 lb</b>	4283 kg	<b>9442 lb</b>
Wide Axle	3741 kg	<b>8248 lb</b>	4350 kg	<b>9590 lb</b>
Maximum Gross Weight	27 269 kg	<b>60,118 lb</b>	36 873 kg	<b>81,290 lb</b>
Travel Speed	up to 32 km/h	<b>up to 20 mph</b>	up to 32 km/h	<b>up to 20 mph</b>
Axles	<b>6</b>		<b>6</b>	
Oscillation	<b>17 deg up, 17 deg down</b>		<b>17 deg up, 17 deg down</b>	
Belt Tension	2449 kg	<b>5400 lb</b>	2449 kg	<b>5400 lb</b>
Belt Width	762 mm	<b>30"</b>	762 mm	<b>30"</b>
Crop Clearance	439 mm	<b>17.3"</b>	439 mm	<b>17.3"</b>

**VFS GROUND PRESSURE**

				<b>VFS Weight with Load</b>											
				9072 kg <b>20,000 lb</b>		13 608 kg <b>30,000 lb</b>		18 144 kg <b>40,000 lb</b>		22 680 kg <b>50,000 lb</b>		27 216 kg <b>60,000 lb</b>		31 750 kg <b>70,000 lb</b>	
<b>Belt Width</b>		<b>Contact Area</b>		<b>Ground pressure</b>											
<b>mm</b>	<b>in</b>	<b>m<sup>2</sup></b>	<b>in<sup>2</sup></b>	<b>kPa</b>	<b>psi</b>	<b>kPa</b>	<b>psi</b>	<b>kPa</b>	<b>psi</b>	<b>kPa</b>	<b>psi</b>	<b>kPa</b>	<b>psi</b>	<b>kPa</b>	<b>psi</b>
635	<b>25</b>	3.76	<b>5836</b>	23.4	<b>3.8</b>	35.1	<b>5.1</b>	47.5	<b>6.9</b>	59.3	<b>8.6</b>	71.0	<b>10.3</b>	82.7	<b>12.0</b>
762	<b>30</b>	4.61	<b>7140</b>	19.3	<b>2.8</b>	28.9	<b>4.2</b>	38.6	<b>5.6</b>	48.2	<b>7.0</b>	57.9	<b>8.4</b>	67.5	<b>9.8</b>

Specifications  
 • Lexion Combines

Agricultural Equipment



MODEL	Lexion 450	Lexion 460/465
PRE-SEPARATION: Type	APS system	
THRESHING:	APS system	
Cylinder diameter	600 mm	600 mm
Cylinder width	1420 mm	1700 mm
Speed		
Single range	382-1050 rpm	362-1050 rpm
Dual range (low)	158-457 rpm	158-457 rpm
Dual range (high)	362-1050 rpm	362-1050 rpm
Concave type	Bar and wire	
Concave area		
Pre-concave	0.37 m <sup>2</sup>	0.44 m <sup>2</sup>
Main concave	1.07 m <sup>2</sup>	1.29 m <sup>2</sup>
Concave grate extension	0.27 m <sup>2</sup>	0.32 m <sup>2</sup>
Total concave area	1.71 m <sup>2</sup>	2.05 m <sup>2</sup>
Concave adjustment	Electric over hydraulic	
Concave overload protection	Hydraulic	
Dump rock trap	Yes	
SEPARATION:		
Straw walkers		
Number of straw walkers	5	6
Length	4367 mm	4367 mm
Crank shaft throw	100 mm	100 mm
Separation area		
Straw walkers	6.2 m <sup>2</sup>	7.42 m <sup>2</sup>
With intensive separation	+20%	9.85 m <sup>2</sup>
Rotary		
Number of rotors	NA	NA
Diameter	NA	NA
Length	NA	NA
Separation area	NA	NA
CLEANING SYSTEM:		
Total cleaning area	4.93 m <sup>2</sup>	6.00 m <sup>2</sup>
Cleaning fan	4 turbine fans	6 turbine fans
Electric sieve adjustment	Optional	Optional
3-D sieve	Optional	Optional
ENGINE:		
Caterpillar	3126 ATAAC	3126 ATAAC
Number of cylinders	6	6
Displacement	7.2 L	7.2 L
Rated speed	2100 rpm	2100 rpm
Horsepower	186 kW	216 kW
Transmission	250 hp	290 hp
Type	Hydrostatic variable 3-speed	
DIMENSIONS/CAPACITIES:		
Fuel tank	650 L	650 L
Unloading speed	70.5 L/sec	95 L/sec
Chassis length	8.83 m	8.83 m
Transport width	3.57 m	3.57 m
Transport height	3.99 m	3.99 m
Weight	12 700 kg	12 700 kg
CAB INSTRUMENTATION:		
Sound level	76 dB(A)	76 dB(A)
On-board computer system	IMO std., CEBIS optional	IMO std., CEBIS optional
Yield monitor	Optional	Optional
GPS yield mapping	Optional	Optional
TRACKS/WHEELS:	465 and 485 — with 893 mm (35") Caterpillar belts	
Mobil-trac system	450, 460, 470 and 480 — Variety of sizes and tread types	
Front tires	Variety of sizes and treads; optional power rear axle available	
Rear tires	Corn, 762 mm (30") row spacing — 6, 8 and 12 row; 559 mm (22") row spacing — 12 row;	
HEADERS	914 mm (36") row spacing — 8 row; 965 mm (38") row spacing — 8 row;	
	Rigid, 7.5 m (25'0") and 9.0 m (30'0"); Flexible, 6.0 m (20'0"),	
	7.5 m (25'0") and 9.0 m (30'0"); Pickup trough, 4.0 m (13'0")	



<b>MODEL</b>	<b>Lexion 470</b>		<b>Lexion 480/485</b>	
<b>PRE-SEPARATION:</b> Type	<b>APS system</b>		<b>APS system</b>	
<b>THRESHING:</b> Cylinder diameter	600 mm	<b>23.5"</b>	600 mm	<b>23.5"</b>
Cylinder width	1700 mm	<b>67"</b>	1700 mm	<b>67"</b>
Speed	<b>362-1050 rpm</b>		<b>362-1050 rpm</b>	
Single range	<b>158-457 rpm</b>		<b>158-457 rpm</b>	
Dual range (low)	<b>362-1050 rpm</b>		<b>362-1050 rpm</b>	
Dual range (high)	<b>Bar and wire</b>		<b>Bar and wire</b>	
Concave type				
Concave area				
Pre-concave	0.37 m <sup>2</sup>	<b>572 in<sup>2</sup></b>	0.44 m <sup>2</sup>	<b>684 in<sup>2</sup></b>
Main concave	1.071 m <sup>2</sup>	<b>1664 in<sup>2</sup></b>	1.29 m <sup>2</sup>	<b>1992 in<sup>2</sup></b>
Concave grate extension	<b>NA</b>		<b>NA</b>	
Total concave area	1.44 m <sup>2</sup>	<b>2235 in<sup>2</sup></b>	1.73 m <sup>2</sup>	<b>2676 in<sup>2</sup></b>
Concave adjustment	<b>Electric over hydraulic</b>		<b>Electric over hydraulic</b>	
Concave overload protection	<b>Hydraulic</b>		<b>Hydraulic</b>	
Dump rock trap	<b>Yes</b>		<b>Yes</b>	
<b>SEPARATION:</b> Straw walkers				
Number of straw walkers	<b>NA</b>		<b>NA</b>	
Length	<b>NA</b>		<b>NA</b>	
Crank shaft throw	<b>NA</b>		<b>NA</b>	
Separation area				
Straw walkers	<b>NA</b>		<b>NA</b>	
With intensive separation	<b>NA</b>		<b>NA</b>	
Rotary				
Number of rotors	<b>2</b>		<b>2</b>	
Diameter	444 mm	<b>17.5"</b>	444 mm	<b>17.5"</b>
Length	4200 mm	<b>13'9"</b>	4200 mm	<b>13'9"</b>
Separation area	4.91 m <sup>2</sup>	<b>7614 in<sup>2</sup></b>	6.22 m <sup>2</sup>	<b>9641 in<sup>2</sup></b>
<b>CLEANING SYSTEM:</b> Total cleaning area	4.93 m <sup>2</sup>	<b>7639 in<sup>2</sup></b>	6.00 m <sup>2</sup>	<b>9286 in<sup>2</sup></b>
Cleaning fan	<b>4 turbine fans</b>		<b>6 turbine fans</b>	
Electric sieve adjustment	<b>Optional</b>		<b>Optional</b>	
3-D sieve	<b>Optional</b>		<b>Optional</b>	
<b>ENGINE:</b> Caterpillar	<b>3126C ATAAC</b>		<b>3176C ATAAC</b>	
Number of cylinders	<b>6</b>		<b>6</b>	
Displacement	7.2 L	<b>439 in<sup>3</sup></b>	10.3 L	<b>629 in<sup>3</sup></b>
Rated speed	<b>2100 rpm</b>		<b>2100 rpm</b>	
Horsepower	216 kW	<b>290 hp</b>	272 kW	<b>365 hp</b>
Transmission	<b>Hydrostatic</b>		<b>Hydrostatic</b>	
Type	<b>variable 3-speed</b>		<b>variable 3-speed</b>	
<b>DIMENSIONS/CAPACITIES:</b> Fuel tank	650 L	<b>170 U.S. gal</b>	650 L	<b>170 U.S. gal</b>
Unloading speed	95 L/sec	<b>2.7 bu/sec</b>	95 L/sec	<b>2.7 bu/sec</b>
Chassis length	8.83 m	<b>29'0"</b>	8.83 m	<b>29'0"</b>
Transport width	3.57 m	<b>11'9"</b>	<b>480: 3.57 m</b>	<b>11'9"</b>
			<b>485: 4.25 m</b>	<b>13'11.5"</b>
Transport height	3.99 m	<b>13'1"</b>	3.99 m	<b>13'1"</b>
Weight	14 200 kg	<b>31,300 lb</b>	<b>480: 14 515 kg</b>	<b>32,000 lb</b>
			<b>485: 18 008 kg</b>	<b>39,700 lb</b>
<b>CAB INSTRUMENTATION:</b> Sound level	<b>76 dB(A)</b>		<b>76 dB(A)</b>	
On-board computer system	<b>IMO std., CEBIS optional</b>		<b>IMO std., CEBIS optional</b>	
Yield monitor	<b>Optional</b>		<b>Optional</b>	
GPS yield mapping	<b>Optional</b>		<b>Optional</b>	
<b>TRACKS/WHEELS:</b> Mobil-trac system	<b>465 and 485 — with 893 mm (35") Caterpillar belts</b>			
Front tires	<b>450, 460, 470 and 480 — Variety of sizes and tread types</b>			
Rear tires	<b>Variety of sizes and treads; optional power rear axle available</b>			
<b>HEADERS</b>	<b>Corn, 762 mm (30") row spacing — 6, 8 and 12 row; 559 mm (22") row spacing — 12 row;</b>			
	<b>914 mm (36") row spacing — 8 row; 965 mm (38") row spacing — 8 row;</b>			
	<b>Rigid, 7.5 m (25'0") and 9.0 m (30'0"); Flexible, 6.0 m (20'0"),</b>			
	<b>7.5 m (25'0") and 9.0 m (30'0"); Pickup trough, 4.0 m (13'0")</b>			



MODEL	D4E SR		D6G SR	
Flywheel Power*	93 kW	125 hp	161 kW	216 hp
Operating Weight**	9400 kg	20,730 lb	14 960 kg	32,987 lb
Engine Model	3304		3306	
Rated Engine RPM	2200		1900	
No. of Cylinders	4		6	
Bore	121 mm	4.75"	121 mm	4.75"
Stroke	152 mm	6"	152 mm	6"
Displacement	7 L	425 in <sup>3</sup>	10.5 L	638 in <sup>3</sup>
Max. Torque Rise (standard)	30%		24%	
(variable horsepower)	30%		21%	
Track Rollers (each side)	5		7	
Width of Standard Track Shoe	406 mm	16"	508 mm	1'8"
Length of Track on Ground	1.89 m	6'2"	2.67 m	8'9"
Ground Contact Area (with std. shoe)	1.53 m <sup>2</sup>	2380 in <sup>2</sup>	2.72 m <sup>2</sup>	4212 in <sup>2</sup>
Grouser Height	48 mm	1.88"	—	—
Track Gauge	1.52 m	5'0"	1.88 m	6'2"
<b>GENERAL DIMENSIONS:</b>				
Height (without ROPS or exhaust)	1.93 m	6'4"	2.17 m	7'2"
Height (to top of ROPS)	2.71 m	8'11"	3.06 m	10'0"
Overall Length	3.37 m	11'0"	3.73 m	12'3"
Width with Standard Shoe	1.98 m	6'6"	—	—
Ground Clearance	360 mm	14"	310 mm	12.2"
Fuel Tank Refill Capacity	295 L	78 U.S. gal	400 L	104 U.S. gal

\*For variable horsepower ratings see the power ratings on adjacent page.

\*\*Operating Weight includes lubricants, coolants, standard track shoes, ROPS canopy, full fuel tank and operator.



### HORSEPOWER RATINGS

MODEL	Gross		Drawbar** Concrete @ Max Engine Speed		Drawbar* Firm Soil		PTO @ Rated Engine Speed	
	kW	hp	kW	hp	kW	hp	kW	hp
Challenger 35	165	221	137	185	112	150	131	175
Challenger 45	181	243	158	211	127	170	149	200
Challenger 55	213	285	176	236	142	191	168	225
Challenger 65E	231	310	207	** 278	175	235	207	** 277
Challenger 75E	254	340	220	** 295	198	266	224	** 301

### VARIABLE HORSEPOWER RATINGS

MODEL	Gross		Drawbar Concrete		Drawbar Firm Soil		PTO	
	kW	hp	kW	hp	kW	hp	kW	hp
D4E SR VHP								
Gears 1-2	66	89	59	80	47	64	—	—
Gears 3-5	103	138	92	125	76	104	—	—
D6G SR VHP								
Gears 1-2-6	128	172	116	155	162	121	—	—
Gears 3-4-5	174	234	162	216	228	170	—	—
Challenger 85E								
Gears 1-2	254	340	208	** 279	—	—	226	303
Gears 3-10	280	375	244	** 327	217	291	253	339
Challenger 95E								
Gears 1-2	254	340	213	** 285	—	—	228	306
Gear 3	280	375	244	** 327	—	—	253	339
Gears 4-10	306	410	272	** 365	236	317	280	375

\*Estimated drawbar power based on firm soil conditions with standard machine configuration.

\*\*University of Nebraska Tractor Test Lab results.

- Travel Speeds
- Challenger Tractors
- Super Rural Tractors
- Lexion Combines

**TRAVEL SPEEDS**

**TRAVEL SPEEDS**

MODEL		Challenger 35		Challenger 45		Challenger 55		MODEL		D4E SR VHP		D6G SR VHP	
GEAR		km/h	mph	km/h	mph	km/h	mph	FORWARD		km/h	mph	km/h	mph
1		2.62	1.6	2.62	1.6	2.62	1.6	GEAR					
2		3.11	1.9	3.11	1.9	3.11	1.9	1		3.2	2.0	3.0	1.9
3		3.64	2.3	3.64	2.3	3.64	2.3	2		4.6	2.9	4.3	2.7
4		4.17	2.6	4.17	2.6	4.17	2.6	3		5.6	3.5	5.8	3.6
5		4.93	3.1	4.93	3.1	4.93	3.1	4		6.4	4.0	6.8	4.3
6		5.76	3.6	5.76	3.6	5.76	3.6	5		7.2	4.5	7.7	4.8
7		6.79	4.2	6.79	4.2	6.79	4.2	6		—		9.3	5.8
8		8.02	5.0	8.02	5.0	8.02	5.0						
9		9.39	5.8	9.39	5.8	9.39	5.8	REVERSE					
10		11.11	6.9	11.11	6.9	11.11	6.9	GEAR					
11		12.70	7.9	12.70	7.9	12.70	7.9	1		3.8	2.4	4.1	2.5
12		15.04	9.3	15.04	9.3	15.04	9.3	2		5.4	3.4	5.8	3.6
13		17.60	10.9	17.60	10.9	17.60	10.9	3		6.6	4.1	7.9	4.9
14		20.70	12.9	20.70	12.9	20.70	12.9	4		7.5	4.7	9.1	5.7
15		24.49	15.2	24.49	15.2	24.49	15.2	5		8.6	5.3	10.5	6.6
16		28.64	17.8	28.64	17.8	28.64	17.8	6		—		—	

**TRAVEL SPEEDS**

MODEL	Challenger 65E		Challenger 75E		Challenger 85E		Challenger 95E	
FORWARD								
GEAR	km/h	mph	km/h	mph	km/h	mph	km/h	mph
1	4.3	2.7	4.5	2.8	4.5	2.8	4.5	2.8
2	6.4	4.0	6.4	4.0	6.4	4.0	6.4	4.0
3	7.6	4.7	7.9	4.9	7.9	4.9	7.9	4.9
4	8.7	5.4	9.0	5.6	9.0	5.6	9.0	5.6
5	10.0	6.2	10.3	6.4	10.3	6.4	10.3	6.4
6	11.3	7.0	11.3	7.0	11.3	7.0	11.3	7.0
7	12.9	8.0	12.9	8.0	12.9	8.0	12.9	8.0
8	14.8	9.2	14.8	9.2	14.8	9.2	14.8	9.2
9	19.3	12.0	20.1	12.5	20.1	12.5	20.1	12.5
10	29.0	18.0	29.0	18.0	29.0	18.0	29.0	18.0
REVERSE								
GEAR								
1	3.2	2.0	3.2	2.0	3.2	2.0	3.2	2.0
2	7.3	4.5	7.6	4.7	7.6	4.7	7.6	4.7

**LEXION TRAVEL SPEEDS**

MODEL	450*		460*		465		470*		480*		485	
FORWARD												
GEAR	km/h	mph	km/h	mph	km/h	mph	km/h	mph	km/h	mph	km/h	mph
1	7.8	4.8	7.6	4.7	6.7	4.2	7.6	4.7	7.6	4.7	6.7	4.2
2	12.6	7.8	12.3	7.6	10.9	6.8	12.3	7.6	12.3	7.6	10.9	6.8
3	30.1	18.7	29.4	18.2	26.0	16.2	29.4	18.2	29.4	18.2	26.0	16.2
REVERSE												
GEAR												
1	5.5	3.4	5.2	3.2	4.7	2.9	5.2	3.2	5.2	3.2	4.7	2.9
2	8.8	5.5	8.5	5.3	7.6	4.8	8.5	5.3	8.5	5.3	7.6	4.8
3	21.1	13.1	21.4	13.3	18.2	11.3	21.4	13.3	21.4	13.3	18.2	11.3

\*With 800/65 R32 tires.

# Agricultural Equipment

- ## Drawbar Pull Forward
- Challenger Tractors
  - Super Rural Tractors

### DRAWBAR PULL FORWARD\*

### DRAWBAR PULL\*

Model			Challenger 35			Challenger 45			Challenger 55			MODEL	D4E SR VHP			D6G SR VHP		
GEAR	kN	kg	lb	kN	kg	lb	kN	kg	lb	FORWARD	At Rated RPM			At Rated RPM				
										GEAR	kN	kg	lb	kN	kg	lb		
1	84.4	8604	<b>18,968</b>	85.1	8675	<b>19,125</b>	85.1	8675	<b>19,125</b>	1	53.4	5450	<b>12,012</b>	110	11 308	<b>24,878</b>		
2	83.4	8499	<b>18,737</b>	85.1	8675	<b>19,125</b>	85.1	8675	<b>19,125</b>	2	36.7	3744	<b>8252</b>	77	7771	<b>17,097</b>		
3	81.6	8314	<b>18,329</b>	85.1	8675	<b>19,125</b>	85.1	8675	<b>19,125</b>	3	49.7	5068	<b>11,170</b>	79	8130	<b>17,887</b>		
4	77.0	7851	<b>17,307</b>	81.0	8255	<b>18,199</b>	85.1	8675	<b>19,125</b>	4	43.2	4408	<b>9715</b>	67	6866	<b>15,105</b>		
5	70.3	7161	<b>15,787</b>	75.6	7710	<b>16,997</b>	81.0	8255	<b>18,200</b>	5	37.5	3832	<b>8448</b>	58	5926	<b>13,037</b>		
6	65.7	6694	<b>14,757</b>	71.8	7318	<b>16,134</b>	76.5	7802	<b>17,200</b>	6	—	—	—	31	3135	<b>6987</b>		
7	58.4	5949	<b>13,116</b>	66.3	6757	<b>14,897</b>	70.5	7188	<b>15,848</b>	REVERSE								
8	50.5	5147	<b>11,348</b>	57.8	5891	<b>12,987</b>	64.7	6593	<b>14,535</b>	GEAR								
9	43.5	4436	<b>9779</b>	49.7	5063	<b>11,162</b>	55.6	5663	<b>12,484</b>									
10	36.7	3740	<b>8244</b>	40.9	4170	<b>9193</b>	45.9	4676	<b>10,310</b>									
11	31.1	3171	<b>6991</b>	34.8	3547	<b>7821</b>	39.1	3990	<b>8796</b>	1	57.5	5868	<b>12,933</b>	144	14 770	<b>32,496</b>		
12	25.5	2601	<b>5735</b>	28.7	2920	<b>6438</b>	32.3	3295	<b>7264</b>	2	50.5	5148	<b>11,349</b>	100	10 221	<b>22,487</b>		
13	21.1	2154	<b>4749</b>	23.8	2427	<b>5351</b>	26.9	2747	<b>6056</b>	3	57.2	5831	<b>12,859</b>	100	10 190	<b>22,420</b>		
14	17.4	1771	<b>3904</b>	19.7	2003	<b>4416</b>	22.3	2275	<b>5015</b>	4	48.1	5002	<b>11,207</b>	84	8634	<b>18,996</b>		
15	14.2	1449	<b>3194</b>	16.1	1646	<b>3629</b>	18.4	1876	<b>4135</b>	5	43.5	4433	<b>9773</b>	73	7477	<b>16,450</b>		
16	11.7	1196	<b>2637</b>	13.4	1365	<b>3010</b>	15.3	1562	<b>3443</b>	6	—	—	—	42	4258	<b>9368</b>		

### DRAWBAR PULL FORWARD Ballasted @ Max. Power

Model	Challenger 35			Challenger 45			Challenger 55		
GEAR	kN	kg	lb	kN	kg	lb	kN	kg	lb
1	122.5	12 503	<b>27,540</b>	125.19	12 780	<b>28,150</b>	129.24	13 193	<b>29,060</b>
2	122.42	12 494	<b>27,520</b>	126.02	12 862	<b>28,330</b>	130.64	13 334	<b>29,370</b>
3	121.17	12 367	<b>27,240</b>	121.7	12 421	<b>27,360</b>	131.21	13 393	<b>29,500</b>
4	118.89	12 135	<b>26,730</b>	124.95	12 753	<b>28,090</b>	130.82	13 352	<b>29,410</b>
5	118.14	12 058	<b>26,560</b>	122.17	12 471	<b>27,470</b>	129.27	13 193	<b>29,060</b>
6	100.52	10 260	<b>22,600</b>	116.48	11 890	<b>26,190</b>	114.38	11 672	<b>25,710</b>
7	85.89	8767	<b>19,310</b>	94.68	9666	<b>21,290</b>	97.89	9993	<b>22,010</b>
8	74.34	7586	<b>16,710</b>	85.87	8762	<b>19,300</b>	83.5	8522	<b>18,770</b>
9	62.37	6365	<b>14,020</b>	72.09	7359	<b>16,210</b>	70.57	7205	<b>15,870</b>
10	51.52	5257	<b>11,580</b>	59.55	6079	<b>13,390</b>	58.18	5938	<b>13,080</b>
11	43.5	4440	<b>9779</b>	50.2	5191	<b>11,435</b>	53.5	5463	<b>12,034</b>
12	36.7	3743	<b>8244</b>	42.6	4407	<b>9708</b>	45.5	4644	<b>10,229</b>
13	31.1	3174	<b>6991</b>	35.49	3673	<b>8090</b>	38.2	3901	<b>8592</b>
14	25.5	2604	<b>5735</b>	29.3	3030	<b>6674</b>	32.1	3277	<b>7217</b>
15	21.1	2156	<b>4749</b>	24.2	2500	<b>5506</b>	26.9	2752	<b>6062</b>
16	17.4	1772	<b>3904</b>	19.8	2050	<b>4515</b>	22.3	2284	<b>5031</b>

\*Specified pull is based on nominal engine performance derated for transmission lube, control and optional implement hydraulic pumps, with corrections made for drive-line mechanical efficiency and rolling resistance on firm level ground. Usable pull will depend on particular attachments, and weight and traction of equipped tractor.

**DRAWBAR PULL FORWARD\***

MODEL	Challenger 65E			Challenger 75E			Challenger 85E			Challenger 95E		
FORWARD GEAR	At Rated RPM			At Rated RPM			At Rated RPM			At Rated RPM		
	kN	kg	lb	kN	kg	lb	kN	kg	lb	kN	kg	lb
1	148.05	15 098	<b>33,284</b>	148.80	15 174	<b>33,452</b>	150.15	15 454	<b>34,070</b>	156.58	15 968	<b>35,202</b>
2	105.99	10 808	<b>23,827</b>	114.70	11 696	<b>25,785</b>	113.52	11 576	<b>25,520</b>	112.83	11 506	<b>25,366</b>
3	90.85	9265	<b>20,425</b>	92.20	9402	<b>20,728</b>	103.61	10 566	<b>23,294</b>	103.01	10 505	<b>23,159</b>
4	79.39	8096	<b>17,849</b>	79.97	8155	<b>17,979</b>	90.00	9177	<b>20,232</b>	98.90	10 085	<b>22,234</b>
5	68.29	6964	<b>15,352</b>	68.79	7015	<b>15,466</b>	78.42	7997	<b>17,629</b>	85.60	8729	<b>19,244</b>
6	59.01	6017	<b>13,265</b>	62.88	6412	<b>14,135</b>	71.27	7268	<b>16,022</b>	77.50	7903	<b>17,423</b>
7	51.45	5247	<b>11,567</b>	54.36	5543	<b>12,221</b>	62.01	6323	<b>13,940</b>	67.32	6865	<b>15,134</b>
8	43.83	4469	<b>9853</b>	47.05	4798	<b>10,578</b>	53.12	5417	<b>11,942</b>	57.86	5901	<b>13,009</b>
9**	33.31	3396	<b>7488</b>	34.35	3502	<b>7722</b>	38.78	3954	<b>8718</b>	42.22	4308	<b>9497</b>
10**	22.35	2279	<b>5025</b>	23.99	2447	<b>5395</b>	38.78	2763	<b>6090</b>	29.51	3010	<b>6635</b>
	At Max. Power			At Max. Power			At Max. Power			At Max. Power		
1	147.22	15 012	<b>33,096</b>	148.12	15 104	<b>33,299</b>	151.55	15 312	<b>33,756</b>	156.20	15 928	<b>35,115</b>
2	130.29	13 286	<b>29,291</b>	131.88	13 448	<b>29,648</b>	136.78	13 949	<b>30,751</b>	138.40	14 113	<b>31,113</b>
3	111.96	11 417	<b>25,169</b>	112.65	11 487	<b>25,325</b>	126.11	12 860	<b>28,351</b>	127.39	12 991	<b>28,639</b>
4	97.46	9938	<b>21,910</b>	98.26	11 020	<b>22,089</b>	109.95	11 212	<b>24,718</b>	122.54	12 496	<b>27,548</b>
5	85.29	8698	<b>19,175</b>	86.51	8822	<b>19,448</b>	95.59	9747	<b>21,489</b>	106.29	10 839	<b>23,896</b>
6	73.67	7513	<b>16,562</b>	78.47	8002	<b>17,641</b>	86.68	8840	<b>19,488</b>	96.21	9811	<b>21,629</b>
7	64.44	6572	<b>14,488</b>	68.15	6949	<b>15,320</b>	75.75	7724	<b>17,029</b>	83.96	8561	<b>18,874</b>
8	55.34	5644	<b>12,442</b>	59.13	6029	<b>13,292</b>	64.96	6625	<b>14,605</b>	73.11	7455	<b>16,436</b>
9**	42.06	4289	<b>9456</b>	43.16	4401	<b>9703</b>	47.43	4836	<b>10,662</b>	53.37	5442	<b>11,998</b>
10**	28.22	2878	<b>6345</b>	30.15	3075	<b>6779</b>	33.13	3379	<b>7449</b>	32.29	3802	<b>8382</b>

\*Numbers from Nebraska test on concrete.

\*\*Tests were not conducted in these gear settings, data is estimated.

**Row-Crop**

Gauge (Track) Spacing	Spacer Quantity (per side)	Spacer Size
1524 mm (60") Base Tractor	No spacers	
1575 mm (62")	1	25.4 mm (1") [max. belt width 457 mm (18")]
1626 mm (64")	1	50.8 mm (2") [max. belt width 508 mm (1'8")]
1676 mm (66")	1	76.2 mm (3") [max. belt width 508 mm (1'8")]
1727 mm (68")	1	101.6 mm (4") [max. belt width 635 mm (2'1")]
1778 mm (70")	1 plus	101.6 mm (4") [max. belt width 635 mm (2'1")]
1829 mm (72")	1	25.4 mm (1")
1829 mm (72")	1	152.4 mm (6") [max. belt width 635 mm (2'1")]
1880 mm (74")	1 plus	152.4 mm (6")
1930 mm (76")	1	25.4 mm (1")
1930 mm (76")	1	203.2 mm (8")
1981 mm (78")	1 plus	203.2 mm (8")
1981 mm (78")	1	25.4 mm (1")
2032 mm (80")	1	254 mm (10")
2083 mm (82")	1 plus	254 mm (10")
2083 mm (82")	1	25.4 mm (1")
2134 mm (84")	1 plus	254 mm (10")
2134 mm (84")	1	50.8 mm (2")
2184 mm (86")	1 plus	254 mm (10")
2184 mm (86")	1	76.2 mm (3")
2235 mm (88")	1	355.6 mm (14")
2286 mm (90")	1 plus	355.6 mm (14")
2286 mm (90")	1	25.4 mm (1")

Gauge (Track) Spacing	Spacer Quantity (per side)	Spacer Size
2032 mm (80") Base Tractor	No spacers	
2083 mm (82")	1	25.4 mm (1")
2134 mm (84")	1	50.8 mm (2")
2184 mm (86")	1	76.2 mm (3")
2235 mm (88")	1	101.6 mm (4")
2286 mm (90")	1 plus	101.6 mm (4")
2286 mm (90")	1	25.4 mm (1")
2337 mm (92")	1	152.4 mm (6")
2389 mm (94")	1 plus	152.4 mm (6")
2389 mm (94")	1	25.4 mm (1")
2438 mm (96")	1	203.2 mm (8")
2489 mm (98")	1 plus	203.2 mm (8")
2489 mm (98")	1	25.4 mm (1")
2540 mm (100")	1	254 mm (10")
2591 mm (102")	1 plus	254 mm (10")
2591 mm (102")	1	25.4 mm (1")
2642 mm (104")	1 plus	254 mm (10")
2642 mm (104")	1	50.8 mm (2")
2692 mm (106")	1 plus	254 mm (10")
2692 mm (106")	1	76.2 mm (3")
2743 mm (108")	1	355.6 mm (14")
2794 mm (110")	1 plus	355.6 mm (14")
2845 mm (112")	1 plus	355.6 mm (14")
2845 mm (112")	1	50.8 mm (2")
2896 mm (114")	1 plus	355.6 mm (14")
2896 mm (114")	1	76.2 mm (3")
2946 mm (116")	1 plus	355.6 mm (14")
2946 mm (116")	1	101.6 mm (4")
2997 mm (118")	1 plus	355.6 mm (14")
2997 mm (118")	1 plus	25.4 mm (1")
2997 mm (118")	1	101.6 mm (4")
3048 mm (120")	1	508 mm (1'8")

**NOTE:** The chart reflects the recommended spacer combinations, although others are possible.


Belt Selection  
 ● Challenger Row-Crop  
 ● Challenger High-Horsepower

**CHALLENGER ROW-CROP TRACTOR BELT SELECTION DATA**

Part Number	Belt Width	Belt Type	Number of Thread Bars	Thread Bar Angle	Thread Bar Height		Tip Width		Number of Guide Blocks	Belt Weight
1R-1109	406 mm <b>16"</b>	General ag	72	30	63.5 mm	<b>2.5"</b>	38 mm	<b>1.5"</b>	36	272 kg <b>600 lb</b>
1R-1331	406 mm <b>16"</b>	Low profile	112	20	38 mm	<b>1.5"</b>	87 mm	<b>3.4"</b>	36	278 kg <b>612 lb</b>
1R-1337	406 mm <b>16"</b>	Extreme service	96	30	63.5 mm	<b>2.5"</b>	57 mm	<b>2.25"</b>	48	351 kg <b>773 lb</b>
1R-1110	457 mm <b>18"</b>	General ag	72	30	63.5 mm	<b>2.5"</b>	38 mm	<b>1.5"</b>	36	306 kg <b>675 lb</b>
1R-1330	457 mm <b>18"</b>	Low profile	112	20	38 mm	<b>1.5"</b>	87 mm	<b>3.4"</b>	36	309 kg <b>680 lb</b>
1R-1211	457 mm <b>18"</b>	Low profile	96	30	38 mm	<b>1.5"</b>	70 mm	<b>2.75"</b>	36	315 kg <b>693 lb</b>
1R-1336	457 mm <b>18"</b>	Extreme service	96	30	63.5 mm	<b>2.5"</b>	57 mm	<b>2.25"</b>	48	390 kg <b>860 lb</b>
1R-1284	508 mm <b>20"</b>	General ag	72	30	63.5 mm	<b>2.5"</b>	38 mm	<b>1.5"</b>	36	330 kg <b>726 lb</b>
1R-1113	635 mm <b>25"</b>	General ag	72	30	63.5 mm	<b>2.5"</b>	38 mm	<b>1.5"</b>	36	395 kg <b>870 lb</b>
1R-1212	635 mm <b>25"</b>	Low profile	96	30	38 mm	<b>1.5"</b>	70 mm	<b>2.75"</b>	36	410 kg <b>902 lb</b>
1R-1283	635 mm <b>25"</b>	Side hill	72	30	63.5 mm	<b>2.5"</b>	38 mm	<b>1.5"</b>	48	445 kg <b>980 lb</b>
1R-1294	635 mm <b>25"</b>	Low profile	112	20	38 mm	<b>1.5"</b>	87 mm	<b>3.4"</b>	36	428 kg <b>929 lb</b>
1R-1291	813 mm <b>32"</b>	Side hill	72	30	63.5 mm	<b>2.5"</b>	38 mm	<b>1.5"</b>	48	492 kg <b>1084 lb</b>
1R-1114	813 mm <b>32"</b>	General ag	72	30	63.5 mm	<b>2.5"</b>	38 mm	<b>1.5"</b>	36	510 kg <b>1104 lb</b>

**CHALLENGER HIGH-HORSEPOWER TRACTOR BELT SELECTION DATA**

Part Number	Belt Width	Belt Type	Number of Thread Bars	Thread Bar Angle	Thread Bar Height		Tip Width		Number of Guide Blocks	Belt Weight
1R-1097	635 mm <b>25"</b>	General ag	72	30	63.5 mm	<b>2.5"</b>	38 mm	<b>1.5"</b>	36	474 kg <b>1044 lb</b>
1R-1098	635 mm <b>25"</b>	Special application	96	30	38 mm	<b>1.5"</b>	70 mm	<b>2.75"</b>	36	469 kg <b>1032 lb</b>
1R-1084	700 mm <b>27.5"</b>	General ag	72	30	63.5 mm	<b>2.5"</b>	38 mm	<b>1.5"</b>	36	533 kg <b>1173 lb</b>
1R-1085	700 mm <b>27.5"</b>	Special application	96	30	38 mm	<b>1.5"</b>	70 mm	<b>2.75"</b>	36	540 kg <b>1190 lb</b>
1R-1150	700 mm <b>27.5"</b>	Low profile	72	30	63.5 mm	<b>2.5"</b>	38 mm	<b>1.5"</b>	36	558 kg <b>1230 lb</b>
1R-1186	700 mm <b>27.5"</b>	Side hill	72	30	63.5 mm	<b>2.5"</b>	38 mm	<b>1.5"</b>	48	537 kg <b>1183 lb</b>
1R-1297	700 mm <b>27.5"</b>	Side hill	72	30	63.5 mm	<b>2.5"</b>	38 mm	<b>1.5"</b>	48	588 kg <b>1296 lb</b>
1R-1075	762 mm <b>30"</b>	General ag	72	30	63.5 mm	<b>2.5"</b>	38 mm	<b>1.5"</b>	36	562 kg <b>1237 lb</b>
1R-1076	762 mm <b>30"</b>	Special application	96	30	38 mm	<b>1.5"</b>	70 mm	<b>2.75"</b>	36	543 kg <b>1196 lb</b>
1R-1134	762 mm <b>30"</b>	Low profile	72	30	63.5 mm	<b>2.5"</b>	38 mm	<b>1.5"</b>	36	582 kg <b>1283 lb</b>
1R-1187	762 mm <b>30"</b>	Side hill	72	30	63.5 mm	<b>2.5"</b>	38 mm	<b>1.5"</b>	48	566 kg <b>1360 lb</b>
1R-1232	762 mm <b>30"</b>	Reinforced	72	30	63.5 mm	<b>2.5"</b>	38 mm	<b>1.5"</b>	36	617 kg <b>1360 lb</b>
1R-1335	762 mm <b>30"</b>	Special application	96	30	63.5 mm	<b>2.5"</b>	48 mm	<b>1.89"</b>	48	611 kg <b>1346 lb</b>
1R-1298	762 mm <b>30"</b>	Special application	96	30	38 mm	<b>1.5"</b>	70 mm	<b>2.75"</b>	48	569 kg <b>1253 lb</b>
1R-1295L	890 mm <b>35"</b>	Special application	72	30	63.5 mm	<b>2.5"</b>	38 mm	<b>1.5"</b>	36	702 kg <b>1546 lb</b>
1R-1296R	890 mm <b>35"</b>	Special application	72	30	63.5 mm	<b>2.5"</b>	38 mm	<b>1.5"</b>	36	702 kg <b>1546 lb</b>
1R-1101L	890 mm <b>35"</b>	Special application	72	30	63.5 mm	<b>2.5"</b>	38 mm	<b>1.5"</b>	36	686 kg <b>1510 lb</b>
1R-1102R	890 mm <b>35"</b>	Special application	72	30	63.5 mm	<b>2.5"</b>	38 mm	<b>1.5"</b>	36	686 kg <b>1510 lb</b>
1R-1103L	890 mm <b>35"</b>	Special application	96	30	38 mm	<b>1.5"</b>	70 mm	<b>2.75"</b>	36	690 kg <b>1520 lb</b>
1R-1104R	890 mm <b>35"</b>	Special application	96	30	38 mm	<b>1.5"</b>	70 mm	<b>2.75"</b>	36	690 kg <b>1520 lb</b>

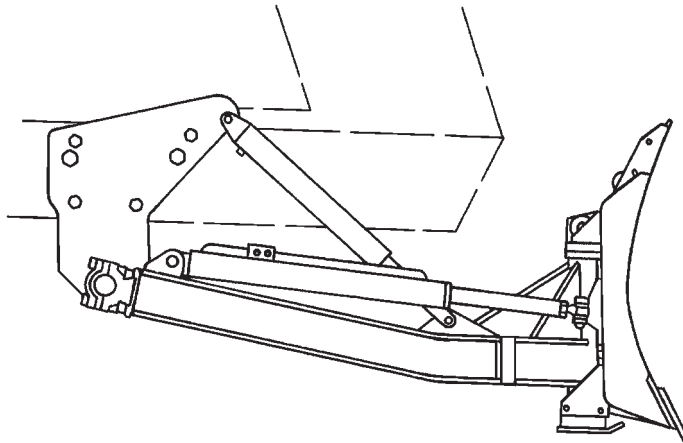

**Blades Specifications  
Challenger 65E, 75E, 85E, 95E**

Model	B95/65A-14P		B95/65A-12'6P		B95/65A-12'6		B95/65A-12P		B95/65A-12	
Challenger Track Width	889 mm	2'11"	762 mm	2'6"	762 mm	2'6"	624 mm	2'1"	624 mm	2'1"
Capacity	4.8 m <sup>3</sup>	5.3 yd <sup>3</sup>	4.3 m <sup>3</sup>	4.7 yd <sup>3</sup>	4.3 m <sup>3</sup>	4.7 yd <sup>3</sup>	4.1 m <sup>3</sup>	4.5 yd <sup>3</sup>	4.1 m <sup>3</sup>	4.5 yd <sup>3</sup>
Blade Type	PAT		PAT		Hyd. Angle		PAT		Hyd. Angle	
Width — Straight	4216 mm	13'10"	3785 mm	12'5"	3785 mm	12'5"	3683 mm	12'1"	3683 mm	12'1"
Width — Angled	3810 mm	12'6"	3429 mm	11'3"	3424 mm	11'3"	3277 mm	10'9"	3277 mm	10'9"
Height	1118 mm	3'8"	1118 mm	3'8"	1118 mm	3'8"	1118 mm	3'8"	1118 mm	3'8"
Max. Dig Depth	610 mm	2'0"	610 mm	2'0"	610 mm	2'0"	610 mm	2'0"	610 mm	2'0"
Max. Height	762 mm	2'6"	762 mm	2'6"	762 mm	2'6"	762 mm	2'6"	762 mm	2'6"
Blade Angle (degrees)	25		25		25		25		25	
Weight (approx.)	1800 kg	3970 lb	1720 kg	3790 lb	1720 kg	3790 lb	1542 kg	3400 lb	1490 kg	3280 lb

**LEON Model 4000 Series Dozer Blades  
Challenger 65E, 75E, 85E, 95E**

Blade Height	1120 mm	44"
Blade Widths	3048 mm	10'
	3658 mm	12'
	4267 mm	14'
	4877 mm	16'
Blade Lift Height	840 mm	33"
Adjustable Skid Shoes	Standard	
Digging Depth	300 mm	12"
Ripple Blade and Roll Action	Standard	
Replaceable Cutting Edge	Standard	
Hydraulic Angling (left and right)	Standard (up to 27°)	
Tilt Angle	10°	
Underframe Clearance	419 mm	16.5"
Complete Hydraulic Components	Standard	
Weight Complete with Push Assembly, 14' Blade, Hydraulics Angling and Tilt	Approx. 2550 kg	5610 lb

**LEON Model 225 Series Dozer Blades  
Challenger 35, 45, 55**

Blade Height	914 mm	36"
Blade Widths	2743 mm	9'
	3048 mm	10'
	3658 mm	12'
	4267 mm	14'
Blade Lift Height	711 mm	28"
Adjustable Skid Shoes	Standard	
Digging Depth	254 mm	10"
Ripple Blade and Roll Action	Standard	
Replaceable Cutting Edge	Standard	
Hydraulic Angling (left and right)	23°	
Manual Angling (left and right)	27°	
Manual Tilt Angle	10°	
Hydraulic Tilt Angle	10°	
Underframe Clearance	356 mm	14"
Complete Hydraulic Components	Standard	

### LEON Model 1000 Loader Challenger 35, 45, 55

Lift Capacity	2497 kg	<b>5500 lb</b>
Break Out Capacity	3632 kg	<b>8000 lb</b>
Lift Height (ground to bucket pin)	4077 mm	<b>160.5"</b>
Clearance Dumped	3010 mm	<b>118.5"</b>
Reach at Max. Height	914 mm	<b>36"</b>
Max. Dump Angle		<b>60°</b>
Rollback Angle		<b>28°</b>
Digging Depth	127 mm	<b>5"</b>
Height in Carrying Position	1981 mm	<b>78"</b>
Bucket Cylinder Diameter	76 mm	<b>3"</b>
Lift Cylinder Diameter	89 mm	<b>3.5"</b>
Quick On — Quick Off	<b>Standard</b>	
Approx. Weight with Bucket	2350 kg	<b>5175 lb</b>
Bucket Width	2438 kg	<b>8'</b>
	2743 mm	<b>9'</b>
	3048 mm	<b>10'</b>
Bucket Capacity	1.09 m <sup>3</sup>	<b>1.42 yd<sup>3</sup></b>
	1.22 m <sup>3</sup>	<b>1.60 yd<sup>3</sup></b>
	1.36 m <sup>3</sup>	<b>1.78 yd<sup>3</sup></b>

Specialized attachments:

Gapple fork, bale spear, hay and manure fork, pallet fork, grill guard.

### LEON Model C3P11 Front Mounted Hitch Challenger 35, 45, 55

Lift Capacity	2273 kg	<b>5000 lb</b>
Attachment Method	<b>Bolt-on using existing holes</b>	
Ground Clearance	476 mm	<b>18.75"</b>
Oscillation (or locked with pins)		<b>13°</b>

Zuidberg Techiek B.V. also manufactures a front mounted three-point hitch for the Challenger 35, 45, 55 tractors. Contact Zuidberg for details.

### Wilcox 3-point Hitch Challenger 65E, 75E, 85E, 95E

Category	<b>III/IVN/IV</b>	
Approx. Weight	1453 kg	<b>3200 lb</b>
Hitch Swing (left to right)		<b>28°</b>
Drawbar Swing (left to right)		<b>28°</b>
Lift Capacity	8172 kg	<b>18,000 lb</b>

### Wilcox Drawbar Hitch Challenger 35, 45, 55

Bar Thickness	51 mm	<b>2"</b>
Wear Plates	<b>Yes, on drawbar and support plates</b>	
Drawbar Pin	<b>Non-rotating, 2 position</b>	
Vertical Load in High Position	2951 kg	<b>6500 lb</b>
Vertical Load in PTO Position	2270 kg	<b>5000 lb</b>

Utilizes existing sway blocks and PTO guard  
Has drawbar rubber bumpers



**DRAWBAR POWER AND TILLAGE**

Tillage work ability, or rate, is measurable in drawbar power, either kilowatts or horsepower. If the quantity of work done is being emphasized, then a unit of time is also included. The common terminology is Kilowatt hours or horsepower hours.

Work rate is a combination of *load* (or force) times *distance*, divided by *time* or simply *load* times *speed*. For example a 5000 kg (11,000 lb) load pulled at 5 km/h (3.1 mph) is equivalent work to a 2000 kg (4400 lb) load pulled at 12.5 km/h (7.8 mph).

A Pullmeter is used most frequently to measure implement loads. The Towner Pullmeter is a hydraulic cylinder with a head machined precisely to 64.5 cm<sup>2</sup> (10 in<sup>2</sup>). Gauges are used to read pounds per square inch thus 10 times the gauge reading gives drawbar pounds pull (DBPP) in thousands of pounds exerted by the implement pulled. Similar pullmeters are available with gauges reading in Kilograms pull.

Formulas providing either Metric or English units of work rate are:

Metric:

$$\text{Drawbar Kilowatts (DBkW)} = \frac{\text{kg Drawbar pull} \times \text{km/h}}{367}$$

$$\text{Drawbar Power} = \frac{\text{kg Drawbar pull} \times \text{km/h}}{274}$$

English:

$$\text{Drawbar Horsepower} = \frac{\text{lb Drawbar pull} \times \text{mph}}{375}$$

Example (Metric)

A 6 m implement imposes 5000 kg draft at 5 km/h requires how many drawbar kilowatts to pull it?

Solution:  $\frac{5000 \text{ kg} \times 5 \text{ km/h}}{367} = 68.1 \text{ DBkW}$



Example (English)

A 20 ft wide implement imposing 11,000 DBPP at 3 mph requires how many drawbar horsepower to pull it?

Solution:  $\frac{11,000 \text{ DBPP} \times 3 \text{ mph}}{375} = 88 \text{ DBHP}$



**TILLAGE PRODUCTION**

Tillage production is most commonly measured in area covered per hour, i.e. hectares per hour or acres per hour. Production can be determined by field measurement of tractor speed and implement width. If implement width is known and drawbar pull can be estimated, reference to tractor drawbar pull/speed graphs will give estimated speeds for each gear, and use of standard formulas will provide reasonable estimates of tillage production. Drawbar pull is a function of: 1) speed of tractor, 2) implement width and, 3) tillage depth.

Formulas

A. At 100% efficiency (not attainable)

Metric:

$$\text{Hectares/hr} = \frac{\text{Width (m)} \times \text{Speed (km/h)}}{10}$$

English:

$$\text{Acres/hr} = \frac{\text{Width (ft)} \times \text{Speed (mph)}}{8.25}$$

B. At 82.5% efficiency (average for tillage — includes turns)

Metric:

$$\text{Hectares/hr} = \text{meters} \times \text{km/h} \times 0.0825$$

English:

$$\text{Acres/hr} = \frac{\text{feet} \times \text{mph}}{10}$$

Example problem

Calculate normal tillage production of a D6E SR with a 6 m (20 ft) cut width disc plowing harrow pulled at a measured speed of 6 km/h (3.7 mph).

Solution:

$$\begin{aligned} \text{Hectares/hr} &= 6 \text{ m} \times 6 \text{ km/h} \times 0.0825 = 3 \text{ Hectares/hr} \end{aligned}$$

$$\text{Acres/hr} = \frac{20 \text{ ft} \times 3.7 \text{ mph}}{10} = 7.4 \text{ Acres/hr}$$



**ESTIMATED DRAFT OR DRAWBAR PULL REQUIRED PER M (FT) OF IMPLEMENT CUTTING WIDTH**

	Speed	Depth	Soil Type				
			Heavy Gumbo Clay Loam	Moderate Heavy Silty Clay Loam	Average Silty Loam	Moderate Light Sandy Loam	Light Sandy or Coarse
Moldboard plow	5.6-9.6 km/h 3.5-6 mph	178-229 mm 7-9"	1860-2382 kg 1250-1600 lb	1414-1713 kg 950-1150 lb	1115-1266 kg 750-850 lb	745-968 kg 500-650 lb	522-669 kg 350-480 lb
Heavy disc plow 965 mm (3'2")	4.8-8.0 km/h 3-5 mph	254-457 mm 10-18"	2677 kg 1800 lb	2382 kg 1600 lb	2083 kg 1400 lb	1489 kg 1000 lb	1489 kg 1000 lb
1270 mm (4'2")	3.7-6.4 km/h 2.3-4 mph	203-305 mm 8-12"	3573 kg 2400 lb	3274 kg 2200 lb	2976 kg 2000 lb	2677 kg 1800 lb	2382 kg 1600 lb
Heavy offset disc harrow 915 mm (3'0") (stubble or breaking)	4.8-8.0 km/h 3-5 mph	102-203 mm 4-8"	1785 kg 1200 lb	1637 kg 1100 lb	1489 kg 1000 lb	1339 kg 900 lb	1191 kg 800 lb
Heavy tandem or med. offset disc harrow 660-813 mm (2'2"-2'8")	4.8-9.6 km/h 3-6 mph	102-203 mm 4-8"	1191 kg 800 lb	1043 kg 700 lb	892 kg 600 lb	775 kg 500 lb	594 kg 400 lb
Finishing or seedbed disc harrow 508-610 mm (1'8"-2'0")	6.4-11.2 km/h 4-7 mph	51-102 mm 2-4"	446 kg 300 lb	410 kg 275 lb	335 kg 225 lb	335 kg 225 lb	148 kg 100 lb
Disc plow (stubble mulch)	6.4-9.6 km/h 4-6 mph	76-152 mm 3-6"	558 kg 375 lb	482 kg 324 lb	410 kg 275 lb	335 kg 225 lb	259 kg 175 lb
Chisel plow	5.6-10.5 km/h 3.5-6.5 mph	203-305 mm 8-12"	1191 kg 800 lb	968 kg 650 lb	775 kg 500 lb	522 kg 350 lb	299 kg 200 lb
Field cultivation or springtooth	6.4-11.2 km/h 4-7 mph	76-102 mm 3-4"	775 kg 500 lb	558 kg 375 lb	371 kg 250 lb	299 kg 200 lb	223 kg 150 lb
Rod weeder (add to FC or springtooth)	6.4-11.2 km/h 4-7 mph	76-102 mm 3-4"	177 kg 120 lb	157 kg 105 lb	135 kg 90 lb	112 kg 75 lb	89 kg 60 lb

Adjust estimates of varying moisture content. Use a pullmeter for more accurate measurements.

	Draft or DBPP/Shank							
	Depth		Heavy		Medium		Light	
Lister			363 kg	800 lb	272 kg	600 lb	181 kg	400 lb
V. chisel (parabolic shank)	406 mm	16"	1162 kg	2560 lb	871 kg	1920 lb	653 kg	1440 lb
	457 mm	18"	1306 kg	2880 lb	980 kg	2160 lb	735 kg	1620 lb
	508 mm	1'8"	1452 kg	3200 lb	1089 kg	2400 lb	816 kg	1800 lb
	559 mm	1'10"	1597 kg	3520 lb	1198 kg	2640 lb	898 kg	1980 lb
Subsoilers	508 mm	1'8"	1633 kg	3600 lb	1270 kg	2800 lb	907 kg	2000 lb
	559 mm	1'10"	1814 kg	4000 lb	1406 kg	3100 lb	998 kg	2200 lb
	610 mm	2'0"	1950 kg	4300 lb	1542 kg	3400 lb	1089 kg	2400 lb
	660 mm	2'2"	2132 kg	4700 lb	1633 kg	3600 lb	1179 kg	2600 lb

Notes —

## CONTENTS

Industries Served .....	3-1
Features .....	3-1
Applications .....	3-3
Specifications: Standard Versions .....	3-6
Specifications: NA Versions .....	3-8
Specifications: Global Versions .....	3-10
Specifications: ES Versions .....	3-11
Travel Speeds .....	3-12
All Wheel Drive (AWD) .....	3-12
Front Mounted Scarifiers .....	3-12
Rippers/Scarifiers .....	3-13
Production .....	3-14
Formulas .....	3-18
Work Tools .....	3-19

## Industries Served

The motor grader is one of the most versatile work tools in the Caterpillar product line. The H-Series machines are used in numerous applications within a wide range of industries. The major industries using Cat motor graders, along with the typical applications within each, are summarized below.

- **Heavy Construction**
  - Highway Construction
  - Paving/Resurfacing
  - Airport Construction
  - Railroad Construction
  - Dam and Levee Construction
  - Haul Road Maintenance
- **Governmental**
  - Road Maintenance
  - Road Construction
  - Ditch Building/Cleaning
  - Snow Removal
- **Building Construction**
  - Residential Construction
  - Commercial Construction
  - Industrial Construction
  - Sewer and Water Systems
- **Industrial**
  - Waste Disposal
  - Pipeline Construction

- **Mining**
  - Haul Road Maintenance
  - Snow Removal
- **Forestry**
  - Access Road Construction
  - Forest Development
  - Snow Removal
  - Haul Road Maintenance

## Features, H-Series Motor Graders:

- **Geographic Versions** — The H-Series was specifically designed to meet the needs of different geographic regions. NA, Standard, ES and Global Versions are available with an assortment of standard features and optional equipment. All motor graders feature advanced Caterpillar engines, power train components, hydraulics and machine structures. The 24H was designed to meet the productivity and durability expectations of Caterpillar mining customers.
- **Power to the Ground** — Proven Caterpillar designed and manufactured components are carefully matched to maximize productivity and efficiency. Caterpillar H-Series engines have excellent lugging performance and fuel economy. Variable Horsepower (VHP) (NA Versions only — standard on models 143H and 163H, optional on certain 120H, 135H, 140H and 160H) provides more power in gears 4F-8F and 3R-6R to increase productivity and improve gradeability when roading. Engine Power Management (standard on all ES and Standard Versions except 12H) delivers full rated power in gears 4F-8F and 3R-6R. In lower gears, where traction is limited, engine horsepower is automatically reduced, lowering fuel consumption and reducing tire slippage. All models have Caterpillar transmissions that provide on-the-go, full-power shifting and inching capability. Auto-shift is standard equipment on the 24H and optional on certain NA and ES models. In addition, the 24H is equipped with a lockup clutch torque converter which allows the machine to operate in direct drive at high output speeds.

- **Blade Positioning** — The H-Series provides a broad range of extended blade positions particularly beneficial in mid-range bank sloping, ditch cutting and ditch cleaning. Along wheel base allows for an aggressive blade angle permitting material to roll more freely, reducing power requirements.
- **Brakes** — Caterpillar designs and builds multi-disc brakes that are completely sealed, oil-bathed, adjustment-free and offer unmatched reliability and durability. They are located at each tandem wheel to eliminate braking loads on the power train and to speed up servicing. The large brake surface provides dependable braking capability and long life. The 24H brakes are oil-actuated and all other models are air-actuated.
- **Visibility** — Ample glass area and carefully placed components provide excellent visibility to enhance operator confidence and productivity in all motor grader applications. The H-Series gives the operator an exceptional view forward to the blade toe, working surface and front tires. Rearward visibility to the ripper and tandem tires and sideways to the blade heel and front tandem tires is maximized. The slanted rear window and optional sunshade reduce glare.
- **Controllability** — The H-Series features motor grader-specific hydraulic controls providing smooth, predictable response every time a lever is moved. The machines can perform multiple, hydraulic-control operations with little effect on the engine or implement speeds. The result is more production in almost any application. The Proportional, Priority, Pressure-Compensated (PPPC) Hydraulic System is load-sensing and provides hydraulic power on demand, consuming horsepower only when needed. The system provides proportionate flow to each circuit when the system demand exceeds the available flow. Lock valves, built into all control valves, maintain exact cylinder positioning. The implement valves provide superior modulation, system response and predictability.
- **Safety** — The H-Series machines provide a safe working environment for both the operator and ground personnel. ROPS and FOPS structures meeting current SAE and ISO requirements are standard on all NA, ES, and Global machines. Back-up alarms are standard on the NA, ES, and Global Version, and all models are equipped with a horn that meets ISO sound requirements. A fully hydraulic power steering system is standard on all models, ensuring precise machine control. Optional secondary steering system, available on all NA and Global Versions (standard on 24H), provides steering if the main hydraulic pump fails. Sturdy, well-placed access steps provide safe entry into the cab, and a cloth contour suspension seat with retractable seat belt (standard on NA, ES, and Global Versions) secures the operator once in the cab. The best visibility in the industry allows the operator to see what is happening around the machine. Various work and warning light packages are also available which provide even more visibility for the operator. A circle drive slip clutch, standard on all H-Series models, reduces the possibility of the grader making abrupt directional changes when hidden objects are encountered. Optional blade lift accumulators absorb vertical shocks when immovable objects are encountered, further protecting both the machine and the operator.
- **Operator Comfort** — The H-Series provides a comfortable environment to keep the operator alert and focused. Conveniently located, low-effort controls reduce fatigue. The interior noise level is maintained between 75 and 80 dBA with the doors and windows closed. Other standard and optional operator-comfort features may include (availability dependent on model):
  - key engine start-stop switch
  - pressurized cab
  - air conditioning and heating
  - fully adjustable Caterpillar Contour Series Seat
  - adjustable steering and implement control console
  - easy-to-see gauges
  - provisions for entertainment and communication radios
  - lunch box location
  - coat hook
  - sweepout cab floor
  - suspended pedals
  - cigarette lighter and ashtray
  - cupholder
  - 12 volt power port
  - lower-opening front windows
  - sliding side windows
  - speedometer/tachometer
  - hour meter
  - defroster fans
  - rear sunshade

- **Environmental Design** — The H-Series responds to important environmental concerns such as noise and air pollution. Designed with low exterior sound levels and low-emissions engines (except on Standard Version models 12H, 140H and 160H), Caterpillar motor graders are quiet and clean. Low exterior sound levels range from 80 to 84 dBA due to slower engine speeds, underhood mufflers, rubber-mounted engines, transmissions and slower fans. R134a refrigerant is used in the air conditioner. To minimize oil leaks and withstand high working pressures and temperatures, Caterpillar designed, heavy-duty XT hose and O-ring face seals are used.
- **Serviceability** — H-Series motor graders are designed for fast, easy servicing. Easy access to service areas allows for quick maintenance and ensures that routine service is performed on time. Features promoting easy servicing include:
  - Electronic Monitoring System (EMS) to alert the operator to potential problems (EMSII on the 24H)
  - easily replaceable wear inserts to keep the drawbar, circle and blade tight and prevent damage to expensive components
  - large, hinged, engine side doors to provide ample access to the engine and transmission service points (optional on Standard Versions)
  - air cleaner located above the engine, accessible from left side
  - hydraulic oil level sight gauge
  - tandem oil level sight gauge (24H)
  - oil sampling capability from engine and hydraulics
  - oil sampling capability from tandem and powertrain systems (24H)
  - clustered lube points located at the bolster, drawbar, articulation joint and ripper for ground-level service (24H)
  - auto-lube option available (24H)
  - diagnostic connectors for Electronic Technician (ET) (excluding 14H and 16H)
  - modular wiring harness
  - engine disconnect switch
  - fuse panel located inside the cab
  - spin on filters
  - lockable battery box cover is easily removed without tools
  - modular powertrain components
  - radiator cleanout access
  - Extended Life Coolant (ELC) extends coolant life to 6000 hours
- **143H and 163H All Wheel Drive Motor Graders** — All Wheel Drive (AWD) improves tractive performance in poor underfoot conditions such as snow, mud and sand. This feature also provides excellent steering and sidedraft control. AWD is available in gears 1F-7F and 1R-5R, making it effective in both low-speed and high-speed applications. VHP is standard on AWD models and delivers maximum power in all gears when AWD is engaged. Three operating modes are available: automatic, manual or off.
- **24H Motor Grader** — To meet the specialized needs of Caterpillar's large mining customers, the 24H is sized to maintain haul roads for large mining-truck fleets. The Caterpillar 3412E Hydraulic Electronic Unit Injector (HEUI) engine, powertrain components and machine structures are designed to meet the rigors of this application.
- **Best Product Support** — Caterpillar motor grader users are assured the best product support anywhere in the world. With industry-best parts availability, training and an offering of inspection, maintenance and repair, Caterpillar dealers can provide the support needed to keep the machines productive.

## APPLICATIONS

The Caterpillar H-Series line of motor graders consists of 10 different models, ranging from the versatile 120H up to the rugged 24H. This broad line allows the customer to choose a motor grader that best fits the intended application. Below is a summary of the typical motor grader applications.

### Finish Grading

This application involves preparing a roadway or site surface for future paving or other construction activity. The material being moved is usually a hard, dry base material on a solid underfoot. Finish blading is the motor grader application that requires the highest degree of accuracy. Thus, it is primarily done at low operating speeds — usually less than 3 mph — in gears 1 and 2. To ensure a smooth, even finished surface, one gear is usually maintained for a given pass. Pass lengths during this application are usually less than 600 m (2000 feet) for road construction and 150 m (500 feet) for site development. Most finish blading is performed by contractors in the Heavy Construction and Building Construction industries.

### Heavy Blading

This application involves cutting, moving, and mixing material, usually in the initial stages of surface preparation. A variety of material types are moved in this manner, and the blade tip position varies accordingly. Full blade loads are usually experienced during heavy blading, since moving material is the primary goal. Pass lengths within this application vary, but are usually less than 600 m (2000 feet). Unlike with finish blading, the speed of the machine is dependent on the load being moved when heavy-blading material. Typical operating speeds are from 0-10 km/h (0 to 6 mph). Therefore, gears 2 through 4 are frequently used in this application. Most heavy blading activity is performed by contractors in the Heavy Construction, Governmental, Industrial, and Forestry industries.

### Site Preparation

This application involves any material cutting, moving, and mixing necessary to prepare a residential, commercial, or industrial site for construction. A variety of materials are encountered in this application. Blade loads vary depending on the activity being performed. Both heavy blading and finish blading are performed when preparing a site. Pass lengths are typically in the range of 30-300 m (100 to 1000 feet). Typical operating speeds for site preparation vary depending on whether heavy blading or finish blading activities are being performed. Most site preparation activities are performed by contractors in the Building Construction industry.

### Road Maintenance

This application involves reshaping dirt or gravel roads to maintain a crown or superelevation, or restoring the surface itself. This generally involves secondary roads maintained by governmental bodies such as townships and counties. Materials being moved in this application vary from extremely hard dirt bases to moist gravel surfaces. The typical blade load falls between that of finish blading and heavy blading. Pass lengths are frequently longer than 600 m (2000 feet), and can extend for miles. The general speed range for this application is 5-16 km/h (3 to 10 mph), corresponding to gears 2 (heavy dirt) through 5 (soft gravel). As with finish blading, accuracy of the graded surface is the primary concern in this application. Thus, frequent shifts should be avoided whenever possible. A gear should be chosen and maintained unless there is a significant change in the material being moved. Most road maintenance activities are performed by the Governmental industry.

### Haul Road Maintenance

This application of the motor grader involves reshaping haul roads at mining, construction, or forestry work sites, usually for the purpose of maintaining smooth travel surfaces for equipment. Materials being moved while maintaining haul roads vary widely depending on the application. Typical blade loads are about one-third to half of full capacity. Some haul roads that experience large hauling units travelling on soft material may require heavy blade loads in order to reshape the road surface. Pass lengths vary depending on the application, but can extend for miles on remote forestry or large mine haul roads. The general speed range for haul road maintenance is heavily dependent on the material being moved as well as the grade of the haul road. Many mine sites are in mountainous areas, requiring haul roads with steep grades. Generally, haul-road maintenance is performed at speeds similar to those required for general road maintenance 5-16 km/h (3 to 10 mph).

A travel surface that allows for the safe and efficient movement of machinery is the ultimate goal with this motor grader application. Very precise roadway elevations and slopes are desired, but are not as crucial as they are when finish blading. Most haul road maintenance activities are performed by the Mining, Heavy Construction, and Forestry industries.

### Side/Bank Slope Work

This application involves preparing side slopes or bank slopes along roadways by placing the moldboard on a sloped surface. Slopes of up to a 2:1 angle can be cut using a motor grader. Often the motor grader is operated on the level surface adjacent to the slope, and the moldboard is extended outward to the sloped surface. Fine soils are generally encountered in this application of the motor grader. Blade loads are usually less than half of the full-blade capacity, and pass lengths are seldom longer than 600 m (2000 feet). A smooth-graded sloped surface is the primary concern in this application, so frequent shifts should be avoided. The typical speed range is 0-6 km/h (0 to 4 mph), corresponding to a gear selection of 1 to 3. The nominal speed is heavily dependent on the type of material being moved and on the slope of the surface. Most side/bank slope work is performed by the Heavy Construction and Governmental industries.

### Ditch Building/Cleaning

This application involves cutting “V” and flat-bottom ditches for drainage purposes and rebuilding them when necessary. Due to excessive rain and/or poor material, ditches often need cleaning and reshaping. When building ditches, materials with a wide range of densities are encountered. Blade loads vary accordingly, from half to full-blade capacity. Pass lengths are usually less than 600 m (2000 feet). The primary objective is to move material in a manner that yields a ditch with the desired slope. Ditch building often involves cutting and moving material of high density. Therefore, typical speed ranges vary. Most ditch-building work, however, is performed in gears 1 through 3, corresponding to a maximum speed of about 8 km/h (5 mph). Ditch cleaning usually involves blading moist materials underneath a sod cover. Blade loads are usually less than half of full-blade capacity when cleaning ditches, and pass lengths are similar to those encountered in ditch building. Typical maximum speeds for this activity are similar to that of ditch building, but less of a blade load is experienced. Ditch building and cleaning activities are usually performed by the Heavy Construction and Governmental industries.

### Ripping/Scarifying

This application involves conditioning hard, rough soils before they are bladed. Shanks on the ripper and/or scarifier are pushed into the ground, thus breaking up otherwise hard surfaces. Hard materials such as asphalt can also be loosened in order to make grading operations less damaging to the moldboard. Rippers and scarifiers can also be used to mix aggregates together. The materials being ripped/scarified are usually hard and dry. Rippers generally penetrate 150-300 mm (6 to 12 inches) into the ground, while scarifiers typically penetrate to a depth of 25-200 mm (1 to 8 inches). Pass lengths are generally less than 600 m (2000 feet) for both activities.

Since the material being ripped/scarified is generally hard, the typical maximum speed for this application is about 6 km/h (4 mph) gears 1-2. If the ripper/scarifier is used for mixing aggregates, the typical operating range becomes 6-20 km/h (4 to 12 mph) gears 3-6. Most ripping/scarifying activities are performed by the Heavy Construction and Governmental industries.

### Snow Removal

Snow removal is the process of cutting and removing snow or ice from the roadway. In addition to the standard motor grader moldboard, other attachments such as a snow wing, V-plow, one-way plow, or reversible plow can be used to remove the snow. The moldboard itself is the most commonly used attachment for snow plowing. It is used in areas where snow depths are low, the terrain is relatively flat, and where excessive drifting does not occur. A snow wing is a moldboard that attaches to the machine's right side. The wing's curvature lifts the snow and “wings” it off the plowed surface. The snow wing is often used in conjunction with the standard moldboard, where the moldboard cuts the material and feeds it onto the wing. V-plows are mounted in front of the motor grader and are designed to dig into and lift packed snow.

The typical speed range for snow removal is 10-30 km/h (6 to 18 mph), corresponding to a gear range of 3 to 7. Snow plowing often involves lower speeds than snow removal. The typical operating range for snow plowing is 8-19 km/h (5 to 12 mph) gears 2 through 4. The majority of Snow Removal/Plowing operations are performed by the Governmental, Mining, and Forestry industries.



# Motor Graders Standard Versions

## Specifications



MODEL	120H		135H		12H	
Net Flywheel Power: Gears 4-8	104 kW	140 hp	116 kW	155 hp	104 kW	140 hp
Gears 1-3▲	93 kW	125 hp	101 kW	135 hp	104 kW	140 hp
Operating Weight*	11 358 kg	25,040 lb	11 788 kg	25,990 lb	13 077 kg	28,830 lb
Engine Model	3116 DITA		3116 DITA		3306 DINA	
Rated Engine RPM	2000		2000		2000	
No. of Cylinders	6		6		6	
Displacement	6.6 L	403 in <sup>3</sup>	6.6 L	403 in <sup>3</sup>	10.45 L	638 in <sup>3</sup>
Max. Torque Rise	33%		33%		30%	
No. of Speeds Forward/Reverse	8/6		8/6		8/6	
Top Speed: Forward	42.6 km/h	26.5 mph	41.9 km/h	26.0 mph	41.7 km/h	25.9 mph
Reverse	33.7 km/h	20.9 mph	33.1 km/h	20.6 mph	32.9 km/h	20.5 mph
Std. Tires — Front & Rear	13.00-24 (10 PR) (G-2)		13.00-24 (10 PR) (G-2)		13.00-24 (10 PR) (G-2)	
Front Axle/Steering:						
Oscillation Angle	32°		32°		32°	
Wheel Lean Angle	18°		18°		18°	
Steering Angle	50°		50°		50°	
Articulation Angle	20°		20°		20°	
Minimum Turning Radius**	7.2 m	23'8"	7.2 m	23'8"	7.4 m	24'3"
Front Frame Section Modulus:						
Min.	1619 cm <sup>3</sup>	99 in <sup>3</sup>	1619 cm <sup>3</sup>	99 in <sup>3</sup>	2083 cm <sup>3</sup>	127 in <sup>3</sup>
Max.	3681 cm <sup>3</sup>	225 in <sup>3</sup>	3681 cm <sup>3</sup>	225 in <sup>3</sup>	4785 cm <sup>3</sup>	291 in <sup>3</sup>
No. Circle Support Shoes	4		4		6	
Hydraulics: Pump Type	Axial Piston		Axial Piston		Axial Piston	
Max. Pump Flow	148 L/min	39 gpm	148 L/min	39 gpm	148 L/min	39 gpm
System Capacity	61 L	16 U.S. gal	61 L	16 U.S. gal	73 L	19 U.S. gal
Implement Pressure: Max.	24 150 kPa	3500 psi	24 150 kPa	3500 psi	24 150 kPa	3500 psi
Min.	3100 kPa	450 psi	3100 kPa	450 psi	3100 kPa	450 psi
Electrical:						
System Size	24V		24V		24V	
Std. Battery CCA @ 0° F	750		750		750	
Std. Alternator	35 amp		35 amp		35 amp	
GENERAL DIMENSIONS:						
Height (to top of ROPS)	3.11 m	10'2"	3.11 m	10'2"	3.11 m	10'2"
Height (stripped top)***	2.91 m	9'7"	2.91 m	9'7"	3.05 m	10'0"
Overall Length	8.14 m	26'9"	8.14 m	26'9"	8.45 m	27'9"
With Ripper & Pushplate	9.64 m	31'8"	9.64 m	31'8"	10.01 m	32'10"
Wheelbase	5.87 m	19'3"	5.87 m	19'3"	6.09 m	20'0"
Blade Base	2.60 m	8'6"	2.60 m	8'6"	2.57 m	8'5"
Overall Width (at top of front tires)	2.44 m	8'0"	2.44 m	8'0"	2.44 m	8'0"
Standard Blade: Length	3.66 m	12'0"	3.66 m	12'0"	3.66 m	12'0"
Height	610 mm	2'0"	610 mm	2'0"	610 mm	2'0"
Thickness	22 mm	0.87"	22 mm	0.87"	22 mm	0.87"
Lift Above Ground	457 mm	18"	457 mm	18"	452 mm	18.9"
Max. Shoulder Reach:◀						
Frame Straight	1.84 m	6'0"	1.84 m	6'0"	1.85 m	6'1"
Articulated Position	2.78 m	9'1"	2.78 m	9'1"	2.96 m	9'2"
Fuel Tank Capacity	284 L	75 U.S. gal	284 L	75 U.S. gal	284 L	75 U.S. gal

\*Operating Weight — based on standard machine configuration, full fuel tank, coolant, lubricants and operator.

\*\*Minimum Turning Radius — combining the use of articulated frame steering, front wheel steer and unlocked differential.

\*\*\*Height (stripped top) — without ROPS, exhaust, or other easily removed encumbrances.

◀ Applicable for the standard blade with hydraulic sideshift and tip control. Maximum shoulder reach is obtainable to the right.

▲ Engine Power Management automatically reduces power in gears 1F-3F and 1R-2R.



MODEL	140H		160H	
Net Flywheel Power: Gears 4-8	138 kW	185 hp	149 kW	200 hp
Gears 1-3▲	123 kW	165 hp	134 kW	180 hp
Operating Weight*	13 552 kg	29,880 lb	14 416 kg	31,780 lb
Engine Model	3306 DIT		3306 DIT	
Rated Engine RPM	1900		1900	
No. of Cylinders	6		6	
Displacement	10.45 L	638 in <sup>3</sup>	10.45 L	638 in <sup>3</sup>
Max. Torque Rise	33%		33%	
No. of Speeds Forward/Reverse	8/6		8/6	
Top Speed: Forward	41.1 km/h	25.5 mph	40.7 km/h	25.3 mph
Reverse	32.4 km/h	20.2 mph	32.1 km/h	20.0 mph
Std. Tires — Front & Rear	14.00-24 (10 PR) (G-2)		14.00-24 (10 PR) (G-2)	
Front Axle/Steering:				
Oscillation Angle	32°		32°	
Wheel Lean Angle	18°		18°	
Steering Angle	50°		50°	
Articulation Angle	20°		20°	
Minimum Turning Radius**	7.4 m	24'3"	7.4 m	24'3"
Front Frame Section Modulus:				
Min.	2083 cm <sup>3</sup>	127 in <sup>3</sup>	2083 cm <sup>3</sup>	127 in <sup>3</sup>
Max.	4785 cm <sup>3</sup>	291 in <sup>3</sup>	4785 cm <sup>3</sup>	291 in <sup>3</sup>
No. Circle Support Shoes	6		6	
Hydraulics: Pump Type	Axial Piston		Axial Piston	
Max. Pump Flow	155 L/min	40.9 gpm	155 L/min	40.9 gpm
System Capacity	73 L	19 U.S. gal	73 L	19 U.S. gal
Implement Pressure: Max.	24 150 kPa	3500 psi	24 150 kPa	3500 psi
Min.	3100 kPa	450 psi	3100 kPa	450 psi
Electrical:				
System Size	24V		24V	
Std. Battery CCA @ 0° F	750		750	
Std. Alternator	35 amp		35 amp	
GENERAL DIMENSIONS:				
Height (to top of ROPS)	3.12 m	10'3"	3.12 m	10'3"
Height (stripped top)***	3.05 m	10'0"	3.05 m	10'0"
Overall Length	8.49 m	27'10"	8.49 m	27'10"
With Ripper & Pushplate	10.01 m	32'10"	10.01 m	32'10"
Wheelbase	6.09 m	20'0"	6.09 m	20'0"
Blade Base	2.57 m	8'5"	2.52 m	8'3"
Overall Width (at top of front tires)	2.46 m	8'1"	2.46 m	8'1"
Standard Blade: Length	3.66 m	12'0"	4.27 m	14'0"
Height	610 mm	2'0"	686 mm	2'3"
Thickness	22 mm	0.87"	25 mm	1"
Lift Above Ground	480 mm	18.9"	452 mm	17.8"
Max. Shoulder Reach:◀				
Frame Straight	1.85 m	6'1"	1.85 m	6'1"
Articulated Position	2.96 m	9'2"	2.96 m	9'2"
Fuel Tank Capacity	284 L	75 U.S. gal	341 L	90 U.S. gal

\*Operating Weight — based on standard machine configuration with full fuel tank, coolant, lubricants and operator.  
 \*\*Minimum Turning Radius — combining the use of articulated frame steering, front wheel steer and unlocked differential.  
 \*\*\*Height (stripped top) — without ROPS, exhaust, or other easily removed encumbrances.  
 ◀ Applicable for the standard blade with hydraulic sideshift and tip control. Maximum shoulder reach is obtainable to the right.  
 ▲ Engine Power Management automatically reduces power in gears 1F-3F and 1R-2R.

# Motor Graders NA Versions

## Specifications



MODEL	120H		135H		12H	
Net Flywheel Power	93 kW	125 hp	101 kW	135 hp	104 kW	140 hp
Variable horsepower: Gears 4-8▲	104 kW	140 hp	116 kW	155 hp	—	—
Operating Weight*	12 519 kg	27,600 lb	12 950 kg	28,550 lb	14 247 kg	31,410 lb
Engine Model	3116 DIT▶		3116 DIT▶		3306 DIT	
Rated Engine RPM	2000		2000		1900	
No. of Cylinders	6		6		6	
Displacement	6.6 L	403 in <sup>3</sup>	6.6 L	403 in <sup>3</sup>	10.45 L	638 in <sup>3</sup>
Max. Torque Rise	33%		30%		30%	
No. of Speeds Forward/Reverse	8/6		8/6		8/6	
Top Speed: Forward	42.6 km/h	26.5 mph	41.9 km/h	26.0 mph	39.7 km/h	24.7 mph
Reverse	33.7 km/h	20.9 mph	33.1 km/h	20.6 mph	31.3 km/h	19.5 mph
Std. Tires — Front & Rear	13.00-24 (10 PR) (G-2)		13.00-24 (10 PR) (G-2)		13.00-24 (10 PR) (G-2)	
Front Axle/Steering:						
Oscillation Angle	32°		32°		32°	
Wheel Lean Angle	18°		18°		18°	
Steering Angle	50°		50°		50°	
Articulation Angle	20°		20°		20°	
Minimum Turning Radius**	7.2 m	23'8"	7.2 m	23'8"	7.4 m	24'3"
Front Frame Section Modulus:						
Min.	1619 cm <sup>3</sup>	99 in <sup>3</sup>	1619 cm <sup>3</sup>	99 in <sup>3</sup>	2083 cm <sup>3</sup>	127 in <sup>3</sup>
Max.	3681 cm <sup>3</sup>	225 in <sup>3</sup>	3681 cm <sup>3</sup>	225 in <sup>3</sup>	4785 cm <sup>3</sup>	291 in <sup>3</sup>
No. Circle Support Shoes	4		4		6	
Hydraulics: Pump Type	Axial Piston		Axial Piston		Axial Piston	
Max. Pump Flow	148 L/min	39 gpm	148 L/min	39 gpm	196 L/min	51.9 gpm
System Capacity	68 L	17.7 U.S. gal	68 L	17.7 U.S. gal	80 L	20.8 U.S. gal
Implement Pressure: Max.	24 150 kPa	3500 psi	24 150 kPa	3500 psi	24 150 kPa	3500 psi
Min.	3100 kPa	450 psi	3100 kPa	450 psi	3100 kPa	450 psi
Interior Sound Level/SAE J919	75 dBA		75 dBA		75 dBA	
Electrical:						
System Size	24V		24V		24V	
Std. Battery CCA @ 0° F	750		750		750	
Std. Alternator	35 amp		35 amp		35 amp	
GENERAL DIMENSIONS:						
Height (to top of ROPS)	3.11 m	10'2"	3.11 m	10'2"	3.11 m	10'2"
Height (stripped top)***	2.91 m	9'7"	2.91 m	9'7"	3.04 m	10'0"
Overall Length	8.26 m	27'1"	8.26 m	27'1"	8.57 m	28'1"
With Pushplate	8.50 m	27'10"	8.50 m	27'10"	10.01 m	32'10"▼
Wheelbase	5.87 m	19'3"	5.87 m	19'3"	6.09 m	20'0"
Blade Base	2.60 m	8'6"	2.60 m	8'6"	2.57 m	8'5"
Overall Width (at top of front tires)	2.44 m	8'0"	2.44 m	8'0"	2.44 m	8'0"
Standard Blade: Length	3.66 m	12'0"	3.66 m	12'0"	3.66 m	12'0"
Height	610 mm	2'0"	610 mm	2'0"	610 mm	2'0"
Thickness	22 mm	0.87"	22 mm	0.87"	22 mm	0.87"
Lift Above Ground	457 mm	18"	457 mm	18"	480 mm	18.9"
Max. Shoulder Reach:◀						
Frame Straight	1.91 m	6'3"	1.91 m	6'3"	1.97 m	6'6"
Articulated Position	2.85 m	9'4"	2.85 m	9'4"	2.91 m	9'7"
Fuel Tank Capacity	284 L	75 U.S. gal	284 L	75 U.S. gal	284 L	75 U.S. gal

\*Operating Weight — based on standard machine configuration with full fuel tank, coolant, lubricants and operator.

\*\*Minimum Turning Radius — combining the use of articulated frame steering, front wheel steer and unlocked differential.

\*\*\*Height (stripped top) — without ROPS, exhaust, seat back or other easily removed encumbrances.

◀ Applicable for the standard blade with hydraulic sideshift and tip control. Maximum shoulder reach is obtainable to the right.

▲ Power is automatically increased in gears 4F-8F and 3R-6R.

▶ 3116 DITA with optional VHP arrangement.

▼ Includes optional rear ripper.



MODEL	140H		143H		160H		163H	
Net Flywheel Power	123 kW	165 hp	123 kW	165 hp	134 kW	180 hp	134 kW	180 hp
Variable horsepower: Gears 4-8▲	138 kW	185 hp	138 kW	185 hp	149 kW	200 hp	149 kW	200 hp
Operating Weight*	14 724 kg	32,460 lb	15 023 kg	33,120 lb	15 586 kg	34,360 lb	16 538 kg	36,460 lb
Engine Model	3306 DIT		3306 DIT		3306 DIT▶		3306 DITA	
Rated Engine RPM	1900		1900		1900		1900	
No. of Cylinders	6		6		6		6	
Displacement	10.45 L	638 in <sup>3</sup>	10.45 L	638 in <sup>3</sup>	10.45 L	638 in <sup>3</sup>	10.45 L	638 in <sup>3</sup>
Max. Torque Rise	30%		30%		30%		33.5%	
No. of Speeds Forward/Reverse	8/6		8/6		8/6		8/6	
Top Speed: Forward	41.1 km/h	25.5 mph	41.1 km/h	25.5 mph	40.7 km/h	25.3 mph	40.7 km/h	25.3 mph
Reverse	32.4 km/h	20.2 mph	32.4 km/h	20.2 mph	32.1 km/h	20.0 mph	32.1 km/h	20.0 mph
Std. Tires — Front & Rear	14.00-24 (10 PR) (G-2)		14.00-24 (10 PR) (G-2)		14.00-24 (12 PR) (G-2)		14.00-24 (12 PR) (G-2)	
Front Axle/Steering:								
Oscillation Angle	32°		32°		32°		32°	
Wheel Lean Angle	18°		18°		18°		18°	
Steering Angle	50°		50°		50°		50°	
Articulation Angle	20°		20°		20°		20°	
Minimum Turning Radius**	7.4 m	24'3"	7.4 m	24'3"	7.4 m	24'3"	7.4 m	24'3"
Front Frame Section Modulus:								
Min.	2083 cm <sup>3</sup>	127 in <sup>3</sup>	2083 cm <sup>3</sup>	127 in <sup>3</sup>	2083 cm <sup>3</sup>	127 in <sup>3</sup>	2083 cm <sup>3</sup>	127 in <sup>3</sup>
Max.	4785 cm <sup>3</sup>	291 in <sup>3</sup>	4785 cm <sup>3</sup>	291 in <sup>3</sup>	4785 cm <sup>3</sup>	291 in <sup>3</sup>	4785 cm <sup>3</sup>	291 in <sup>3</sup>
No. Circle Support Shoes	6		6		6		6	
Hydraulics: Pump Type	Axial Piston		Axial Piston		Axial Piston		Axial Piston	
Max. Pump Flow	206 L/min	54.4 gpm	206 L/min	54.4 gpm	206 L/min	54.4 gpm	206 L/min	54.4 gpm
System Capacity	80 L	20.8 U.S. gal	98 L	25.5 U.S. gal	80 L	20.8 U.S. gal	98 L	25.5 U.S. gal
Implement Pressure: Max.	24 150 kPa	3500 psi	24 150 kPa	3500 psi	24 150 kPa	3500 psi	24 150 kPa	3500 psi
Min.	3100 kPa	450 psi	3100 kPa	450 psi	3100 kPa	450 psi	3100 kPa	450 psi
Interior Sound Level/SAE J919	75 dBA		77 dBA		75 dBA		77 dBA	
Electrical:								
System Size	24V		24V		24V		24V	
Std. Battery CCA @ 0° F	750		950		750		950	
Std. Alternator	50 amp		50 amp		50 amp		50 amp	
GENERAL DIMENSIONS:								
Height (to top of ROPS)	3.12 m	10'3"	3.12 m	10'3"	3.12 m	10'3"	3.12 m	10'3"
Height (stripped top)***	3.04 m	10'0"	3.04 m	10'0"	3.04 m	10'0"	3.04 m	10'0"
Overall Length	8.60 m	28'3"	8.60 m	28'3"	8.60 m	28'3"	8.60 m	28'3"
With Ripper & Pushplate	10.01 m	32'10"	10.01 m	32'10"	10.01 m	32'10"	10.01 m	32'10"
Wheelbase	6.09 m	20'0"	6.09 m	20'0"	6.09 m	20'0"	6.09 m	20'0"
Blade Base	2.57 m	8'5"	2.57 m	8'5"	2.52 m	8'3"	2.52 m	8'3"
Overall Width (at top of front tires)	2.46 m	8'1"	2.55 m	8'5"	2.48 m	8'2"	2.55 m	8'5"
Standard Blade: Length	3.66 m	12'0"	3.66 m	12'0"	4.27 m	14'0"	4.27 m	14'0"
Height	610 mm	2'0"	610 mm	2'0"	686 mm	2'3"	686 mm	2'3"
Thickness	22 mm	0.87"	22 mm	0.87"	25 mm	1"	25 mm	1"
Lift Above Ground	480 mm	18.9"	480 mm	18.9"	452 mm	17.8"	452 mm	17.8"
Max. Shoulder Reach:◀								
Frame Straight	1.97 m	6'6"	1.97 m	6'6"	1.96 m	6'5"	1.96 m	6'5"
Articulated Position	2.91 m	9'7"	2.91 m	9'7"	2.90 m	9'6"	2.90 m	9'6"
Fuel Tank Capacity	341 L	90 U.S. gal	341 L	90 U.S. gal	341 L	90 U.S. gal	341 L	90 U.S. gal

\*Operating Weight — based on standard machine configuration with full fuel tank, coolant, lubricants and operator.

\*\*Minimum Turning Radius — combining the use of articulated frame steering, front wheel steer and unlocked differential.

\*\*\*Height (stripped top) — without ROPS, exhaust, seat back or other easily removed encumbrances.

◀ Applicable for the standard blade with hydraulic sideshift and tip control. Maximum shoulder reach is obtainable to the right.

▲ Power is automatically increased in gears 4F-8F and 3R-6R.

▶ 3306 DITA when equipped with optional VHP arrangement.



MODEL	14H		16H		24H	
Net Flywheel Power	160 kW	215 hp	205 kW	275 hp	373 kW	500 hp
Operating Weight*	18 784 kg	41,410 lb	24 748 kg	54,560 lb	61 950 kg	136,610 lb
Engine Model	3306 DITA		3406 DITA		3412E HEUI	
Rated Engine RPM	1850		1850		2000	
No. of Cylinders	6		6		12	
Displacement	10.45 L	638 in <sup>3</sup>	14.6 L	893 in <sup>3</sup>	27.0 L	1647 in <sup>3</sup>
Max. Torque Rise	30%		30%		30%	
No. of Speeds Forward/Reverse	8/8		8/8		6/3	
Top Speed: Forward	42.7 km/h	26.5 mph	44.5 km/h	27.7 mph	37.7 km/h	23.4 mph
Reverse	47.3 km/h	29.4 mph	42.3 km/h	26.3 mph	36.1 km/h	22.4 mph
Std. Tires — Front & Rear	16.00-24 (12 PR) (G-2)		18.00-25 (12 PR) (E-2)		29.5-29	
Front Axle/Steering:						
Oscillation Angle	32°		32°		32°	
Wheel Lean Angle	18°		18°		18°	
Steering Angle	50°		50°		50°	
Articulation Angle	20°		20°		25°	
Minimum Turning Radius**	7.9 m	25'11"	8.2 m	27'0"	12.0 m	39'11"
Front Frame Section Modulus:						
Min.	2649 cm <sup>3</sup>	162 in <sup>3</sup>	3746 cm <sup>3</sup>	228 in <sup>3</sup>	9655 cm <sup>3</sup>	589 in <sup>3</sup>
Max.	5091 cm <sup>3</sup>	310 in <sup>3</sup>	8057 cm <sup>3</sup>	491 in <sup>3</sup>	22 490 cm <sup>3</sup>	1372 in <sup>3</sup>
No. Circle Support Shoes	6		6		8	
Hydraulics: Pump Type	Axial Piston		Axial Piston		Axial Piston	
Max. Pump Flow	243 L/min	64.1 gpm	243 L/min	64.1 gpm	508 L/min	134 gpm
System Capacity	125 L	32.5 U.S. gal	130 L	33.8 U.S. gal	250 L	65 U.S. gal
Implement Pressure: Max.	24 150 kPa	3500 psi	24 150 kPa	3500 psi	24 150 kPa	3500 psi
Min.	3100 kPa	450 psi	3100 kPa	450 psi	3100 kPa	450 psi
Interior Sound Level/SAE J919	80 dBA		80 dBA		75 dBA	
Electrical:						
System Size	24V		24V		24V	
Std. Battery CCA @ 0° F	950		1300		1300	
Std. Alternator	50 amp		50 amp		100 amp	
GENERAL DIMENSIONS:						
Height (to top of ROPS)	3.34 m	10'11"	3.52 m	11'7"	4.35 m	14'3"
Height (stripped top)***	2.85 m	9'4"	3.11 m	10'2"	—	—
Overall Length	9.21 m	30'2"	9.99 m	32'9"	14.16 m	46'6"
With Ripper & Pushplate	10.67 m	35'0"	11.62 m	38'2"	15.80 m	51'10"
Wheelbase	6.46 m	21'2"	6.96 m	22'10"	10.23 m	33'7"
Blade Base	2.86 m	9'5"	3.07 m	10'1"	4.08 m	13'4"
Overall Width (at top of front tires)	2.82 m	9'3"	3.08 m	10'1"	4.23 m	13'8"▲
Standard Blade: Length	4.27 m	14'0"	4.88 m	16'0"	7.32 m	24'0"
Height	686 mm	2'3"	787 mm	2'7"	1067 mm	3'6"
Thickness	25 mm	1"	25 mm	1"	51 mm	2"
Lift Above Ground	419 mm	16.5"	419 mm	16.5"	634 mm	25"
Max. Shoulder Reach:◀						
Frame Straight	2.08 m	6'10"	2.31 m	7'7"	3.22 m	10'7"
Articulated Position	3.07 m	10'1"	3.37 m	11'1"	5.05 m	16'7"
Fuel Tank Capacity	379 L	100 U.S. gal	492 L	130 U.S. gal	1207 L	319 U.S. gal

\*Operating Weight — based on standard machine configuration with full fuel tank, coolant, lubricants and operator. 24H includes ripper.

\*\*Minimum Turning Radius — combining the use of articulated frame steering, front wheel steer and unlocked differential.

\*\*\*Height (stripped top) — without ROPS, exhaust, seat back or other easily removed encumbrances.

◀ Applicable for the standard blade with hydraulic sideshift and tip control. Maximum shoulder reach is obtainable to the right on 14H, both sides on 16H.

▲ Overall width with optional rear fenders 4.22 m (13'10").



MODEL	120H		12H		140H		160H	
Net Flywheel Power: Gears 4-8	104 kW	<b>140 hp</b>	104 kW	<b>140 hp</b>	138 kW	<b>185 hp</b>	149 kW	<b>200 hp</b>
Gears 1-3▲	93 kW	<b>125 hp</b>	—	—	123 kW	<b>165 hp</b>	134 kW	<b>180 hp</b>
Operating Weight*	12 519 kg	<b>27,600 lb</b>	14 248 kg	<b>31,410 lb</b>	14 724 kg	<b>32,460 lb</b>	15 586 kg	<b>34,360 lb</b>
Engine Model	<b>3116 DITA</b>		<b>3306 DIT</b>		<b>3306 DIT</b>		<b>3306 DITA</b>	
Rated Engine RPM	<b>2000</b>		<b>1900</b>		<b>1900</b>		<b>1900</b>	
No. of Cylinders	<b>6</b>		<b>6</b>		<b>6</b>		<b>6</b>	
Displacement	6.6 L	<b>403 in<sup>3</sup></b>	10.45 L	<b>638 in<sup>3</sup></b>	10.45 L	<b>638 in<sup>3</sup></b>	10.45 L	<b>638 in<sup>3</sup></b>
Max. Torque Rise	<b>33%</b>		<b>30%</b>		<b>30%</b>		<b>30%</b>	
No. of Speeds Forward/Reverse	<b>8/6</b>		<b>8/6</b>		<b>8/6</b>		<b>8/6</b>	
Top Speed: Forward	42.6 km/h	<b>26.5 mph</b>	39.7 km/h	<b>24.7 mph</b>	41.1 km/h	<b>25.5 mph</b>	40.7 km/h	<b>25.3 mph</b>
Reverse	33.7 km/h	<b>20.9 mph</b>	31.3 km/h	<b>19.5 mph</b>	32.4 km/h	<b>20.2 mph</b>	32.1 km/h	<b>20.0 mph</b>
Std. Tires — Front & Rear	<b>13.00-24 (10 PR) (G-2)</b>		<b>13.00-24 (10 PR) (G-2)</b>		<b>14.00-24 (10 PR) (G-2)</b>		<b>14.00-24 (12 PR) (G-2)</b>	
Front Axle/Steering:								
Oscillation Angle	<b>32°</b>		<b>32°</b>		<b>32°</b>		<b>32°</b>	
Wheel Lean Angle	<b>18°</b>		<b>18°</b>		<b>18°</b>		<b>18°</b>	
Steering Angle	<b>50°</b>		<b>50°</b>		<b>50°</b>		<b>50°</b>	
Articulation Angle	<b>20°</b>		<b>20°</b>		<b>20°</b>		<b>20°</b>	
Minimum Turning Radius**	7.2 m	<b>23'8"</b>	7.4 m	<b>24'3"</b>	7.4 m	<b>24'3"</b>	7.4 m	<b>24'3"</b>
Front Frame Section Modulus:								
Min.	1619 cm <sup>3</sup>	<b>99 in<sup>3</sup></b>	2083 cm <sup>3</sup>	<b>127 in<sup>3</sup></b>	2083 cm <sup>3</sup>	<b>127 in<sup>3</sup></b>	2083 cm <sup>3</sup>	<b>127 in<sup>3</sup></b>
Max.	3681 cm <sup>3</sup>	<b>225 in<sup>3</sup></b>	4785 cm <sup>3</sup>	<b>291 in<sup>3</sup></b>	4785 cm <sup>3</sup>	<b>291 in<sup>3</sup></b>	4785 cm <sup>3</sup>	<b>291 in<sup>3</sup></b>
No. Circle Support Shoes	<b>4</b>		<b>6</b>		<b>6</b>		<b>6</b>	
Hydraulics: Pump Type	<b>Axial Piston</b>		<b>Axial Piston</b>		<b>Axial Piston</b>		<b>Axial Piston</b>	
Max. Pump Flow	148 L/min	<b>39 gpm</b>	206 L/min	<b>54.4 gpm</b>	206 L/min	<b>54.4 gpm</b>	206 L/min	<b>54.4 gpm</b>
System Capacity	68 L	<b>17.7 U.S. gal</b>	80 L	<b>20.8 U.S. gal</b>	80 L	<b>20.8 U.S. gal</b>	80 L	<b>20.8 U.S. gal</b>
Implement Pressure: Max.	24 150 kPa	<b>3500 psi</b>	24 150 kPa	<b>3500 psi</b>	24 150 kPa	<b>3500 psi</b>	24 150 kPa	<b>3500 psi</b>
Min.	3100 kPa	<b>450 psi</b>	3100 kPa	<b>450 psi</b>	3100 kPa	<b>450 psi</b>	3100 kPa	<b>450 psi</b>
Interior Sound Level/ISO 6394	<b>77 dBA</b>		<b>77 dBA</b>		<b>77 dBA</b>		<b>77 dBA</b>	
Electrical:								
System Size	<b>24V</b>		<b>24V</b>		<b>24V</b>		<b>24V</b>	
Std. Battery CCA @ 0° F	<b>950</b>		<b>950</b>		<b>950</b>		<b>950</b>	
Std. Alternator	<b>50 amp</b>		<b>50 amp</b>		<b>50 amp</b>		<b>50 amp</b>	
GENERAL DIMENSIONS:								
Height (to top of ROPS)	3.11 m	<b>10'2"</b>	3.11 m	<b>10'2"</b>	3.12 m	<b>10'3"</b>	3.12 m	<b>10'3"</b>
Height (stripped top)***	2.91 m	<b>9'7"</b>	3.04 m	<b>10'0"</b>	3.04 m	<b>10'0"</b>	3.04 m	<b>10'0"</b>
Overall Length	8.26 m	<b>27'1"</b>	8.57 m	<b>28'1"</b>	8.60 m	<b>28'3"</b>	8.60 m	<b>28'3"</b>
With Ripper & Pushplate	9.76 m	<b>32'0"</b>	10.01 m	<b>32'10"</b>	10.01 m	<b>32'10"</b>	10.01 m	<b>32'10"</b>
Wheelbase	5.87 m	<b>19'3"</b>	6.09 m	<b>20'0"</b>	6.09 m	<b>20'0"</b>	6.09 m	<b>20'0"</b>
Blade Base	2.60 m	<b>8'6"</b>	2.57 m	<b>8'5"</b>	2.57 m	<b>8'5"</b>	2.52 m	<b>8'3"</b>
Overall Width (at top of front tires)	2.44 m	<b>8'0"</b>	2.44 m	<b>8'0"</b>	2.46 m	<b>8'1"</b>	2.48 m	<b>8'2"</b>
Standard Blade: Length	3.66 m	<b>12'0"</b>	3.66 m	<b>12'0"</b>	3.66 m	<b>12'0"</b>	4.27 m	<b>14'0"</b>
Height	610 mm	<b>2'0"</b>	610 mm	<b>2'0"</b>	610 mm	<b>2'0"</b>	686 mm	<b>2'3"</b>
Thickness	22 mm	<b>0.87"</b>	22 mm	<b>0.87"</b>	22 mm	<b>0.87"</b>	25 mm	<b>1"</b>
Lift Above Ground	457 mm	<b>18"</b>	480 mm	<b>18.9"</b>	480 mm	<b>18.9"</b>	452 mm	<b>17.8"</b>
Max. Shoulder Reach:◀								
Frame Straight	1.91 m	<b>6'3"</b>	1.97 m	<b>6'6"</b>	1.97 m	<b>6'6"</b>	1.96 m	<b>6'5"</b>
Articulated Position	2.85 m	<b>9'4"</b>	2.91 m	<b>9'7"</b>	2.91 m	<b>9'7"</b>	2.90 m	<b>9'6"</b>
Fuel Tank Capacity	284 L	<b>75 U.S. gal</b>	284 L	<b>75 U.S. gal</b>	341 L	<b>90 U.S. gal</b>	341 L	<b>90 U.S. gal</b>

\*Operating Weight — based on standard machine configuration with full fuel tank, coolant, lubricants and operator.

\*\*Minimum turning radius — combined use of frame articulation, front wheel steer and unlocked differential.

\*\*\*Height (stripped top) — without ROPS, exhaust, seat back or other easily removed encumbrances.

◀ Applicable for the standard blade with hydraulic sideshift and tip control. Maximum shoulder reach is obtainable to the right.

▲ Engine Power Management automatically reduces power in gears 1F-3F and 1R-2R.

# Motor Graders

- Travel Speeds (All Versions)
- All Wheel Drive
- M10 Scarifiers

## TRAVEL SPEEDS @ RATED RPM WITH STD. TIRES (ALL VERSIONS)

Gear		1		2		3		4		5		6		7		8	
		km/h	mph	km/h	mph	km/h	mph	km/h	mph	km/h	mph	km/h	mph	km/h	mph	km/h	mph
120H	Forward	3.6	2.3	5.0	3.1	7.2	4.5	9.9	6.2	15.6	9.7	21.3	13.2	29.3	18.2	42.6	26.5
	Reverse	2.9	1.8	5.4	3.4	7.8	4.9	12.3	7.7	23.1	14.4	33.7	20.9	—	—	—	—
135H	Forward	3.6	2.3	4.9	3.1	7.2	4.5	9.9	6.2	15.4	9.6	20.9	13.0	28.8	17.9	41.9	26.0
	Reverse	2.9	1.8	5.4	3.3	7.8	4.9	12.2	7.6	23.0	14.3	33.1	20.6	—	—	—	—
12H*	Forward	3.4	2.1	4.6	2.9	6.7	4.2	9.2	5.7	14.6	9.0	19.8	12.3	27.3	17.0	39.7	24.7
	Reverse	2.7	1.7	5.0	3.1	7.3	4.5	11.5	7.2	21.6	13.4	31.3	19.5	—	—	—	—
140H	Forward	3.5	2.2	4.8	3.0	7.0	4.3	9.6	6.0	15.1	9.4	20.5	12.8	28.3	17.6	41.1	25.5
	Reverse	2.8	1.7	5.2	3.2	7.6	4.7	11.9	7.4	22.3	13.9	32.4	20.2	—	—	—	—
143H	Forward	3.5	2.2	4.8	3.0	7.0	4.3	9.6	6.0	15.1	9.4	20.5	12.8	28.3	17.6	41.1	25.5
	Reverse	2.8	1.7	5.2	3.2	7.6	4.7	11.9	7.4	22.3	13.9	32.4	20.2	—	—	—	—
160H	Forward	3.5	2.2	4.8	3.0	7.0	4.3	9.6	6.0	15.0	9.3	20.3	12.6	28.0	17.4	40.7	25.3
	Reverse	2.8	1.7	5.2	3.2	7.6	4.7	11.8	7.3	22.3	13.9	32.1	20.0	—	—	—	—
163H	Forward	3.5	2.2	4.8	3.0	7.0	4.3	9.6	6.0	15.0	9.3	20.3	12.6	28.0	17.4	40.7	25.3
	Reverse	2.8	1.7	5.2	3.2	7.6	4.7	11.8	7.3	22.3	13.9	32.1	20.0	—	—	—	—
14H	Forward	3.7	2.3	5.3	3.3	7.1	4.4	10.3	6.4	15.5	9.6	21.8	13.5	29.5	18.3	42.7	26.5
	Reverse	4.1	2.6	5.8	3.6	7.9	4.9	11.4	7.1	17.7	10.7	24.1	15.0	32.7	20.3	47.3	29.4
16H	Forward	3.9	2.4	5.5	3.4	7.4	4.6	10.7	6.7	16.2	10.1	22.7	14.1	30.8	19.1	44.5	27.7
	Reverse	3.7	2.3	5.2	3.2	7.0	4.4	10.2	6.3	15.4	9.6	21.6	13.4	29.2	18.2	42.3	26.3
24H Wide-based tires	Forward	3.2	2.0	4.9	3.1	8.5	5.3	13.1	8.1	24.3	15.1	37.7	23.4	—	—	—	—
	Reverse	4.7	2.9	12.6	7.8	36.1	22.4	—	—	—	—	—	—	—	—	—	—

\*For 12H Standard Version travel speeds, multiply by 1.05.

### ALL WHEEL DRIVE (AWD)

	143H		163H	
Power with AWD engaged	138 kW	185 hp	149 kW	200 hp
Working Range:				
Forward Gears	1-7		1-7	
Reverse Gears	1-5		1-5	
Pump Type	Axial Piston		Axial Piston	
System Capacity	175 L/min	46.2 gpm	175 L/min	46.2 gpm
Operating Pressure: Max.	35 000 kPa	5080 psi	35 000 kPa	5080 psi
Min.	5500 kPa	800 psi	5500 kPa	800 psi

### M10 — MOUNTED SCARIFIERS

#### 120H, 135H, 12H, 140H, 143H, 160H, 163H

Type	V		Straight*	
Working Width	1184 mm	46.6"	1800 mm	71"
Depth (Max.)	292 mm	11.5"	317 mm	12.5"
Number of Shank Holders	11		17	
Spacing	116 mm	4.6"	111 mm	4.38"

\*Available on NA Versions only.

MOTOR GRADER/ RIPPER	120H/135H†		12H/140H/143H/ 160H/163H		14H		16H		24H		
Parallelogram — Rear Mounted	Ripper		Ripper/Scarifier		Ripper		Ripper		Ripper		
Tire Size (std.) Front & Rear	13.00-24		14.00-24***		16.00-24		18.00-25		29.5-29		
Dimensions:											
<b>Scarifier</b>											
Maximum digging depth	—		411 mm	16.2"	—		—		—		
Number of pockets	—		9		—		—		—		
Spacing	—		267 mm	10.5"	—		—		—		
<b>Ripper Shank</b>											
Maximum digging depth	262 mm	10.3"	462 mm	18.2"	401 mm	15.8"	452 mm	17.8"	490 mm	17.3"	
Maximum reach at ground line*	1034 mm	3'4.7"	1168 mm	3'10"	1380 mm	4'6.3"	1500 mm	4'11"	1165 mm	3'9.9"	
Maximum ground clearance under tip (shank pinned in bottom hole)	652 mm	2'1.6"	521 mm	1'8.5"	663 mm	2'2.1"	673 mm	2'2.5"	739 mm	2'5.1"	
Maximum ramp angle, ripper up (shank pinned in bottom hole)	23°		23°		21°		21°		20°		
Shank Section	36 x 76 mm 1.4" x 3.0"		61 x 140 mm 2.4" x 5.5"		61 x 140 mm 2.4" x 5.5"		76 x 178 mm 3" x 7"		78 x 178 mm 3" x 7"		
<b>Ripper Beam</b>											
Overall Width	2.30 m	7'7"	2.30 m	7'7"	2.60 m	8'6"	2.98 m	9'9"	3.91 m	12'10"	
Height	152 mm	6"	152 mm	6"	165 mm	6.5"	214 mm	8.4"	216 mm	8.5"	
Length	182 mm	7.2"	229 mm	9"	211 mm	8.3"	254 mm	10"	254 mm	10"	
Number of Pockets	5		5		7		7		7		
Pocket Spacing:											
Inside	533 mm	1'9"	533 mm	1'9"	472 mm	1'7"	500 mm	1'8"	593 mm	1'11.4"	
Middle	533 mm	1'9"	533 mm	1'9"	373 mm	15"	445 mm	17.5"	604 mm	1'11.8"	
Outside	533 mm	1'9"	533 mm	1'9"	373 mm	15"	445 mm	17.5"	604 mm	1'11.8"	
Shank Gauge	2.13 m	7'0"	2.13 m	7'0"	2.44 m	8'0"	—		—		
Installed weights:											
Ripper with standard shank	613 kg	1350 lb	1060.5 kg	2336 lb	1542 kg	3399 lb	2177 kg	4799 lb	2812 kg	6186 lb	
Each additional shank	11 kg	24 lb	31 kg	68 lb	31 kg	68 lb	68 kg	150 lb	68 kg	150 lb	
<b>Ripper Forces ◀</b>											
Penetration Force ◀	4343 kg	9566 lb	8047 kg**	17,740 lb**	10 676 kg	23,541 lb	10 163 kg	22,410 lb	117 720 N	39,987 lb	
Pryout Force	2279 kg	5020 lb	9281 kg	20,460 lb	11 804 kg	26,028 lb	15 323 kg	33,788 lb	263 880 N	59,373 lb	

\*Measured from mounting face on frame.

\*\*Applies to 12H, 140H and 143H. Penetration force for 160H and 163H is 8518 kg (18,780 lb).

\*\*\*12H std. tire is 13.00-24.

†Available on Standard and ES Versions only.

NOTE: See Section 1 for Ripper Tips.

◀This value may vary slightly with various vehicle configurations.



**PRODUCTION**

The motor grader is used in a variety of applications in a variety of industries. Therefore, there are many ways to measure its operating capacity, or production. One method expresses a motor grader’s production in relation to the area covered by the moldboard.

**Formula:**

$$A = S \times (L_e - L_o) \times 1000 \times E \text{ (Metric)}$$

$$A = S \times (L_e - L_o) \times 5280 \times E \text{ (English)}$$

- where A: Hourly operating area (m<sup>2</sup>/h or ft<sup>2</sup>/h)  
 S: Operating speed (km/h or mph)  
 L<sub>e</sub>: Effective blade length (m or ft)  
 L<sub>o</sub>: Width of overlap (m or ft)  
 E: Job efficiency

**Operating Speeds:**


Typical operating speeds by application

Finish Grading:	0-4 km/h	(0-2.5 mph)
Heavy Blading:	0-9 km/h	(0-6 mph)
Ditch Repair:	0-5 km/h	(0-3 mph)
Ripping:	0-5 km/h	(0-3 mph)
Road Maintenance:	5-16 km/h	(3-9.5 mph)
Haul Road Maintenance:	5-16 km/h	(3-9.5 mph)
Snow Plowing:	7-21 km/h	(4-13 mph)
Snow Winging:	15-28 km/h	(9-17 mph)

**Effective Blade Length:**

Since the moldboard is usually angled when moving material, an effective blade length must be computed to account for this angle. This is the actual width of material swept by the moldboard.

**Note:** Angles are measured as shown below. The effective length becomes shorter as the angle increases.

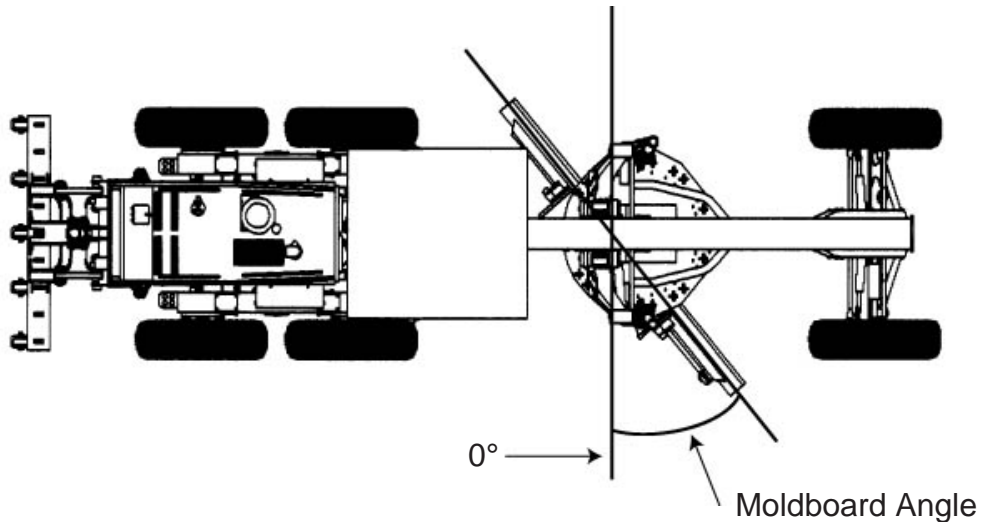

Moldboard Length, m (ft)	Effective Length, m (ft) 30 degree blade angle	Effective Length, m (ft) 45 degree blade angle
3.658 (12)	3.17 (10.4)	2.59 (8.5)
3.962 (13)	3.43 (11.3)	2.80 (9.2)
4.267 (14)	3.70 (12.1)	3.02 (9.9)
4.877 (16)	4.22 (13.9)	3.45 (11.3)
7.315 (24)	6.33 (20.8)	5.17 (17.0)

For other blade lengths and carry angles:  
Effective length = Blade length  $\times$  SIN (angle)

### Width of Overlap:

The width of overlap is generally 0.6 m (2.0 ft). This overlap accounts for the need to keep the tires out of the windrow on the return pass.

### Job Efficiency:

Job efficiencies vary based on job conditions, operator skill, etc.

A good estimation for efficiency is approximately 0.70 to 0.85, but actual operating conditions should be used to determine the best value.

### Example problem:

A 140H motor grader with a 3.66 m (12 ft) moldboard is performing road maintenance on a township road. The machine is working at an average speed of 13 km/h (8 mph) with a moldboard carry angle of 60 degrees. What is the motor grader's production based on coverage area?

**Note:** Due to the long passes involved in road maintenance — fewer turnarounds — a higher job efficiency of 0.90 is chosen.

### Solution:

From the table, the effective blade length is 3.17 m (10.4 ft).

### Metric

$$\begin{aligned} \text{Production, A} &= 13 \text{ km/h} \times (3.17 \text{ m} - 0.6 \text{ m}) \times \\ &\quad 1000 \times 0.90 \\ &= \mathbf{30\,069 \text{ m}^2/\text{hr} (3.07 \text{ hectares/hr})} \end{aligned}$$

### English

$$\begin{aligned} \text{Production, A} &= 8 \text{ mph} \times (10.4 \text{ ft} - 2.0 \text{ ft}) \times \\ &\quad 5280 \times 0.90 \\ &= \mathbf{319,334 \text{ ft}^2/\text{hr} (7.33 \text{ acres/hr})} \end{aligned}$$

Figure 1

MOTOR GRADER COMPARISON in HAUL ROAD MAINTENANCE					Worksheet Variables		
	Moderate	Difficult	Moderate	Difficult	Application Variables		
Motor Grader Model	Cat 16H	Cat 16H	Cat 24H	Cat 24H	Pass Overlap Width (m)	Moldboard Angle	Road Width (m)
Haul Road Length Maintained (meters)	1000	1000	1000	1000	2	36	35
Haul Road Width (meters)	35	35	35	35			
Motor Grader Blade Width (meters)	4.9	4.9	7.3	7.3			
Blade Carry Angle	36	36	36	36			
1st Pass Blade Coverage (meters)	3.9	4.0	5.9	5.9			
Remaining Passes Blade Coverage (meters)	1.9	2.0	3.9	3.9			
Grader Passes Required/Road Width	16	16	7	7			
Maintenance Transmission Gear	3	3	3	3			
Maintenance Speed (kph)	9.0	6.0	10.0	7.0			
<b>Time Analysis:</b>							
Time/Pass (minutes)	6.67	10.00	6.00	8.57			
Maneuver Time/Pass (minutes)	0.50	0.50	0.50	0.50			
Total Time/Pass (minutes)	7.17	10.50	6.50	9.07			
Total Time to Grade Haul Road (hours)	1.91	2.80	0.76	1.06			
Total Time to Grade 1 Km. (50-min. hour)	2.29	3.36	0.91	1.27			
<b>Road Coverage Requirements</b>							
<b>Coverage Requirement:</b>					<b>Frequency of Maintenance</b>	<b>Percentage</b>	
Total Kms. of Haul Roads	30	30	30	30	Total Kms. of Haul Roads	30	
% Graded One Time Per 14 Shifts (1 week)	10%	10%	10%	10%	Weekly	10%	
% Graded One Time Per 4 Shifts (2 days)	30%	30%	30%	30%	Every other day	30%	
% Graded One Time Per 2 Shifts (1 day)	15%	15%	15%	15%	Daily	15%	
% Graded One Time Per Shift	25%	25%	25%	25%	Once per shift	25%	
% Graded Two Times Per Shift	20%	20%	20%	20%	Twice per shift	20%	
% Graded Three Times Per Shift	0%	0%	0%	0%	Three times per shift	0%	
Total Kms. of Haul Roads/Shift	24.2	24.2	24.2	24.2	Total — must equal 100%	100%	
Working Hours Per Shift	11	11	11	11			
Kms. of Road/Grader/Shift	4.79	3.27	12.08	8.66			
<b>Fleet Requirement:</b>							
“Working” Motor Graders Required/Shift	5.1 to 7.4		2.0 to 2.8				
Motor Grader Mechanical Availability	90%	90%	90%	90%			
Motor Grader Fleet Required (units)	5.6 to 8.2		2.2 to 3.1				

**NOTE:** The above numbers are generated from the formulas and inputs in figure 2. This is the finished spreadsheet’s output when set up according to figure 2.

Figure 2

MOTOR GRADER COMPARISON in HAUL ROAD MAINTENANCE		Worksheet Variables		
	Moderate	Application Variables		
	Cat 16H	Pass Overlap Width (m)	Moldboard Angle	Road Width (m)
Motor Grader Model				
Haul Road Length Maintained (meters)	1000			
Haul Road Width (meters)	=M\$8	2	36	35
Motor Grader Blade Width (meters)	4.88			
Blade Carry Angle	=L\$8			
1st Pass Blade Coverage (meters)	=COS(RADIANS(B10))*B9			
Remaining Passes Blade Coverage (meters)	=B11-\$J\$8			
Grader Passes Required/Road Width	=ROUND((B8-B11)/B12,0)			
Maintenance Transmission Gear	3			
Maintenance Speed (kph)	9			
<b>Time Analysis:</b>				
Time/Pass (minutes)	=(+B7/1000)*(60/B15)			
Maneuver Time/Pass (minutes)	0.5			
Total Time/Pass (minutes)	=SUM(B18:B19)			
Total Time to Grade Haul Road (hours)	=B13*B20/60			
Total Time to Grade 1 Km. (50-min. hour)	=1000/B7*B22/0.833			
		Road Coverage Requirements		
		Frequency of Maintenance	Percentage	
<b>Coverage Requirement:</b>				
Total Kms. of Haul Roads	=M\$28	Total Kms. of Haul Roads	30	
% Graded One Time Per 14 Shifts (1 week)	=M\$29	Weekly	0.1	
% Graded One Time Per 4 Shifts (2 days)	=M\$30	Every other day	0.3	
% Graded One Time Per 2 Shifts (1 day)	=M\$31	Daily	0.15	
% Graded One Time Per Shift	=M\$32	Once per shift	0.25	
% Graded Two Times Per Shift	=M\$33	Twice per shift	0.2	
% Graded Three Times Per Shift	=M\$34	Three times per shift	0	
Total Kms. of Haul Roads/Shift	=(B28*B29*0.0714)+(B28*B30*0.25)+(B28*B31*0.5)+(B28*B32*1)+(B28*B33*2)+(B28*B34*3)	Total — must equal 100%	=SUM(M29:M34)	
Working Hours Per Shift	11			
Kms. of Road/Grader/Shift	=B37/B24			
<b>Fleet Requirement:</b>				
“Working” Motor Graders Required/Shift	=B35/B38			
Motor Grader Mechanical Availability	0.9			
Motor Grader Fleet Required (units)	=B41/B42			

**NOTE:** The formulas in the “Moderate — Cat 16H” column are the same formulas needed for the “Difficult — Cat 16H,” “Moderate — Cat 24H” and “Difficult — Cat 24H” columns.

Input the data from this spreadsheet exactly how you see it here. This will allow you to generate figure 1. If you have any questions or difficulties please contact the Motor Grader Marketing Group at 217-475-4638. If you can receive e-mails Motor Grader Marketing will e-mail you the file containing the spreadsheet.

**BLADE PULL**

This specification is also known as drawbar pull. This spec can be calculated as follows:

Variables:

Rear weight of machine =  $W_r$

Tire traction coefficient =  $T$  (Section 29, look up the table entitled “Coefficient of Traction Factors”)

$$W_r \times T = \text{Blade Pull}$$

Example problem:

Calculate the blade pull for a 140H NA version machine operating in a quarry pit...

$RW = 10,501 \text{ kg}$

$T = .65$

$$10,501 \times 0.65 = 6,825.65$$

**BLADE DOWN PRESSURE**

This spec can be calculated as follows:

Variables:

Blade to front axle length =  $BA$

Wheel base length =  $WB$

Weight on front wheels =  $FW$

Blade down pressure =  $BD$

$$[WB/(WB-BA)] \times FW = BD$$

Example problem:

Calculate the blade down pressure for a 140H NA version machine...

$BA = 2565 \text{ mm}$

$WB = 6086 \text{ mm}$

$FW = 4223 \text{ kg}$

$BD = ?$

$$[6086/(6086-2565)] \times 4223 = 7,299 \text{ kg}$$

This specification is only a minor indicator of a motor grader’s productivity. It alone gives no measure of overall machine productivity. When considering motor grader production you need an optimum balance between the machine’s front and rear weights. If a machine has too much weight on the front axle it might have a high blade down pressure spec, however it will lack the essential rear weight and traction needed to push through the load. Too much weight in the rear and it will not have the necessary weight in the front during heavy cuts to maintain proper steering control.

Caterpillar machines are built with this optimum balance in mind. A Cat motor grader is engineered with the proper weight distribution necessary for maximum productivity.

**Effective Blade Length\***

		Moldboard (ft)			
		12'	14'	16'	24'
Angle°	0°	12.00	14.00	16.00	24.00
	5°	11.95	13.95	15.94	23.91
	10°	11.82	13.79	15.76	23.64
	15°	11.59	13.52	15.45	23.18
	20°	11.28	13.16	15.04	22.55
	25°	10.88	12.69	14.50	21.75
	30°	10.39	12.12	13.86	20.78
	35°	9.83	11.47	13.11	19.66
	40°	9.19	10.72	12.26	18.39
	45°	8.49	9.90	11.31	16.97

\*Effective blade length is the amount of blade coverage the machine is capable of when the blade is at a given angle.

Work Tool	120H	135H	12H	140H	143H	160H	163H	14H	16H
Lift Group	X	X	X	X	X	X	X	X	X
V-Plow	X	X	X	X	X	X	X	X	
One Way Plow	X	X	X	X	X	X	X	X	
Manual Reversible Plow	X	X	X	X	X	X	X	X	
Hydraulic Reversible Plow	X	X	X	X	X	X	X	X	
Snow Wing	X	X	X	X	X	X	X	X	
Scarifier	X	X	X	X	X	X	X	X	X
Manual Angle Blade	X	X	X	X	X	X	X	X	
Hydraulic Angle Blade	X	X	X	X	X	X	X	X	
Straight Blade	X	X	X	X	X	X	X	X	X

This list is not all inclusive. Contact your Caterpillar Dealer for special attachment needs.

**NOTE:** Attachments for Cat H-Series Motor Graders require additional hydraulics. All front-mounted attachments require a Quick Attach-Detach Parallel Lift Group. Contact your Caterpillar Dealer for details.



# SKID STEER LOADERS

## CONTENTS

Features	4-1
Specifications	4-2
Performance data	4-4
Dimensions	4-10
Attachments:	
Augers	4-12
Cold Planers	4-15
Landscape Tillers	4-17
Landscape Rakes	4-19
Trenchers	4-21
Vibratory Compactors	4-23
Brooms	4-25

## Features:

- **Caterpillar 3034 engine** provides high horsepower and torque. Closed circuit breather, glow-plug starting aid, ecology drain and SOS oil sampling ports standard.
- **Ergonomically designed cab** provides maximum operator comfort & visibility.
- **Low-effort**, pilot hydraulic joystick controls, arm-rest & retractable seat belt for easy operation.
- **Deep skid resistant steps** and two tilt cylinders makes egress/ingress easy.
- **Hand and foot throttle** for continuous or variable engine speed.
- **Exclusive anti-stall feature** provides maximum rimpull and hydraulic power while lugging the engine.
- **High hydraulic horsepower** gets work done quickly.
- **Direct drive hystat pumps** eliminate universal joints and belts.
- **Tilt-up cooling package** provides access to engine compartment.
- **Long life coolant** and extended hour service intervals for low operating costs.
- **Single engine belt** drives 55 ampere alternator and water pump.
- **Deutsch connectors** are color coded, numbered and protected with nylon braiding.
- **Electro-depositioned** or “E” coat corrosion protection for long life.





MODEL	216		226		228	
Flywheel Power: Net	37 kW	49 hp	40 kW	54 hp	40 kW	54 hp
Gross	39 kW	52 hp	43 kW	58 hp	43 kW	58 hp
Engine Model	3034		3034		3034	
Rated Engine RPM	2600		2600		2600	
Bore	97 mm	3.8"	97 mm	3.8"	97 mm	3.8"
Stroke	100 mm	3.9"	100 mm	3.9"	100 mm	3.9"
Displacement	3 L	183 in <sup>3</sup>	3 L	183 in <sup>3</sup>	3 L	183 in <sup>3</sup>
No. Cylinders	4		4		4	
Speeds Forward						
Infinite	0-11.1 kph	0-6.9 mph	0-11.1 kph	0-6.9 mph	0-11.1 kph	0-6.9 mph
Speeds Reverse						
Infinite	0-11.1 kph	0-6.9 mph	0-11.1 kph	0-6.9 mph	0-11.1 kph	0-6.9 mph
Hydraulic Cycle Time, Empty Bucket:	<b>Seconds</b>		<b>Seconds</b>		<b>Seconds</b>	
Raise	2.7		2.7		2.7	
Dump	2.0		2.0		2.0	
Lower (Empty, Float Down)	2.8		2.8		2.8	
Total	7.5		7.5		7.5	
Tread Width	1244 mm	4'1"	1244 mm	4'1"	1244 mm	4'1"
Width Over Tires	1525 mm	5'0"	1525 mm	5'0"	1525 mm	5'0"
Ground Clearance	203 mm	8"	203 mm	8"	203 mm	8"
Fuel Tank Capacity	65 L	17 U.S. gal	65 L	17 U.S. gal	65 L	17 U.S. gal
Hydraulic Tank Capacity	35 L	9.2 U.S. gal	35 L	9.2 U.S. gal	35 L	9.2 U.S. gal
Hydraulic System Capacity (includes tank)	55 L	14.5 U.S. gal	55 L	14.5 U.S. gal	55 L	14.5 U.S. gal
Hydraulic System, open center						
Hydraulic Pump Capacity	57.2 L/min	15.1 gpm	57.2 L/min	15.1 gpm	114 L/min	30 gpm



MODEL	236		246		248	
Flywheel Power: Net	44 kW	59 hp	55 kW	74 hp	55 kW	74 hp
Gross	47 kW	63 hp	60 kW	80 hp	60 kW	80 hp
Engine Model	3034		3034T		3034T	
Rated Engine RPM	2600		2600		2600	
Bore	97 mm	3.8"	97 mm	3.8"	97 mm	3.8"
Stroke	100 mm	3.9"	100 mm	3.9"	100 mm	3.9"
Displacement	3 L	183 in <sup>3</sup>	3 L	183 in <sup>3</sup>	3 L	183 in <sup>3</sup>
No. Cylinders	4		4		4	
Speeds Forward						
Infinite	0-12.1 kph	0-7.5 mph	0-12.1 kph	0-7.5 mph	0-12.1 kph	0-7.5 mph
Speeds Reverse						
Infinite	0-12.1 kph	0-7.5 mph	0-12.1 kph	0-7.5 mph	0-12.1 kph	0-7.5 mph
Hydraulic Cycle Time, Empty Bucket:	<b>Seconds</b>		<b>Seconds</b>		<b>Seconds</b>	
Raise	2.8		2.8		2.8	
Dump	2.0		2.0		2.0	
Lower (Empty, Float Down)	2.8		2.8		2.8	
Total	7.6		7.6		7.6	
Tread Width	1514 mm	5'0"	1514 mm	5'0"	1514 mm	5'0"
Width Over Tires	1834 mm	6'0"	1834 mm	6'0"	1834 mm	6'0"
Ground Clearance	243 mm	9.6"	243 mm	9.6"	243 mm	9.6"
Fuel Tank Capacity	90 L	23.8 U.S. gal	90 L	23.8 U.S. gal	90 L	23.8 U.S. gal
Hydraulic Tank Capacity	35 L	9.2 U.S. gal	35 L	9.2 U.S. gal	35 L	9.2 U.S. gal
Hydraulic System Capacity (includes tank)	52 L	13.7 U.S. gal	52 L	13.7 U.S. gal	52 L	13.7 U.S. gal
Hydraulic System, open center						
Hydraulic Pump Capacity	83 L/min	22 gpm	83 L/min	22 gpm	125 L/min	33 gpm

Bucket Type	General Purpose						Multi-Purpose			
	1520 mm (60") 10 x 16.5			1680 mm (66") 10 x 16.5			1520 mm (60") 10 x 16.5			
Bucket Width Tire Size		Holes Only	Bolt-on Edge	Bolt-on Teeth	Holes Only	Bolt-on Edge	Bolt-on Teeth	Holes Only	Bolt-on Edge	
<b>Ground Engaging Type</b>										
Rated bucket capacity	m <sup>3</sup> yd <sup>3</sup>	0.36 <b>0.47</b>	0.37 <b>0.48</b>	0.36 <b>0.47</b>	0.40 <b>0.52</b>	0.41 <b>0.53</b>	0.40 <b>0.52</b>	0.30 <b>0.39</b>	0.31 <b>0.40</b>	
Struck capacity	m <sup>3</sup> yd <sup>3</sup>	0.26 <b>0.34</b>	0.27 <b>0.35</b>	0.26 <b>0.34</b>	0.29 <b>0.38</b>	0.29 <b>0.38</b>	0.29 <b>0.38</b>	0.22 <b>0.29</b>	0.22 <b>0.29</b>	
Width	mm in	1576 <b>62</b>	1586 <b>62</b>	1576 <b>62</b>	1730 <b>68</b>	1740 <b>68</b>	1730 <b>68</b>	1595 <b>62</b>	1595 <b>62</b>	
Dump clearance at maximum lift/dump	mm in	2133 <b>83</b>	2103 <b>82</b>	2069 <b>81</b>	2130 <b>83</b>	2100 <b>82</b>	2066 <b>81</b>	2122 <b>83</b>	2092 <b>82</b>	
Reach at maximum lift/dump	mm in	546 <b>21</b>	557 <b>21</b>	620 <b>24</b>	549 <b>21</b>	560 <b>22</b>	623 <b>24</b>	560 <b>22</b>	571 <b>22</b>	
Floor angle at maximum lift/dump	degrees	<b>39.9°</b>	<b>39.9°</b>	<b>39.9°</b>	<b>40°</b>	<b>40°</b>	<b>40°</b>	<b>40.2°</b>	<b>40.2°</b>	
Floor angle at maximum lift/rack back	degrees	<b>96.7°</b>	<b>96.7°</b>	<b>96.7°</b>	<b>96.5°</b>	<b>96.5°</b>	<b>96.5°</b>	<b>96.4°</b>	<b>96.4°</b>	
Clearance at maximum lift/level bucket	mm in	2658 <b>104</b>	2642 <b>104</b>	2657 <b>104</b>	2656 <b>104</b>	2640 <b>103</b>	2655 <b>104</b>	2655 <b>104</b>	2683 <b>105</b>	
Hinge pin height at maximum lift	mm in	2853 <b>112</b>	2853 <b>112</b>	2853 <b>112</b>	2849 <b>112</b>	2849 <b>112</b>	2849 <b>112</b>	2847 <b>112</b>	2847 <b>112</b>	
Maximum overall height	mm in	3762 <b>148</b>	3790 <b>149</b>	3860 <b>151</b>	3759 <b>147</b>	3787 <b>149</b>	3857 <b>151</b>	3746 <b>147</b>	3774 <b>148</b>	
Reach at level lift arm/bucket	mm in	1333 <b>52</b>	1361 <b>53</b>	1431 <b>56</b>	1335 <b>52</b>	1363 <b>53</b>	1433 <b>56</b>	1346 <b>52</b>	1374 <b>54</b>	
Maximum floor angle at minimum lift	degrees	<b>26.1°</b>	<b>26.1°</b>	<b>26.1°</b>	<b>26°</b>	<b>26°</b>	<b>26°</b>	<b>25.8°</b>	<b>25.8°</b>	
Dig depth with level bucket	mm in	0 <b>0</b>	16 <b>0.63</b>	1 <b>0.04</b>	0 <b>0</b>	16 <b>0.63</b>	1 <b>0.04</b>	0 <b>0</b>	16 <b>0.63</b>	
Overall length with bucket on ground	mm in	3286 <b>129</b>	3314 <b>130</b>	3384 <b>133</b>	3286 <b>129</b>	3314 <b>130</b>	3384 <b>133</b>	3290 <b>129</b>	3318 <b>130</b>	
Front clearance circle radius	mm in	1989 <b>78</b>	2016 <b>79</b>	2079 <b>81</b>	2021 <b>79</b>	2048 <b>80</b>	2110 <b>83</b>	1992 <b>78</b>	2020 <b>79</b>	
Tipping load	216	kg lb	1235 <b>2710</b>	1180 <b>2600</b>	1205 <b>2660</b>	1215 <b>2670</b>	1165 <b>2560</b>	1190 <b>2630</b>	1095 <b>2410</b>	1055 <b>2320</b>
	226	kg lb	1280 <b>2820</b>	1230 <b>2710</b>	1255 <b>2760</b>	1265 <b>2780</b>	1210 <b>2670</b>	1240 <b>2730</b>	1145 <b>2520</b>	1105 <b>2430</b>
	228	kg lb	1340 <b>2950</b>	1290 <b>2840</b>	1315 <b>2890</b>	1320 <b>2910</b>	1270 <b>2800</b>	1300 <b>2860</b>	1200 <b>2640</b>	1160 <b>2550</b>
Breakout force — lift	216	kg lb	1225 <b>2690</b>	1180 <b>2590</b>	1210 <b>2660</b>	1210 <b>2660</b>	1165 <b>2560</b>	1195 <b>2630</b>	1115 <b>2450</b>	1070 <b>2360</b>
	226	kg lb	1340 <b>2950</b>	1295 <b>2850</b>	1325 <b>2910</b>	1330 <b>2920</b>	1280 <b>2810</b>	1310 <b>2890</b>	1230 <b>2710</b>	1190 <b>2610</b>
	228	kg lb	1340 <b>2950</b>	1295 <b>2850</b>	1325 <b>2910</b>	1330 <b>2920</b>	1280 <b>2810</b>	1310 <b>2890</b>	1230 <b>2700</b>	1185 <b>2610</b>
Breakout force — tilt	216	kg lb	1495 <b>3290</b>	1395 <b>3070</b>	1475 <b>3240</b>	1490 <b>3280</b>	1390 <b>3060</b>	1470 <b>3230</b>	1410 <b>3100</b>	1325 <b>2910</b>
	226	kg lb	1615 <b>3560</b>	1515 <b>3330</b>	1595 <b>3510</b>	1610 <b>3540</b>	1505 <b>3320</b>	1590 <b>3500</b>	1530 <b>3360</b>	1440 <b>3160</b>
	228	kg lb	1615 <b>3560</b>	1515 <b>3330</b>	1595 <b>3510</b>	1610 <b>3550</b>	1510 <b>3320</b>	1595 <b>3500</b>	1530 <b>3360</b>	1440 <b>3160</b>
Operating weight	216	kg lb	2580 <b>5670</b>	2610 <b>5740</b>	2600 <b>5710</b>	2600 <b>5710</b>	2630 <b>5780</b>	2610 <b>5740</b>	2710 <b>5960</b>	2740 <b>6030</b>
	226	kg lb	2620 <b>5760</b>	2650 <b>5830</b>	2640 <b>5800</b>	2640 <b>5800</b>	2670 <b>5870</b>	2650 <b>5830</b>	2750 <b>6050</b>	2780 <b>6120</b>
	228	kg lb	2710 <b>5960</b>	2740 <b>6030</b>	2730 <b>6000</b>	2730 <b>6000</b>	2760 <b>6070</b>	2740 <b>6030</b>	2840 <b>6250</b>	2870 <b>6310</b>

Bucket Type		Multi-Purpose				Dirt			
		1680 mm (66") 10 x 16.5				1370 mm (54") 7 x 15		1520 mm (60") 10 x 16.5	
Bucket Width Tire Size		Bolt-on Teeth	Holes Only	Bolt-on Edge	Bolt-on Teeth	Holes Only	Bolt-on Edge	Holes Only	Bolt-on Edge
Ground Engaging Type									
Rated bucket capacity	m <sup>3</sup> yd <sup>3</sup>	0.30 <b>0.39</b>	0.33 <b>0.43</b>	0.34 <b>0.44</b>	0.33 <b>0.43</b>	0.30 <b>0.39</b>	0.31 <b>0.40</b>	0.34 <b>0.44</b>	0.35 <b>0.46</b>
Struck capacity	m <sup>3</sup> yd <sup>3</sup>	0.22 <b>0.29</b>	0.24 <b>0.31</b>	0.24 <b>0.31</b>	0.24 <b>0.31</b>	0.22 <b>0.29</b>	0.23 <b>0.30</b>	0.25 <b>0.33</b>	0.25 <b>0.33</b>
Width	mm in	1595 <b>62</b>	1749 <b>68</b>	1749 <b>68</b>	1749 <b>68</b>	1421 <b>56</b>	1431 <b>56</b>	1576 <b>62</b>	1586 <b>62</b>
Dump clearance at maximum lift/dump	mm in	2058 <b>81</b>	2122 <b>83</b>	2029 <b>79</b>	2058 <b>81</b>	2154 <b>85</b>	2125 <b>83</b>	2169 <b>85</b>	2140 <b>84</b>
Reach at maximum lift/dump	mm in	634 <b>24</b>	560 <b>22</b>	571 <b>22</b>	634 <b>25</b>	523 <b>20</b>	538 <b>21</b>	505 <b>19</b>	520 <b>20</b>
Floor angle at maximum lift/dump	degrees	<b>40.2°</b>	<b>40.2°</b>	<b>40.2°</b>	<b>40.2°</b>	<b>39.9°</b>	<b>39.9°</b>	<b>39.9°</b>	<b>39.9°</b>
Floor angle at maximum lift/rack back	degrees	<b>96.4°</b>	<b>96.4°</b>	<b>96.4°</b>	<b>96.4°</b>	<b>96.7°</b>	<b>96.7°</b>	<b>96.7°</b>	<b>96.7°</b>
Clearance at maximum lift/level bucket	mm in	2654 <b>104</b>	2655 <b>104</b>	2683 <b>105</b>	2654 <b>104</b>	2646 <b>104</b>	2633 <b>103</b>	2661 <b>105</b>	2648 <b>104</b>
Hinge pin height at maximum lift	mm in	2847 <b>112</b>	2847 <b>112</b>	2847 <b>112</b>	2847 <b>112</b>	2838 <b>111</b>	2838 <b>111</b>	2854 <b>112</b>	2854 <b>112</b>
Maximum overall height	mm in	3844 <b>151</b>	3746 <b>147</b>	3774 <b>148</b>	3844 <b>151</b>	3694 <b>145</b>	3724 <b>146</b>	3709 <b>146</b>	3739 <b>147</b>
Reach at level lift arm/bucket	mm in	1444 <b>56</b>	1346 <b>53</b>	1374 <b>54</b>	1444 <b>57</b>	1298 <b>51</b>	1328 <b>52</b>	1280 <b>50</b>	1310 <b>51</b>
Maximum floor angle at minimum lift	degrees	<b>25.8°</b>	<b>25.8°</b>	<b>25.8°</b>	<b>25.8°</b>	<b>26.1°</b>	<b>26.1°</b>	<b>26.1°</b>	<b>26.1°</b>
Dig depth with level bucket	mm in	1 <b>0.04</b>	0 <b>0</b>	16 <b>0.63</b>	1 <b>0.04</b>	0 <b>0</b>	13 <b>0.51</b>	0 <b>0</b>	13 <b>0.51</b>
Overall length with bucket on ground	mm in	3388 <b>133</b>	3290 <b>129</b>	3318 <b>130</b>	3388 <b>133</b>	3233 <b>127</b>	3263 <b>128</b>	3233 <b>127</b>	3263 <b>128</b>
Front clearance circle radius	mm in	2083 <b>82</b>	1992 <b>78</b>	2020 <b>79</b>	2113 <b>83</b>	1910 <b>75</b>	1940 <b>76</b>	1940 <b>76</b>	1970 <b>77</b>
Tipping load	216 kg lb	1080 <b>2370</b>	1075 <b>2360</b>	1010 <b>2220</b>	1055 <b>2320</b>	1285 <b>2830</b>	1250 <b>2750</b>	1320 <b>2900</b>	1270 <b>2790</b>
	226 kg lb	1130 <b>2480</b>	1125 <b>2470</b>	1055 <b>2330</b>	1105 <b>2430</b>	1335 <b>2940</b>	1300 <b>2860</b>	1370 <b>3010</b>	1320 <b>2910</b>
	228 kg lb	1185 <b>2610</b>	1180 <b>2600</b>	1130 <b>2490</b>	1160 <b>2550</b>	1400 <b>3080</b>	1360 <b>2990</b>	1430 <b>3150</b>	1380 <b>3040</b>
Breakout force — lift	216 kg lb	1100 <b>2420</b>	1100 <b>2420</b>	1050 <b>2310</b>	1080 <b>2380</b>	1310 <b>2880</b>	1270 <b>2800</b>	1300 <b>2860</b>	1255 <b>2760</b>
	226 kg lb	1215 <b>2680</b>	1215 <b>2670</b>	1165 <b>2570</b>	1200 <b>2640</b>	1430 <b>3140</b>	1390 <b>3060</b>	1420 <b>3120</b>	1370 <b>3010</b>
	228 kg lb	1215 <b>2670</b>	1215 <b>2670</b>	1165 <b>2560</b>	1195 <b>2630</b>	1430 <b>3140</b>	1390 <b>3060</b>	1415 <b>3120</b>	1370 <b>3010</b>
Breakout force — tilt	216 kg lb	1395 <b>3070</b>	1395 <b>3070</b>	1300 <b>2860</b>	1375 <b>3020</b>	1645 <b>3620</b>	1545 <b>3400</b>	1635 <b>3600</b>	1530 <b>3370</b>
	226 kg lb	1515 <b>3340</b>	1515 <b>3330</b>	1415 <b>3110</b>	1495 <b>3290</b>	1775 <b>3900</b>	1675 <b>3680</b>	1770 <b>3890</b>	1655 <b>3640</b>
	228 kg lb	1515 <b>3340</b>	955 <b>2100</b>	1415 <b>3110</b>	1495 <b>3290</b>	1775 <b>3910</b>	1675 <b>3680</b>	1770 <b>3890</b>	1655 <b>3650</b>
Operating weight	216 kg lb	2730 <b>6000</b>	2730 <b>6000</b>	2760 <b>6070</b>	2745 <b>6040</b>	2450 <b>5380</b>	2470 <b>5430</b>	2520 <b>5540</b>	2550 <b>5610</b>
	226 kg lb	2770 <b>6090</b>	2770 <b>6090</b>	2800 <b>6160</b>	2785 <b>6130</b>	2490 <b>5470</b>	2490 <b>5470</b>	2560 <b>5630</b>	2590 <b>5700</b>
	228 kg lb	2860 <b>6280</b>	2860 <b>6290</b>	2890 <b>6360</b>	2875 <b>6330</b>	2580 <b>5670</b>	2600 <b>5710</b>	2650 <b>5830</b>	2680 <b>5800</b>


Work Tool		Pallet Fork						
		910 mm (36")		1070 mm (42")		1220 mm (48")		
Tine Length		910 mm (36")		1070 mm (42")		1220 mm (48")		
Tire Size		7 x 15	10 x 16.5	7 x 15	10 x 16.5	7 x 15	10 x 16.5	
Carriage overall width without step	mm	1157	1157	1157	1157	1157	1157	
	in	45	45	45	45	45	45	
Carriage step additional width	mm	108	108	108	108	108	108	
	in	4.25	4.25	4.25	4.25	4.25	4.25	
Carriage height above blade top	mm	923	923	923	923	923	923	
	in	36	36	36	36	36	36	
Blade surface height at maximum height	mm	2725	2741	2725	2741	2725	2741	
	in	107	108	107	108	107	108	
Shank front face reach at maximum height	mm	310	290	310	290	310	290	
	in	12	11	12	11	12	11	
Blade surface height at level liftarms	mm	1368	1383	1368	1383	1368	1383	
	in	54	54	54	54	54	54	
Shank front face reach at level liftarms	mm	761	743	761	743	761	743	
	in	30	29	30	29	30	29	
Blade surface height at minimum lift	mm	74	91	74	91	74	91	
	in	2.91	3.58	2.91	3.58	2.91	3.58	
Shank front face reach at minimum lift	mm	362	345	362	345	362	345	
	in	14	13	14	13	14	13	
Overall length at minimum lift, level tine	mm	3602	3602	3762	3762	3912	3912	
	ft/in	11'10"	11'10"	12'4"	12'4"	12'10"	12'10"	
Tipping load (SAE)	216	kg	955	990	900	930	850	880
		lb	2110	2180	1980	2050	1870	1940
	226	kg	995	1030	935	970	885	915
		lb	2190	2265	2060	2130	1950	2020
	228	kg	1050	1080	980	1015	930	960
		lb	2310	2385	2160	2230	2050	2110
Operating weight	216	kg	2505	2560	2515	2575	2525	2580
		lb	5510	5640	5530	5660	5550	5680
	226	kg	2545	2605	2555	2615	2565	2620
		lb	5600	5730	5620	5750	5640	5770
	228	kg	2635	2695	2645	2700	2655	2715
		lb	5800	5930	5820	5950	5840	5970

Bucket Type		General Purpose						Multi-Purpose	
		1680 mm (66") 12 x 16.5			1830 mm (72") 12 x 16.5			1680 mm (66") 12 x 16.5	
Bucket Width Tire Size		Holes Only	Bolt-on Edge	Bolt-on Teeth	Holes Only	Bolt-on Edge	Bolt-on Teeth	Holes Only	Bolt-on Edge
<b>Ground Engaging Type</b>									
Rated bucket capacity	m <sup>3</sup> yd <sup>3</sup>	0.40 <b>0.52</b>	0.40 <b>0.52</b>	0.41 <b>0.53</b>	0.44 <b>0.57</b>	0.44 <b>0.57</b>	0.45 <b>0.59</b>	0.33 <b>0.43</b>	0.33 <b>0.43</b>
Struck capacity	m <sup>3</sup> yd <sup>3</sup>	0.29 <b>0.38</b>	0.29 <b>0.38</b>	0.29 <b>0.38</b>	0.32 <b>0.42</b>	0.32 <b>0.42</b>	0.32 <b>0.42</b>	0.24 <b>0.31</b>	0.25 <b>0.33</b>
Width	mm in	1730 <b>68</b>	1740 <b>68</b>	1730 <b>68</b>	1883 <b>74</b>	1893 <b>75</b>	1883 <b>74</b>	1749 <b>69</b>	1749 <b>69</b>
Dump clearance at maximum lift/dump	mm in	2360 <b>93</b>	2331 <b>92</b>	2299 <b>91</b>	2362 <b>93</b>	2331 <b>92</b>	2298 <b>90</b>	2356 <b>93</b>	2326 <b>92</b>
Reach at maximum lift/dump	mm in	587 <b>23</b>	593 <b>23</b>	655 <b>26</b>	581 <b>22</b>	594 <b>23</b>	656 <b>26</b>	591 <b>23</b>	605 <b>24</b>
Floor angle at maximum lift/dump	degrees	<b>39.9°</b>	<b>39.9°</b>	<b>39.9°</b>	<b>39.9°</b>	<b>39.9°</b>	<b>39.9°</b>	<b>40.1°</b>	<b>40.1°</b>
Floor angle at maximum lift/rack back	degrees	<b>97.3°</b>	<b>97.3°</b>	<b>97.3°</b>	<b>97.3°</b>	<b>97.3°</b>	<b>97.3°</b>	<b>97.2°</b>	<b>97.2°</b>
Clearance at maximum lift/level bucket	mm in	2904 <b>114</b>	2887 <b>113</b>	2902 <b>114</b>	2904 <b>114</b>	2887 <b>113</b>	2902 <b>114</b>	2905 <b>114</b>	2889 <b>113</b>
Hinge pin height at maximum lift	mm in	3098 <b>122</b>	3098 <b>122</b>	3098 <b>122</b>	3098 <b>122</b>	3097 <b>122</b>	3098 <b>122</b>	3096 <b>122</b>	3095 <b>122</b>
Maximum overall height	mm in	4014 <b>158</b>	4042 <b>159</b>	4112 <b>162</b>	4014 <b>158</b>	4042 <b>159</b>	4111 <b>162</b>	4019 <b>158</b>	4046 <b>159</b>
Reach at level lift arm/bucket	mm in	1409 <b>55</b>	1438 <b>56</b>	1507 <b>59</b>	1409 <b>55</b>	1439 <b>56</b>	1508 <b>59</b>	1419 <b>56</b>	1449 <b>57</b>
Maximum floor angle at minimum lift	degrees	<b>27.9°</b>	<b>27.9°</b>	<b>27.9°</b>	<b>27.9°</b>	<b>27.9°</b>	<b>27.9°</b>	<b>27.3°</b>	<b>27.3°</b>
Dig depth with level bucket	mm in	0 <b>0</b>	16 <b>0.63</b>	1 <b>0.04</b>	0 <b>0</b>	16 <b>0.63</b>	1 <b>0.04</b>	0 <b>0</b>	16 <b>0.63</b>
Overall length with bucket on ground	mm in	3568 <b>140</b>	3596 <b>141</b>	3666 <b>144</b>	3568 <b>140</b>	3596 <b>141</b>	3666 <b>144</b>	3572 <b>141</b>	3600 <b>142</b>
Front clearance circle radius	mm in	2134 <b>84</b>	2165 <b>85</b>	2198 <b>86</b>	2166 <b>85</b>	2197 <b>86</b>	2226 <b>88</b>	2136 <b>84</b>	2168 <b>85</b>
Tipping load	236 kg lb	1615 <b>3550</b>	1560 <b>3440</b>	1590 <b>3500</b>	1605 <b>3530</b>	1550 <b>3410</b>	1585 <b>3490</b>	1470 <b>3230</b>	1420 <b>3120</b>
	246 kg lb	1710 <b>3760</b>	1660 <b>3650</b>	1690 <b>3720</b>	1700 <b>3740</b>	1645 <b>3620</b>	1680 <b>3700</b>	1565 <b>3440</b>	1515 <b>3330</b>
	248 kg lb	1795 <b>3950</b>	1745 <b>3830</b>	1775 <b>3900</b>	1790 <b>3930</b>	1730 <b>3810</b>	1765 <b>3890</b>	1650 <b>3630</b>	1600 <b>3520</b>
Breakout force — lift	236 kg lb	1890 <b>4160</b>	1835 <b>4040</b>	1875 <b>4120</b>	1885 <b>4140</b>	1825 <b>4020</b>	1865 <b>4110</b>	1775 <b>3900</b>	1740 <b>3830</b>
	246 kg lb	1890 <b>4150</b>	1835 <b>4030</b>	1870 <b>4120</b>	1880 <b>4140</b>	1825 <b>4010</b>	1865 <b>4105</b>	1770 <b>3900</b>	1720 <b>3780</b>
	248 kg lb	1875 <b>4120</b>	1820 <b>4000</b>	1860 <b>4090</b>	1870 <b>4110</b>	1810 <b>3980</b>	1850 <b>4075</b>	1760 <b>3870</b>	1705 <b>3750</b>
Breakout force — tilt	236 kg lb	2200 <b>4840</b>	2070 <b>4560</b>	2180 <b>4790</b>	2195 <b>4820</b>	2065 <b>4540</b>	2175 <b>4785</b>	2095 <b>4600</b>	1995 <b>4390</b>
	246 kg lb	2200 <b>4840</b>	2075 <b>4560</b>	2180 <b>4800</b>	2195 <b>4830</b>	2065 <b>4550</b>	2175 <b>4790</b>	2095 <b>4600</b>	1975 <b>4340</b>
	248 kg lb	2200 <b>4840</b>	2075 <b>4560</b>	2180 <b>4800</b>	2195 <b>4830</b>	2070 <b>4550</b>	2180 <b>4795</b>	2095 <b>4600</b>	1975 <b>4340</b>
Operating weight	236 kg lb	3160 <b>6955</b>	3195 <b>7030</b>	3180 <b>6990</b>	3170 <b>6970</b>	3205 <b>7050</b>	3185 <b>7010</b>	3295 <b>7250</b>	3330 <b>7320</b>
	246 kg lb	3240 <b>7130</b>	3275 <b>7200</b>	3260 <b>7165</b>	3250 <b>7150</b>	3285 <b>7230</b>	3265 <b>7190</b>	3375 <b>7420</b>	3405 <b>7490</b>
	248 kg lb	3380 <b>7430</b>	3410 <b>7500</b>	3395 <b>7470</b>	3390 <b>7450</b>	3420 <b>7530</b>	3400 <b>7490</b>	3510 <b>7720</b>	3545 <b>7800</b>

Bucket Type		Multi-Purpose				Dirt			
		1830 mm (72") 12 x 16.5				1520 mm (60") 12 x 16.5		1680 mm (66") 12 x 16.5	
Bucket Width Tire Size		Bolt-on Teeth	Holes Only	Bolt-on Edge	Bolt-on Teeth	Holes Only	Bolt-on Edge	Holes Only	Bolt-on Edge
<b>Ground Engaging Type</b>									
Rated bucket capacity	m <sup>3</sup> yd <sup>3</sup>	0.34 <b>0.44</b>	0.37 <b>0.48</b>	0.37 <b>0.48</b>	0.37 <b>0.48</b>	0.34 <b>0.44</b>	0.35 <b>0.46</b>	0.37 <b>0.48</b>	0.38 <b>0.49</b>
Struck capacity	m <sup>3</sup> yd <sup>3</sup>	0.24 <b>0.31</b>	0.27 <b>0.35</b>	0.28 <b>0.36</b>	0.27 <b>0.35</b>	0.25 <b>0.33</b>	0.25 <b>0.33</b>	0.27 <b>0.35</b>	0.27 <b>0.35</b>
Width	mm in	1749 <b>69</b>	1902 <b>75</b>	1902 <b>75</b>	1902 <b>75</b>	1576 <b>62</b>	1586 <b>62</b>	1730 <b>68</b>	1740 <b>69</b>
Dump clearance at maximum lift/dump	mm in	2292 <b>90</b>	2356 <b>93</b>	2326 <b>92</b>	2292 <b>90</b>	2398 <b>94</b>	2369 <b>93</b>	2398 <b>94</b>	2368 <b>93</b>
Reach at maximum lift/dump	mm in	665 <b>26</b>	591 <b>23</b>	605 <b>24</b>	665 <b>26</b>	540 <b>21</b>	554 <b>22</b>	541 <b>21</b>	555 <b>22</b>
Floor angle at maximum lift/dump	degrees	<b>40.1°</b>	<b>40.1°</b>	<b>40.1°</b>	<b>40.1°</b>	<b>39.9°</b>	<b>39.9°</b>	<b>39.9°</b>	<b>39.9°</b>
Floor angle at maximum lift/rack back	degrees	<b>97.2°</b>	<b>97.2°</b>	<b>97.2°</b>	<b>97.2°</b>	<b>97.4°</b>	<b>97.4°</b>	<b>97.4°</b>	<b>97.4°</b>
Clearance at maximum lift/level bucket	mm in	2902 <b>114</b>	2904 <b>114</b>	2889 <b>113</b>	2902 <b>114</b>	2908 <b>114</b>	2893 <b>114</b>	2908 <b>114</b>	2892 <b>114</b>
Hinge pin height at maximum lift	mm in	3095 <b>122</b>	3096 <b>122</b>	3095 <b>122</b>	3095 <b>122</b>	3100 <b>122</b>	3099 <b>122</b>	3099 <b>122</b>	3099 <b>122</b>
Maximum overall height	mm in	4116 <b>162</b>	4018 <b>158</b>	4046 <b>159</b>	4116 <b>162</b>	3965 <b>156</b>	3992 <b>157</b>	3965 <b>156</b>	3992 <b>157</b>
Reach at level lift arm/bucket	mm in	1518 <b>60</b>	1420 <b>56</b>	1449 <b>57</b>	1518 <b>60</b>	1356 <b>53</b>	1385 <b>55</b>	1357 <b>53</b>	1386 <b>55</b>
Maximum floor angle at minimum lift	degrees	<b>27.3°</b>	<b>27.3°</b>	<b>27.3°</b>	<b>27.3°</b>	<b>28°</b>	<b>28°</b>	<b>28°</b>	<b>28°</b>
Dig depth with level bucket	mm in	1 <b>0.04</b>	0 <b>0</b>	16 <b>0.63</b>	1 <b>0.04</b>	0 <b>0</b>	16 <b>0.63</b>	0 <b>0</b>	16 <b>0.63</b>
Overall length with bucket on ground	mm in	3670 <b>144</b>	3572 <b>141</b>	3600 <b>142</b>	3670 <b>144</b>	3515 <b>138</b>	3543 <b>139</b>	3515 <b>138</b>	3543 <b>139</b>
Front clearance circle radius	mm in	2200 <b>86</b>	2168 <b>85</b>	2200 <b>86</b>	2229 <b>88</b>	2067 <b>81</b>	2094 <b>82</b>	2097 <b>82</b>	2125 <b>84</b>
Tipping load	236 kg lb	1450 <b>3190</b>	1450 <b>3190</b>	1400 <b>3080</b>	1430 <b>3150</b>	1725 <b>3800</b>	1675 <b>3690</b>	1705 <b>3750</b>	1650 <b>3630</b>
	246 kg lb	1545 <b>3400</b>	1545 <b>3400</b>	1495 <b>3280</b>	1525 <b>3360</b>	1825 <b>4010</b>	1775 <b>3900</b>	1800 <b>3960</b>	1745 <b>3840</b>
	248 kg lb	1630 <b>3580</b>	1630 <b>3590</b>	1575 <b>3470</b>	1610 <b>3540</b>	1915 <b>4210</b>	1860 <b>4090</b>	1890 <b>4160</b>	1835 <b>4030</b>
Breakout force — lift	236 kg lb	1755 <b>3860</b>	1755 <b>3870</b>	1700 <b>3740</b>	1740 <b>3830</b>	1990 <b>4370</b>	1935 <b>4260</b>	1970 <b>4330</b>	1910 <b>4210</b>
	246 kg lb	1755 <b>3860</b>	1755 <b>3860</b>	1700 <b>3740</b>	1740 <b>3830</b>	1985 <b>4370</b>	1935 <b>4250</b>	1965 <b>4330</b>	1910 <b>4200</b>
	248 kg lb	1740 <b>3830</b>	1740 <b>3830</b>	1685 <b>3710</b>	1725 <b>3800</b>	1975 <b>4340</b>	1920 <b>4220</b>	1950 <b>4290</b>	1895 <b>4170</b>
Breakout force — tilt	236 kg lb	2075 <b>4560</b>	2085 <b>4580</b>	1960 <b>4320</b>	2065 <b>4550</b>	2395 <b>5260</b>	2255 <b>4960</b>	2380 <b>5240</b>	2240 <b>4930</b>
	246 kg lb	2075 <b>4570</b>	2085 <b>4590</b>	1965 <b>4320</b>	2070 <b>4550</b>	2395 <b>5270</b>	2260 <b>4970</b>	2385 <b>5240</b>	2245 <b>4940</b>
	248 kg lb	2075 <b>4570</b>	2085 <b>4590</b>	1965 <b>4320</b>	2070 <b>4550</b>	2395 <b>5270</b>	2260 <b>4970</b>	2385 <b>5240</b>	2245 <b>4940</b>
Operating weight	236 kg lb	3310 <b>7280</b>	3310 <b>7290</b>	3350 <b>7370</b>	3330 <b>7320</b>	3085 <b>6790</b>	3115 <b>6860</b>	3110 <b>6840</b>	3145 <b>6920</b>
	246 kg lb	3390 <b>7460</b>	3390 <b>7460</b>	3430 <b>7540</b>	3410 <b>7500</b>	3165 <b>6970</b>	3195 <b>7030</b>	3190 <b>7020</b>	3225 <b>7090</b>
	248 kg lb	3530 <b>7760</b>	3530 <b>7770</b>	3565 <b>7840</b>	3545 <b>7800</b>	3305 <b>7270</b>	3335 <b>7330</b>	3330 <b>7320</b>	3360 <b>7390</b>

Work Tool		Pallet Fork						
		910 mm (36")		1070 mm (42")		1220 mm (48")		
Tine Length		8.25 x 15	12 x 16.5	8.25 x 15	12 x 16.5	8.25 x 15	12 x 16.5	
Tire Size		8.25 x 15	12 x 16.5	8.25 x 15	12 x 16.5	8.25 x 15	12 x 16.5	
Carriage overall width without step	mm	1157	1157	1157	1157	1157	1157	
	in	45	45	45	45	45	45	
Carriage step additional width	mm	108	108	108	108	108	108	
	in	4.25	4.25	4.25	4.25	4.25	4.25	
Carriage height above blade top	mm	923	923	923	923	923	923	
	in	36	36	36	36	36	36	
Blade surface height at maximum height	mm	2979	2969	2979	2969	2979	2969	
	in	117	116	117	116	117	116	
Shank front face reach at maximum height	mm	251	271	251	271	251	271	
	in	9.88	10.67	9.88	10.67	9.88	10.67	
Blade surface height at level liftarms	mm	1504	1494	1504	1494	1504	1494	
	in	59	58	59	58	59	58	
Shank front face reach at level liftarms	mm	750	762	750	762	750	762	
	in	29	30	29	30	29	30	
Blade surface height at minimum lift	mm	80	71	80	71	80	71	
	in	3.15	2.80	3.15	2.80	3.15	2.80	
Shank front face reach at minimum lift	mm	332	339	332	339	332	339	
	in	13	13	13	13	13	13	
Overall length at minimum lift, level tine	mm	3884	3884	4044	4044	4194	4194	
	ft/in	12'9"	12'9"	13'3"	13'3"	13'9"	13'9"	
Tipping load	236	kg	1280	1320	1210	1245	1150	1185
		lb	2820	2900	2660	2740	2530	2610
	246	kg	1355	1395	1285	1320	1220	1255
		lb	2990	3070	2830	2910	2690	2770
	248	kg	1425	1465	1350	1390	1285	1320
		lb	3140	3220	2970	3050	2830	2910
Operating weight	236	kg	3065	3130	3075	3140	3085	3150
		lb	6740	6880	6770	6910	6790	6930
	246	kg	3145	3210	3155	3220	3165	3230
		lb	6920	7060	6940	7080	6960	7100
	248	kg	3280	3345	3290	3360	3300	3365
		lb	7220	7360	7240	7380	7260	7400




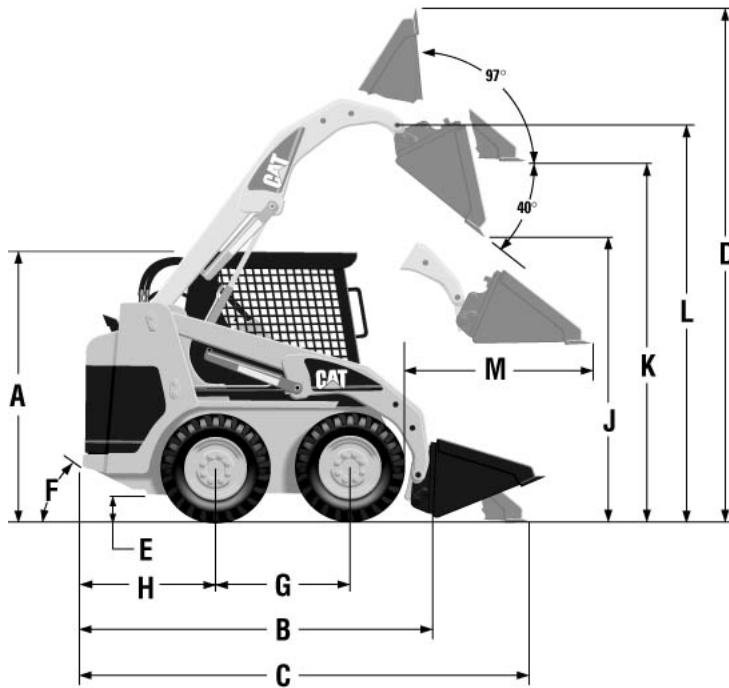

MODEL	216		226		228	
Rated operating capacity*	612 kg	<b>1350 lb</b>	680 kg	<b>1500 lb</b>	680 kg	<b>1500 lb</b>
A Height to top of ROPS	1950 mm	<b>6'5"</b>	1950 mm	<b>6'5"</b>	1950 mm	<b>6'5"</b>
B Length to coupler	2519 mm	<b>8'3"</b>	2519 mm	<b>8'3"</b>	2519 mm	<b>8'3"</b>
C Length with bucket on ground	3233 mm	<b>10'7"</b>	3233 mm	<b>10'7"</b>	3233 mm	<b>10'7"</b>
D Maximum overall height	3709 mm	<b>12'2"</b>	3709 mm	<b>12'2"</b>	3709 mm	<b>12'2"</b>
E Ground clearance	195 mm	<b>8"</b>	195 mm	<b>8"</b>	195 mm	<b>8"</b>
F Departure angle		<b>26°</b>		<b>26°</b>		<b>26°</b>
G Wheelbase	986 mm	<b>3'3"</b>	986 mm	<b>3'3"</b>	986 mm	<b>3'3"</b>
H Bumper overhang from axle	967 mm	<b>3'2"</b>	967 mm	<b>3'2"</b>	967 mm	<b>3'2"</b>
Bucket overall width	1576 mm	<b>5'2"</b>	1576 mm	<b>5'2"</b>	1576 mm	<b>5'2"</b>
J Clearance at maximum lift/dump	2169 mm	<b>7'1"</b>	2169 mm	<b>7'1"</b>	2169 mm	<b>7'1"</b>
Floor angle at maximum lift/dump		<b>40°</b>		<b>40°</b>		<b>40°</b>
Floor angle at maximum lift/rack		<b>97°</b>		<b>97°</b>		<b>97°</b>
K Clearance at maximum lift/level	2661 mm	<b>8'9"</b>	2661 mm	<b>8'9"</b>	2169 mm	<b>7'1"</b>
L Hinge pin height at maximum lift	2854 mm	<b>9'4"</b>	2854 mm	<b>9'4"</b>	2853 mm	<b>9'4"</b>
M Reach at level liftarm/bucket	1280 mm	<b>4'2"</b>	1280 mm	<b>4'2"</b>	1270 mm	<b>4'2"</b>
Hinge pin height at carry position	236 mm	<b>9.3"</b>	236 mm	<b>9.3"</b>	239 mm	<b>9"</b>
Maximum floor angle at carry position		<b>30°</b>		<b>30°</b>		<b>30°</b>

\*SAE J818 MAY87, ISO 5998:1986.

**NOTE:** 216/226 machine dimensions shown with standard machine equipped with optional 10 x 16.5 6 PR tires and 1524 mm (60") dirt bucket.  
236/246 machine dimensions shown with standard machine equipped with optional 12 x 16.5 10 PR tires and 1730 (66") dirt bucket.

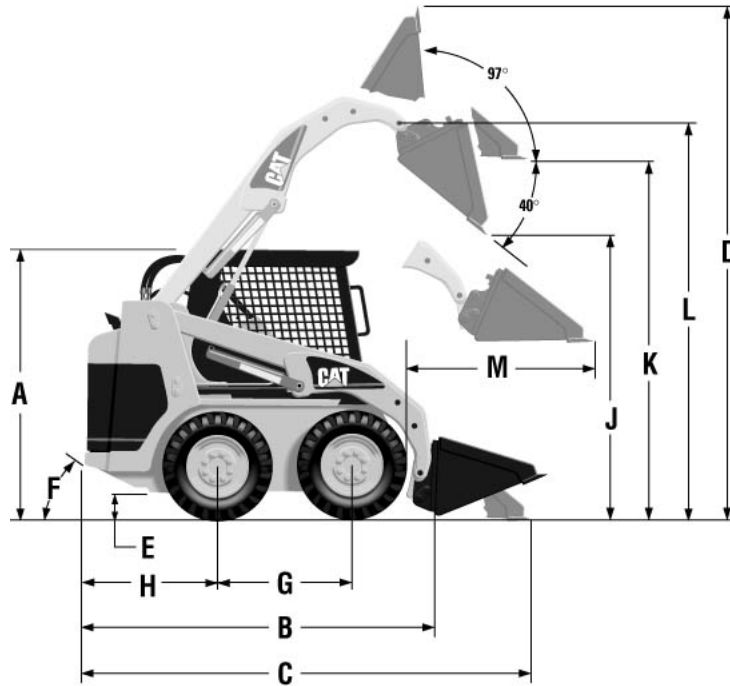

MODEL	236		246		248	
Rated operating capacity*	793 kg	<b>1750 lb</b>	907 kg	<b>2000 lb</b>	907 kg	<b>2000 lb</b>
A Height to top of ROPS	2092 mm	<b>6'10"</b>	2092 mm	<b>6'10"</b>	2092 mm	<b>6'10"</b>
B Length to coupler	2800 mm	<b>9'2"</b>	2800 mm	<b>9'2"</b>	2800 mm	<b>9'2"</b>
C Length with bucket on ground	3515 mm	<b>11'6"</b>	3515 mm	<b>11'6"</b>	3515 mm	<b>11'6"</b>
D Maximum overall height	3965 mm	<b>13'0"</b>	3965 mm	<b>13'0"</b>	3965 mm	<b>13'0"</b>
E Ground clearance	235 mm	<b>9.3"</b>	235 mm	<b>9.3"</b>	235 mm	<b>9"</b>
F Departure angle		<b>28°</b>		<b>28°</b>		<b>28°</b>
G Wheelbase	1134 mm	<b>3'9"</b>	1134 mm	<b>3'9"</b>	1134 mm	<b>3'9"</b>
H Bumper overhang from axle	1038 mm	<b>3'5"</b>	1038 mm	<b>3'5"</b>	1038 mm	<b>3'5"</b>
Bucket overall width	1730 mm	<b>5'8"</b>	1730 mm	<b>5'8"</b>	1730 mm	<b>5'8"</b>
J Clearance at maximum lift/dump	2398 mm	<b>7'10"</b>	2398 mm	<b>7'10"</b>	2398 mm	<b>7'10"</b>
Floor angle at maximum lift/dump		<b>40°</b>		<b>40°</b>		<b>40°</b>
Floor angle at maximum lift/rack		<b>97°</b>		<b>97°</b>		<b>97°</b>
K Clearance at maximum lift/level	2908 mm	<b>9'6"</b>	2908 mm	<b>9'6"</b>	2398 mm	<b>7'10"</b>
L Hinge pin height at maximum lift	3099 mm	<b>10'2"</b>	3099 mm	<b>10'2"</b>	3098 mm	<b>10'2"</b>
M Reach at level liftarm/bucket	1357 mm	<b>4'5"</b>	1357 mm	<b>4'5"</b>	1346 mm	<b>4'5"</b>
Hinge pin height at carry position	257 mm	<b>10"</b>	257 mm	<b>10"</b>	257 mm	<b>10"</b>
Maximum floor angle at carry position		<b>30°</b>		<b>30°</b>		<b>30°</b>

\*SAE J818 MAY87, ISO 5998:1986.

**NOTE:** 216/226 machine dimensions shown with standard machine equipped with optional 10 x 16.5 6 PR tires and 1524 mm (60") dirt bucket.  
236/246 machine dimensions shown with standard machine equipped with optional 12 x 16.5 10 PR tires and 1730 (66") dirt bucket.

**Features:**

- **Cat XT hose and O-ring face seals** are used throughout for superior leak-free performance.
- **Both standard and tree bits are available in a variety of sizes** for a wide range of projects.
- **Standard bit teeth and pilot points** are produced from hardened steel. Optional hardfaced and carbide inserted versions are also available.
- **Optional bit extension is available** in 305 mm (12") length.
- **Hex-to-round shaft adapter is available** to accommodate existing round auger bit mountings.
- **A13 and A19** are compatible with both mini hydraulic excavators and skid steer loaders.

**A13 Auger**

- **Chain reduction drive system** transfers power from the drive motor to the drive shaft, reducing motor speed and increasing torque.
- **Drive and driven sprockets are keyed** to both shafts for overload protection and easy servicing.
- **Durable continuous roller drive chain** transmits power from the drive sprocket to the driven sprocket.
- **Chain tension** is controlled with an adjustment cam.

**A19 Auger**

- **Planetary reduction drive system** transfers power from the drive motor to the drive shaft, reducing motor speed and increasing torque.
- **Drive motor shaft** is splined and couples directly to the planetary gearbox.

**Market Opportunities**

- **Agriculture** — Augers are an effective work tool around the farm to drill holes for fence posts, pole barn supports and footers for outbuildings.
- **Building/General Construction** — Augers are an essential work tool on many construction sites to drill holes for deck posts and footings, signs and fencing.

- **Landscaping/Landscape Maintenance** — Augers with special tree bits are ideal for preparing holes for tree planting. They are also ideal for school, park, golf course and recreational maintenance departments to drill holes for playground supports, trees and shrubs, fence posts, and signs.
- **Governmental/Municipalities** — Augers with multiple bit sizes are popular work tools to do a wide spectrum of jobs, including digging holes for traffic signs, poles, posts and trees.
- **Rental** — Augers are one of the highest opportunity rental work tool after buckets.
- **Specialty Trades/Utility** — Augers are ideal for electrical, fencing and plumbing contractors when installing lighting, fence posts and gas/water mains.

**Augers** are typically not a full time work tool, however they are a highly utilized option for specialized applications. They are often used in conjunction with a bucket, set of pallet forks and/or a trencher.


**Auger Bits**

Auger bits are available in both standard and tree bit configurations with standard hardened, reversible teeth and cast/hardened pilot point. Optional hardfaced and carbide inserted teeth and pilot points are available for aggressive boring conditions. Standard bits are available diameters ranging from 6"–36"; tree bits are available in 24" and 36" diameters. Typical digging depth is 48", however for deeper holes, optional 12" extensions are available. A special HEX to round adapter is also available for customers who use existing round shaft auger bits.

**Machine Compatibility**

The following are the recommended and approved Caterpillar machine/Auger combinations for maximum system performance.

Auger Model	Machine Model(s)
A13	302.5, 216, 226, 236, 246
A19	216, 226, 236, 246

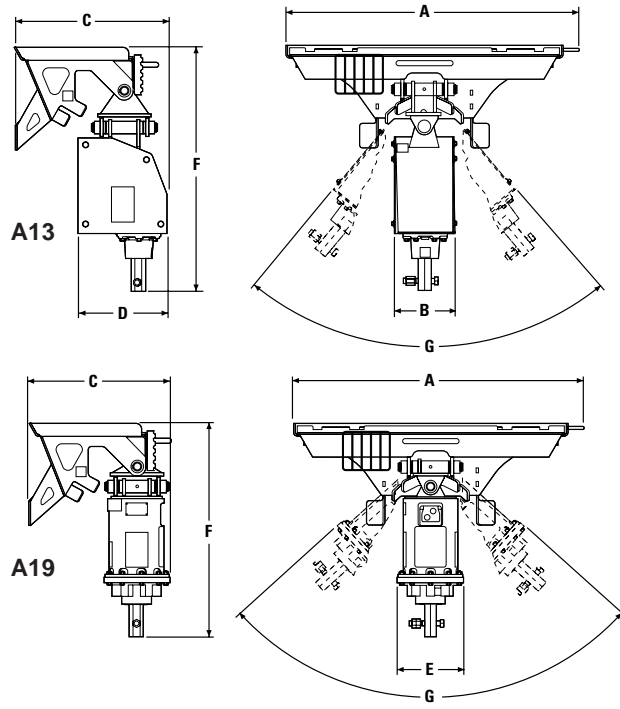

	A13		A19	
A Overall width w/bracket	1216 mm	48"	1216 mm	48"
B Housing width	247 mm	10"	—	—
C Overall length w/bracket	640 mm	25"	594 mm	23"
D Housing length	378 mm	15"	—	—
E Housing diameter	—	—	279 mm	11"
F Overall height with bracket	1016 mm	40"	889 mm	35"
G Swing range	<b>70°</b>		<b>94°</b>	
Drive unit weight*	80 kg	176 lb	89 kg	196 lb
Mounting bracket weight*	79 kg	174 lb	79 kg	174 lb
Total weight*	159 kg	350 lb	168 kg	370 lb
Drive method	<b>Chain drive</b>		<b>Planetary drive</b>	
Hydraulic flow range	42-87 L/min	11-23 gpm	42-87 L/min	11-23 gpm
Hydraulic pressure range	145-227 bar	2100-3300 psi	145-227 bar	2100-3300 psi
Motor size	280 cm <sup>3</sup>	17.1 in <sup>3</sup>	245 cm <sup>3</sup>	14.9 in <sup>3</sup>
Torque**	1764 N•m	1300 lb-ft	2535 N•m	1868 lb-ft
HEX output shaft size	51 mm	2"	51 mm	2"
Auger bit retention	<b>Cross bolts/nuts</b>		<b>Cross bolts/nuts</b>	
Housing design	<b>Box</b>		<b>Cylindrical</b>	
Fasteners	<b>Cat</b>		<b>Cat</b>	
Hydraulic hose	<b>Cat XT-3 ES</b>		<b>Cat XT-3 ES</b>	

\*Without bits.  
\*\*Approximate theoretical torque @ 145 bar (2100 psi).

**A13 Auger**

Theoretical Bit Speed			Theoretical Digging Torque			
L/min	gpm	rpm	bar	psi	N•m	lb-ft
42	11	54	145	2100	1764	1300
45	12	59	152	2200	1848	1362
49	13	64	159	2300	1932	1424
53	14	69	166	2400	2016	1486
57	15	74	172	2500	2100	1548
61	16	79	179	2600	2184	1610
64	17	84	186	2700	2268	1672
68	18	89	193	2800	2352	1734
72	19	94	200	2900	2436	1795
76	20	99	207	3000	2520	1857
80	21	104	214	3100	2604	1919
83	22	109	221	3200	2688	1981
87	23	114	228	3300	2772	2043

**A19 Auger**

Theoretical Bit Speed			Theoretical Digging Torque			
L/min	gpm	rpm	bar	psi	N•m	lb-ft
42	11	38	145	2100	2535	1868
45	12	41	152	2200	2655	1956
49	13	45	159	2300	2776	2045
53	14	48	166	2400	2897	2134
57	15	52	172	2500	3017	2223
61	16	55	179	2600	3138	2312
64	17	59	186	2700	3259	2401
68	18	62	193	2800	3379	2490
72	19	65	200	2900	3500	2579
76	20	69	207	3000	3621	2668
80	21	72	214	3100	3741	2757
83	22	76	221	3200	3862	2846
87	23	79	228	3300	3983	2935

**Features:**

- **Two sizes available:** the 305 mm (12") maximum drum width PC3 and the 406 mm (16") maximum drum width PC4. Both units efficiently utilize the standard flow auxiliary hydraulic horsepower capabilities of Cat Skid Steer Loaders.
- **Direct drive system** transmits power directly from the drive motor shaft to the planing drum.
- **Four pivoting skids** on the planer housing provide a stable platform when planing.
- **Optimal drum bit pattern and standard all purpose conical bits** provide maximum cutting performance and efficiency.
- **Hydraulic side shift** is standard, allowing planing as close as 76 mm (3") to curbs, walls and other obstructions.
- **Tilt and depth functions** help ensure precision beveling and pavement removal.
- **Cat XT hose and O-ring face seals** are used throughout for superior leak-free performance.
- **Optional drum widths and concrete bits** are available for specialty planing jobs.
- **Optional water sprinkler kit** is available for dust suppression.

**Conical Bits:** Cold planer drums are designed with an optimal bit pattern to provide maximum cutting performance and efficiency, while ensuring superior surface texture. Standard all-purpose tungsten carbide inserted conical bits provide all-purpose planing in most applications. Special concrete bits are also available for aggressive applications.

**Market Opportunities**


- **Infrastructure/Heavy Construction** — Skid steer mounted cold planers are frequently used on bridges to remove pavement where large dedicated planers are restricted due to weight.
- **Concrete/Masonry (Including Asphalt/Paving)** — Cold planers are used extensively by paving contractors in urban and rural settings to remove damaged pavement prior to overlay, remove excess pavement, provide specific surface texture (skid resistance), remove traffic lane stripes and re-establish proper draining characteristics of pavement.
- **Governmental/Municipalities (Street and Road Maintenance)** — Cold planers are ideal for urban road and parking lot maintenance departments to remove cracked or deteriorated pavement, milling bumps or imperfections in expanded pavement.

**Cold planers** are highly utilized work tools for specialized applications. They are often used in conjunction with a bucket and broom.

**Machine Compatibility**

The following are the recommended and approved Caterpillar machine/Cold Planer combinations for maximum system performance.

Cold Planer Model	Machine Model(s)
PC3	216, 226, 236, 246
PC4	226, 236, 246

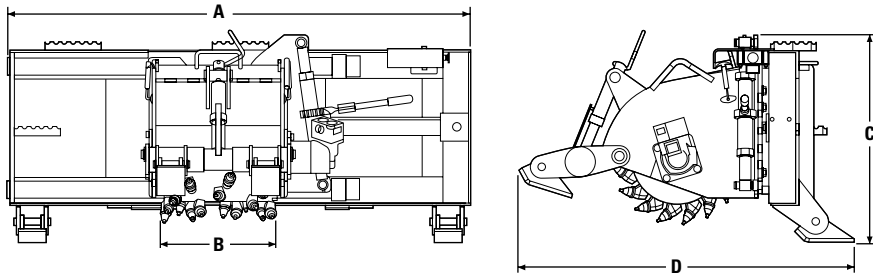

	PC3		PC4	
A Overall width	1676 mm	66"	1676 mm	66"
B Maximum drum width	305 mm	12"	406 mm	16"
Optional drum widths	64 mm	2.5"	64 mm	2.5"
	102 mm	4"	102 mm	4"
	152 mm	6"	152 mm	6"
C Overall height	762 mm	30"	762 mm	30"
D Length	1168 mm	46"	1168 mm	46"
Weight	481 kg	1060 lb	522 kg	1150 lb
Drive method	Direct drive		Direct drive	
Hydraulic flow range	53-83 L/min	14-22 gpm	53-83 L/min	14-22 gpm
Hydraulic pressure range	172-227 bar	2500-3300 psi	172-227 bar	2500-3300 psi
Motor size	311 cm <sup>3</sup>	19 in <sup>3</sup>	395 cm <sup>3</sup>	24 in <sup>3</sup>
Tip speed	269 mpm @ 57 L/min	883 fpm @ 15 gpm	284 mpm @ 76 L/min	931 fpm @ 20 gpm
Fasteners	Cat		Cat	
Hydraulic hose	Cat XT-3 ES, two braid		Cat XT-3 ES, two braid	
Number of conical bits	28 per 305 mm (12 in) drum		50 per 406 mm (16 in) drum	
Standard bit type	All purpose		All purpose	
Optional bit type	Concrete		Concrete	
Maximum depth of cut	127 mm	5"	127 mm	5"
Cut diameter	470 mm	18.5"	470 mm	18.5"
Tilt angle range	±19°		±19°	
Side shift travel	559 mm	22"	559 mm	22"

**Features:**

- **Two sizes available:** the 1321 mm (52") working width LT13 and the 1854 mm (73") working width LT18. Both units efficiently utilize the standard flow auxiliary hydraulic horsepower capabilities of Cat Skid Steer Loaders.
- **Direct drive system** features two in-line motors that transmit power directly from the drive motor shaft to the tiller shaft. Power to both ends of the shaft eliminates torque twist and increased system performance.
- **Adjustable skid shoes** provide a working depth range of 25-152 mm (1"-6").
- **High strength medium carbon alloy steel tines** are hardened for maximum strength, durability and wear life in the toughest soil conditions.
- **Cat XT hose and O-ring face seals** are used throughout for superior leak-free performance.

**Market Opportunities**

- **Agriculture** — Landscape tillers provide an effective work tool around the farm or orchard to breakup and condition soil prior to planting.
- **Building/General Construction** — Landscape tillers can be used on construction sites to level soil and remove ruts.
- **Landscaping/Landscape Maintenance** — Landscape tillers are ideal for mixing and composting soils for improved seedbeds, soil stabilization and soil preparation prior to landscaping and laying sod.
- **Governmental/Municipalities** — Landscape tillers are ideal for city maintenance departments and parks to recondition, level and stabilize soil after utility work or prior to yearly landscaping.


**Landscape tillers** are productive work tools for specialized applications. They are often used in conjunction with a bucket, landscape rake and auger.

**Machine Compatibility**

The following are the recommended and approved Caterpillar machine/Landscape Tiller combinations for maximum system performance.

Landscape Tiller Model	Machine Model(s)
LT13	216, 226, 236, 246
LT18	236, 246



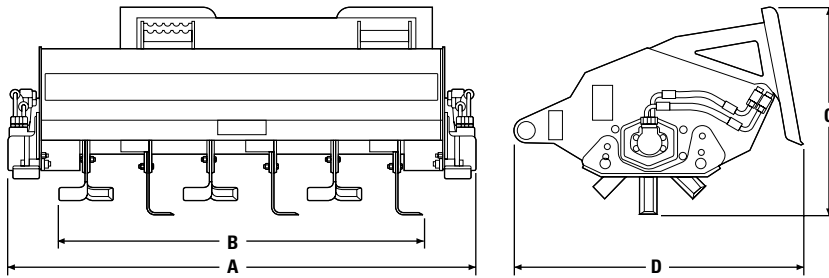

	LT13		LT18	
A Overall width	1727 mm	68"	2184 mm	86"
B Working width	1321 mm	52"	1854 mm	73"
C Height	762 mm	30"	838 mm	33"
D Length	1067 mm	42"	1067 mm	42"
Working depth range	25-152 mm	1"-6"	25-152 mm	1"-6"
Weight	345 kg	760 lb	476 kg	1050 lb
Drive method	Direct drive		Direct drive	
Number of motors	Two in-line		Two in-line	
Hydraulic flow range	42-83 L/min	11-22 gpm	42-83 L/min	11-22 gpm
Hydraulic pressure range	145-227 bar	2100-3300 psi	145-227 bar	2100-3300 psi
Motor size	305 cm <sup>3</sup>	18.6 in <sup>3</sup>	305 cm <sup>3</sup>	18.6 in <sup>3</sup>
Effective displacement	610 cm <sup>3</sup>	37.2 in <sup>3</sup>	610 cm <sup>3</sup>	37.2 in <sup>3</sup>
Drum speed	101 rpm @ 57 L/min	101 rpm @ 15 gpm	133 rpm @ 76 L/min	133 rpm @ 20 gpm
Fasteners	Cat		Cat	
Hydraulic hose	Cat XT-3 ES		Cat XT-3 ES	
Number of tines	24		36	

**Features:**

- **Two sizes available:** the 1321 mm (62") working width LR15 and the 1880 mm (74") working width LR18. Both units efficiently utilize the standard flow auxiliary hydraulic horsepower capabilities of Cat Skid Steer Loaders.
- **Chain reduction drive system** features #80H roller chain for strength and durability, a variable speed unidirectional gerotor motor for maximum performance and cartridge relief valve for system protection.
- **Durable #2060H conveyor chain** provides strength, durability and long life in a variety of soil conditions.
- **High strength medium carbon alloy steel teeth** are hardened for maximum strength, durability and wear life in the toughest soil conditions.
- **Quick dumping capability** is accomplished with a poppet check valve. Once the hopper bucket is full, simply reverse flow to actuate the rake head and dump the bucket.
- **Cat XT hose and O-ring face seals** are used throughout for superior leak-free performance.

**Market Opportunities**

- **Agriculture** — Landscape rakes provide an effective work tool around the farm or nursery to condition, level and remove rock and foreign material from soil prior to planting.
- **Building/General Construction** — Landscape rakes can be used on construction sites to level and remove debris from soil prior to landscaping and seeding.
- **Demolition** — Landscape rakes provide an excellent means to clean up loose material after the demolition work is complete.
- **Landscaping/Landscape Maintenance** — Landscape rakes are ideal for aerating, conditioning, leveling and removing rocks from soil prior to seeding or laying sod. They also are ideal for conditioning and cleaning baseball fields.


**Landscape rakes** are productive work tools for specialized applications. They are often used in conjunction with a bucket, landscape tiller and auger.

**Machine Compatibility**

The following are the recommended and approved Caterpillar machine/Landscape Rake combinations for maximum system performance.

Landscape Rake Model	Machine Model(s)*
LR15	216, 226, 236, 246
LR18	236, 246

\*Lift restriction! Do not raise liftarm — work tool hinge higher than 1 m (3 ft) above the ground. Tipping can result.

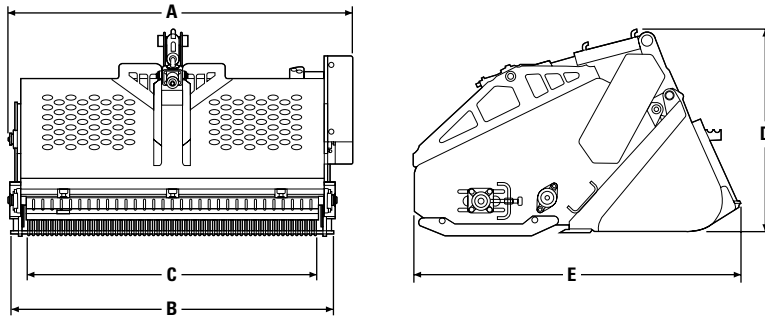

	LR15		LR18	
A Overall width	1676 mm	66"	1930 mm	76"
B Working width	1576 mm	62"	1880 mm	74"
C Raking width	1397 mm	55"	1702 mm	67"
D Height	991 mm	39"	991 mm	39"
E Length	1626 mm	64"	1626 mm	64"
Weight	567 kg	1250 lb	615 kg	1355 lb
Drive method	Chain reduction		Chain reduction	
Drive chain	#80H		#80H	
Conveyor chain	#2060H		#2060H	
Hydraulic flow range	42-83 L/min	11-22 gpm	42-83 L/min	11-22 gpm
Hydraulic pressure range	100-227 bar	1500-3300 psi	100-227 bar	1500-3300 psi
Bucket capacity (struck)*	0.31 m <sup>3</sup>	0.4 yd <sup>3</sup>	0.34 m <sup>3</sup>	0.44 yd <sup>3</sup>
Motor size	305 cm <sup>3</sup>	18.6 in <sup>3</sup>	305 cm <sup>3</sup>	18.6 in <sup>3</sup>
Chain speed	131 rpm @ 57 L/min	131 rpm @ 15 gpm	173 rpm @ 76 L/min	173 rpm @ 20 gpm
Fasteners	Cat		Cat	
Hydraulic hose	Cat XT-3 ES		Cat XT-3 ES	
Number of teeth	384		432	
Rock size	19-52 mm	0.75"-6"	19-52 mm	0.75"-6"

\*Rated struck capacities shown as per ISO 7546: 1983 and SAE J742 FEB85.

**Features:**

- **Direct drive system** provides maximum performance and durability. A variable speed, bi-directional motor is matched to the Cat Skid Steer Loader's standard flow auxiliary hydraulic circuit for excellent torque output.
- **Durable double standard anti-backflex chain** is standard for strength, durability and long life in all soil types.
- **1219 mm (48") boom and 152 mm (6") cutting width** is standard for all-purpose performance.
- **Hard faced, medium carbon alloy steel teeth** deliver long life in the toughest soil conditions.
- **Hydraulic or manual sideshift options** are available for close trenching flexibility near foundations and other structures.
- **Optional cutting widths and crumbar bar** are available for wider trenching requirements and loose material removal.
- **Cat XT hose and O-ring face seals** are used throughout for superior leak-free performance.

**Market Opportunities**

- **Agriculture** — Trenchers provide an effective work tool around the farm or nursery to cut trenches for water lines, electrical cables and other utilities.
- **Building/General Construction** — Trenchers are often used on construction sites to cut trenches for plumbing, electrical, telephone and cable television lines.
- **Landscaping/Landscape Maintenance** — Trenchers are popular landscaping work tools when installing irrigation and water sprinkler systems. They can also be used to remove roots that grow too close to buildings or cart paths. Landscapers, golf course maintenance departments and irrigation contractors are prime users.
- **Specialty Trades/Utilities** — Trenchers are excellent work tools for specialty trades and utility contractors that need to bury water and gas pipe, conduit, electrical, telephone and cable television lines.

**Trenchers** are productive work tools for specialized applications. They are often used in conjunction with a bucket and auger.


**Machine Compatibility**

The following are the recommended and approved Caterpillar machine/Trencher combinations for maximum system performance.

Trencher Model	Machine Model(s)
T9	216, 226, 236, 246

**T9 Trencher**

Theoretical Drive Shaft Torque			
Pressure		Torque	
bar	psi	N•m	lb-ft
145	2100	911	670
152	2200	956	703
159	2300	1000	735
166	2400	1043	767
172	2500	1088	800
179	2600	1130	831
183	2650	1156	850
186	2700	1174	863
193	2800	1217	895
200	2900	1261	927
207	3000	1304	959
214	3100	1348	991
221	3200	1391	1023
228	3300	1435	1055

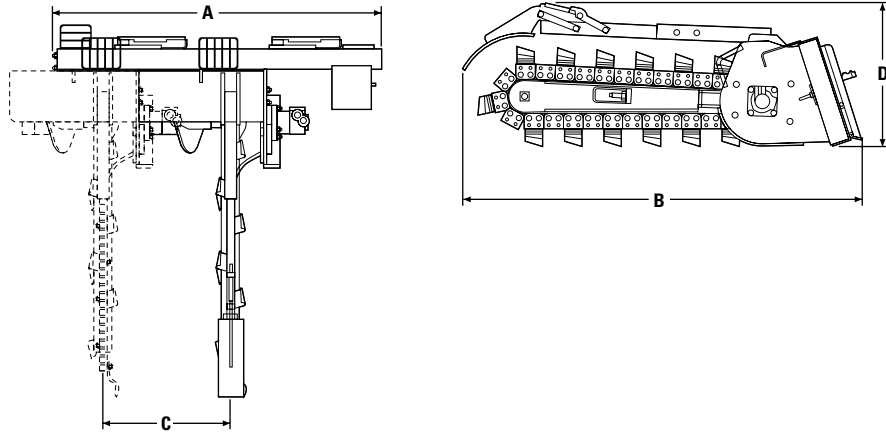

**T9**

A Overall width	1701 mm	67"
B Overall length	2066 mm	81"
C Side shift travel (center to right)	660 mm	26"
D Height	739 mm	29"
Standard boom length	1219 mm	48"
Weight*	465 kg	1025 lb
Drive method	<b>Direct drive</b>	
Hydraulic flow range	42-83 L/min	11-22 gpm
Hydraulic pressure range	145-227 bar	2100-3300 psi
Motor size	395 cm <sup>3</sup>	24.1 in <sup>3</sup>
Torque @ 183 bar (2650 psi)	1156 N•m	850 lb-ft
Fasteners	<b>Cat</b>	
Hydraulic hose	<b>Cat XT-3 ES, two braid**</b>	
Standard cutting width	152 mm	6"
Optional cutting widths	203 and 254 mm	8" and 10"
Maximum working depth	1219 mm	48"
Number of teeth (every other station)	<b>15</b>	

\*Equipped with standard boom, hydraulic side shift control, double standard anti-backflex chain, 254 mm (10") cutting width and standard hard-faced teeth.

\*\*Cat two braid medium pressure hose is used on optional hydraulic sideshift circuit only.

**Features:**

- **Two sizes available:** the 1676 mm (66") drum width CV16 and the 1854 mm (73") drum width CV18. Both units efficiently utilize the standard flow auxiliary hydraulic horsepower capabilities of Cat Skid Steer Loaders.
- **Direct drive system** uses a variable speed bi-directional gear motor that drives an eccentric weighted shaft, resulting in drum vibration.
- **Durable high strength steel drums** are roll formed and butt welded for long life.
- **A spring-loaded scraper bar** is standard to prevent material buildup on the drum.
- **Oscillating tilt** is capable from a pivoting interface that allows + 15 degrees of oscillation to follow ground contour.
- **Cat XT hose and O-ring face seals** are used throughout for superior leak-free performance.

**Market Opportunities**

- **Building/General Construction** — Vibratory compactors can be used on construction sites to level and compact soil around building foundations after backfilling.
- **Governmental/Municipalities (Street and Road Maintenance)** — Vibratory compactors are useful work tools for compacting soil and crushed rock prior to paving or pouring concrete. They are also useful for compacting small areas of asphalt (pothole repair).
- **Landscaping/Landscape Maintenance** — Vibratory compactors are used by landscaping contractors after installing irrigation and water sprinkler systems. Golf course maintenance departments will often use this product to compact greens and fairways.
- **Paving** — Vibratory compactors are used by paving contractors for smaller paving jobs (compacting soil and crushed stone), compacting hot patch (pot hole repair) or compacting material in tight areas where a dedicated roller can't maneuver.
- **Specialty Trades/Utilities** — Vibratory compactors are ideal for compacting back-filled soil after trenching and backhoe work.


**Vibratory compactors** are productive work tools for specialized applications. They are often used in conjunction with a bucket, cold planer and trencher.

**Machine Compatibility**

The following are the recommended and approved Caterpillar machine/Vibratory Compactor combinations for maximum system performance.

Vibratory Compactor Model	Machine Model(s)*
CV16	216*, 226, 236, 246
CV18	236, 246

\*Lift restriction! Do not raise liftarm — work tool hinge higher than 1 m (3 ft) above the ground. Tipping can result.

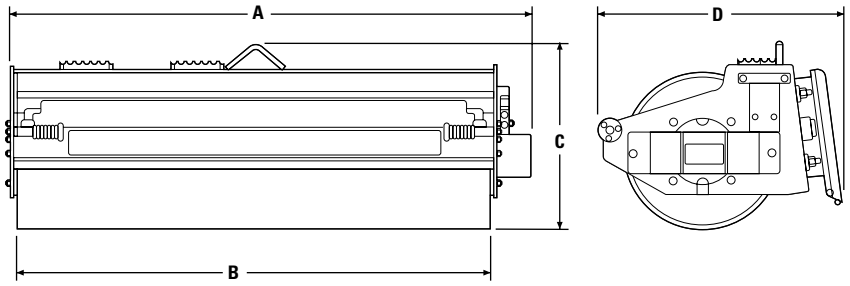

	CV16		CV18	
A Overall width	1901 mm	75"	2080 mm	82"
B Drum width	1676 mm	66"	1854 mm	73"
C Overall height	737 mm	29"	737 mm	29"
D Overall length	965 mm	38"	965 mm	38"
Drum diameter	610 mm	24"	610 mm	24"
Weight	749 kg	1650 lb	780 kg	1720 lb
Drive method	Direct drive		Direct drive	
Number of motors	One		One	
Motor size	31.5 cm <sup>3</sup>	1.9 in <sup>3</sup>	31.5 cm <sup>3</sup>	1.9 in <sup>3</sup>
Hydraulic flow range	42-83 L/min	11-22 gpm	42-83 L/min	11-22 gpm
Hydraulic pressure range	145-227 bar	2100-3300 psi	145-227 bar	2100-3300 psi
Drum oscillation range	±15°		±15°	
Drum frequency	2000 vpm @ 57 L/min	2000 vpm @ 15 gpm	2000 vpm @ 57 L/min	2000 vpm @ 15 gpm
Dynamic force	3972 kg	8740 lb	4654 kg	10,240 lb
Total applied force	4737 kg	10,440 lb	5530 kg	12,189 lb
Fasteners	Cat		Cat	
Hydraulic hose	Cat XT-3 ES		Cat XT-3 ES	

**Features:**

- **Sweeping Widths:** Choose the 1524 mm (60") BP15, the 1829 mm (72") BP18 pickup brooms or the 2134 mm (84") BA18 angle broom. All units efficiently utilize the standard flow auxiliary hydraulic horsepower capabilities of Cat Skid Steer Loaders.
- **Direct drive system** provides maximum performance and durability. The BP15 and BA18 use a single variable speed unidirectional motor that drives the brush core; the BP18 uses two inline motors.
- **Durable polypropylene/steel wire brush sections** are standard and provide tough cleaning action on most paved surfaces.
- **Manual or hydraulic angling** is available on BA18 for quick angle changes up to 30° right or left of center.
- **A large integrated hopper bucket on BP15 and BP18** provides ample capacity for collected dirt and debris. Caterpillar bolt on cutting edges are standard for long wear life.
- **Optional gutter brush for BP15 and BP18** are available to assist in removing material from gutters.
- **Optional water sprinkler kit** available for dust suppression.
- **Optional brush types** are available for various surface types.
- **Cat XT hose and O-ring face seals** are used throughout for superior leak-free performance.

**Market Opportunities**

- **Building/General Construction** — Brooms are often found on construction sites once the construction is complete to remove and collect dirt, rock and other construction debris from drive-ways, sidewalks and streets.
- **Demolition** — Brooms are ideal for collecting loose dirt and debris from demolition sites.

- **Governmental/Municipalities (Street and Road Maintenance)** — Brooms are useful work tools for cleaning city streets, sidewalks and parking areas. Airport maintenance is another popular application.
- **Industrial/Recycling** — Pickup brooms are excellent for cleaning factory floors or industrial pavements.
- **Landscaping/Landscape Maintenance** — Brooms are used by landscaping contractors to clean paved surfaces after the landscaping is complete. Golf course maintenance departments will often use this product to clean cart paths, parking lots and even turf.
- **Paving** — Pickup brooms are often used by paving contractors to sweep and collect milled asphalt and concrete. Angle brooms are used to clean milled surfaces.
- **Specialty Trades/Utilities** — Brooms are often utilized by specialty trades and utility contractors to clean up after trenching and backhoe work.

**Pickup brooms** are productive work tools for specialized applications. They are often used in conjunction with a bucket, cold planer and trencher.

**Machine Compatibility**

Following are the recommended and approved Cat Skid Steer Loader/Broom combinations for maximum system performance.



Model	BP15 Broom	BP18 Broom	BA18 Broom
216 Skid Steer Loader	●*	!	●
226 Skid Steer Loader	●	!	●
236 Skid Steer Loader	●	●	●
246 Skid Steer Loader	●	●	●

● Provides optimum system performance.



! Not approved. Do not use.

\* Lift restriction! Do not raise liftarm — work tool hinge pin higher than 1 m (3 ft) above the ground. Tipping can result.




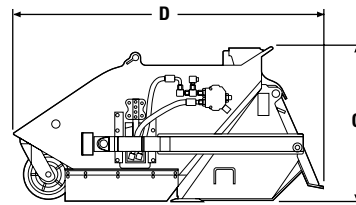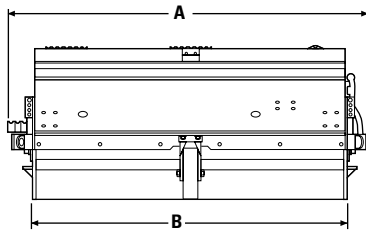

Pickup Brooms



Angle Brooms



	BP15 Pickup Broom		BP18 Pickup Broom		BA18 Angle Broom	
A Overall width	1828 mm	72"	2108 mm	83"	2388 mm	94"
AA Overall width angled*	—	—	—	—	2362 mm	93"
B Sweeping width	1524 mm	60"	1829 mm	72"	2134 mm	84"
BB Sweeping width angled*	—	—	—	—	1702 mm	67"
C Height	787 mm	31"	787 mm	31"	864 mm	34"
D Length	1575 mm	62"	1575 mm	62"	1676 mm	66"
Weight**	395 kg	870 lb	472 kg	1040 lb	404 kg	890 lb
Drive method	Direct drive		Direct drive		Direct drive	
Number of motors	One		Two in-line		One	
Motor size	250 cm <sup>3</sup>	15.3 in <sup>3</sup>	200 cm <sup>3</sup> each	12.2 in <sup>3</sup> each	410 cm <sup>3</sup>	24.9 in <sup>3</sup>
Effective displacement	250 cm <sup>3</sup>	15.3 in <sup>3</sup>	400 cm <sup>3</sup>	24.4 in <sup>3</sup>	410 cm <sup>3</sup>	24.9 in <sup>3</sup>
Hydraulic flow range	30-83 L/min	8-22 gpm	57-95 L/min	15-25 gpm	42-83 L/min	11-22 gpm
Hydraulic pressure range	145-227 bar	2100-3300 psi	145-227 bar	2100-3300 psi	145-227 bar	2100-3300 psi
Rated brush speed	150 rpm @ 38 L/min	150 rpm @ 10 gpm	190 rpm @ 38 L/min	190 rpm @ 10 gpm	159 rpm @ 57 L/min	159 rpm @ 15 gpm
Hopper capacity***	0.42 m <sup>3</sup>	0.55 yd <sup>3</sup>	0.45 m <sup>3</sup>	0.59 yd <sup>3</sup>	—	—
Fasteners	Cat		Cat		Cat	
Hydraulic hose	Cat XT-3 ES		Cat XT-3 ES		Cat XT-3 ES	
Brush diameter	660 mm	26"	660 mm	26"	813 mm	32"
Brush head retention	Dual chain/ loader arm bracket		Dual chain/ loader arm bracket		—	
Brush material (standard)	Replaceable polypropylene/ steel wire sections		Replaceable polypropylene/ steel wire sections		Replaceable polypropylene/ steel wire sections	

\*31° right or left.

\*\*With gutter brush.

\*\*\*Rated struck capacities shown as per ISO 7546: 1983 and SAE J742 FEB85.

# EXCAVATORS

## CONTENTS

### EXCAVATORS

Specifications	5-2
Shipping Dimensions	5-17
Major Component Weights	5-29
Range Dimensions:	
One-piece Boom	5-35
Variable Adjustable Boom	5-54
Hydraulic Adjustable Boom	5-58
Lifting Capacity (definition)	5-60
Lifting Capacity at Ground Level (charts)	5-62
Bucket Capacity (definition)	5-93
Curl and Crowd Forces	5-93
Bucket Specifications	5-105
Working Weights (bucket & payload)	5-126
Equipping Excavators:	
Long Reach	5-129
Ditch Cleaning	5-131
Demolition Arrangements	5-133
Machine Selection (tracks vs. wheels)	5-140
Stick/Bucket Combinations	5-141
Shoe Selection and Ground Pressure	5-143
Quick Coupler Systems	5-146
Major Attachment Summary	5-147
Work Tools	5-153
Cycle Time Estimating Charts	5-154
Machine Operation	5-156
Earthmoving Production	5-157
Production Estimating Tables	5-159
Trenching Production	5-161

### 5000 SERIES

Features	5-169
Specifications	5-170
Adjustments to Standard	
Operating Weight	5-172
Digging Envelopes	5-173
Shipping Information	5-175
General Dimensions	5-177
Shoe Selection and Ground Pressure	5-178
Curl and Crowd Forces	5-179
Working Weights	5-180
Bucket Selection	5-181
Vital Information Management	
System (VIMS)	5-181
Estimating Cycle Time	5-182
Production Tables	5-184

### MATERIAL HANDLING ARRANGEMENTS

M325B MH-Range	5-188
Lift Capacities	5-188
320B MH, 325B MH, 330B MH	
Belgium Sourced-Range	5-191
Lifting Capacities	5-192
325B MH-375 MH	
Japan/U.S. Sourced, Track UC-Range	5-198
Lifting Capacities	5-200
325B MH-330B MH	
U.S. Sourced, Wheeled Carrier-Range	5-207
Lifting Capacities	5-208



MODEL	301.5		301.6		301.8		302.5	
Sourcing	U.K.		U.K.		U.K.		U.K.	
Flywheel Power	13 kW	<b>17.4 hp</b>	13 kW	<b>17.4 hp</b>	13 kW	<b>17.4 hp</b>	16.8 kW	<b>22.5 hp</b>
Operating Weight*	1650 kg	<b>3640 lb</b>	1690 kg	<b>3726 lb</b>	1725 kg	<b>3803 lb</b>	2730 kg	<b>6020 lb</b>
Bucket Capacity	0.018-	<b>0.023-</b>	0.018-	<b>0.023-</b>	0.018-	<b>0.023-</b>	0.035-	<b>0.046-</b>
Range (heaped)	0.056 m <sup>3</sup>	<b>0.073 yd<sup>3</sup></b>	0.056 m <sup>3</sup>	<b>0.073 yd<sup>3</sup></b>	0.056 m <sup>3</sup>	<b>0.073 yd<sup>3</sup></b>	0.092 m <sup>3</sup>	<b>0.12 yd<sup>3</sup></b>
Engine Model	<b>3003</b>		<b>3003</b>		<b>3003</b>		<b>3013</b>	
Rated Engine RPM	<b>2300</b>		<b>2300</b>		<b>2300</b>		<b>2300</b>	
No. of Cylinders	<b>3</b>		<b>3</b>		<b>3</b>		<b>3</b>	
Bore	75 mm	<b>2.95"</b>	75 mm	<b>2.95"</b>	75 mm	<b>2.95"</b>	84 mm	<b>3.31"</b>
Stroke	72 mm	<b>2.83"</b>	72 mm	<b>2.83"</b>	72 mm	<b>2.83"</b>	90 mm	<b>3.54"</b>
Displacement	0.95 L	<b>58.2 in<sup>3</sup></b>	0.95 L	<b>58.2 in<sup>3</sup></b>	0.95 L	<b>58.2 in<sup>3</sup></b>	1.5 L	<b>91.7 in<sup>3</sup></b>
Max. Implement								
Hydraulic Pump	2 × 17/	<b>2 × 4.5/</b>	2 × 17/	<b>2 × 4.5/</b>	2 × 17/	<b>2 × 4.5/</b>	2 × 32/	<b>2 × 8.5/</b>
Output at Rated	1 × 18	<b>1 × 4.8</b>	1 × 18	<b>1 × 4.8</b>	1 × 18	<b>1 × 4.8</b>	1 × 19	<b>1 × 4.9</b>
RPM	L/min	<b>gpm</b>	L/min	<b>gpm</b>	L/min	<b>gpm</b>	L/min	<b>gpm</b>
Relief Valve Settings:								
Implement Circuits	18 600 kPa	<b>2700 psi</b>	18 600 kPa	<b>2700 psi</b>	18 600 kPa	<b>2700 psi</b>	20 600 kPa	<b>2987 psi</b>
Travel Circuits	18 600 kPa	<b>2700 psi</b>	18 600 kPa	<b>2700 psi</b>	18 600 kPa	<b>2700 psi</b>	20 600 kPa	<b>2987 psi</b>
Swing Circuits	17 200 kPa	<b>2500 psi</b>	17 200 kPa	<b>2500 psi</b>	17 200 kPa	<b>2500 psi</b>	17 200 kPa	<b>2500 psi</b>
Pilot Circuits	—		—		—		—	
Maximum Drawbar Pull	13.6 kN	<b>3060 lb</b>	13.6 kN	<b>3060 lb</b>	13.6 kN	<b>3060 lb</b>	22 kN	<b>4950 lb</b>
Maximum Travel	<b>Two Speed Travel</b>		<b>Two Speed Travel</b>		<b>Two Speed Travel</b>		<b>Two Speed Travel</b>	
Speed at	Lo: 2.2 km/h	<b>1.4 mph</b>	Lo: 2.2 km/h	<b>1.4 mph</b>	Lo: 2.2 km/h	<b>1.4 mph</b>	Lo: 2.5 km/h	<b>1.55 mph</b>
Rated RPM	Hi: 4.4 km/h	<b>2.7 mph</b>	Hi: 4.4 km/h	<b>2.7 mph</b>	Hi: 4.4 km/h	<b>2.7 mph</b>	Hi: 4.5 km/h	<b>2.8 mph</b>
Width of Standard								
Track Shoe	230 mm	<b>9"</b>	230 mm	<b>9"</b>	230 mm	<b>9"</b>	300 mm	<b>12"</b>
Overall Track Length	1390 mm	<b>4'7"</b>	1486 mm	<b>4'8"</b>	1486 mm	<b>4'8"</b>	1910 mm	<b>6'3"</b>
Ground Contact Area with Std. Shoe	0.52 m <sup>2</sup>	<b>806 in<sup>2</sup></b>	0.57 m <sup>2</sup>	<b>883 in<sup>2</sup></b>	0.57 m <sup>2</sup>	<b>883 in<sup>2</sup></b>	0.97 m <sup>2</sup>	<b>1503 in<sup>2</sup></b>
Track Gauge								
Standard Undercarriage	750 mm	<b>30"</b>	750 mm	<b>30"</b>	750 mm	<b>30"</b>	1150 mm	<b>45"</b>
Variable Width Undercarriage	—	—	—	—	1110 mm	<b>44"</b>	—	—
Fuel Tank Refill Capacity	20 L	<b>5.3 U.S. gal</b>	20 L	<b>5.3 U.S. gal</b>	20 L	<b>5.3 U.S. gal</b>	41.5 L	<b>10.8 U.S. gal</b>
Hydraulic System (includes tank)	37 L	<b>9.8 U.S. gal</b>	37 L	<b>9.8 U.S. gal</b>	37 L	<b>9.8 U.S. gal</b>	50 L	<b>13 U.S. gal</b>

\*Operating weight includes coolant, lubricants, full fuel tank, cab, standard shoes, bucket, medium stick, and operator 75 kg (165 lb).

**NOTE:** Certain models may not be available in all Sales areas.

Specifications may also vary by Sales area.

Contact your Caterpillar Dealer for details.



MODEL	303.5		304.5		307B		307B SB	
Sourcing	U.K.		U.K.		Japan		Japan	
Flywheel Power	19 kW	<b>25.5 hp</b>	27.9 kW	<b>37.4 hp</b>	40 kW	<b>54 hp</b>	40 kW	<b>54 hp</b>
Operating Weight*	3480 kg	<b>7673 lb</b>	4520 kg	<b>9966 lb</b>	6500 kg	<b>14,320 lb</b>	7400 kg	<b>16,310 lb</b>
Bucket Capacity	0.049-	<b>0.063-</b>	0.058-	<b>0.075-</b>	0.14-	<b>0.18-</b>	0.14-	<b>0.18-</b>
Range (heaped)	0.126 m <sup>3</sup>	<b>0.164 yd<sup>3</sup></b>	0.162 m <sup>3</sup>	<b>0.211 yd<sup>3</sup></b>	0.28 m <sup>3</sup>	<b>0.37 yd<sup>3</sup></b>	0.28 m <sup>3</sup>	<b>0.37 yd<sup>3</sup></b>
Engine Model	<b>3013</b>		<b>3024</b>		<b>4M40E1</b>		<b>4M40E1</b>	
Rated Engine RPM	<b>2300</b>		<b>2300</b>		<b>2100</b>		<b>2100</b>	
No. of Cylinders	<b>3</b>		<b>4</b>		<b>4</b>		<b>4</b>	
Bore	84 mm	<b>3.31"</b>	80 mm	<b>3.15"</b>	95 mm	<b>3.7"</b>	95 mm	<b>3.7"</b>
Stroke	90 mm	<b>3.55"</b>	100 mm	<b>3.94"</b>	100 mm	<b>3.9"</b>	100 mm	<b>3.9"</b>
Displacement	1.5 L	<b>91.7 in<sup>3</sup></b>	2.2 L	<b>134.5 in<sup>3</sup></b>	2.84 L	<b>173 in<sup>3</sup></b>	2.84 L	<b>173 in<sup>3</sup></b>
Max. Implement								
Hydraulic Pump	2 × 37/	<b>2 × 9.8/</b>	2 × 49/	<b>2 × 13/</b>				
Output at Rated	1 × 29	<b>1 × 7.7</b>	1 × 39	<b>1 × 10</b>	2 × 64	<b>2 × 17</b>	2 × 64	<b>2 × 17</b>
RPM	L/min	<b>gpm</b>	L/min	<b>gpm</b>	L/min	<b>gpm</b>	L/min	<b>gpm</b>
Relief Valve Settings:								
Implement Circuits	20 600 kPa	<b>2987 psi</b>	23 000 kPa	<b>3336 psi</b>	27 460 kPa	<b>3980 psi</b>	27 460 kPa	<b>3980 psi</b>
Travel Circuits	20 600 kPa	<b>2987 psi</b>	23 000 kPa	<b>3336 psi</b>	31 380 kPa	<b>4550 psi</b>	31 380 kPa	<b>4550 psi</b>
Swing Circuits	17 200 kPa	<b>2500 psi</b>	18 600 kPa	<b>2698 psi</b>	22 060 kPa	<b>3200 psi</b>	24 030 kPa	<b>3480 psi</b>
Pilot Circuits	—	—	—	—	3930 kPa	<b>570 psi</b>	3930 kPa	<b>570 psi</b>
Maximum Drawbar								
Pull	30.6 kN	<b>6879 lb</b>	39 kN	<b>8767 lb</b>	55 kN	<b>12,130 lb</b>	55 kN	<b>12,130 lb</b>
Maximum Travel	<b>Two Speed Travel</b>		<b>Two Speed Travel</b>		<b>Two Speed Travel</b>		<b>Two Speed Travel</b>	
Speed at	Lo: 2.6 km/h	<b>1.6 mph</b>	Lo: 2.7 km/h	<b>1.7 mph</b>	Lo: 3.5 km/h	<b>2.2 mph</b>	Lo: 3.5 km/h	<b>2.2 mph</b>
Rated RPM	Hi: 4.5 km/h	<b>2.8 mph</b>	Hi: 4.7 km/h	<b>2.9 mph</b>	Hi: 5 km/h	<b>3.1 mph</b>	Hi: 5 km/h	<b>3.1 mph</b>
Width of Standard								
Track Shoe	300 mm	<b>12"</b>	400 mm	<b>15"</b>	450 mm	<b>18"</b>	450 mm	<b>18"</b>
Overall Track Length	2060 mm	<b>6'7"</b>	2450 mm	<b>8'0"</b>	2760 mm	<b>9'1"</b>	2760 mm	<b>9'1"</b>
Ground Contact Area								
with Std. Shoe	1.1 m <sup>2</sup>	<b>1705 in<sup>2</sup></b>	1.7 m <sup>2</sup>	<b>2635 in<sup>2</sup></b>	2.11 m <sup>2</sup>	<b>3271 in<sup>2</sup></b>	2.11 m <sup>2</sup>	<b>3271 in<sup>2</sup></b>
Track Gauge								
Standard	1250 mm	<b>49"</b>	1500 mm	<b>59"</b>	1750 mm	<b>5'9"</b>	1750 mm	<b>5'9"</b>
Variable Width	—	—	—	—	—	—	—	—
Undercarriage	—	—	—	—	—	—	—	—
Fuel Tank Refill								
Capacity	55 L	<b>11.5 U.S. gal</b>	55 L	<b>11.5 U.S. gal</b>	135 L	<b>36 U.S. gal</b>	135 L	<b>36 U.S. gal</b>
Hydraulic System								
(includes tank)	70 L	<b>13.2 U.S. gal</b>	85 L	<b>22.5 U.S. gal</b>	94 L	<b>25 U.S. gal</b>	105 L	<b>28 U.S. gal</b>

\*Operating weight includes coolant, lubricants, full fuel tank, cab, standard shoes, bucket, medium stick, and operator 75 kg (165 lb).

NOTE: Certain models may not be available in all Sales areas.

Specifications may also vary by Sales area.

Contact your Caterpillar Dealer for details.



MODEL	307B SB		311B		312B		312B	
Sourcing	France		Japan		Japan		France	
Flywheel Power	40 kW	<b>54 hp</b>	59 kW	<b>79 hp</b>	63 kW	<b>84 hp</b>	66 kW	<b>88 hp</b>
Operating Weight*	7800 kg	<b>17,200 lb</b>	11 125 kg	<b>24,550 lb</b>	12 435 kg	<b>27,410 lb</b>	13 000 kg	<b>28,665 lb</b>
Bucket Capacity	0.09-	<b>0.12-</b>	0.35-	<b>0.46-</b>	0.35-	<b>0.46-</b>	0.24-	<b>0.31-</b>
Range (heaped)	0.35 m <sup>3</sup>	<b>0.46 yd<sup>3</sup></b>	0.78 m <sup>3</sup>	<b>1.02 yd<sup>3</sup></b>	0.78 m <sup>3</sup>	<b>1.02 yd<sup>3</sup></b>	0.75 m <sup>3</sup>	<b>0.98 yd<sup>3</sup></b>
Engine Model	<b>4M40E1</b>		<b>3064T</b>		<b>3064T</b>		<b>3054T</b>	
Rated Engine RPM	<b>2100</b>		<b>1800</b>		<b>1900</b>		<b>1900</b>	
No. of Cylinders	<b>4</b>		<b>4</b>		<b>4</b>		<b>4</b>	
Bore	95 mm	<b>3.7"</b>	102 mm	<b>4"</b>	102 mm	<b>4"</b>	100 mm	<b>3.9"</b>
Stroke	100 mm	<b>3.9"</b>	130 mm	<b>5.1"</b>	130 mm	<b>5.1"</b>	127 mm	<b>5"</b>
Displacement	2.84 L	<b>173 in<sup>3</sup></b>	4.25 L	<b>259 in<sup>3</sup></b>	4.25 L	<b>259 in<sup>3</sup></b>	4 L	<b>244 in<sup>3</sup></b>
Max. Implement Hydraulic Pump Output at Rated RPM	2 × 64 L/min	<b>2 × 17 gpm</b>	2 × 108 L/min	<b>2 × 29 gpm</b>	2 × 120 L/min	<b>2 × 32 gpm</b>	2 × 120 L/min	<b>2 × 32 gpm</b>
Relief Valve Settings:								
Implement Circuits	27 500 kPa	<b>3990 psi</b>	29 900 kPa	<b>4340 psi</b>	29 900 kPa	<b>4340 psi</b>	30 000 kPa	<b>4350 psi</b>
Travel Circuits	31 400 kPa	<b>4553 psi</b>	34 300 kPa	<b>4980 psi</b>	34 300 kPa	<b>4980 psi</b>	34 300 kPa	<b>4970 psi</b>
Swing Circuits	20 600 kPa	<b>2987 psi</b>	23 050 kPa	<b>3340 psi</b>	23 050 kPa	<b>3340 psi</b>	25 000 kPa	<b>3625 psi</b>
Pilot Circuits	4000 kPa	<b>580 psi</b>	3930 kPa	<b>570 psi</b>	3930 kPa	<b>570 psi</b>	4000 kPa	<b>580 psi</b>
Maximum Drawbar Pull: Standard	52 kN	<b>11,690 lb</b>	95 kN	<b>21,360 lb</b>	106 kN	<b>23,830 lb</b>	106 kN	<b>23,830 lb</b>
Heavy	—	—	—	—	—	—	125 kN	<b>28,100 lb</b>
Maximum Travel Speed at Rated RPM	<b>Two Speed Travel</b>		<b>Two Speed Travel</b>		<b>Two Speed Travel</b>		<b>Two Speed Travel</b>	
Lo:	4.1 km/h	<b>2.5 mph</b>	3.8 km/h	<b>2.4 mph</b>	3.8 km/h	<b>2.4 mph</b>	3.6 km/h	<b>2.2 mph</b>
Hi:	5 km/h	<b>3.1 mph</b>	5.5 km/h	<b>3.4 mph</b>	5.5 km/h	<b>3.4 mph</b>	5.5 km/h	<b>3.4 mph</b>
Width of Standard Track Shoe	450 mm	<b>18"</b>	500 mm	<b>20"</b>	500 mm	<b>20"</b>	500 mm	<b>20"</b>
Overall Track Length	2660 mm	<b>8'9"</b>	3320 mm	<b>10'11"</b>	3490 mm	<b>11'5"</b>	3490 mm	<b>11'5"</b>
Ground Contact Area with Std. Shoe	1.84 m <sup>2</sup>	<b>2852 in<sup>2</sup></b>	2.86 m <sup>2</sup>	<b>4430 in<sup>2</sup></b>	3.03 m <sup>2</sup>	<b>4700 in<sup>2</sup></b>	3.03 m <sup>2</sup>	<b>4700 in<sup>2</sup></b>
Track Gauge	1750 mm	<b>5'9"</b>	1990 mm	<b>6'6"</b>	1990 mm	<b>6'6"</b>	1990 mm	<b>6'6"</b>
Fuel Tank Refill Capacity	135 L	<b>36 U.S. gal</b>	250 L	<b>66 U.S. gal</b>	250 L	<b>66 U.S. gal</b>	250 L	<b>66 U.S. gal</b>
Hydraulic System (includes tank)	105 L	<b>28 U.S. gal</b>	157 L	<b>41 U.S. gal</b>	162 L	<b>43 U.S. gal</b>	162 L	<b>43 U.S. gal</b>

\*Operating weight includes coolant, lubricants, full fuel tank, standard shoes, bucket, medium stick, and operator 75 kg (165 lb).

**NOTE:** Certain models may not be available in all Sales areas.

Specifications may also vary by Sales area.

Contact your Caterpillar Dealer for details.



MODEL	312B L		312B L		313B CR		315B	
Sourcing	Japan		France		Japan		Japan	
Flywheel Power	63 kW	<b>84 hp</b>	66 kW	<b>88 hp</b>	66 kW	<b>89 hp</b>	74 kW	<b>99 hp</b>
Operating Weight*	12 935 kg	<b>28,520 lb</b>	13 270 kg	<b>29,260 lb</b>	12 760 kg	<b>28,130 lb</b>	15 800 kg	<b>34,800 lb</b>
Bucket Capacity	0.35-	<b>0.46-</b>	0.24-	<b>0.31-</b>	0.35-	<b>0.46-</b>	0.37-	<b>0.5-</b>
Range (heaped)	0.78 m <sup>3</sup>	<b>1.02 yd<sup>3</sup></b>	0.75 m <sup>3</sup>	<b>0.98 yd<sup>3</sup></b>	0.78 m <sup>3</sup>	<b>1.02 yd<sup>3</sup></b>	0.84 m <sup>3</sup>	<b>1.1 yd<sup>3</sup></b>
Engine Model	<b>3064T</b>		<b>3054T</b>		<b>3064T</b>		<b>3046T</b>	
Rated Engine RPM	<b>1900</b>		<b>1900</b>		<b>1900</b>		<b>2100</b>	
No. of Cylinders	<b>4</b>		<b>4</b>		<b>4</b>		<b>6</b>	
Bore	102 mm	<b>4"</b>	100 mm	<b>3.9"</b>	104 mm	<b>4"</b>	94 mm	<b>3.7"</b>
Stroke	130 mm	<b>5.1"</b>	127 mm	<b>5"</b>	115 mm	<b>5"</b>	120 mm	<b>4.7"</b>
Displacement	4.25 L	<b>259 in<sup>3</sup></b>	4 L	<b>244 in<sup>3</sup></b>	3.9 L	<b>238 in<sup>3</sup></b>	5 L	<b>305 in<sup>3</sup></b>
Max. Implement Hydraulic Pump Output at Rated RPM	2 × 120 L/min	<b>2 × 32 gpm</b>	2 × 120 L/min	<b>2 × 32 gpm</b>	2 × 112 L/min	<b>2 × 29.6 gpm</b>	2 × 132 L/min	<b>2 × 35 gpm</b>
Relief Valve Settings:								
Implement Circuits	29 900 kPa	<b>4340 psi</b>	30 000 kPa	<b>4350 psi</b>	27 460 kPa	<b>3980 psi</b>	34 300 kPa	<b>4980 psi</b>
Travel Circuits	34 300 kPa	<b>4980 psi</b>	34 300 kPa	<b>4970 psi</b>	31 380 kPa	<b>4550 psi</b>	34 300 kPa	<b>4980 psi</b>
Swing Circuits	23 050 kPa	<b>3340 psi</b>	25 000 kPa	<b>3625 psi</b>	25 990 kPa	<b>3770 psi</b>	23 050 kPa	<b>3340 psi</b>
Pilot Circuits	3930 kPa	<b>570 psi</b>	4000 kPa	<b>580 psi</b>	3430 kPa	<b>500 psi</b>	3930 kPa	<b>570 psi</b>
Maximum Drawbar Pull: Standard	106 kN	<b>23,830 lb</b>	106 kN	<b>23,830 lb</b>	97 kN	<b>21,800 lb</b>	131 kN	<b>29,540 lb</b>
Heavy	—	—	125 kN	<b>28,100 lb</b>	—	—	—	—
Maximum Travel Speed at Rated RPM	<b>Two Speed Travel</b> Lo: 3.8 km/h <b>2.4 mph</b> Hi: 5.5 km/h <b>3.4 mph</b>		<b>Two Speed Travel</b> Lo: 3.2 km/h <b>1.9 mph</b> Hi: 5.5 km/h <b>3.4 mph</b>		<b>Two Speed Travel</b> Lo: 3.5 km/h <b>2.2 mph</b> Hi: 5.2 km/h <b>3.2 mph</b>		<b>Two Speed Travel</b> Lo: 3.3 km/h <b>2.1 mph</b> Hi: 5.5 km/h <b>3.4 mph</b>	
Width of Standard Track Shoe	600 mm	<b>24"</b>	600 mm	<b>24"</b>	500 mm	<b>1'8"</b>	500 mm	<b>20"</b>
Overall Track Length	3750 mm	<b>12'4"</b>	3750 mm	<b>12'4"</b>	3490 mm	<b>11'5"</b>	3685 mm	<b>12'1"</b>
Ground Contact Area with Std. Shoe	3.95 m <sup>2</sup>	<b>5925 in<sup>2</sup></b>	3.95 m <sup>2</sup>	<b>5925 in<sup>2</sup></b>	3.03 m <sup>2</sup>	<b>4700 in<sup>2</sup></b>	3.16 m <sup>2</sup>	<b>4898 in<sup>2</sup></b>
Track Gauge	1990 mm	<b>6'6"</b>	1990 mm	<b>6'6"</b>	1990 mm	<b>6'6"</b>	1990 mm	<b>6'6"</b>
Fuel Tank Refill Capacity	250 L	<b>66 U.S. gal</b>	250 L	<b>66 U.S. gal</b>	145 L	<b>38 U.S. gal</b>	280 L	<b>74 U.S. gal</b>
Hydraulic System (includes tank)	162 L	<b>43 U.S. gal</b>	162 L	<b>43 U.S. gal</b>	190 L	<b>50.2 U.S. gal</b>	188 L	<b>49.7 U.S. gal</b>

\*Operating weight includes coolant, lubricants, full fuel tank, standard shoes, bucket, medium stick, and operator 75 kg (165 lb).

**NOTE:** Certain models may not be available in all Sales areas.

Specifications may also vary by Sales area.

Contact your Caterpillar Dealer for details.



MODEL	315B L		315B L		317B L		317B LN	
Sourcing	Japan		France		France		France	
Flywheel Power	74 kW	<b>99 hp</b>	80 kW	<b>107 hp</b>	81 kW	<b>109 hp</b>	81 kW	<b>109 hp</b>
Operating Weight*	16 400 kg	<b>36,200 lb</b>	16 200 kg	<b>35,720 lb</b>	17 300 kg	<b>38,150 lb</b>	17 300 kg	<b>38,150 lb</b>
Bucket Capacity	0.37-	<b>0.5-</b>	0.35-	<b>0.45-</b>	0.41-	<b>0.53-</b>	0.41-	<b>0.53-</b>
Range (heaped)	0.84 m <sup>3</sup>	<b>1.1 yd<sup>3</sup></b>	0.9 m <sup>3</sup>	<b>1.17 yd<sup>3</sup></b>	1 m <sup>3</sup>	<b>1.3 yd<sup>3</sup></b>	1 m <sup>3</sup>	<b>1.3 yd<sup>3</sup></b>
Engine Model	<b>3046T</b>		<b>3054TA</b>		<b>3046T</b>		<b>3046T</b>	
Rated Engine RPM	<b>2100</b>		<b>2100</b>		<b>2100</b>		<b>2100</b>	
No. of Cylinders	<b>6</b>		<b>4</b>		<b>6</b>		<b>6</b>	
Bore	94 mm	<b>3.7"</b>	100 mm	<b>3.9"</b>	94 mm	<b>3.7"</b>	94 mm	<b>3.7"</b>
Stroke	120 mm	<b>4.7"</b>	127 mm	<b>5"</b>	120 mm	<b>4.7"</b>	120 mm	<b>4.7"</b>
Displacement	5 L	<b>305 in<sup>3</sup></b>	4 L	<b>244 in<sup>3</sup></b>	5 L	<b>305 in<sup>3</sup></b>	5 L	<b>305 in<sup>3</sup></b>
Max. Implement Hydraulic Pump Output at Rated RPM	2 × 132 L/min	<b>2 × 35 gpm</b>	2 × 132 L/min	<b>2 × 35 gpm</b>	2 × 132 L/min	<b>2 × 35 gpm</b>	2 × 132 L/min	<b>2 × 35 gpm</b>
Relief Valve Settings:								
Implement Circuits	34 320 kPa	<b>4980 psi</b>	35 000 kPa	<b>5075 psi</b>	34 300 kPa	<b>4970 psi</b>	34 300 kPa	<b>4970 psi</b>
Travel Circuits	34 320 kPa	<b>4980 psi</b>	34 300 kPa	<b>4970 psi</b>	34 300 kPa	<b>4970 psi</b>	34 300 kPa	<b>4970 psi</b>
Swing Circuits	23 050 kPa	<b>3340 psi</b>	26 500 kPa	<b>3842 psi</b>	23 000 kPa	<b>3335 psi</b>	23 000 kPa	<b>3335 psi</b>
Pilot Circuits	3930 kPa	<b>570 psi</b>	4000 kPa	<b>580 psi</b>	4000 kPa	<b>580 psi</b>	4000 kPa	<b>580 psi</b>
Maximum Drawbar Pull	131 kN	<b>29,540 lb</b>	132 kN	<b>29,700 lb</b>	154 kN	<b>34,650 lb</b>	154 kN	<b>34,650 lb</b>
Maximum Travel Speed at Rated RPM	<b>Two Speed Travel</b> Lo: 3.3 km/h <b>2.1 mph</b> Hi: 5.5 km/h <b>3.4 mph</b>		<b>Two Speed Travel</b> Lo: 3.2 km/h <b>1.9 mph</b> Hi: 5.5 km/h <b>3.4 mph</b>		<b>Two Speed Travel</b> Lo: 2.8 km/h <b>1.7 mph</b> Hi: 5 km/h <b>3.1 mph</b>		<b>Two Speed Travel</b> Lo: 2.8 km/h <b>1.7 mph</b> Hi: 5 km/h <b>3.1 mph</b>	
Width of Standard Track Shoe	600 mm	<b>24"</b>	500 mm	<b>20"</b>	600 mm	<b>24"</b>	500 mm	<b>20"</b>
Overall Track Length	3970 mm	<b>13'0"</b>	3960 mm	<b>12'6"</b>	4075 mm	<b>13'4"</b>	4075 mm	<b>13'4"</b>
Ground Contact Area with Std. Shoe	4.14 m <sup>2</sup>	<b>6420 in<sup>2</sup></b>	3.16 m <sup>2</sup>	<b>4907 in<sup>2</sup></b>	4.26 m <sup>2</sup>	<b>6600 in<sup>2</sup></b>	3.55 m <sup>2</sup>	<b>5500 in<sup>2</sup></b>
Track Gauge	1990 mm	<b>6'6"</b>	1990 mm	<b>6'6"</b>	2200 mm	<b>7'3"</b>	1995 mm	<b>6'6.5"</b>
Fuel Tank Refill Capacity	280 L	<b>74 U.S. gal</b>	280 L	<b>74 U.S. gal</b>	280 L	<b>74 U.S. gal</b>	280 L	<b>74 U.S. gal</b>
Hydraulic System (includes tank)	188 L	<b>49.7 U.S. gal</b>	188 L	<b>49.7 U.S. gal</b>	188 L	<b>49.7 U.S. gal</b>	188 L	<b>49.7 U.S. gal</b>

\*Operating weight includes coolant, lubricants, full fuel tank, standard shoes, bucket, medium stick, and operator 75 kg (165 lb).

**NOTE:** Certain models may not be available in all Sales areas.

Specifications may also vary by Sales area.

Contact your Caterpillar Dealer for details.



MODEL	318B L		318B L		318B LN		318B LN	
Sourcing	Japan		France		Japan		France	
Flywheel Power	86 kW	<b>115 hp</b>	86 kW	<b>115 hp</b>	86 kW	<b>115 hp</b>	86 kW	<b>115 hp</b>
Operating Weight*	18 360 kg	<b>40,480 lb</b>	18 500 kg	<b>40,790 lb</b>	17 990 kg	<b>39,660 lb</b>	18 000 kg	<b>39,690 lb</b>
Bucket Capacity	0.4-	<b>0.52-</b>	0.41-	<b>0.53-</b>	0.4-	<b>0.52-</b>	0.41-	<b>0.53-</b>
Range (heaped)	1.2 m <sup>3</sup>	<b>1.57 yd<sup>3</sup></b>	1.35 m <sup>3</sup>	<b>1.75 yd<sup>3</sup></b>	1.2 m <sup>3</sup>	<b>1.57 yd<sup>3</sup></b>	1.35 m <sup>3</sup>	<b>1.75 yd<sup>3</sup></b>
Engine Model	<b>3046T</b>		<b>3046T</b>		<b>3046T</b>		<b>3046T</b>	
Rated Engine RPM	<b>2200</b>		<b>2200</b>		<b>2200</b>		<b>2200</b>	
No. of Cylinders	<b>6</b>		<b>6</b>		<b>6</b>		<b>6</b>	
Bore	94 mm	<b>3.7"</b>	94 mm	<b>3.7"</b>	94 mm	<b>3.7"</b>	94 mm	<b>3.7"</b>
Stroke	120 mm	<b>4.7"</b>	120 mm	<b>4.7"</b>	120 mm	<b>4.7"</b>	120 mm	<b>4.7"</b>
Displacement	5 L	<b>305 in<sup>3</sup></b>	5 L	<b>305 in<sup>3</sup></b>	5 L	<b>305 in<sup>3</sup></b>	5 L	<b>305 in<sup>3</sup></b>
Max. Implement Hydraulic Pump Output at Rated RPM	2 × 150 L/min	<b>2 × 40 gpm</b>	2 × 150 L/min	<b>2 × 40 gpm</b>	2 × 150 L/min	<b>2 × 40 gpm</b>	2 × 150 L/min	<b>2 × 40 gpm</b>
Relief Valve Settings:								
Implement Circuits	34 300 kPa	<b>4970 psi</b>	34 300 kPa	<b>4970 psi</b>	34 300 kPa	<b>4970 psi</b>	34 300 kPa	<b>4970 psi</b>
Travel Circuits	34 300 kPa	<b>4970 psi</b>	34 300 kPa	<b>4970 psi</b>	34 300 kPa	<b>4970 psi</b>	34 300 kPa	<b>4970 psi</b>
Swing Circuits	25 500 kPa	<b>3700 psi</b>	25 500 kPa	<b>3700 psi</b>	25 500 kPa	<b>3700 psi</b>	25 500 kPa	<b>3700 psi</b>
Pilot Circuits	4000 kPa	<b>580 psi</b>	4000 kPa	<b>580 psi</b>	4000 kPa	<b>580 psi</b>	4000 kPa	<b>580 psi</b>
Maximum Drawbar Pull: Standard	174 kN	<b>39,100 lb</b>	157 kN	<b>35,300 lb</b>	174 kN	<b>39,100 lb</b>	157 kN	<b>35,300 lb</b>
Heavy	—	—	178 kN	<b>40,015 lb</b>	—	—	178 kN	<b>40,015 lb</b>
Maximum Travel Speed at Rated RPM	<b>Two Speed Travel</b>		<b>Two Speed Travel</b>		<b>Two Speed Travel</b>		<b>Two Speed Travel</b>	
Lo:	2.9 km/h	<b>1.8 mph</b>	3.2 km/h	<b>2.0 mph</b>	2.9 km/h	<b>1.8 mph</b>	3.2 km/h	<b>2.0 mph</b>
Hi:	4.6 km/h	<b>2.9 mph</b>	5.6 km/h	<b>3.5 mph</b>	4.6 km/h	<b>2.9 mph</b>	5.6 km/h	<b>3.5 mph</b>
Width of Standard Track Shoe	600 mm	<b>24"</b>	600 mm	<b>24"</b>	500 mm	<b>20"</b>	500 mm	<b>20"</b>
Overall Track Length	4075 mm	<b>13'4"</b>	4075 mm	<b>13'4"</b>	4075 mm	<b>13'4"</b>	4075 mm	<b>13'4"</b>
Ground Contact Area with Std. Shoe	4.26 m <sup>2</sup>	<b>6600 in<sup>2</sup></b>	4.26 m <sup>2</sup>	<b>6600 in<sup>2</sup></b>	3.26 m <sup>2</sup>	<b>5050 in<sup>2</sup></b>	3.55 m <sup>2</sup>	<b>5500 in<sup>2</sup></b>
Track Gauge	2200 mm	<b>7'3"</b>	2200 mm	<b>7'3"</b>	1995 mm	<b>6'7"</b>	1995 mm	<b>6'6"</b>
Fuel Tank Refill Capacity	280 L	<b>74 U.S. gal</b>	280 L	<b>74 U.S. gal</b>	280 L	<b>74 U.S. gal</b>	280 L	<b>74 U.S. gal</b>
Hydraulic System (includes tank)	188 L	<b>49.7 U.S. gal</b>	188 L	<b>49.7 U.S. gal</b>	188 L	<b>49.7 U.S. gal</b>	188 L	<b>49.7 U.S. gal</b>

\*Operating weight includes coolant, lubricants, full fuel tank, standard shoes, bucket, long stick, and operator 75 kg (165 lb).

**NOTE:** Certain models may not be available in all Sales areas.

Specifications may also vary by Sales area.

Contact your Caterpillar Dealer for details.





MODEL	M312		M315		M318		M320	
Flywheel Power	85.1 kW	<b>114 hp</b>	92.4 kW	<b>124 hp</b>	104.4 kW	<b>140 hp</b>	104.4 kW	<b>140 hp</b>
Operating Weight*	13 810 kg	<b>30,450 lb</b>	15 730 kg	<b>34,685 lb</b>	17 910 kg	<b>39,490 lb</b>	19 410 kg	<b>20,640 lb</b>
Bucket Capacity	0.24-	<b>0.31-</b>	0.24-	<b>0.31-</b>	0.4-	<b>0.52-</b>	0.41-	<b>0.54-</b>
Range (heaped)	0.86 m <sup>3</sup>	<b>1.12 yd<sup>3</sup></b>	0.86 m <sup>3</sup>	<b>1.12 yd<sup>3</sup></b>	1.05 m <sup>3</sup>	<b>1.37 yd<sup>3</sup></b>	1.35 m <sup>3</sup>	<b>1.77 yd<sup>3</sup></b>
Engine Model	<b>3054TA</b>		<b>3054TA</b>		<b>3116T</b>		<b>3116T</b>	
Rated Engine RPM	<b>2000</b>		<b>2300</b>		<b>2000</b>		<b>2000</b>	
No. of Cylinders	<b>4</b>		<b>4</b>		<b>6</b>		<b>6</b>	
Bore	100 mm	<b>3.9"</b>	100 mm	<b>3.9"</b>	102 mm	<b>4"</b>	102 mm	<b>4"</b>
Stroke	127 mm	<b>5"</b>	127 mm	<b>5"</b>	130 mm	<b>5.1"</b>	130 mm	<b>5.1"</b>
Displacement	3.99 L	<b>243 in<sup>3</sup></b>	3.99 L	<b>243 in<sup>3</sup></b>	6.6 L	<b>402.6 in<sup>3</sup></b>	6.6 L	<b>402.6 in<sup>3</sup></b>
Max. Implement Hydraulic Pump Output at Rated RPM	190+80 L/min	<b>50+21 gpm</b>	220+80 L/min	<b>58+21 gpm</b>	260+112 L/min	<b>69+30 gpm</b>	320+112 L/min	<b>85+30 gpm</b>
Relief Valve Setting	33 000 kPa <b>4785 psi</b>		33 000 kPa <b>4785 psi</b>		33 000 kPa <b>4785 psi</b>		33 000 kPa <b>4785 psi</b>	
Tires — standard	<b>Dual 10.00-20 16PR</b>		<b>Dual 10.00-20 16PR</b>		<b>Dual 10.00-20 16PR</b>		<b>Dual 11.00-20 16PR</b>	
— optional	<b>Dual 10.00-20 14PR</b> <b>Dual 11.00-20 16PR</b> <b>Single 18R-19.5 XF</b>		<b>Dual 10.00-20 14PR</b> <b>Dual 11.00-20 16PR</b> <b>Single 18R-19.5 XF</b> <b>Single 18R-22.5 XF</b>		<b>Dual 10.00-20 14PR</b> <b>Dual 11.00-20 16PR</b> <b>Single 18R-19.5 XF</b> <b>Single 18R-22.5 XF</b>		<b>Dual 10.00-20 Solid</b> <b>Single 18R-19.5 XF</b> <b>Single 18R-22.5 XF</b> <b>—</b>	
Max. Travel Speed	34 km/h	<b>21 mph</b>	34 km/h	<b>21 mph</b>	34 km/h	<b>21 mph</b>	20 km/h	<b>12 mph</b>
Tread Width**	1913 mm	<b>6'3"</b>	1913 mm	<b>6'3"</b>	1913 mm	<b>6'3"</b>	1913 mm	<b>6'3"</b>
Wheel Base	2500 mm	<b>8'2"</b>	2500 mm	<b>8'2"</b>	2600 mm	<b>8'6"</b>	2750 mm	<b>9'0"</b>
Width Over Tires**	2500 mm	<b>8'2"</b>	2500 mm	<b>8'2"</b>	2500 mm	<b>8'2"</b>	2950 mm	<b>9'8"</b>
Ground Clearance**	375 mm	<b>14.8"</b>	375 mm	<b>14.8"</b>	375 mm	<b>14.8"</b>	360 mm	<b>14.1"</b>
Fuel Tank Refill Capacity	230 L	<b>60.8 U.S. gal</b>	240 L	<b>63.4 U.S. gal</b>	320 L	<b>84.5 U.S. gal</b>	370 L	<b>98 U.S. gal</b>
Hydraulic System (includes tank)	180 L	<b>47.6 U.S. gal</b>	210 L	<b>55.5 U.S. gal</b>	220 L	<b>58.1 U.S. gal</b>	300 L	<b>79 U.S. gal</b>

\*Operating weight includes full fuel tank, operator 75 kg (165 lb), one-piece boom, mid-size stick and bucket, and two sets of outriggers.

\*\*With standard tires.

**NOTE:** Standard cold inflation pressure for all tires is 650 kPa (94 psi).

Certain models may not be available in all Sales areas.

Specifications may also vary by Sales area.

Contact your Caterpillar Dealer for details.



MODEL	320C		320C		320C L		320C L	
Sourcing	Japan, Brazil		Belgium		Japan, Brazil		Belgium	
Flywheel Power	103 kW	<b>138 hp</b>	103 kW	<b>138 hp</b>	103 kW	<b>138 hp</b>	103 kW	<b>138 hp</b>
Operating Weight*	19 700 kg	<b>43,430 lb</b>	21 000 kg	<b>46,300 lb</b>	21 000 kg	<b>46,300 lb</b>	21 550 kg	<b>47,510 lb</b>
Bucket Capacity	0.45-	<b>0.59-</b>	0.45-	<b>0.59-</b>	0.45-	<b>0.59-</b>	0.45-	<b>0.59-</b>
Range (heaped)	1.5 m <sup>3</sup>	<b>1.96 yd<sup>3</sup></b>	1.5 m <sup>3</sup>	<b>1.96 yd<sup>3</sup></b>	1.5 m <sup>3</sup>	<b>1.96 yd<sup>3</sup></b>	1.5 m <sup>3</sup>	<b>1.96 yd<sup>3</sup></b>
Engine Model	<b>3066T</b>		<b>3066T</b>		<b>3066T</b>		<b>3066T</b>	
Rated Engine RPM	<b>1800</b>		<b>1800</b>		<b>1800</b>		<b>1800</b>	
No. of Cylinders	<b>6</b>		<b>6</b>		<b>6</b>		<b>6</b>	
Bore	102 mm	<b>4"</b>	102 mm	<b>4"</b>	102 mm	<b>4"</b>	102 mm	<b>4"</b>
Stroke	130 mm	<b>5"</b>	130 mm	<b>5"</b>	130 mm	<b>5"</b>	130 mm	<b>5"</b>
Displacement	6.4 L	<b>391 in<sup>3</sup></b>	6.4 L	<b>391 in<sup>3</sup></b>	6.4 L	<b>391 in<sup>3</sup></b>	6.4 L	<b>391 in<sup>3</sup></b>
Max. Implement Hydraulic Pump Output at Rated RPM	2 × 205 L/min	<b>2 × 54 gpm</b>	2 × 205 L/min	<b>2 × 54 gpm</b>	2 × 205 L/min	<b>2 × 54 gpm</b>	2 × 205 L/min	<b>2 × 54 gpm</b>
Relief Valve Settings:								
Implement Circuits	34 300 kPa	<b>4970 psi</b>	34 300 kPa	<b>4970 psi</b>	34 300 kPa	<b>4970 psi</b>	34 300 kPa	<b>4970 psi</b>
Travel Circuits	34 300 kPa	<b>4970 psi</b>	34 300 kPa	<b>4970 psi</b>	34 300 kPa	<b>4970 psi</b>	34 300 kPa	<b>4970 psi</b>
Swing Circuits	25 000 kPa	<b>3630 psi</b>	25 000 kPa	<b>3630 psi</b>	25 000 kPa	<b>3630 psi</b>	25 000 kPa	<b>3630 psi</b>
Pilot Circuits	4140 kPa	<b>600 psi</b>	4140 kPa	<b>600 psi</b>	4140 kPa	<b>600 psi</b>	4140 kPa	<b>600 psi</b>
	<b>Two Speed Travel</b>		<b>Two Speed Travel</b>		<b>Two Speed Travel</b>		<b>Two Speed Travel</b>	
Maximum Drawbar Pull	196 kN	<b>44,040 lb</b>	196 kN	<b>44,040 lb</b>	196 kN	<b>44,040 lb</b>	196 kN	<b>44,040 lb</b>
Maximum Travel Speed at Rated RPM	Lo: 3.5 km/h	<b>2.2 mph</b>	Lo: 3.5 km/h	<b>2.2 mph</b>	Lo: 3.5 km/h	<b>2.2 mph</b>	Lo: 3.5 km/h	<b>2.2 mph</b>
	Hi: 5.5 km/h	<b>3.4 mph</b>	Hi: 5.5 km/h	<b>3.4 mph</b>	Hi: 5.5 km/h	<b>3.4 mph</b>	Hi: 5.5 km/h	<b>3.4 mph</b>
Width of Standard Track Shoe	600 mm	<b>2'0"</b>	600 mm	<b>2'0"</b>	600 mm	<b>2'0"</b>	600 mm	<b>2'0"</b>
Overall Track Length	4075 mm	<b>13'4"</b>	4075 mm	<b>13'4.4"</b>	4455 mm	<b>14'7"</b>	4455 mm	<b>14'7"</b>
Ground Contact Area with Std. Shoe	4.26 m <sup>2</sup>	<b>6600 in<sup>2</sup></b>	4.26 m <sup>2</sup>	<b>6600 in<sup>2</sup></b>	4.72 m <sup>2</sup>	<b>7320 in<sup>2</sup></b>	4.72 m <sup>2</sup>	<b>7320 in<sup>2</sup></b>
Track Gauge	2200 mm	<b>7'3"</b>	2200 mm	<b>7'2.6"</b>	2380 mm	<b>7'10"</b>	2380 mm	<b>7'10"</b>
Fuel Tank Refill Capacity	400 L	<b>106 U.S. gal</b>	320 L	<b>84.5 U.S. gal</b>	400 L	<b>106 U.S. gal</b>	320 L	<b>84.5 U.S. gal</b>
Hydraulic System (includes tank)	200 L	<b>52.8 U.S. gal</b>	200 L	<b>52.8 U.S. gal</b>	200 L	<b>52.8 U.S. gal</b>	200 L	<b>52.8 U.S. gal</b>

\*Operating weight includes coolant, lubricants, full fuel tank, standard shoes, bucket and operator 75 kg (165 lb).

**NOTE:** Certain models may not be available in all Sales areas.

Specifications may also vary by Sales area.

Contact your Caterpillar Dealer for details.



MODEL	320C LN		320C S		322B	
Sourcing	Belgium		Belgium		Japan	
Flywheel Power	103 kW	<b>138 hp</b>	103 kW	<b>138 hp</b>	114 kW	<b>153 hp</b>
Operating Weight*	21 550 kg	<b>47,510 lb</b>	22 530 kg	<b>49,680 lb</b>	22 760 kg	<b>50,180 lb</b>
Bucket Capacity	0.45-	<b>0.59-</b>	0.45-	<b>0.59-</b>	0.45-	<b>0.6-</b>
Range (heaped)	1.5 m <sup>3</sup>	<b>1.96 yd<sup>3</sup></b>	1.5 m <sup>3</sup>	<b>1.96 yd<sup>3</sup></b>	1.8 m <sup>3</sup>	<b>2.4 yd<sup>3</sup></b>
Engine Model	<b>3066T</b>		<b>3066T</b>		<b>3116T</b>	
Rated Engine RPM	<b>1800</b>		<b>1800</b>		<b>1950</b>	
No. of Cylinders	<b>6</b>		<b>6</b>		<b>6</b>	
Bore	102 mm	<b>4"</b>	102 mm	<b>4"</b>	105 mm	<b>4.1"</b>
Stroke	130 mm	<b>5"</b>	130 mm	<b>5"</b>	127 mm	<b>5"</b>
Displacement	6.4 L	<b>389 in<sup>3</sup></b>	6.4 L	<b>389 in<sup>3</sup></b>	6.6 L	<b>403 in<sup>3</sup></b>
Max. Implement Hydraulic Pump Output at Rated RPM	2 × 205 L/min	<b>2 × 54 gpm</b>	2 × 205 L/min	<b>2 × 54 gpm</b>	2 × 205 L/min	<b>2 × 54 gpm</b>
Relief Valve Settings:						
Implement Circuits	34 300 kPa	<b>4970 psi</b>	34 300 kPa	<b>4970 psi</b>	34 300 kPa	<b>4980 psi</b>
Travel Circuits	34 300 kPa	<b>4970 psi</b>	34 300 kPa	<b>4970 psi</b>	34 300 kPa	<b>4980 psi</b>
Swing Circuits	25 000 kPa	<b>3630 psi</b>	25 000 kPa	<b>3630 psi</b>	27 500 kPa	<b>3980 psi</b>
Pilot Circuits	4140 kPa	<b>600 psi</b>	4140 kPa	<b>600 psi</b>	4140 kPa	<b>600 psi</b>
	<b>Two Speed Travel</b>		<b>Two Speed Travel</b>		<b>Two Speed Travel</b>	
Maximum Drawbar Pull	—	<b>—</b>	—	<b>—</b>	Lo: 194 kN	<b>43,650 lb</b>
	196 kN	<b>44,040 lb</b>	196 kN	<b>44,040 lb</b>	Hi: 108 kN	<b>24,500 lb</b>
Maximum Travel Speed at Rated RPM	Lo: 3.5 km/h	<b>2.2 mph</b>	Lo: 3.5 km/h	<b>2.2 mph</b>	Lo: 3.4 km/h	<b>2.1 mph</b>
	Hi: 5.5 km/h	<b>3.4 mph</b>	Hi: 5.5 km/h	<b>3.4 mph</b>	Hi: 5.5 km/h	<b>3.4 mph</b>
Width of Standard Track Shoe	500 mm	<b>1'8"</b>	550 mm	<b>1'9"</b>	600 mm	<b>2'0"</b>
Overall Track Length	4455 mm	<b>14'7"</b>	4358 mm	<b>14'4"</b>	4260 mm	<b>14'0"</b>
Ground Contact Area with Std. Shoe	4.26 m <sup>2</sup>	<b>6600 in<sup>2</sup></b>	4.15 m <sup>2</sup>	<b>6433 in<sup>2</sup></b>	4.48 m <sup>2</sup>	<b>6940 in<sup>2</sup></b>
Track Gauge	2200 mm	<b>7'3"</b>	1895 mm	<b>6'3"</b>	2390 mm	<b>7'10"</b>
Fuel Tank Refill Capacity	320 L	<b>84.5 U.S. gal</b>	320 L	<b>84.5 U.S. gal</b>	340 L	<b>90 U.S. gal</b>
Hydraulic System (includes tank)	200 L	<b>52.8 U.S. gal</b>	200 L	<b>52.8 U.S. gal</b>	—	<b>—</b>

\*Operating weight includes coolant, lubricants, full fuel tank, standard shoes, bucket and operator 75 kg (165 lb).

**NOTE:** Certain models may not be available in all Sales areas.

Specifications may also vary by Sales area.

Contact your Caterpillar Dealer for details.



MODEL	322B L		322B L		322B LN	
Sourcing	Japan, U.S.		Belgium		Belgium	
Flywheel Power	114 kW	<b>153 hp</b>	114 kW	<b>153 hp</b>	114 kW	<b>153 hp</b>
Operating Weight*	23 990 kg	<b>52,890 lb</b>	24 590 kg	<b>54,220 lb</b>	23 810 kg	<b>52,500 lb</b>
Bucket Capacity Range (heaped)	0.45-1.9 m <sup>3</sup>	<b>0.6-2.5 yd<sup>3</sup></b>	0.63-1.9 m <sup>3</sup>	<b>0.82-2.5 yd<sup>3</sup></b>	0.63-1.9 m <sup>3</sup>	<b>0.82-2.5 yd<sup>3</sup></b>
Engine Model	<b>3116TA</b>		<b>3116TA</b>		<b>3116TA</b>	
Rated Engine RPM	<b>1950</b>		<b>1950</b>		<b>1950</b>	
No. of Cylinders	<b>6</b>		<b>6</b>		<b>6</b>	
Bore	105 mm	<b>4.1"</b>	105 mm	<b>4.1"</b>	105 mm	<b>4.1"</b>
Stroke	127 mm	<b>5"</b>	127 mm	<b>5"</b>	127 mm	<b>5"</b>
Displacement	6.6 L	<b>403 in<sup>3</sup></b>	6.6 L	<b>403 in<sup>3</sup></b>	6.6 L	<b>403 in<sup>3</sup></b>
Max. Implement Hydraulic Pump Output at Rated RPM	2 × 205 L/min	<b>2 × 54 gpm</b>	2 × 205 L/min	<b>2 × 54.2 gpm</b>	2 × 205 L/min	<b>2 × 54 gpm</b>
Relief Valve Settings:						
Implement Circuits	34 300 kPa	<b>4980 psi</b>	34 300 kPa	<b>4980 psi</b>	34 300 kPa	<b>4980 psi</b>
Travel Circuits	34 300 kPa	<b>4980 psi</b>	34 300 kPa	<b>4980 psi</b>	34 300 kPa	<b>4980 psi</b>
Swing Circuits	27 500 kPa	<b>3980 psi</b>	27 500 kPa	<b>3980 psi</b>	27 500 kPa	<b>3980 psi</b>
Pilot Circuits	4140 kPa	<b>600 psi</b>	4140 kPa	<b>600 psi</b>	4140 kPa	<b>600 psi</b>
	<b>Two Speed Travel</b>		<b>Two Speed Travel</b>		<b>Two Speed Travel</b>	
Maximum Drawbar Pull	Lo: 194 kN Hi: 108 kN	<b>43,650 lb 24,500 lb</b>	Lo: 194 kN Hi: 108 kN	<b>43,650 lb 24,500 lb</b>	Lo: 194 kN Hi: 108 kN	<b>43,650 lb 24,500 lb</b>
Maximum Travel Speed at Rated RPM	Lo: 3.4 km/h Hi: 5.5 km/h	<b>2.1 mph 3.4 mph</b>	Lo: 3.4 km/h Hi: 5.5 km/h	<b>2.1 mph 3.4 mph</b>	Lo: 3.4 km/h Hi: 5.5 km/h	<b>2.1 mph 3.4 mph</b>
Width of Standard Track Shoe	800 mm	<b>2'8"</b>	800 mm	<b>2'8"</b>	600 mm	<b>2'0"</b>
Overall Track Length	4630 mm	<b>15'2"</b>	4640 mm	<b>15'3"</b>	4640 mm	<b>15'3"</b>
Ground Contact Area with Std. Shoe	6.58 m <sup>2</sup>	<b>10,200 in<sup>2</sup></b>	6.58 m <sup>2</sup>	<b>10,200 in<sup>2</sup></b>	4.94 m <sup>2</sup>	<b>7650 in<sup>2</sup></b>
Track Gauge	2590 mm	<b>8'6"</b>	2590 mm	<b>8'6"</b>	2590 mm	<b>8'6"</b>
Fuel Tank Refill Capacity	340 L	<b>90 U.S. gal</b>	340 L	<b>90 U.S. gal</b>	340 L	<b>90 U.S. gal</b>

\*Operating weight includes coolant, lubricants, full fuel tank, standard shoes, bucket and operator 75 kg (165 lb).

**NOTE:** Certain models may not be available in all Sales areas.  
Specifications may also vary by Sales area.  
Contact your Caterpillar Dealer for details.



MODEL	325B		325B L		325B L		325B LN	
Sourcing	Japan		Japan, U.S.		Belgium		Belgium	
Flywheel Power	125 kW	<b>168 hp</b>	125 kW	<b>168 hp</b>	125 kW	<b>168 hp</b>	125 kW	<b>168 hp</b>
Operating Weight*	25 900 kg	<b>57,100 lb</b>	27 530 kg	<b>60,700 lb</b>	28 590 kg	<b>63,040 lb</b>	27 070 kg	<b>59,690 lb</b>
Bucket Capacity	0.7-	<b>0.92-</b>	0.7-	<b>0.92-</b>	0.63-	<b>0.82-</b>	0.63-	<b>0.82-</b>
Range (heaped)	2.2 m <sup>3</sup>	<b>2.88 yd<sup>3</sup></b>	2.2 m <sup>3</sup>	<b>2.88 yd<sup>3</sup></b>	1.9 m <sup>3</sup>	<b>2.5 yd<sup>3</sup></b>	1.9 m <sup>3</sup>	<b>2.5 yd<sup>3</sup></b>
Engine Model	<b>3116TA</b>		<b>3116TA</b>		<b>3116TA</b>		<b>3116TA</b>	
Rated Engine RPM	<b>2000</b>		<b>2000</b>		<b>2000</b>		<b>2000</b>	
No. of Cylinders	<b>6</b>		<b>6</b>		<b>6</b>		<b>6</b>	
Bore	105 mm	<b>4.1"</b>	105 mm	<b>4.1"</b>	105 mm	<b>4.1"</b>	105 mm	<b>4.1"</b>
Stroke	127 mm	<b>5"</b>	127 mm	<b>5"</b>	127 mm	<b>5"</b>	127 mm	<b>5"</b>
Displacement	6.6 L	<b>403 in<sup>3</sup></b>	6.6 L	<b>403 in<sup>3</sup></b>	6.6 L	<b>403 in<sup>3</sup></b>	6.6 L	<b>403 in<sup>3</sup></b>
Max. Implement Hydraulic Pump Output at Rated RPM	2 × 210 L/min	<b>2 × 55.5 gpm</b>	2 × 214 L/min	<b>2 × 56.5 gpm</b>	2 × 210 L/min	<b>2 × 55 gpm</b>	2 × 210 L/min	<b>2 × 55 gpm</b>
Relief Valve Settings:								
Implement Circuits	34 300 kPa	<b>4980 psi</b>	34 300 kPa	<b>4980 psi</b>	34 300 kPa	<b>4980 psi</b>	34 300 kPa	<b>4980 psi</b>
Travel Circuits	34 300 kPa	<b>4980 psi</b>	34 300 kPa	<b>4980 psi</b>	34 300 kPa	<b>4980 psi</b>	34 300 kPa	<b>4980 psi</b>
Swing Circuits	27 500 kPa	<b>3980 psi</b>	29 400 kPa	<b>4250 psi</b>	27 500 kPa	<b>3980 psi</b>	27 500 kPa	<b>3980 psi</b>
Pilot Circuits	4140 kPa	<b>600 psi</b>	4100 kPa	<b>595 psi</b>	4140 kPa	<b>600 psi</b>	4140 kPa	<b>600 psi</b>
	<b>Two Speed Travel</b>		<b>Two Speed Travel</b>		<b>Two Speed Travel</b>		<b>Two Speed Travel</b>	
Maximum Drawbar Pull	Lo: 215 kN Hi: 131 kN	<b>48,350 lb 29,540 lb</b>	Lo: 215 kN Hi: 131 kN	<b>48,350 lb 29,540 lb</b>	Lo: 215 kN Hi: 131 kN	<b>48,350 lb 29,540 lb</b>	Lo: 215 kN Hi: 131 kN	<b>48,350 lb 29,540 lb</b>
Maximum Travel Speed at Rated RPM	Lo: 3.1 km/h Hi: 5 km/h	<b>1.9 mph 3.1 mph</b>	Lo: 3.1 km/h Hi: 5 km/h	<b>1.9 mph 3.1 mph</b>	Lo: 3.1 km/h Hi: 5 km/h	<b>1.9 mph 3.1 mph</b>	Lo: 3.1 km/h Hi: 5 km/h	<b>1.9 mph 3.1 mph</b>
Width of Standard Track Shoe	600 mm	<b>2'0"</b>	800 mm	<b>2'8"</b>	800 mm	<b>2'8"</b>	600 mm	<b>2'0"</b>
Overall Track Length	4360 mm	<b>14'4"</b>	4660 mm	<b>15'3"</b>	4660 mm	<b>15'3"</b>	4660 mm	<b>15'3"</b>
Ground Contact Area with Std. Shoe	4.55 m <sup>2</sup>	<b>7050 in<sup>2</sup></b>	6.56 m <sup>2</sup>	<b>10,200 in<sup>2</sup></b>	6.56 m <sup>2</sup>	<b>10,200 in<sup>2</sup></b>	4.92 m <sup>2</sup>	<b>7630 in<sup>2</sup></b>
Track Gauge	2390 mm	<b>7'10"</b>	2590 mm	<b>8'6"</b>	2590 mm	<b>8'6"</b>	2390 mm	<b>7'10"</b>
Fuel Tank Refill Capacity	420 L	<b>111 U.S. gal</b>	420 L	<b>111 U.S. gal</b>	420 L	<b>111 U.S. gal</b>	420 L	<b>111 U.S. gal</b>

\*Operating weight includes coolant, lubricants, full fuel tank, standard shoes, bucket and operator 75 kg (165 lb).

**NOTE:** Certain models may not be available in all Sales areas. Specifications may also vary by Sales area. Contact your Caterpillar Dealer for details.



MODEL	330B		330B L		330B L		330B LN	
Sourcing	Japan		Japan, U.S.		Belgium		Belgium	
Flywheel Power	165 kW	<b>222 hp</b>	165 kW	<b>222 hp</b>	165 kW	<b>222 hp</b>	165 kW	<b>222 hp</b>
Operating Weight*	32 420 kg	<b>71,470 lb</b>	33 730 kg	<b>74,360 lb</b>	34 180 kg	<b>75,370 lb</b>	33 730 kg	<b>74,380 lb</b>
Bucket Capacity	0.7-	<b>0.92-</b>	0.7-	<b>0.92-</b>	0.66-	<b>0.86-</b>	0.66-	<b>0.86-</b>
Range (heaped)	2.2 m <sup>3</sup>	<b>2.88 yd<sup>3</sup></b>	2.2 m <sup>3</sup>	<b>2.88 yd<sup>3</sup></b>	2.1 m <sup>3</sup>	<b>2.75 yd<sup>3</sup></b>	2.1 m <sup>3</sup>	<b>2.75 yd<sup>3</sup></b>
Engine Model	<b>3306TA</b>		<b>3306TA</b>		<b>3306TA</b>		<b>3306TA</b>	
Rated Engine RPM	<b>1800</b>		<b>1800</b>		<b>1800</b>		<b>1800</b>	
No. of Cylinders	<b>6</b>		<b>6</b>		<b>6</b>		<b>6</b>	
Bore	121 mm	<b>4.75"</b>	121 mm	<b>4.75"</b>	121 mm	<b>4.75"</b>	121 mm	<b>4.75"</b>
Stroke	152 mm	<b>6"</b>	152 mm	<b>6"</b>	152 mm	<b>6"</b>	152 mm	<b>6"</b>
Displacement	10.5 L	<b>638 in<sup>3</sup></b>	10.5 L	<b>638 in<sup>3</sup></b>	10.5 L	<b>640 in<sup>3</sup></b>	10.5 L	<b>638 in<sup>3</sup></b>
Max. Implement Hydraulic Pump Output at Rated RPM	2 × 240 L/min	<b>2 × 63 gpm</b>	2 × 240 L/min	<b>2 × 63 gpm</b>	2 × 240 L/min	<b>2 × 63 gpm</b>	2 × 240 L/min	<b>2 × 63 gpm</b>
Relief Valve Settings:								
Implement Circuits	34 300 kPa	<b>4980 psi</b>	34 300 kPa	<b>4980 psi</b>	34 300 kPa	<b>4980 psi</b>	34 300 kPa	<b>4980 psi</b>
Travel Circuits	34 300 kPa	<b>4980 psi</b>	34 300 kPa	<b>4980 psi</b>	34 300 kPa	<b>4980 psi</b>	34 300 kPa	<b>4980 psi</b>
Swing Circuits	27 500 kPa	<b>3980 psi</b>	27 500 kPa	<b>3980 psi</b>	27 500 kPa	<b>3980 psi</b>	27 500 kPa	<b>3980 psi</b>
Pilot Circuits	4140 kPa	<b>600 psi</b>	4140 kPa	<b>600 psi</b>	4140 kPa	<b>600 psi</b>	4140 kPa	<b>600 psi</b>
	<b>Two Speed Travel</b>		<b>Two Speed Travel</b>		<b>Two Speed Travel</b>		<b>Two Speed Travel</b>	
Maximum Drawbar Pull	Lo: 268 kN Hi: 148 kN	<b>60,250 lb 33,300 lb</b>	Lo: 268 kN Hi: 148 kN	<b>60,250 lb 33,300 lb</b>	Lo: 268 kN Hi: 148 kN	<b>60,250 lb 33,300 lb</b>	Lo: 268 kN Hi: 148 kN	<b>60,250 lb 33,300 lb</b>
Maximum Travel Speed at Rated RPM	Lo: 2.7 km/h Hi: 4.6 km/h	<b>1.7 mph 2.9 mph</b>	Lo: 2.7 km/h Hi: 4.6 km/h	<b>1.7 mph 2.9 mph</b>	Lo: 2.7 km/h Hi: 4.6 km/h	<b>1.7 mph 2.9 mph</b>	Lo: 2.7 km/h Hi: 4.6 km/h	<b>1.7 mph 2.9 mph</b>
Width of Standard Track Shoe	600 mm	<b>2'0"</b>	750 mm	<b>2'6"</b>	750 mm	<b>2'5.5"</b>	600 mm	<b>2'0"</b>
Overall Track Length	4.58 m	<b>15'0"</b>	5.02 m	<b>16'6"</b>	5.02 m	<b>16'6"</b>	5.02 m	<b>16'6"</b>
Ground Contact Area with Std. Shoe	4.74 m <sup>2</sup>	<b>7350 in<sup>2</sup></b>	6.58 m <sup>2</sup>	<b>10,200 in<sup>2</sup></b>	6.58 m <sup>2</sup>	<b>10,200 in<sup>2</sup></b>	5.26 m <sup>2</sup>	<b>8150 in<sup>2</sup></b>
Track Gauge	2.59 m	<b>8'6"</b>	2.59 m	<b>8'6"</b>	2.59 m	<b>8'6"</b>	2.39 m	<b>7'10"</b>
Fuel Tank Refill Capacity	560 L	<b>148 U.S. gal</b>	560 L	<b>148 U.S. gal</b>	560 L	<b>148 U.S. gal</b>	560 L	<b>148 U.S. gal</b>

\*Operating weight includes coolant, lubricants, full fuel tank, standard shoes, bucket and operator 75 kg (165 lb).

**NOTE:** Certain models may not be available in all Sales areas. Specifications may also vary by Sales area. Contact your Caterpillar Dealer for details.


**345B  
Series II**

**345B L – FIX  
Series II**

**345B L – VG  
Series II**

**345B L – VG**

MODEL	Japan		Japan, U.S.		U.S.		Belgium	
Sourcing	Japan		Japan, U.S.		U.S.		Belgium	
Flywheel Power	239 kW	<b>321 hp</b>	239 kW	<b>321 hp</b>	239 kW	<b>321 hp</b>	216 kW	<b>290 hp</b>
Operating Weight*	44 500 kg	<b>98,100 lb</b>	45 300 kg	<b>99,900 lb</b>	46 200 kg	<b>101,850 lb</b>	47 615 kg	<b>105,000 lb</b>
Bucket Capacity	1.6-	<b>1.91-</b>	1.6-	<b>1.91-</b>	1.6-	<b>1.91-</b>	1.8-	<b>2.3-</b>
Range (heaped)	2.4 m <sup>3</sup>	<b>2.87 yd<sup>3</sup></b>	2.4 m <sup>3</sup>	<b>2.87 yd<sup>3</sup></b>	2.4 m <sup>3</sup>	<b>2.87 yd<sup>3</sup></b>	3.5 m <sup>3</sup>	<b>4.6 yd<sup>3</sup></b>
Engine Model	<b>3176CATAAC</b>		<b>3176CATAAC</b>		<b>3176CATAAC</b>		<b>3176CATAAC</b>	
Rated Engine RPM	<b>2000</b>		<b>2000</b>		<b>2000</b>		<b>2000</b>	
No. of Cylinders	<b>6</b>		<b>6</b>		<b>6</b>		<b>6</b>	
Bore	125 mm	<b>4.92"</b>	125 mm	<b>4.92"</b>	125 mm	<b>4.92"</b>	125 mm	<b>4.92"</b>
Stroke	140 mm	<b>5.51"</b>	140 mm	<b>5.51"</b>	140 mm	<b>5.51"</b>	140 mm	<b>5.51"</b>
Displacement	10.3 L	<b>629 in<sup>3</sup></b>	10.3 L	<b>629 in<sup>3</sup></b>	10.3 L	<b>629 in<sup>3</sup></b>	10.3 L	<b>629 in<sup>3</sup></b>
Max. Implement Hydraulic Pump Output at Rated RPM	2 × 360 L/min	<b>2 × 95 gpm</b>	2 × 360 L/min	<b>2 × 95 gpm</b>	2 × 360 L/min	<b>2 × 95 gpm</b>	2 × 320 L/min	<b>2 × 85 gpm</b>
Relief Valve Settings:								
Implement Circuits	34 300 kPa	<b>4970 psi</b>	34 300 kPa	<b>4970 psi</b>	34 300 kPa	<b>4970 psi</b>	34 300 kPa	<b>4970 psi</b>
Travel Circuits	34 300 kPa	<b>4970 psi</b>	34 300 kPa	<b>4970 psi</b>	34 300 kPa	<b>4970 psi</b>	34 300 kPa	<b>4970 psi</b>
Swing Circuits	27 500 kPa	<b>3990 psi</b>	27 500 kPa	<b>3990 psi</b>	27 500 kPa	<b>3990 psi</b>	28 400 kPa	<b>4125 psi</b>
Pilot Circuits	4650 kPa	<b>670 psi</b>	4650 kPa	<b>670 psi</b>	4650 kPa	<b>670 psi</b>	3930 kPa	<b>570 psi</b>
Maximum Drawbar Pull	331 kN	<b>74,380 lb</b>	331 kN	<b>74,380 lb</b>	331 kN	<b>74,380 lb</b>	322 kN	<b>72,400 lb</b>
Maximum Travel Speed at Rated RPM	<b>Two Speed Travel</b>		<b>Two Speed Travel</b>		<b>Two Speed Travel</b>		<b>Two Speed Travel</b>	
Lo:	3.5 km/h	<b>2.2 mph</b>	3.5 km/h	<b>2.2 mph</b>	3.5 km/h	<b>2.2 mph</b>	3.2 km/h	<b>2 mph</b>
Hi:	4.4 km/h	<b>2.7 mph</b>	4.4 km/h	<b>2.7 mph</b>	4.4 km/h	<b>2.7 mph</b>	4.4 km/h	<b>2.7 mph</b>
Width of Standard Track Shoe	750 mm	<b>2'6"</b>	750 mm	<b>2'6"</b>	750 mm	<b>2'6"</b>	600 mm	<b>2'0"</b>
Overall Track Length	5.03 m	<b>16'6"</b>	5.36 m	<b>17'7"</b>	5.34 m	<b>17'6"</b>	5.34 m	<b>17'6"</b>
Ground Contact Area with Std. Shoe	6.57 m <sup>2</sup>	<b>10,180 in<sup>2</sup></b>	7.07 m <sup>2</sup>	<b>10,960 in<sup>2</sup></b>	5.63 m <sup>2</sup>	<b>8730 in<sup>2</sup></b>	5.63 m <sup>2</sup>	<b>8727 in<sup>2</sup></b>
Track Gauge	2.74 m	<b>9'0"</b>	2.74 m	<b>9'0"</b>	2.74 m	<b>9'0"</b>	2.74 m	<b>9'0"</b>
Extended	—		—		2.89 m	<b>9'6"</b>	2.89 m	<b>9'6"</b>
Fuel Tank Refill Capacity	720 L	<b>190 U.S. gal</b>	720 L	<b>190 U.S. gal</b>	720 L	<b>190 U.S. gal</b>	600 L	<b>159 U.S. gal</b>
Hydraulic System (includes tank)	530 L	<b>140 U.S. gal</b>	530 L	<b>140 U.S. gal</b>	530 L	<b>140 U.S. gal</b>	—	—

\*Operating weight includes coolant, lubricants, full fuel tank, standard shoes, bucket and operator 75 kg (165 lb).

**NOTE:** Certain models may not be available in all Sales areas.

Specifications may also vary by Sales area.

Contact your Caterpillar Dealer for details.



MODEL	365B L		365B L		375		375	
Sourcing	Japan		Belgium		Japan, U.S.		Belgium	
Flywheel Power	287 kW	<b>385 hp</b>	287 kW	<b>385 hp</b>	319 kW	<b>428 hp</b>	319 kW	<b>428 hp</b>
Operating Weight*	65 360 kg	<b>144,100 lb</b>	68 095 kg	<b>150,150 lb</b>	81 190 kg	<b>178,800 lb</b>	79 160 kg**	<b>174,550 lb**</b>
Bucket Capacity	2.3-	<b>3-</b>	1.2-	<b>1.57-</b>	1.5-	<b>1.96-</b>	3.6-	<b>4.7-</b>
Range (heaped)	3.5 m <sup>3</sup>	<b>4.58 yd<sup>3</sup></b>	5.3 m <sup>3</sup>	<b>6.9 yd<sup>3</sup></b>	4.4 m <sup>3</sup>	<b>5.75 yd<sup>3</sup></b>	5.6 m <sup>3</sup>	<b>7.3 yd<sup>3</sup></b>
Engine Model	<b>3196ATAAC</b>		<b>3196ATAAC</b>		<b>3406CATAAC</b>		<b>3406CATAAC</b>	
Rated Engine RPM	<b>2000</b>		<b>2000</b>		<b>1800</b>		<b>1800</b>	
No. of Cylinders	<b>6</b>		<b>6</b>		<b>6</b>		<b>6</b>	
Bore	130 mm	<b>5"</b>	130 mm	<b>5"</b>	137 mm	<b>5.4"</b>	137 mm	<b>5.4"</b>
Stroke	150 mm	<b>6"</b>	150 mm	<b>6"</b>	165 mm	<b>6.5"</b>	165 mm	<b>6.5"</b>
Displacement	11.9 L	<b>726 in<sup>3</sup></b>	11.9 L	<b>726 in<sup>3</sup></b>	14.6 L	<b>893 in<sup>3</sup></b>	14.6 L	<b>891 in<sup>3</sup></b>
Max. Implement Hydraulic Pump Output at Rated RPM	2 × 400 L/min	<b>2 × 105 gpm</b>	2 × 400 L/min	<b>2 × 105 gpm</b>	2 × 430 L/min	<b>2 × 114 gpm</b>	2 × 435 L/min	<b>2 × 115 gpm</b>
Relief Valve Settings:								
Implement Circuits	32 000 kPa	<b>4640 psi</b>	32 000 kPa	<b>4640 psi</b>	31 400 kPa	<b>4550 psi</b>	31 400 kPa	<b>4550 psi</b>
Travel Circuits	35 000 kPa	<b>5080 psi</b>	35 000 kPa	<b>5080 psi</b>	34 300 kPa	<b>4980 psi</b>	34 300 kPa	<b>4980 psi</b>
Swing Circuits	28 000 kPa	<b>4060 psi</b>	28 050 kPa	<b>4070 psi</b>	27 500 kPa	<b>3980 psi</b>	—	—
Pilot Circuits	4116 kPa	<b>600 psi</b>	6970 kPa	<b>1010 psi</b>	3500 kPa	<b>508 psi</b>	3480 kPa	<b>505 psi</b>
Maximum Drawbar Pull	461 kN	<b>103,600 lb</b>	462 kN	<b>103,950 lb</b>	546 kN	<b>122,800 lb</b>	Lo: 546 kN Hi: 278 kN	<b>122,795 lb</b> <b>62,390 lb</b>
Maximum Travel Speed at Rated RPM	<b>Two Speed Travel</b> Lo: 2.8 km/h Hi: 4.1 km/h		<b>Two Speed Travel</b> Lo: 2.8 km/h Hi: 4.1 km/h		<b>Two Speed Travel</b> Lo: 2.7 km/h Hi: 4.4 km/h		<b>Two Speed Travel</b> Lo: 2.7 km/h Hi: 4.5 km/h	
		<b>1.7 mph</b> <b>2.5 mph</b>		<b>1.7 mph</b> <b>2.5 mph</b>		<b>1.7 mph</b> <b>2.7 mph</b>		<b>1.7 mph</b> <b>2.8 mph</b>
Width of Standard Track Shoe	750 mm	<b>2'6"</b>	750 mm	<b>2'6"</b>	610 mm	<b>2'0"</b>	610 mm	<b>2'0"</b>
Overall Track Length	5.86 m	<b>19'3"</b>	5.86 m	<b>19'3"</b>	5.84 m	<b>19'2"</b>	5840 m	<b>19'1.9"</b>
Ground Contact Area with Std. Shoe	7.67 m <sup>2</sup>	<b>11,890 in<sup>2</sup></b>	7.67 m <sup>2</sup>	<b>11,890 in<sup>2</sup></b>	6.14 m <sup>2</sup>	<b>9520 in<sup>2</sup></b>	6.14 m <sup>2</sup>	<b>9520 in<sup>2</sup></b>
Track Gauge	2.75 m	<b>9'0"</b>	2.75 m	<b>9'0"</b>	2.75 m	<b>9'0"</b>	2.75 m	<b>9'4"</b>
Extended	3.25 m	<b>10'8"</b>	3.25 m	<b>10'8"</b>	3.51 m	<b>11'6"</b>	3.51 m	<b>11'6"</b>
Fuel Tank Refill Capacity	800 L	<b>211 U.S. gal</b>	800 L	<b>211 U.S. gal</b>	990 L	<b>262 U.S. gal</b>	990 L	<b>262 U.S. gal</b>
Hydraulic System (includes tank)	670 L	<b>177 U.S. gal</b>	670 L	<b>177 U.S. gal</b>	—	—	—	—
Hydraulic tank	310 L	<b>82 U.S. gal</b>	310 L	<b>82 U.S. gal</b>	—	—	—	—

\*Operating weight includes coolant, lubricants, full fuel tank, one-piece boom, long stick, small profile bucket, operator 75 kg (165 lb) and wide shoes.

\*\*Operating weight includes coolant, lubricants, fuel tank, reach boom, medium stick configuration, bucket and operator 75 kg (165 lb).

**NOTE:** Certain models may not be available in all Sales areas.

Specifications may also vary by Sales area.

Contact your Caterpillar Dealer for details.





MODEL	375 L		375 L	
Sourcing	Japan, U.S.		Belgium	
Flywheel Power	319 kW	428 hp	319 kW	428 hp
Operating Weight*	82 380 kg	181,500 lb	80 700 kg**	177,940 lb**
Bucket Capacity Range (heaped)	1.5-4.4 m <sup>3</sup>	1.96-5.75 yd <sup>3</sup>	2.7-5.6 m <sup>3</sup>	3.5-7.3 yd <sup>3</sup>
Engine Model	3406CATTAC		3406CATAAC	
Rated Engine RPM	1800		1800	
No. of Cylinders	6		6	
Bore	137 mm	5.4"	137 mm	5.4"
Stroke	165 mm	6.5"	165 mm	6.5"
Displacement	14.6 L	893 in <sup>3</sup>	14.6 L	891 in <sup>3</sup>
Max. Implement Hydraulic Pump Output at Rated RPM	2 × 430 L/min	2 × 114 gpm	2 × 435 L/min	2 × 115 gpm
Relief Valve Settings:				
Implement Circuits	31 400 kPa	4550 psi	31 400 kPa	4550 psi
Travel Circuits	34 300 kPa	4980 psi	34 300 kPa	4980 psi
Swing Circuits	27 500 kPa	3980 psi	—	—
Pilot Circuits	3500 kPa	508 psi	3480 kPa	505 psi
Maximum Drawbar Pull	546 kN	122,800 lb	Lo: 546 kN Hi: 278 kN	122,795 lb 62,390 lb
	<b>Two Speed Travel</b>		<b>Two Speed Travel</b>	
Maximum Travel Speed at Rated RPM	Lo: 2.7 km/h Hi: 4.4 km/h	1.7 mph 2.7 mph	Lo: 2.7 km/h Hi: 4.5 km/h	1.7 mph 2.8 mph
Width of Standard Track Shoe	750 mm	2'6"	610 mm	2'0"
Overall Track Length	6.36 m	20'10"	6360 mm	20'10.4"
Ground Contact Area with Std. Shoe	8.33 m <sup>2</sup>	12,910 in <sup>2</sup>	6.77 m <sup>2</sup>	10,500 in <sup>2</sup>
Track Gauge	2.75 m	9'0"	2.75 m	9'4"
Extended	3.51 m	11'6"	3.51 m	11'6"
Fuel Tank Refill Capacity	990 L	262 U.S. gal	990 L	262 U.S. gal

\*Operating weight includes coolant, lubricants, full fuel tank, one-piece boom, long stick, small profile bucket, operator 75 kg (165 lb) and wide shoes.

\*\*Operating weight includes coolant, lubricants, full fuel tank, reach boom, medium stick configuration, bucket and operator 75 kg (165 lb).

**NOTE:** Certain models may not be available in all Sales areas.

Specifications may also vary by Sales area.  
Contact your Caterpillar Dealer for details.

**SHIPPING DIMENSIONS KEYS****301.5 through 375**

---

- A Cab height
  - B House width, without mirrors
  - C Track width, standard shoe
  - D Ground clearance, frame
  - E Ground clearance, counterweight
  - F Tail swing radius
  - G Overall track length  
(grouser bar to grouser bar)
  - H Overall transport length
  - J Shipping height
  - K Length of track on ground
  - L Track gauge
- 

**M312 through M320**


---

- A Cab height
  - B Transport width
  - C Overall tire width
  - D Ground clearance, frame
  - E House height
  - F Exhaust stack height
  - G Overall length  
(outrigger to outrigger)
  - H Overall transport length
  - J Transport height
  - K Ground clearance, counterweight
  - L Transport length without boom
  - M Cab swing radius
  - N Tail swing radius
  - O Wheelbase length
  - P Overall width  
(outrigger to outrigger)
-

# Excavators

## Shipping Dimensions


- 301.5 ● 301.6 ● 301.8 ● 302.5 ● 303.5 ● 304.5
- 307B ● 307B SB ● 311B ● 312B

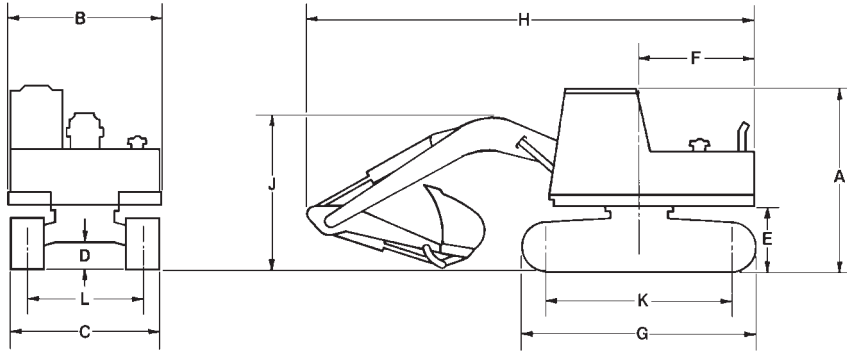

Sourcing	301.5		301.6		301.8		302.5		303.5		304.5	
	U.K.		U.K.		U.K.		U.K.		U.K.		U.K.	
	mm	ft	mm	ft	mm	ft	mm	ft	mm	ft	mm	ft
A	2190	7'2"	2190	7'2"	2190	7'2"	2300	7'7"	2440	8'0"	2530	7'7"
B	980	3'3"	980	3'3"	980	3'3"	1380	4'6"	1550	5'1"	1550	5'1"
C	980	3'3"	980	3'3"	980	3'3"	1450	4'8"	1550	5'1"	1900	5'1"
D	220	8.7"	220	8.7"	180	7"	310	12"	290	11"	330	1'1"
E	460	18"	460	1'5"	460	1'5"	560	22"	585	1'9"	670	2'2"
F	1070	3'6"	1070	3'6"	1070	3'6"	1280	4'2"	1400	4'6"	1490	4'9"
G	1390	4'7"	1486	4'9"	1486	4'9"	1910	6'3"	2060	6'8"	2450	8'0"
H*	3690	12'1"	3690	12'1"	3690	12'1"	4520	14'10"	5070	16'6"	5560	18'2"
J*	—	—	—	—	—	—	—	—	—	—	—	—
K	1020	3'4"	1116	3'7"	1116	3'7"	1470	4'10"	1640	5'5"	1910	6'3"
L	750	2'6"	750	2'6"	750	2'6"	1150	3'9"	1250	4'1"	1500	4'9"

Sourcing	307B		307B SB		307B SB		311B		312B		312B	
	Japan		Japan		France		Japan		Japan		France	
	mm	ft	mm	ft	mm	ft	mm	ft	mm	ft	mm	ft
A	2630	8'8"	2640	8'8"	2640	8'8"	2760	9'1"	2760	9'1"	2910	9'7"
B	2280	7'6"	2280	7'6"	2280	7'6"	2495	8'2"	2495	8'2"	2480	8'2"
C	2200	7'3"	2200	7'3"	2200	7'3"	2490	8'2"	2490	8'2"	2490	8'2"
D	380	15"	380	15"	365	14"	455	18"	455	18"	435	17"
E	785	2'7"	785	2'7"	785	2'7"	920	3'0"	920	3'0"	900	2'11"
F	1750	5'9"	1750	5'9"	1750	5'9"	2130	7'0"	2130	7'0"	2090	6'10"
G	2760	9'1"	2760	9'1"	2660	8'9"	3320	10'11"	3490	11'5"	3490	11'5"
H*	6080	19'11"	6730	22'1"	6750	22'2"	7250	23'9"	7595	24'11"	7590	24'10"
J*	2630	8'8"	2640	8'8"	2640	8'8"	2760	9'1"	2760	9'1"	2660	8'9"
K	2120	6'11"	2120	6'11"	2050	6'9"	2610	8'7"	2780	9'1"	2780	9'1"
L	1750	5'9"	1750	5'9"	1750	5'9"	1990	6'6"	1990	6'6"	1990	6'6"

\*Varies with stick length.

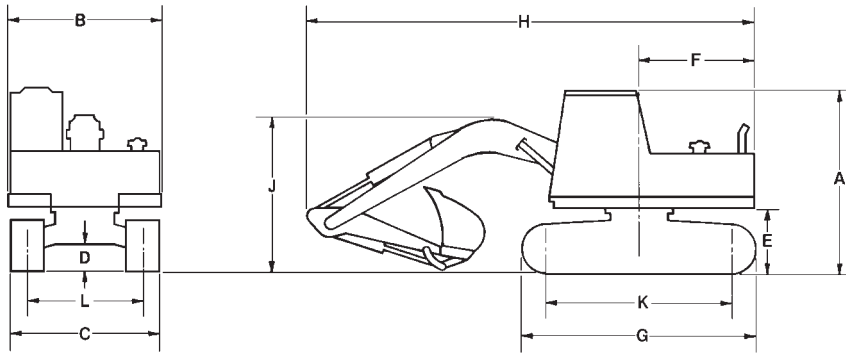


Sourcing	312B L		312B L		313B CR		315B		315B L	
	Japan		France		Japan		Japan		Japan	
	mm	ft	mm	ft	mm	ft	mm	ft	mm	ft
<b>A</b>	2760	9'1"	2910	9'7"	2730	8'11"	2880	9'5"	2880	9'5"
<b>B</b>	2595	8'6"	2480	8'2"	2490	8'2"	2490	8'2"	2490	8'2"
<b>C</b>	2590	8'6"	2590	8'6"	2490	8'2"	2490	8'2"	2590	8'6"
<b>D</b>	455	18"	435	17"	440	1'5"	490	19"	490	19"
<b>E</b>	920	3'0"	900	2'11"	880	2'11"	1050	3'5"	1050	3'5"
<b>F</b>	2130	7'0"	2090	6'10"	1460	4'9"	2450	8'0"	2450	8'0"
<b>G</b>	3750	12'4"	3750	12'4"	3490	11'5"	3690	12'1"	3970	13'0"
<b>H*</b>	7595	24'11"	7590	24'10"	7170	23'6"	8500	28'0"	8500	28'0"
<b>J*</b>	2760	9'1"	2660	8'9"	2820	9'3"	2880	9'5"	2880	9'5"
<b>K</b>	3040	12'0"	3040	12'0"	2780	9'1"	2880	9'5"	3170	10'5"
<b>L</b>	1990	6'6"	1990	6'6"	1990	6'6"	1990	6'6"	1990	6'6"

\*Varies with stick length.

# Excavators

## Shipping Dimensions


- 315B L   ● 317B L   ● 317B LN
- 318B L   ● 318B LN

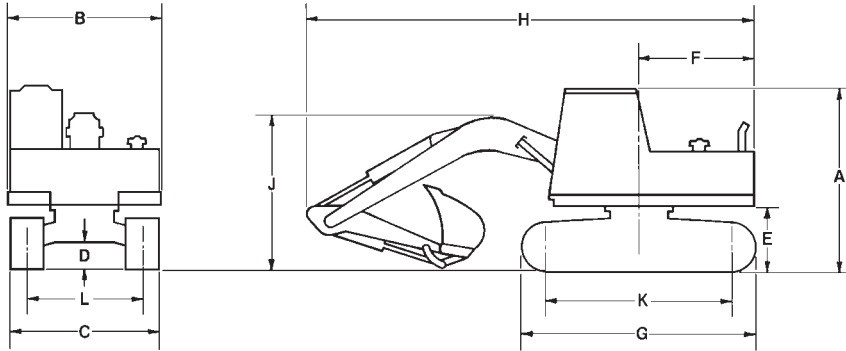

Sourcing	315B L		317B L		317B LN		318B L	
	France		France		France		Japan	
	mm	ft	mm	ft	mm	ft	mm	ft
A	3000	9'11"	3040	9'9"	3040	9'9"	2990	9'10"
B	2490	8'2"	2490	8'2"	2490	8'2"	2480	8'2"
C	2490	8'2"	2800	9'2"	2495	8'2"	2800	9'2"
D	460	18"	470	18"	470	18"	490	19"
E	1010	3'4"	1030	3'4"	1030	3'4"	1040	3'5"
F	2450	8'0"	2450	8'0"	2450	8'0"	2450	8'0"
G	3960	13'0"	4075	13'4"	4075	13'4"	4075	13'4"
H*	8420	27'7"	8420	27'7"	8420	27'7"	8720	28'7"
J*	2920	9'7"	2920	9'7"	2920	9'7"	3050	10'0"
K	3170	10'5"	3265	10'8"	3265	10'8"	3265	10'9"
L	1990	6'6"	2200	7'3"	1995	6'7"	2200	7'3"

Sourcing	318B L		318B LN		318B LN	
	France		Japan		France	
	mm	ft	mm	ft	mm	ft
A	3040	9'9"	2990	9'10"	3040	9'9"
B	2490	8'2"	2480	8'2"	2490	8'2"
C	2800	9'2"	2490	8'2"	2495	8'2"
D	470	18"	490	19"	470	18"
E	1030	3'4"	1040	3'5"	1030	3'4"
F	2450	8'0"	2450	8'0"	2450	8'0"
G	4075	13'4"	4075	13'4"	4075	13'4"
H*	8690	28'6"	8720	28'7"	8690	28'6"
J*	2830	9'3"	3050	10'0"	2830	9'3"
K	3265	10'8"	3265	10'9"	3265	10'8"
L	2200	7'3"	1990	6'6"	1995	6'7"

\*Varies with stick length.

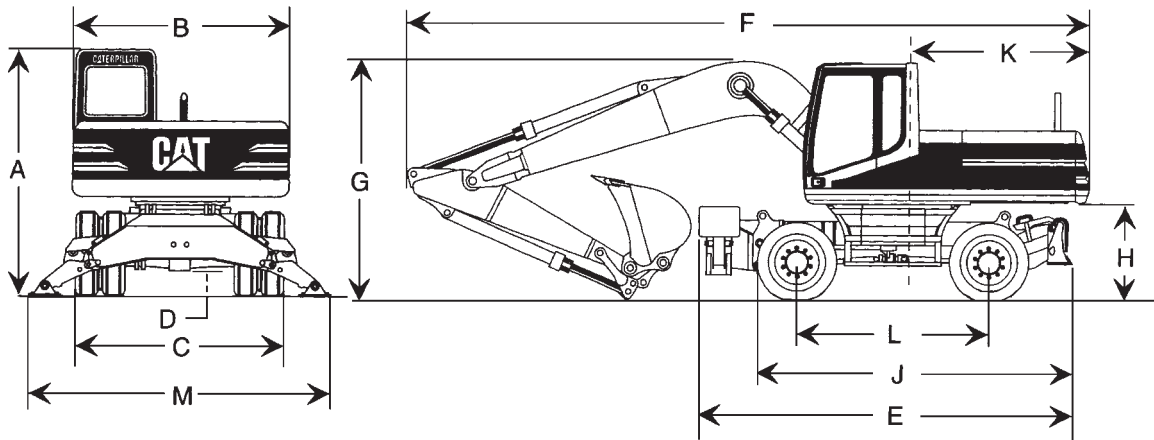

5

	M312		M315		M318		M320	
	mm	ft	mm	ft	mm	ft	mm	ft
<b>A</b>	3070	10'1"	3080	10'1"	3100	10'2"	3145	10'4"
<b>B</b>	2500	8'2"	2500	8'2"	2500	8'2"	2650	8'8"
<b>C*</b>	2500	8'2"	2500	8'2"	2500	8'2"	2750	9'0"
<b>Dozer width</b>	2500	8'2"	2500	8'2"	2500	8'2"	2750	9'0"
<b>D</b>	375	14.7"	375	14.7"	375	14.7"	360	14.2"
<b>E<sup>1</sup></b>	4900	16'1"	5000	16'5"	5000	16'5"	5175	17'0"
<b>E<sup>2</sup></b>	4660	15'3"	4930	16'2"	5030	16'5"	5205	17'1"
<b>E<sup>3</sup></b>	4140	13'6"	4140	13'6"	4240	13'9"	4405	14'5"
<b>F</b>	8620**	28'3"	8840**	29'0"	8970	29'5"	9660	31'8"
<b>G</b>	3070	10'1"	3080	10'1"	3100	10'2"	3145	10'4"
<b>H</b>	1262	4'2"	1262	4'2"	1280	4'2"	1310	4'4"
<b>J</b>	4140	13'7"	4140	13'7"	4240	13'11"	4405	14'5"
<b>K</b>	1990	6'5"	2150	7'1"	2450	8'0"	2700	8'10"
<b>L</b>	2500	8'2"	2500	8'2"	2600	8'6"	2750	9'0"
<b>M</b>	3835	12'7"	3835	12'7"	3835	12'7"	3900	12'9"

E<sup>1</sup> 2 Sets Outriggers.  
 E<sup>2</sup> Outriggers/Dozer.  
 E<sup>3</sup> Dozer only.

\*10 × 20 Dual Tires.


\*\*Linkage over dozer.

**NOTE:** Shipping dimensions above are for standard machine equipped with one-piece boom and medium stick.

# Excavators

## Shipping Dimensions

- 320C, 320C L
- Japan Sourced

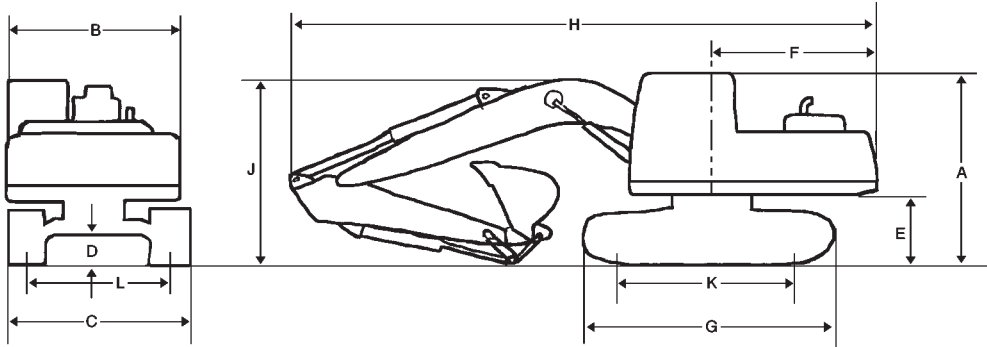


	320C Reach		320C Mass		320C L Reach		320C L Mass	
	mm	ft	mm	ft	mm	ft	mm	ft
<b>A</b>	2948	9'8"	2948	9'8"	2948	9'8"	2948	9'8"
<b>B</b>	2740	9'0"	2740	9'0"	2740	9'0"	2740	9'0"
<b>C</b>	2800	9'2"	2800	9'2"	3180	10'5"	2980	9'9"
<b>D</b>	467	1'6"	467	1'6"	463	1'6"	463	1'6"
<b>E</b>	1047	3'5"	1047	3'5"	1047	3'5"	1047	3'5"
<b>F</b>	2750	9'0"	2750	9'0"	2750	9'0"	2750	9'0"
<b>G</b>	4075	13'4"	4075	13'4"	4455	14'6"	4455	14'6"
<b>H</b>	9400	30'10"	9000	29'6"	9400	30'10"	9000	29'6"
<b>J*</b>	3010	9'11"	3050	10'0"	2930	9'7"	3050	10'0"
<b>K</b>	3265	10'9"	3270	10'9"	3650	12'0"	3650	12'0"
<b>L</b>	2200	7'3"	2200	7'3"	2380	7'10"	2380	7'10"

\*Varies with stick length.

- Shipping Dimensions
- 320C, 320C L, 320C LN, 320B S
  - Belgium Sourced

## Excavators

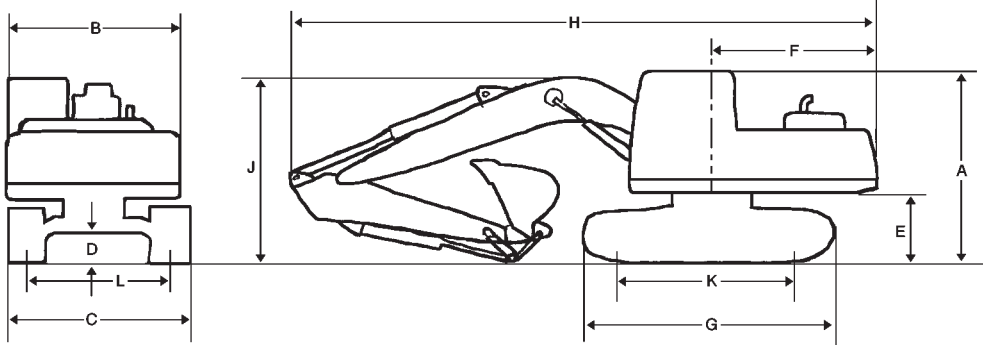

5

	320C Reach†		320C Mass†		320C VA†		320C L Reach†		320C L Mass†		320C L VA†	
	mm	ft	mm	ft	mm	ft	mm	ft	mm	ft	mm	ft
<b>A</b>	3030	9'11"	3030	9'11"	3030	9'11"	3030	9'11"	3030	9'11"	3030	9'11"
<b>B</b>	2490	8'2"	2490	8'2"	2490	8'2"	2490	8'2"	2490	8'2"	2490	8'2"
<b>C</b>	2800	9'2"	2800	9'2"	2800	9'2"	2980	9'9"	2980	9'9"	2980	9'9"
<b>D</b>	470	18"	470	18"	470	18"	470	18"	470	18"	470	18"
<b>E</b>	1020	3'4"	1020	3'4"	1020	3'4"	1020	3'4"	1020	3'4"	1020	3'4"
<b>F</b>	2750	9'0"	2750	9'0"	2750	9'0"	2750	9'0"	2750	9'0"	2750	9'0"
<b>G</b>	4075	13'4"	4075	13'4"	4075	13'4"	4455	14'7"	4455	14'7"	4455	14'7"
<b>H</b>	9360	30'8"	8890	29'2"	9250	30'4"	9360	30'8"	8890	29'2"	9250	30'4"
<b>J*</b>	2910	9'7"	2870	9'5"	2980	9'9"	2910	9'7"	2870	9'5"	2980	9'9"
<b>K</b>	3265	10'8"	3265	10'8"	3265	10'8"	3650	12'0"	3650	12'0"	3650	12'0"
<b>L</b>	2200	7'3"	2200	7'3"	2200	7'3"	2380	7'10"	2380	7'10"	2380	7'10"

	320C LN Reach†		320C LN Mass†		320C LN VA†		320B S Reach		320B S Mass		320B S VA	
	mm	ft	mm	ft	mm	ft	mm	ft	mm	ft	mm	ft
<b>A</b>	3030	9'11"	3030	9'11"	3030	9'11"	3100	10'2"	3100	10'2"	3100	10'2"
<b>B</b>	2490	8'2"	2490	8'2"	2490	8'2"	2490	8'2"	2490	8'2"	2490	8'2"
<b>C</b>	2595	8'6"	2595	8'6"	2595	8'6"	2495	8'2"	2495	8'2"	2495	8'2"
<b>D</b>	470	18"	470	18"	470	18"	490	1'7"	490	1'7"	490	1'7"
<b>E</b>	1000	3'3"	1000	3'3"	1000	3'3"	1080	3'7"	1080	3'7"	1080	3'7"
<b>F</b>	2750	9'0"	2750	9'0"	2750	9'0"	2750	9'0"	2750	9'0"	2750	9'0"
<b>G</b>	4460	14'8"	4460	14'8"	4460	14'8"	4360	14'4"	4360	14'4"	4360	14'4"
<b>H</b>	9360	30'8"	8890	29'2"	9250	30'4"	9360	30'8"	8890	29'2"	9250	30'4"
<b>J*</b>	3225	10'7"	3225	10'7"	3225	10'7"	3245	10'8"	3245	10'8"	3245	10'8"
<b>K</b>	3650	12'0"	3650	12'0"	3650	12'0"	3490	11'5"	3490	11'5"	3490	11'5"
<b>L</b>	1995	6'7"	1995	6'7"	1995	6'7"	1895	6'3"	1895	6'3"	1895	6'3"


\*Varies with stick length.  
†Preliminary information.



# Excavators

## Shipping Dimensions

- 322B, 322B L — Japan/U.S. Sourced
- 322B L, 322B LN — Belgium Sourced

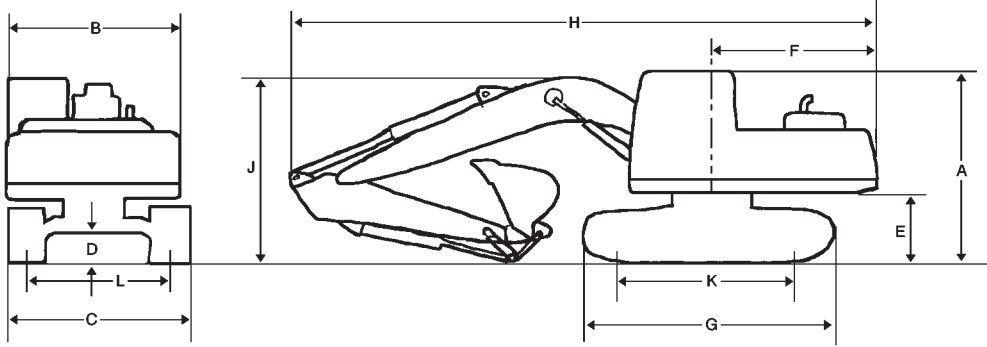

### Japan/U.S. Sourced


	322B Reach		322B Mass		322B L Reach		322B L Mass	
	mm	ft	mm	ft	mm	ft	mm	ft
<b>A</b>	2980	9'9"	2980	9'9"	2980	9'9"	2980	9'9"
<b>B</b>	2740	9'0"	2740	9'0"	2740	9'0"	2740	9'0"
<b>C</b>	2990	9'10"	2990	9'10"	3390	11'1"	3390	11'1"
<b>D</b>	500	20"	500	20"	500	20"	500	20"
<b>E</b>	1090	3'7"	1090	3'7"	1090	3'7"	1090	3'7"
<b>F</b>	2900	9'6"	2900	9'6"	2900	9'6"	2900	9'6"
<b>G</b>	4260	14'0"	4260	14'0"	4640	15'3"	4640	15'3"
<b>H</b>	9960	32'8"	9490	31'2"	9960	32'8"	9490	31'2"
<b>J*</b>	3120	10'3"	3450	11'4"	3120	10'3"	3450	11'4"
<b>K</b>	3450	11'4"	3450	11'4"	3830	12'7"	3830	12'7"
<b>L</b>	2390	7'10"	2390	7'10"	2590	8'6"	2590	8'6"

### Belgium Sourced

	322B L Reach		322B L Mass		322B L VA		322B LN Reach		322B LN Mass		322B LN VA	
	mm	ft	mm	ft	mm	ft	mm	ft	mm	ft	mm	ft
<b>A</b>	2980	9'9"	2980	9'9"	2980	9'9"	2980	9'9"	2980	9'9"	2980	9'9"
<b>B</b>	2740	9'0"	2740	9'0"	2740	9'0"	2740	9'0"	2740	9'0"	2740	9'0"
<b>C</b>	3390	11'2"	3390	11'2"	3390	11'2"	2990	9'10"	2990	9'10"	2990	9'10"
<b>D</b>	470	1'7"	470	1'7"	470	1'7"	470	1'7"	470	1'7"	470	1'7"
<b>E</b>	1080	3'7"	1080	3'7"	1080	3'7"	1080	3'7"	1080	3'7"	1080	3'7"
<b>F</b>	2855	9'4"	2855	9'4"	2855	9'4"	2855	9'4"	2855	9'4"	2855	9'4"
<b>G</b>	4630	15'2"	4630	15'2"	4630	15'2"	4630	15'2"	4630	15'2"	4630	15'2"
<b>H</b>	10 000	32'10"	9480	31'1"	9700	31'10"	10 000	32'10"	9480	31'1"	9700	31'10"
<b>J*</b>	3280	10'9"	3320	10'11"	3300	10'10"	3280	10'9"	3320	10'11"	3300	10'10"
<b>K</b>	3830	12'7"	3830	12'7"	3830	12'7"	3830	12'7"	3830	12'7"	3830	12'7"
<b>L</b>	2590	8'6"	2590	8'6"	2590	8'6"	2390	7'10"	2390	7'10"	2390	7'10"

\*Varies with stick length.

- 325B, 325B L — Japan/U.S. Sourced
- 325B L, 325B LN — Belgium Sourced

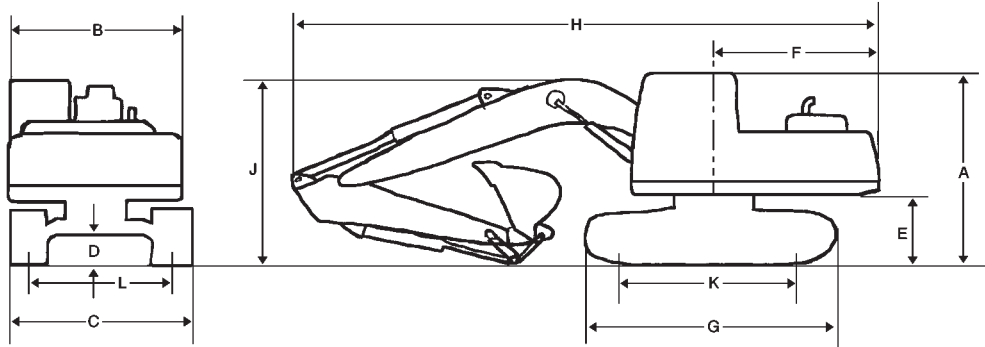

Japan/U.S. Sourced

	325B Reach		325B Mass		325B L Reach		325B L Mass	
	mm	ft	mm	ft	mm	ft	mm	ft
<b>A</b>	3090	10'2"	3090	10'2"	3090	10'2"	3090	10'2"
<b>B</b>	2900	9'6"	2900	9'6"	2900	9'6"	2900	9'6"
<b>C</b>	2990	9'10"	2990	9'10"	3390	11'1"	3390	11'1"
<b>D</b>	510	1'8"	510	1'8"	510	1'8"	510	1'8"
<b>E</b>	1140	3'9"	1140	3'9"	1140	3'9"	1140	3'9"
<b>F</b>	3050	10'0"	3050	10'0"	3050	10'0"	3050	10'0"
<b>G</b>	4360	14'4"	4360	14'4"	4660	15'3"	4660	15'3"
<b>H</b>	10 290	33'10"	9710	31'10"	10 290	33'10"	9710	31'10"
<b>J*</b>	3270	10'9"	3460	11'4"	3270	10'9"	3460	11'4"
<b>K</b>	3490	11'5"	3490	11'5"	3795	12'5"	3795	12'5"
<b>L</b>	2390	7'10"	2390	7'10"	2590	8'6"	2590	8'6"

Belgium Sourced


	325B L Reach		325B L Mass		325B L VA		325B LN Reach		325B LN Mass		325B LN VA	
	mm	ft	mm	ft	mm	ft	mm	ft	mm	ft	mm	ft
<b>A</b>	3140	10'4"	3140	10'4"	3140	10'4"	3140	10'4"	3140	10'4"	3140	10'4"
<b>B</b>	2900	9'6"	2900	9'6"	2900	9'6"	2900	9'6"	2900	9'6"	2900	9'6"
<b>C</b>	3390	11'2"	3390	11'2"	3390	11'2"	2990	9'10"	2990	9'10"	2990	9'10"
<b>D</b>	480	1'7"	480	1'7"	480	1'7"	480	1'7"	480	1'7"	480	1'7"
<b>E</b>	1130	3'9"	1130	3'9"	1130	3'9"	1130	3'9"	1130	3'9"	1130	3'9"
<b>F</b>	3050	10'0"	3050	10'0"	3050	10'0"	3050	10'0"	3050	10'0"	3050	10'0"
<b>G</b>	4660	15'4"	4660	15'4"	4660	15'4"	4660	15'3"	4660	15'3"	4660	15'3"
<b>H</b>	10 350	33'11"	9890	32'5"	10 090	33'1"	10 350	33'11"	9890	32'5"	10 090	33'1"
<b>J*</b>	3210	10'6"	3330	10'11"	3150	10'4"	3210	10'6"	3330	10'11"	3150	10'4"
<b>K</b>	3800	12'6"	3800	12'6"	3800	12'6"	3800	12'6"	3800	12'6"	3800	12'6"
<b>L</b>	2590	8'6"	2590	8'6"	2590	8'6"	2390	7'10"	2390	7'10"	2390	7'10"

\*Varies with stick length.

# Excavators

## Shipping Dimensions

- 330B, 330B L — Japan/U.S. Sourced
- 330B L, 330B LN — Belgium Sourced

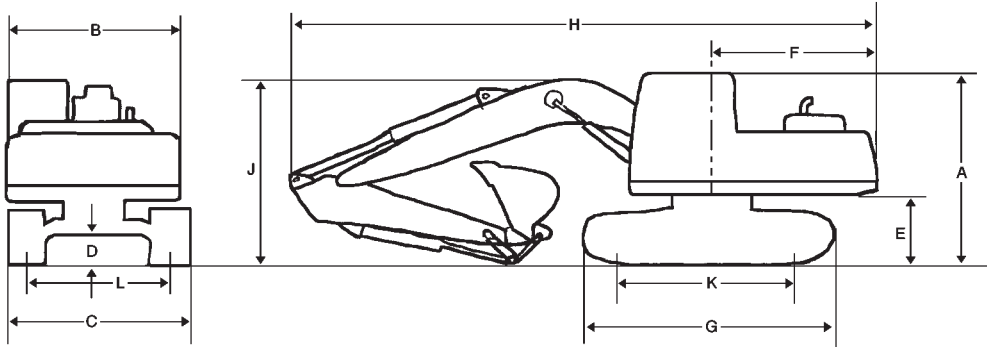


### Japan/U.S. Sourced

	330B Reach		330B Mass		330B L Reach		330B L Mass	
	mm	ft	mm	ft	mm	ft	mm	ft
<b>A</b>	3150	10'4"	3150	10'4"	3150	10'4"	3150	10'4"
<b>B</b>	2990	9'10"	2990	9'10"	2990	9'10"	2990	9'10"
<b>C</b>	3190	10'6"	3190	10'6"	3340	10'11"	3340	10'11"
<b>D</b>	510	20"	510	20"	510	20"	510	20"
<b>E</b>	1260	4'2"	1260	4'2"	1260	4'2"	1260	4'2"
<b>F</b>	3500	11'6"	3500	11'6"	3500	11'6"	3500	11'6"
<b>G</b>	4580	15'0"	4580	15'0"	5020	16'6"	5020	16'6"
<b>H</b>	11 010	36'2"	10 760	35'4"	11 010	36'2"	10 760	35'4"
<b>J*</b>	3290	10'10"	3560	11'8"	3290	10'10"	3560	11'8"
<b>K</b>	3610	11'10"	3610	11'10"	4040	13'3"	4040	13'3"
<b>L</b>	2590	8'6"	2590	8'6"	2590	8'6"	2590	8'6"

### Belgium Sourced

	330B L Reach		330B L Mass		330B LN Reach		330B LN Mass	
	mm	ft	mm	ft	mm	ft	mm	ft
<b>A</b>	3250	10'8"	3250	10'8"	3250	10'8"	3250	10'8"
<b>B</b>	3000	9'10"	3000	9'10"	3000	9'10"	3000	9'10"
<b>C</b>	3340	11'0"	3340	11'0"	2990	9'10"	2990	9'10"
<b>D</b>	510	1'8"	510	1'8"	510	1'8"	510	1'8"
<b>E</b>	1260	4'2"	1260	4'2"	1260	4'2"	1260	4'2"
<b>F</b>	3500	11'6"	3500	11'6"	3500	11'6"	3500	11'6"
<b>G</b>	5020	16'6"	5020	16'6"	5020	16'6"	5020	16'6"
<b>H</b>	11 150	36'7"	10 810	35'6"	11 150	36'7"	10 810	35'6"
<b>J*</b>	3560	11'8"	3580	11'9"	3560	11'8"	3580	11'9"
<b>K</b>	4040	13'3"	4040	13'3"	4040	13'3"	4040	13'3"
<b>L</b>	2590	8'6"	2590	8'6"	2390	7'10"	2390	7'10"

\*Varies with stick length.

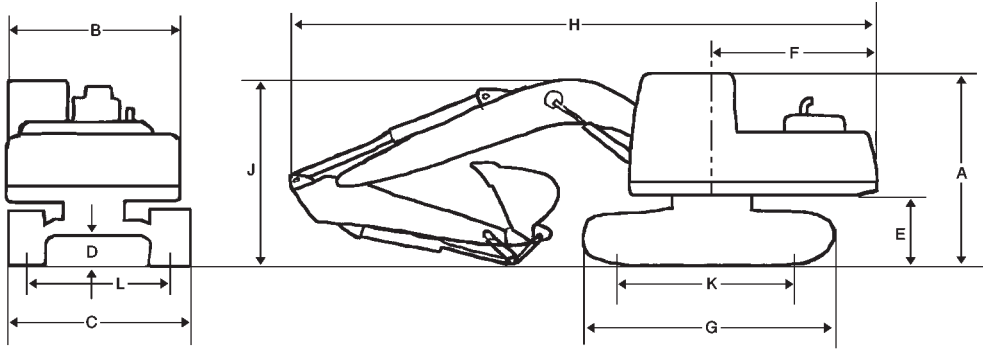

5

	345B Series II Reach		345B Series II Mass		345B L Series II – FIX Reach		345B L Series II – FIX Mass		345B L – VG Reach		345B L – VG Mass	
	mm	ft	mm	ft	mm	ft	mm	ft	mm	ft	mm	ft
<b>A</b>	3250	10'8"	3250	10'8"	3245	10'8"	3245	10'8"	3345	11'0"	3345	11'0"
<b>B</b>	3000	9'10"	3000	9'10"	2995	9'10"	2995	9'10"	**2995	9'10"	**2995	9'10"
<b>C</b>	3490	11'5"	3490	11'5"	3490	11'5"	3490	11'5"	2990	9'10"	2990	9'10"
<b>D</b>	510	1'8"	510	1'8"	510	1'8"	510	1'8"	740	2'5"	740	2'5"
<b>E</b>	1290	4'3"	1290	4'3"	1290	4'3"	1290	4'3"	1460	4'9"	1460	4'9"
<b>F</b>	3650	12'0"	3650	12'0"	3645	12'0"	3645	12'0"	3610	11'10"	3610	11'10"
<b>G</b>	5030	16'6"	5030	16'6"	5360	17'7"	5360	17'7"	5330	17'6"	5330	17'6"
<b>H</b>	11 380	37'4"	11 380	37'4"	11 770	38'7"	11 380	37'4"	11 740	38'6"	11 380	37'4"
<b>J*</b>	3680	12'1"	3680	12'1"	3660	12'0"	3690	12'1"	3680	12'1"	3850	12'8"
<b>K</b>	5030	16'6"	4030	13'3"	4630	15'2"	4630	15'2"	4340	14'3"	4340	14'3"
<b>L</b>	2740	9'0"	2740	9'0"	2740	9'0"	2740	9'0"	**2390	7'10"	**2390	7'10"

\*Varies with stick length.

\*\*Transport position.

NOTE: 600 mm shoes are available for 345B in some areas.

750 mm shoes are available for 345B L.

Medium stick is available all models.

Undercarriage is retracted.

	365B L Reach		365B L Mass		365B L Reach		365B L Mass	
Sourcing	Japan		Japan		Belgium		Belgium	
	mm	ft	mm	ft	mm	ft	mm	ft
<b>A</b>	3560	11'8"	3560	11'8"	3630	11'11"	3630	11'11"
<b>B</b>	3420	11'3"	3420	11'3"	3420	11'3"	3420	11'3"
<b>C</b>	3500	11'6"	3500	11'6"	3500	11'6"	3500	11'6"
<b>D</b>	840	2'9"	840	2'9"	720	2'2"	720	2'2"
<b>E</b>	1540	5'1"	1540	5'1"	1540	5'1"	1540	5'1"
<b>F</b>	3920	12'10"	3920	12'10"	3920	12'6"	3920	12'6"
<b>G</b>	5860	19'3"	5860	19'3"	5860	19'3"	5860	19'3"
<b>H</b>	13 210	43'4"	12 030	39'6"	13 290	43'7"	12 170	39'11"
<b>J*</b>	4450	14'7"	4550	14'11"	4450	14'7"	4560	15'0"
<b>K</b>	4710	15'5"	4710	15'5"	4705	15'5"	4705	15'5"
<b>L</b>	3250	10'8"	3250	10'8"	2750	9'0"	2750	9'0"

\*Varies with stick length.

NOTE: 600 mm shoes are available for 350.

750 mm shoes are available for 350 L.


Medium stick is available all models.

Undercarriage is retracted.

# Excavators

## Shipping Dimensions

- 375, 375 L
- Japan/U.S. Sourced ● Belgium Sourced

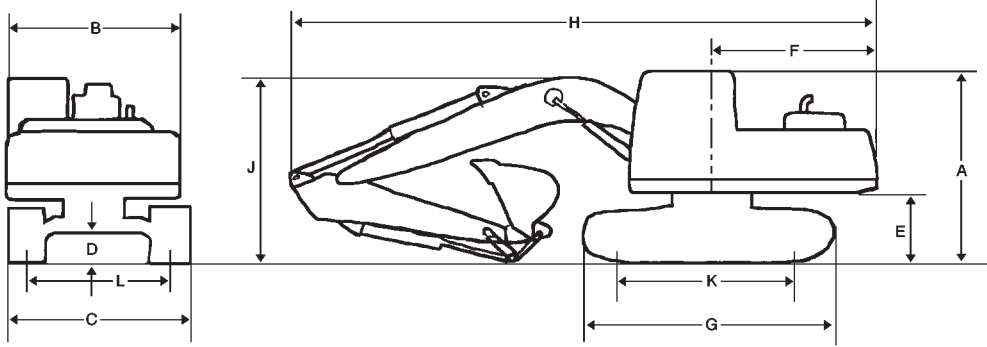

### Japan/U.S. Sourced

	375 Reach		375 GP		375 Mass		375 L Reach		375 L GP		375 L Mass	
	mm	ft	mm	ft	mm	ft	mm	ft	mm	ft	mm	ft
<b>A</b>	3650	12'0"	3650	12'0"	3650	12'0"	3650	12'0"	3650	12'0"	3650	12'0"
<b>B</b>	3470	11'5"	3470	11'5"	3470	11'5"	3470	11'5"	3470	11'5"	3470	11'5"
<b>C</b>	3480	11'5"	3480	11'5"	3480	11'5"	3500	11'6"	3500	11'6"	3500	11'6"
<b>D</b>	890	2'11"	890	2'11"	890	2'11"	890	2'11"	890	2'11"	890	2'11"
<b>E</b>	1600	5'3"	1600	5'3"	1600	5'3"	1600	5'3"	1600	5'3"	1600	5'3"
<b>F</b>	4200	13'9"	4200	13'9"	4200	13'9"	4200	13'9"	4200	13'9"	4200	13'9"
<b>G</b>	5840	19'2"	5840	19'2"	5840	19'2"	6360	20'10"	6360	20'10"	6360	20'10"
<b>H</b>	14 710	48'3"	14 290	46'11"	13 140	43'1"	14 710	48'3"	14 290	46'11"	13 140	43'1"
<b>J</b>	4690	15'5"	5240	17'2"	4890	16'1"	4690	15'5"	5240	17'2"	4890	16'1"
<b>K</b>	4600	15'1"	4600	15'1"	4600	15'1"	5120	16'10"	5120	16'10"	5120	16'10"
<b>L</b>	2750	9'0"	2750	9'0"	2750	9'0"	2750	9'0"	2750	9'0"	2750	9'0"

NOTE: 610 mm shoes are available for 375.  
 750 mm shoes are available for 375 L.  
 Medium stick is available all Reach & Mass.  
 3.4 m short stick is available for GP.  
 Undercarriage is retracted.

### Belgium Sourced

	375 Reach		375 Mass		375 L Reach		375 L Mass	
	mm	ft	mm	ft	mm	ft	mm	ft
<b>A</b>	3650	12'0"	3650	12'0"	3650	12'0"	3650	12'0"
<b>B</b>	3470	11'5"	3470	11'5"	3470	11'5"	3470	11'5"
<b>C</b>	3480	11'5"	3480	11'5"	3480	11'5"	3480	11'5"
<b>D</b>	890	2'11"	890	2'11"	890	2'11"	890	2'11"
<b>E</b>	1600	5'3"	1600	5'3"	1600	5'3"	1600	5'3"
<b>F</b>	4200	13'9"	4200	13'9"	4200	13'9"	4200	13'9"
<b>G</b>	5840	19'2"	5840	19'2"	6360	20'10"	6360	20'10"
<b>H</b>	13 140	43'1"	13 140	43'1"	14 290	46'11"	13 140	43'1"
<b>J</b>	5240	17'2"	4890	16'1"	5240	17'2"	4890	16'1"
<b>K</b>	4600	15'1"	4600	15'1"	5120	16'10"	5120	16'10"
<b>L</b>	2750	9'0"	2750	9'0"	2750	9'0"	2750	9'0"

Major Component Weights

● 301.5 ● 301.6 ● 301.8 ● 302.5 ● 303.5  
● 304.5 ● 307B ● 307B SB ● 311B ● 312B

Excavators

	301.5		301.6		301.8		302.5		303.5	
Buckets: (see data in bucket section)	kg	lb	kg	lb	kg	lb	kg	lb	kg	lb
<b>Sticks:*</b>										
Short Stick	—	—	—	—	—	—	—	—	—	—
Medium Stick	54	119	—	—	54	119	90	198	122	269
Long Stick	59	130	59	130	59	130	102	225	143	315
Extra Long Stick	—	—	—	—	—	—	—	—	—	—
<b>Booms:**</b>										
One-piece	105	231	105	231	105	231	179	395	231	509
Parallel-Offset	—	—	—	—	—	—	—	—	—	—
VA (France sourced only)	—	—	—	—	—	—	—	—	—	—
<b>Other:</b>										
Upperstructure (complete w/o ctwt)	802	† 1768	802	1768	805	1775	1160	† 2557	1459	3217
Standard undercarriage (std shoe)	436	961	443	977	549	1210	900	1984	1119	2467
Long undercarriage (std shoe)	—	—	—	—	—	—	—	—	—	—
Counterweight	100	220	125	276	100	220	118	260	312	688

\*Stick weights include stick, stick lines, bucket cylinder, bucket cylinder pins and bucket linkage.

\*\*Boom weights include boom, boom lines, boom cylinders and rod end pins, stick cylinder, head end pin and stick lines.

†Includes canopy, does not include boom, stick, counterweight or work tool. Undercarriage includes blade, blade cylinder and lines, track motors, swivel joint and lines, swinger sprocket, idlers, rollers and rubber track.

	304.5		307B		307B SB		311B		312B	
Buckets: (see data in bucket section)	kg	lb	kg	lb	kg	lb	kg	lb	kg	lb
<b>Sticks:*</b>										
Short Stick	—	—	—	—	—	—	515	1140	560	1240
Medium Stick	158	348	265	584	150	330	500	1105	540	1200
Long Stick	180	397	330	727	230	510	600	1330	620	1370
Extra Long Stick	—	—	—	—	—	—	—	—	—	—
<b>Booms:**</b>										
One-piece	291	642	635	1400	590	1300	1135	2500	1230	2710
Parallel-Offset	—	—	1115	2460	—	—	—	—	—	—
VA (France sourced only)	—	—	1006	2217	—	—	—	—	1720	3790
<b>Other:</b>										
Upperstructure (complete w/o ctwt)	1698	3743	2550	5620	3150	6940	3870	8530	3875	8540
Standard undercarriage (std shoe)	1795	3957	2120	4670	2120	4670	3700	8155	3835	8455
Long undercarriage (std shoe)	—	—	—	—	—	—	—	—	4335	9555
Counterweight	312	688	750	1650	1150	2540	1450	3200	2450	5400

\*Stick weights include stick, stick lines, bucket cylinder, bucket cylinder pins and bucket linkage.

\*\*Boom weights include boom, boom lines, boom cylinders and rod end pins, stick cylinder, head end pin and stick lines.

†Includes canopy, does not include boom, stick, counterweight or work tool. Undercarriage includes blade, blade cylinder and lines, track motors, swivel joint and lines, swinger sprocket, idlers, rollers and rubber track.

	313B CR		315B		315B L		317B L		318B L		318B L	
Source	Japan		—		France		France		Japan		France	
Buckets: (see data in bucket section)	kg	lb	kg	lb	kg	lb	kg	lb	kg	lb	kg	lb
<b>Sticks:*</b>												
Short Stick	—	—	650	<b>1430</b>	650	<b>1430</b>	650	<b>1430</b>	590	<b>1300</b>	960	<b>2115</b>
Medium Stick	540	<b>1190</b>	580	<b>1280</b>	580	<b>1280</b>	580	<b>1280</b>	570	<b>1260</b>	940	<b>2070</b>
Long Stick	620	<b>1370</b>	630	<b>1390</b>	630	<b>1390</b>	630	<b>1390</b>	590	<b>1300</b>	930	<b>2050</b>
Extra Long Stick	—	—	700	<b>1540</b>	700	<b>1540</b>	700	<b>1540</b>	690	<b>1520</b>	1000	<b>2205</b>
<b>Booms:**</b>												
One-piece	1290	<b>2840</b>	1600	<b>3500</b>	1600	<b>3530</b>	1600	<b>3500</b>	1900	<b>4190</b>	1900	<b>4190</b>
Parallel-Offset	—	—	—	—	—	—	—	—	—	—	—	—
VA (France sourced only)	—	—	—	—	2100	<b>4630</b>	2100	<b>4630</b>	—	—	2400	<b>5290</b>
<b>Other:</b>												
Upperstructure (complete w/o ctwt)	3060	<b>6750</b>	4600	<b>10,200</b>	4600	<b>10,200</b>	5100	<b>11,245</b>	4550	<b>10,030</b>	5100	<b>11,245</b>
Standard undercarriage (std shoe)	4010	<b>8840</b>	5300	<b>11,600</b>	—	—	—	—	—	—	—	—
Long undercarriage (std shoe)	—	—	5900	<b>12,900</b>	5900	<b>12,900</b>	6470	<b>14,260</b>	6650	<b>14,650</b>	6470	<b>14,260</b>
Narrow undercarriage (std shoe)	—	—	—	—	—	—	6190	<b>13,650</b>	6360	<b>14,030</b>	6190	<b>13,650</b>
Counterweight	3220	<b>7100</b>	3000	<b>6600</b>	3300	<b>7276</b>	3300	<b>7280</b>	3610	<b>7960</b>	3600	<b>7940</b>

\*Stick weights include stick, stick lines, bucket cylinder, bucket cylinder pins and bucket linkage.

\*\*Boom weights include boom, boom lines, boom cylinders and rod end pins, stick cylinder and head end pin.

	M312		M315		M318		M320	
<b>Buckets: (see data in bucket section)</b>	kg	lb	kg	lb	kg	lb	kg	lb
<b>Sticks:*</b>								
Short Stick	522	1151	588	1297	743	1638	936	2064
Medium Short Stick	509	1122	604	1332	795	1753	991	2185
Medium Stick	541	1193	633	1396	837	1846	1081	2384
Long Stick	596	1314	652	1438	1025	2260	1253	2763
Extra Long Stick	614	1354	761	1678	—	—	—	—
Industrial Stick	508	1120	606	1336	737	1625	—	—
<b>Booms:**</b>								
One-piece Boom	1208	2664	1371	3023	1737	3830	2165	4774
VA Stub Boom	867	1912	997	2198	1173	2586	1409	3107
VA Fore Boom	748	1649	885	1951	1059	2335	1329	2930
<b>Other:</b>								
Upperstructure (with swing bearing, no boom)	6350	14,002	7473	16,478	8590	18,941	9282	20,467
Undercarriage (with standard tires)	3390	7475	3700	8159	4070	8974	4917	10,842
Outriggers (each set, with cylinders and linkage)	800	1764	1040	2293	1070	2359	1275	2811
Dozer Blade (with cylinders and linkage)	650	1433	700	1544	700	1544	900	1985

\*Stick weight includes stick, stick lines, bucket cylinder, bucket cylinder pins, bucket linkage and bucket linkage pins.

\*\*One-piece boom weight includes boom, boom lines, boom cylinders, boom cylinder rod end pin, stick cylinder, stick cylinder head end pin and boom nose pin.

— VA stub boom weight includes stub boom, stub boom lines, boom cylinders, VA cylinder, VA cylinder head end pin and stub/fore boom pin.

— VA fore boom weight includes fore boom, fore boom lines, stick cylinder, stick cylinder head end pin, VA cylinder rod end pin and fore boom nose pin.



# Excavators

## Major Component Weights

- 320C ● 322B ● 325B ● 330B ● 345B Series II
- Japan/U.S./Brazil Sourced

Source	320C		322B		325B		330B		345B Series II	
	Japan/Brazil		Japan/U.S.		Japan/U.S.		Japan/U.S.		Japan/U.S.	
Buckets: (see data in bucket section)	kg	lb	kg	lb	kg	lb	kg	lb	kg	lb
<b>Booms:**</b>										
One-piece Reach	1397	<b>3080</b>	2480	<b>5470</b>	2745	<b>6050</b>	3830	<b>8445</b>	3351	<b>7390</b>
<b>Sticks:* (for Reach Boom)</b>										
Short	722	<b>1590</b>	760	<b>1680</b>	895	<b>1980</b>	1090	<b>2400</b>	1746	<b>3850</b>
*	635	<b>1400</b>	785	<b>1730</b>	825	<b>1820</b>	1130	<b>2490</b>	1751	<b>3860</b>
*	661	<b>1460</b>	985	<b>2170</b>	905	<b>2000</b>	1220	<b>2690</b>	1771	<b>3900</b>
*	912	<b>2010</b>	—	—	903	<b>1990</b>	1350	<b>2980</b>	—	—
Long	—	—	—	—	—	—	—	—	—	—
<b>Booms:**</b>										
One-piece Mass	1405	<b>3100</b>	2540	<b>5600</b>	2820	<b>6220</b>	3755	<b>8280</b>	3870	<b>8530</b>
VA Boom	—	—	—	—	—	—	—	—	—	—
<b>Sticks:* (for Mass Boom &amp; VA Boom)</b>										
Short	722	<b>1590</b>	880	<b>1940</b>	895	<b>1980</b>	1090	<b>2400</b>	1800	<b>3970</b>
*	752	<b>1660</b>	935	<b>2060</b>	995	<b>2200</b>	1180	<b>2600</b>	1826	<b>4030</b>
Long	—	—	—	—	—	—	1300	<b>2870</b>	—	—
Upperstructure (complete w/o ctwt)	5775	<b>12,730</b>	6445	<b>14,210</b>	7020	<b>15,480</b>	8830	<b>19,470</b>	11 671	<b>25,730</b>
Reinforced Frame	—	—	—	—	—	—	—	—	—	—
Undercarriage — Standard	(600) 6649	<b>14,660</b>	(600) 7380	<b>16,270</b>	(600) 8680	<b>19,140</b>	(600) 10 915	<b>24,060</b>	(600) 13 980	<b>30,820</b>
	(700) 6800	<b>14,990</b>	(700) 7640	<b>16,845</b>	(700) 8980	<b>19,800</b>	(750) 11 410	<b>25,150</b>	(750) 15 202	<b>33,510</b>
	(800) 7090	<b>15,630</b>	(800) 7950	<b>17,530</b>	(800) 9615	<b>21,200</b>	(850) 12 100	<b>26,680</b>	(900) 15 740	<b>34,700</b>
( ) Shoe width — Long (FIX)	(600) 7847	<b>17,300</b>	(600) 7960	<b>17,550</b>	(600) 9280	<b>20,460</b>	(600) 11 680	<b>25,750</b>	(600) 15 010	<b>33,090</b>
	—	—	(700) 8250	<b>18,180</b>	(700) 9600	<b>21,170</b>	(750) 12 220	<b>26,940</b>	(750) 15 911	<b>35,080</b>
	—	—	(800) 8580	<b>18,920</b>	(800) 10 270	<b>22,640</b>	(850) 12 980	<b>28,620</b>	(900) 16 870	<b>37,190</b>
— Long (VG)	—	—	—	—	—	—	—	—	(600) 16 680	<b>36,770</b>
	—	—	—	—	—	—	—	—	(750) 17 780	<b>39,200</b>
	—	—	—	—	—	—	—	—	(900) 18 640	<b>41,095</b>
— Narrow	—	—	—	—	—	—	—	—	—	—
— Long Narrow	—	—	(600) 7950	<b>17,530</b>	(600) 9215	<b>20,320</b>	(600) 11 560	<b>25,490</b>	(750) —	—
	—	—	—	—	—	—	12 100	<b>26,680</b>	—	—
Counterweight — Standard	3850	<b>8490</b>	4460	<b>9835</b>	5220	<b>11,500</b>	5920	<b>13,050</b>	8500 †	<b>18,740</b>
— Extra	—	—	—	—	—	—	—	—	—	—
— Super Long Reach	—	—	—	—	—	—	—	—	—	—
— Super Long Demo.	—	—	—	—	—	—	—	—	—	—
— Material Handling	—	—	—	—	—	—	—	—	—	—
— Ditch Cleaning	—	—	—	—	—	—	—	—	—	—

\*Stick weights include stick and stick lines.

\*\*Boom weights include boom, boom lines, boom cylinders and rod end pins, stick cylinder and head end pin.

†8000 kg (17,600 lb) without counterweight attachment for U.S. sourced machine.

	320C		322B		325B		330B		345B Series II	
Buckets: (see data in bucket section)	kg	lb	kg	lb	kg	lb	kg	lb	kg	lb
<b>Booms:**</b>										
One-piece Reach	2060	<b>4540</b>	2480	<b>5470</b>	2480	<b>5470</b>	3400	<b>7500</b>	4610	<b>10,165</b>
<b>Sticks:* (for Reach Boom)</b>										
Short	720	<b>1590</b>	730	<b>1610</b>	840	<b>1850</b>	1020	<b>2250</b>	1670	<b>3680</b>
Medium	620	<b>1370</b>	760	<b>1680</b>	800	<b>1760</b>	1080	<b>2380</b>	1655	<b>3650</b>
Long	670	<b>1480</b>	—	—	870	<b>1920</b>	1170	<b>2580</b>	—	—
Extra Long	—	—	—	—	—	—	—	—	—	—
<b>Booms:**</b>										
One-piece Mass	2085	<b>4600</b>	2550	<b>5620</b>	2915	<b>6430</b>	3610	<b>7960</b>	5130	<b>11,310</b>
VA Boom	2660	<b>5865</b>	—	—	3540	<b>7805</b>	—	—	—	—
<b>Sticks:* (for Mass Boom)</b>										
Short	610	<b>1345</b>	840	<b>1850</b>	840	<b>1850</b>	1020	<b>2250</b>	1700	<b>3750</b>
Medium	750	<b>1650</b>	890	<b>1960</b>	950	<b>2095</b>	1110	<b>2450</b>	1675	<b>3690</b>
Upperstructure (complete w/o ctwt)	5560	<b>12,260</b>	6230	<b>13,740</b>	7320	<b>16,140</b>	9804	<b>21,620</b>	10 150	<b>22,380</b>
Undercarriage — Standard	6470	<b>14,270</b>	—	—	—	—	—	—	—	—
— L	7330	<b>16,160</b>	8580	<b>18,920</b>	10 685	<b>23,560</b>	12 300	<b>27,120</b>	18 780	<b>41,410</b>
— LN	6750	<b>14,880</b>	7910	<b>17,440</b>	9625	<b>21,220</b>	11 500	<b>25,360</b>	—	—
— S	7990	<b>17,620</b>	—	—	—	—	—	—	—	—
Counterweight — Standard	4410	<b>9725</b>	—	—	—	—	—	—	—	—
— L	4410	<b>9725</b>	4860	<b>10,730</b>	5210	<b>11,490</b>	6120	<b>13,490</b>	9300	<b>20,510</b>
— LN	4710	<b>10,385</b>	4860	<b>10,730</b>	5210	<b>11,490</b>	6620	<b>14,600</b>	—	—
— S	4710	<b>10,385</b>	—	—	—	—	—	—	—	—

\*Stick weights include stick and stick lines.

\*\*Boom weights include boom, boom lines, boom cylinders and rod end pins, stick cylinder and head end pin.

**NOTE:** Heavy duty track shoes available.


	365B L		365B L		375		375	
Buckets: (see data in bucket section)	kg	lb	kg	lb	kg	lb	kg	lb
Source	Japan		Belgium		Japan/U.S.		Belgium	
<b>Booms:*</b>								
One-piece Reach	5277	11,630	4778	10,530	9410	20,700	10 500	23,150
<b>Sticks:** (for Reach Boom)</b>								
Short	2224	4900	2128	4690	2780	6129	4540	10,010
•	2310	5090	2141	4720	2870	6330	4130	9110
*	2788	6150	2611	5760	3230	7100	—	—
Long	—	—	—	—	3560	7800	4300	9480
<b>Booms:*</b>								
One-piece General Purpose	—	—	—	—	9300	20,500	—	—
<b>Sticks:** (for General Purpose Boom)</b>								
Short	—	—	—	—	—	—	—	—
•	—	—	—	—	2980	6600	—	—
•	—	—	—	—	3230	7100	—	—
Long	—	—	—	—	3560	7800	—	—
<b>Booms:*</b>								
One-piece Mass	5483	12,090	4992	11,010	9620	21,200	10 650	23,480
<b>Sticks:** (for Mass Boom)</b>								
Short	2542	5600	2429	5360	2890	6400	4470	9860
•	2733	6030	2612	5760	2970	6500	4540	10,010
•	—	—	—	—	—	—	—	—
Long	—	—	—	—	3260	7800	4850	10,690
Upperstructure (complete w/o ctwt)	15 872	34,990	25 040	55,200	19 200	42,300	31 700	69,900
Undercarriage — Std	—	—	—	—	(610) 28 140	62,038	28 140	62,050
( ) Shoe width — Long	(750) 26 425	58,260	(750) 27 280	60,140	(750) 31 540	69,534	30 800	67,910
Counterweight — Std	—	—	—	—	11 600	25,550	11 790	26,030
— Long	9700	21,380	9800	21,610	—	—	4860	10,720
— Removal C/W	—	—	—	—	12 090	26,680	—	—

\*Boom weights include: boom, boom lines, cylinders, rod end pins, stick cylinder and head end pin.

\*\*Stick weights include stick and stick lines.

NOTE: Heavy duty track shoes available.

- 301.5
- 301.6
- 301.8
- 302.5
- 303.5
- 304.5

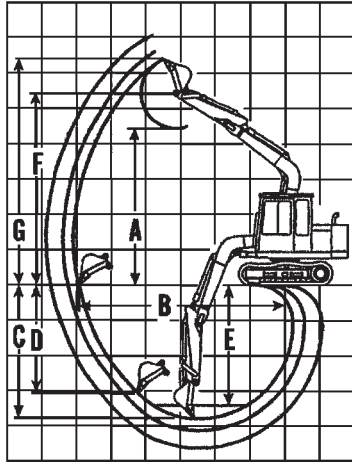

**One-Piece Boom Digging Envelope**


- Standard shoes and undercarriage
- Lug height not included

**KEY:**

- A** Maximum loading height of bucket with teeth
- B** Maximum reach at ground level
- C** Maximum digging depth
- D** Maximum vertical wall
- E** Maximum depth of cut for 2.44 m (8'0") level bottom (straight clean up)
- F** Maximum bucket hinge pin height
- G** Maximum height, to bucket teeth at highest arc

Stick	301.5		301.6		301.8		301.8		301.8	
	890 mm	2'11"	1.09 m	3'6"	1.09 m	3'6"	890 mm	2'11"	1.09 m	3'6"
	m	ft	m	ft	m	ft	m	ft	m	ft
<b>A</b>	2.36	7'9"	2.47	8'1"	2.47	8'1"	2.36	7'9"	2.47	8'1"
<b>B</b>	3.61	11'8"	3.8	12'5"	3.8	12'5"	3.61	11'8"	3.8	12'5"
<b>C</b>	2.13	7'0"	2.33	7'6"	2.33	7'6"	2.13	7'0"	2.33	7'6"
<b>D</b>	1.62	5'4"	1.81	5'9"	1.81	5'9"	1.62	5'4"	1.81	5'9"
<b>E</b>	—	—	—	—	—	—	—	—	—	—
<b>F</b>	2.86	9'5"	2.97	9'7"	2.97	9'7"	2.86	9'5"	2.97	9'7"
<b>G</b>	3.32	10'11"	3.42	11'2"	3.42	11'2"	3.32	10'11"	3.42	11'2"

Stick	302.5		302.5		303.5		303.5		304.5		304.5	
	1.11 m	3'8"	1.41 m	4'8"	1.24 m	4'1"	1.64 m	5'4"	1.43 m	4'7"	1.83 m	6'0"
	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft
<b>A</b>	3.10	10'2"	3.25	10'8"	3.57	11'7"	4.03	13'2"	4.02	13'1"	4.28	14'1"
<b>B</b>	4.56	15'0"	4.93	16'2"	5.29	17'3"	5.65	18'5"	5.81	19'1"	6.18	20'2"
<b>C</b>	2.65	8'8"	2.95	9'8"	3.16	10'3"	3.56	11'7"	3.53	11'5"	3.93	12'8"
<b>D</b>	2.12	6'11"	2.38	7'10"	5.17	17'0"	5.54	18'1"	5.67	18'6"	6.05	19'8"
<b>E</b>	—	—	—	—	—	—	—	—	—	—	—	—
<b>F</b>	3.75	12'4"	3.89	12'9"	4.32	14'1"	4.54	14'9"	4.85	15'9"	5.12	16'7"
<b>G</b>	4.38	14'4"	4.52	14'10"	5.04	16'5"	5.52	18'1"	5.67	18'6"	5.94	19'4"

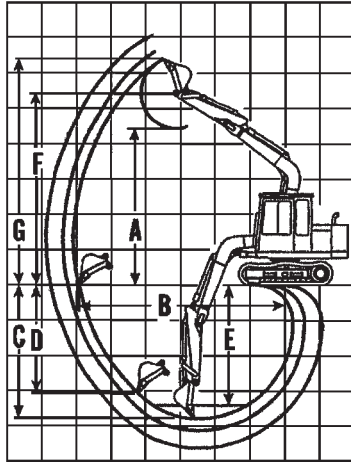

**One-Piece Boom Digging Envelope**

- Standard shoes and undercarriage
- Lug height not included

**KEY:**

- A** Maximum loading height of bucket with teeth
- B** Maximum reach at ground level
- C** Maximum digging depth
- D** Maximum vertical wall
- E** Maximum depth of cut for 2.44 m (8'0") level bottom (straight clean up)
- F** Maximum bucket hinge pin height
- G** Maximum height, to bucket teeth at highest arc

**307B**

**307B SB**

Stick	1.67 m 5'6"		2.21 m 7'3"		1.67 m 5'6"		1.72 m * 5'8"		2.21 m 7'3"	
	m	ft	m	ft	m	ft	m	ft	m	ft
<b>A</b>	5.15	16'11"	5.56	18'3"	4.16	13'8"	4.17	13'8"	4.45	14'7"
<b>B</b>	6.20	20'4"	6.72	22'1"	6.89	22'7"	6.88	22'7"	7.42	24'4"
<b>C</b>	4.11	13'5"	4.65	15'3"	4.16	13'8"	4.15	13'7"	4.70	15'5"
<b>D</b>	3.64	11'11"	4.16	13'8"	3.00	9'10"	2.98	9'9"	3.58	11'9"
<b>E</b>	3.77	12'4"	4.35	14'3"	3.76	12'4"	3.75	12'3"	4.34	14'3"
<b>F</b>	6.24	20'6"	6.65	21'10"	5.25	17'3"	5.24	17'2"	5.54	18'2"
<b>G</b>	7.29	23'11"	7.69	25'3"	6.18	20'3"	6.19	20'3"	6.49	21'4"

**311B**


Stick	1.95 m 6'5"		2.25 m 7'5"		2.8 m 9'2"	
	m	ft	m	ft	m	ft
<b>A</b>	5.30	17'5"	5.45	17'11"	5.78	19'0"
<b>B</b>	7.29	23'11"	7.57	24'10"	8.10	26'7"
<b>C</b>	4.74	15'7"	5.04	16'6"	5.59	18'4"
<b>D</b>	4.15	13'7"	4.37	14'4"	4.88	16'0"
<b>E</b>	4.42	14'6"	4.73	15'6"	5.30	17'5"
<b>F</b>	6.51	21'4"	6.66	21'10"	6.99	22'11"
<b>G</b>	7.66	25'2"	7.81	25'7"	8.13	26'8"

\*France sourced.

- 312B
- 312B L
- 313B CR
- 315B
- 315B L
- Japan Sourced
- France Sourced

Range Dimensions

Excavators

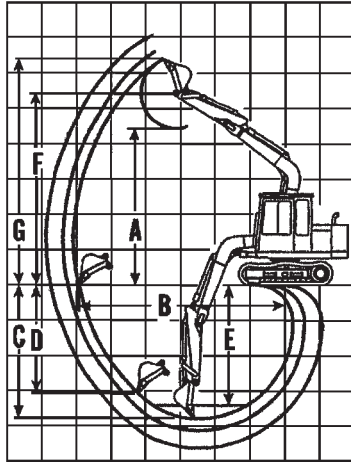

**One-Piece Boom Digging Envelope**

- Standard shoes and undercarriage
- Lug height not included

**KEY:**

- A** Maximum loading height of bucket with teeth
- B** Maximum reach at ground level
- C** Maximum digging depth
- D** Maximum vertical wall
- E** Maximum depth of cut for 2.44 m (8'0") level bottom (straight clean up)
- F** Maximum bucket hinge pin height
- G** Maximum height, to bucket teeth at highest arc


Japan Sourced			312B, 312B L			France Sourced			312B, 312B L			
Stick	2.1 m	6'11"	2.5 m	8'2"	3 m	9'10"	2.1 m	6'11"	2.5 m	8'2"	3 m	9'10"
	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft
<b>A</b>	5.86	19'3"	6.11	20'1"	6.34	20'10"	5.83	19'1"	6.03	19'9"	6.31	20'8"
<b>B</b>	7.79	25'7"	8.17	26'10"	8.62	28'3"	7.81	25'7"	8.19	26'10"	8.64	28'4"
<b>C</b>	5.13	16'10"	5.53	18'2"	6.03	19'9"	5.15	16'11"	5.55	18'2"	6.05	19'10"
<b>D</b>	4.43	14'6"	4.89	16'1"	5.25	17'3"	4.62	15'2"	5.01	16'5"	5.52	18'1"
<b>E</b>	4.83	15'10"	5.24	17'2"	5.75	18'10"	4.91	16'1"	5.34	17'6"	5.87	19'3"
<b>F</b>	7.07	23'2"	7.32	24'0"	7.55	24'9"	7.07	23'2"	7.32	24'0"	7.56	24'9"
<b>G</b>	8.23	27'0"	8.48	27'10"	8.70	28'6"	8.27	27'1"	8.52	27'11"	8.75	28'8"

Japan Sourced			313B CR		Japan Sourced		315B, 315B L					
Stick	2.5 m	8'2"	3 m	9'10"	1.85 m	6'1"	2.25 m	7'5"	2.6 m	8'6"	3.1 m	10'2"
	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft
<b>A</b>	6.81	22'4"	7.13	23'5"	5.93	19'6"	6.15	20'2"	6.32	20'9"	6.41	21'0"
<b>B</b>	8.10	26'7"	8.55	28'1"	8.04	26'5"	8.42	27'7"	8.74	28'8"	9.14	30'0"
<b>C</b>	5.45	17'11"	5.95	19'6"	5.31	17'5"	5.71	18'9"	6.06	19'10"	6.56	21'6"
<b>D</b>	4.87	16'0"	5.24	17'2"	4.40	14'5"	4.93	16'2"	5.34	17'6"	5.57	18'3"
<b>E</b>	5.24	17'2"	5.77	18'11"	5.02	16'5"	5.46	17'11"	5.83	19'1"	6.33	20'9"
<b>F</b>	8.05	26'5"	8.37	27'6"	7.27	23'10"	7.49	24'7"	7.66	25'1"	7.75	25'5"
<b>G</b>	9.24	30'4"	7.13	23'5"	8.50	27'10"	8.74	28'8"	8.91	29'3"	8.97	29'5"

# Excavators

## Range Dimensions

- 315B L ● 317B L ● 317B LN
- France Sourced

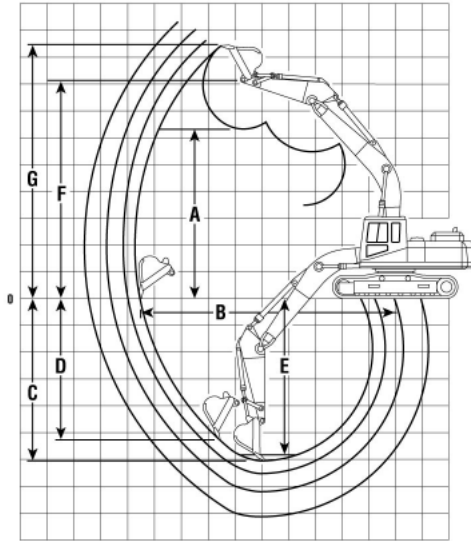

### One-Piece Boom Digging Envelope

- Standard shoes and undercarriage

#### KEY:

- A** Maximum loading height of bucket with teeth
- B** Maximum reach at ground level
- C** Maximum digging depth
- D** Maximum vertical wall
- E** Maximum depth of cut for 2.44 m (8'0") level bottom (straight clean up)
- F** Maximum bucket hinge pin height
- G** Maximum height, to bucket teeth at highest arc

### France Sourced


### 315B L

Stick	1.85 m		2.25 m		2.6 m		3.1 m	
	m	ft	m	ft	m	ft	m	ft
<b>A</b>	6.05	19'11"	6.07	19'11"	6.43	21'1"	6.27	20'7"
<b>B</b>	7.92	25'11"	8.21	26'11"	8.62	28'3"	8.90	29'2"
<b>C</b>	5.18	17'0"	5.58	18'3"	5.93	19'5"	6.43	21'1"
<b>D</b>	3.89	12'9"	4.03	13'3"	4.86	15'11"	4.68	15'4"
<b>E</b>	4.87	16'0"	5.27	17'3"	5.69	18'8"	6.13	20'1"
<b>F</b>	7.28	23'11"	7.30	23'11"	7.66	25'1"	7.50	24'7"
<b>G</b>	8.49	27'10"	8.51	27'11"	8.89	29'2"	8.69	28'6"

### France Sourced

### 317B L, 317B LN

Stick	1.85 m		2.25 m		2.6 m		3.1 m	
	m	ft	m	ft	m	ft	m	ft
<b>A</b>	5.97	19'7"	5.99	19'8"	6.35	20'10"	6.44	21'1"
<b>B</b>	8.00	26'3"	8.29	27'2"	8.70	28'6"	9.10	29'10"
<b>C</b>	5.26	17'3"	5.66	18'7"	6.01	19'8"	6.51	21'4"
<b>D</b>	4.01	13'2"	4.16	13'8"	4.99	16'4"	5.16	16'11"
<b>E</b>	4.96	16'3"	5.36	17'7"	5.77	18'11"	6.27	20'7"
<b>F</b>	7.30	23'11"	7.32	24'1"	7.70	25'3"	7.55	24'9"
<b>G</b>	8.54	28'1"	8.54	28'1"	8.94	29'4"	9.00	29'6"

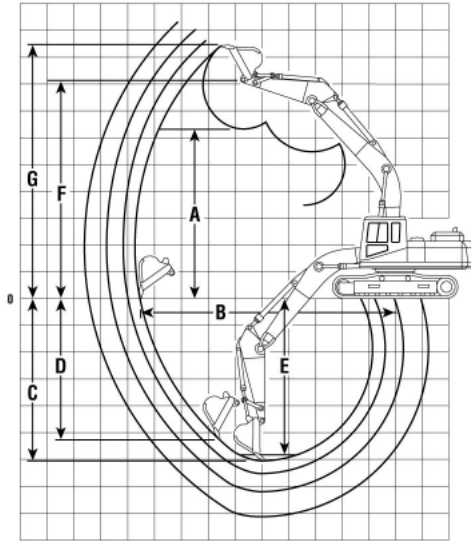

**One-Piece Boom Digging Envelope**

- Standard shoes and undercarriage

**KEY:**

- A** Maximum loading height of bucket with teeth
- B** Maximum reach at ground level
- C** Maximum digging depth
- D** Maximum vertical wall
- E** Maximum depth of cut for 2.44 m (8'0") level bottom (straight clean up)
- F** Maximum bucket hinge pin height
- G** Maximum height, to bucket teeth at highest arc

**Japan Sourced**

**318B L, 318B LN**


Stick	1.8 m		2.25 m		2.7 m		3.2 m	
	m	ft	m	ft	m	ft	m	ft
<b>A</b>	5.88	19'3"	6.16	20'3"	6.46	21'2"	6.86	22'6"
<b>B</b>	8.21	26'11"	8.65	28'5"	9.11	29'11"	9.63	31'7"
<b>C</b>	5.47	17'11"	5.92	19'5"	6.37	20'11"	6.87	22'6"
<b>D</b>	3.45	11'4"	4.84	15'11"	5.41	17'9"	6.01	19'9"
<b>E</b>	5.46	17'11"	5.66	18'7"	6.16	20'3"	6.70	22'0"
<b>F</b>	7.30	23'11"	7.57	24'10"	7.87	25'10"	8.27	27'2"
<b>G</b>	8.53	28'0"	8.92	29'3"	9.24	30'4"	9.65	31'8"

**France Sourced**

**318B L, 318B LN**

Stick	1.8 m		2.25 m		2.7 m		3.2 m	
	m	ft	m	ft	m	ft	m	ft
<b>A</b>	5.82	19'1"	6.09	20'0"	6.39	20'4"	6.33	20'9"
<b>B</b>	8.27	27'2"	8.71	28'7"	9.16	30'1"	9.27	30'5"
<b>C</b>	5.54	18'2"	5.99	19'8"	6.44	21'1"	6.83	22'5"
<b>D</b>	3.79	12'5"	4.81	15'9"	5.48	18'0"	3.43	11'3"
<b>E</b>	5.23	17'2"	5.73	18'10"	6.22	20'5"	6.52	21'5"
<b>F</b>	7.29	23'11"	7.57	24'10"	7.87	25'10"	7.81	25'7"
<b>G</b>	8.58	28'1"	8.93	29'3"	9.26	30'4"	8.86	29'1"



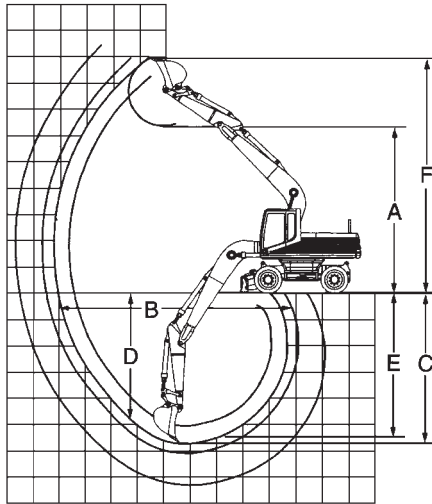

**One-Piece Boom Digging Envelope**

- Standard 10 × 20 tires and undercarriage
- General purpose bucket

**KEY:**


- A** Maximum loading height of bucket with teeth
- B** Maximum reach at ground level
- C** Maximum digging depth
- D** Maximum vertical wall
- E** Maximum depth of cut for 2.44 m (8'0") level bottom (straight clean up)
- F** Maximum height, to bucket teeth at highest arc

**M312**

Stick	1.6 m		5'3"		2 m		6'6"		2.3 m		7'5"		2.6 m		8'5"		3 m		9'9"			
	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft		
<b>A</b>	5.64	18'5"	5.86	19'2"	6.03	19'8"	6.19	20'3"	6.20	20'3"	6.19	20'3"	6.20	20'3"	6.20	20'3"	6.20	20'3"	6.20	20'3"	6.20	20'3"
<b>B</b>	7.62	25'0"	8.01	26'3"	8.30	27'2"	8.59	28'2"	8.90	29'2"	8.59	28'2"	8.90	29'2"	8.90	29'2"	8.90	29'2"	8.90	29'2"	8.90	29'2"
<b>C</b>	4.42	14'5"	4.82	15'8"	5.12	16'8"	5.42	17'8"	5.82	19'1"	5.42	17'8"	5.82	19'1"	5.82	19'1"	5.82	19'1"	5.82	19'1"	5.82	19'1"
<b>D</b>	2.39	7'8"	3.75	12'3"	4.03	13'2"	4.30	14'1"	4.39	14'4"	4.30	14'1"	4.39	14'4"	4.39	14'4"	4.39	14'4"	4.39	14'4"	4.39	14'4"
<b>E</b>	4.10	13'5"	4.57	15'0"	4.89	16'0"	5.21	17'1"	5.63	18'5"	5.21	17'1"	5.63	18'5"	5.63	18'5"	5.63	18'5"	5.63	18'5"	5.63	18'5"
<b>F</b>	7.88	25'5"	8.21	26'9"	8.38	27'5"	8.55	28'1"	8.52	28'0"	8.55	28'1"	8.52	28'0"	8.52	28'0"	8.52	28'0"	8.52	28'0"	8.52	28'0"

**M315**

Stick	1.7 m		5'7"		2.1 m		6'9"		2.4 m		7'9"		2.6 m		8'5"		3.1 m		10'1"			
	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft		
<b>A</b>	5.94	19'6"	6.16	20'3"	6.33	20'9"	6.44	21'1"	6.59	21'7"	6.44	21'1"	6.59	21'7"	6.59	21'7"	6.59	21'7"	6.59	21'7"	6.59	21'7"
<b>B</b>	7.95	26'1"	8.34	27'4"	8.63	28'4"	8.82	28'9"	9.26	30'5"	8.82	28'9"	9.26	30'5"	9.26	30'5"	9.26	30'5"	9.26	30'5"	9.26	30'5"
<b>C</b>	4.65	15'3"	5.05	16'7"	5.35	17'7"	5.55	18'2"	6.05	19'10"	5.55	18'2"	6.05	19'10"	6.05	19'10"	6.05	19'10"	6.05	19'10"	6.05	19'10"
<b>D</b>	2.51	8'3"	4.00	13'1"	4.27	14'0"	4.48	14'8"	4.76	15'7"	4.48	14'8"	4.76	15'7"	4.76	15'7"	4.76	15'7"	4.76	15'7"	4.76	15'7"
<b>E</b>	4.37	14'4"	4.81	15'9"	5.13	16'10"	5.34	17'6"	5.87	19'3"	5.34	17'6"	5.87	19'3"	5.87	19'3"	5.87	19'3"	5.87	19'3"	5.87	19'3"
<b>F</b>	8.18	26'10"	8.52	27'11"	8.69	28'6"	8.80	28'10"	8.93	29'4"	8.80	28'10"	8.93	29'4"	8.93	29'4"	8.93	29'4"	8.93	29'4"	8.93	29'4"

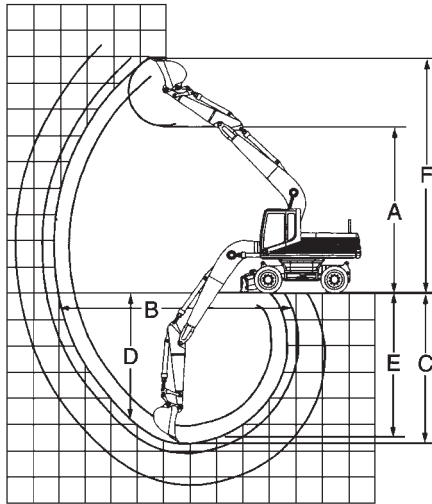

**One-Piece Boom Digging Envelope**

- Standard 10 × 20 tires and undercarriage
- General purpose bucket

**KEY:**

- A** Maximum loading height of bucket with teeth
- B** Maximum reach at ground level
- C** Maximum digging depth
- D** Maximum vertical wall
- E** Maximum depth of cut for 2.44 m (8'0") level bottom (straight clean up)
- F** Maximum height, to bucket teeth at highest arc

**M318**

Stick	1.8 m		5'11"		2.4 m		7'9"		2.8 m		9'2"		4 m		13'1"	
	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft
<b>A</b>	6.08	19'11"	6.33	20'9"	6.42	21'1"	6.73	22'1"								
<b>B</b>	8.49	27'10"	9.04	29'8"	9.38	30'9"	10.55	34'7"								
<b>C</b>	5.09	16'8"	5.69	18'8"	6.09	20'0"	7.37	24'2"								
<b>D</b>	2.93	9'7"	4.36	14'4"	4.56	15'0"	5.47	17'11"								
<b>E</b>	4.82	15'10"	5.47	17'11"	5.89	19'4"	7.22	23'8"								
<b>F</b>	8.53	28'0"	8.89	29'2"	8.95	29'4"	9.45	31'0"								


**M320**

Stick	1.9 m		6'3"		2.5 m		8'2"		2.9 m		9'6"		4.2 m		13'9"	
	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft
<b>Bucket</b>	1.05 m <sup>3</sup>	1.37 yd <sup>3</sup>	0.9 m <sup>3</sup>	1.18 yd <sup>3</sup>	0.81 m <sup>3</sup>	1.06 yd <sup>3</sup>	0.55 m <sup>3</sup>	0.72 yd <sup>3</sup>								
<b>A</b>	6.06	19'11"	6.30	20'8"	6.21	20'4"	6.84	22'5"								
<b>B</b>	9.05	29'8"	9.61	31'6"	9.90	32'6"	11.18	36'8"								
<b>C</b>	5.19	17'0"	5.79	19'0"	6.19	20'4"	7.47	24'6"								
<b>D</b>	2.46	8'1"	3.91	12'10"	3.67	12'0"	5.34	17'6"								
<b>E</b>	4.94	16'2"	5.58	18'4"	6.00	19'8"	7.35	24'1"								
<b>F</b>	8.62	28'3"	8.97	29'5"	8.80	28'10"	9.50	31'2"								

# Excavators

## Range Dimensions

- 320C ● 320C L
- Japan Sourced

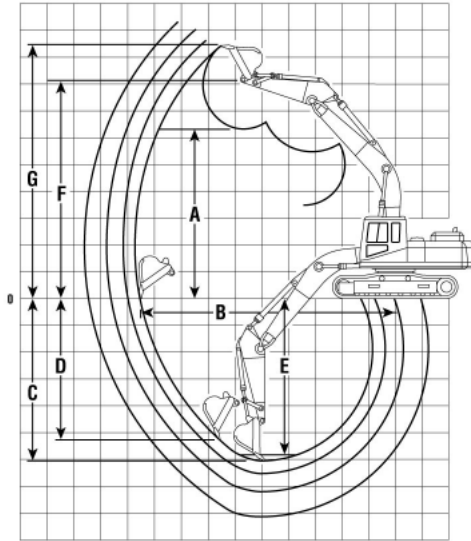

### One-Piece Boom Digging Envelope

- Standard shoes and undercarriage

#### KEY:

- A** Maximum loading height of bucket with teeth
- B** Maximum reach at ground level
- C** Maximum digging depth
- D** Maximum vertical wall
- E** Maximum depth of cut for 2.44 m (8'0") level bottom (straight clean up)
- F** Maximum bucket hinge pin height
- G** Maximum height, to bucket teeth at highest arc


### 320C, 320C L with Reach Boom

Stick	3.9 m		2.9 m		2.5 m		1.9 m	
	m	ft	m	ft	m	ft	m	ft
<b>A</b>	6.93	22'9"	6.58	21'6"	6.46	21'2"	5.96	19'7"
<b>B</b>	10.63	34'11"	9.77	32'1"	9.31	30'7"	8.76	28'9"
<b>C</b>	7.58	24'10"	6.64	21'9"	6.15	20'2"	5.63	18'6"
<b>D</b>	6.80	22'4"	6.04	19'10"	5.33	17'6"	4.68	15'4"
<b>E</b>	7.25	23'9"	6.38	20'11"	5.85	19'2"	5.31	17'5"
<b>F</b>	8.41	27'7"	8.06	26'5"	7.87	25'9"	7.45	24'5"
<b>G</b>	9.73	31'11"	9.40	30'10"	9.16	30'1"	8.78	28'10"

### 320C, 320C L with Mass Boom

Stick	2.4 m	
	m	ft
<b>A</b>	5.92	19'5"
<b>B</b>	8.76	28'9"
<b>C</b>	5.70	18'8"
<b>D</b>	4.94	16'2"
<b>E</b>	4.93	16'2"
<b>F</b>	7.43	24'5"
<b>G</b>	8.77	28'9"

- 320C ● 320C L ● 320C LN ● 320C S
- Belgium Sourced (Preliminary Information)

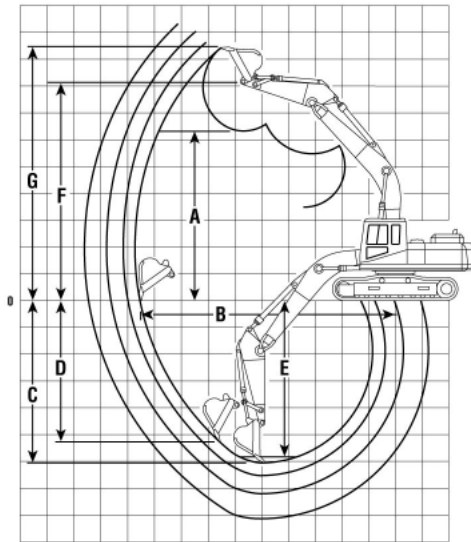

**One-Piece Boom Digging Envelope**

- Standard shoes and undercarriage

**KEY:**

- A** Maximum loading height of bucket with teeth
- B** Maximum reach at ground level
- C** Maximum digging depth
- D** Maximum vertical wall
- E** Maximum depth of cut for 2.44 m (8'0") level bottom (straight clean up)
- F** Maximum bucket hinge pin height
- G** Maximum height, to bucket teeth at highest arc

**320C, 320C L with Reach Boom**

**320C, 320C L with Mass Boom**

Stick	2.92 m		9'7"		2.5 m		8'2"		1.9 m		6'3"		2.4 m		7'10"		1.9 m		6'3"	
	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft
<b>A</b>	6.66	21'10"	6.46	21'2"	5.89	19'4"	5.85	19'2"	5.63	18'6"	8.82	28'11"	8.35	27'5"						
<b>B</b>	9.69	31'9"	9.29	30'6"	8.82	28'11"	8.82	28'11"	8.35	27'5"	5.75	18'8"	5.25	17'3"						
<b>C</b>	6.65	21'10"	6.14	20'2"	5.68	18'8"	5.75	18'10"	5.25	17'3"	3.87	12'8"	3.43	11'3"						
<b>D</b>	5.45	17'11"	5.15	16'11"	3.57	12'1"	3.87	12'8"	3.43	11'3"	8.84	29'0"	5.01	16'5"						
<b>E</b>	6.37	20'11"	5.94	19'6"	5.42	17'9"	8.84	29'0"	5.01	16'5"	—	—	—	—						
<b>F</b>	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
<b>G</b>	9.39	30'10"	9.20	30'2"	8.76	28'9"	8.52	27'11"	8.75	28'8"	—	—	—	—						

**320C, 320C L, 320C LN with VA Boom**


**320C S with Mass Boom**

Stick	2.4 m		7'10"		1.9 m		6'3"		2.4 m		7'10"		1.9 m		6'3"					
	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft				
<b>A</b>	7.50	24'7"	7.10	23'4"	5.94	19'6"	5.70	18'8"	8.80	28'10"	8.34	27'4"	5.18	17'0"						
<b>B</b>	9.19	30'2"	8.74	28'8"	8.80	28'10"	8.34	27'4"	5.68	18'8"	5.18	17'0"	3.35	11'0"						
<b>C</b>	5.69	18'8"	5.19	17'0"	5.68	18'8"	5.18	17'0"	3.80	12'6"	3.35	11'0"	4.93	16'2"						
<b>D</b>	3.95	13'0"	3.50	11'6"	3.80	12'6"	3.35	11'0"	5.47	17'11"	4.93	16'2"	—	—						
<b>E</b>	5.58	18'4"	5.06	16'7"	5.47	17'11"	4.93	16'2"	—	—	—	—	—	—						
<b>F</b>	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
<b>G</b>	8.75	28'8"	8.53	28'0"	8.83	29'0"	8.60	28'3"	—	—	—	—	—	—						

# Excavators

## Range Dimensions

- 320C S   ● 322B   ● 322B L
- Belgium Sourced   ● Japan/U.S. Sourced

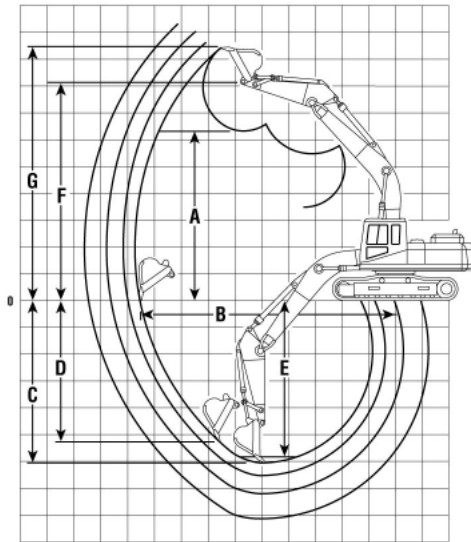

### One-Piece Boom Digging Envelope

- Standard shoes and undercarriage

#### KEY:


- A** Maximum loading height of bucket with teeth
- B** Maximum reach at ground level
- C** Maximum digging depth
- D** Maximum vertical wall
- E** Maximum depth of cut for 2.44 m (8'0") level bottom (straight clean up)
- F** Maximum bucket hinge pin height
- G** Maximum height, to bucket teeth at highest arc

Belgium Sourced		320C S* with 5.675 m (18'7") Reach Boom					
		Stick	2.92 m	9'7"	2.5 m	8'2"	1.9 m
		m	ft	m	ft	m	ft
<b>A</b>		6.74	22'1"	6.54	21'2"	5.97	19'7"
<b>B</b>		9.68	31'9"	9.28	30'5"	8.80	28'10"
<b>C</b>		6.49	21'4"	6.06	19'7"	5.61	18'5"
<b>D</b>		5.48	18'0"	5.08	16'8"	3.50	11'6"
<b>E</b>		6.30	20'8"	5.86	19'3"	5.35	17'7"
<b>F</b>		—	—	—	—	—	—
<b>G</b>		9.47	31'1"	9.28	30'5"	8.84	29'0"

\*Preliminary information.

Japan/U.S. Sourced		322B, 322B L with Reach Boom					
		Stick	3.6 m	11'10"	2.95 m	9'8"	2.5 m
		m	ft	m	ft	m	ft
<b>A</b>		7.10	23'4"	6.73	22'1"	6.54	21'5"
<b>B</b>		10.47	34'4"	10.01	32'10"	9.59	31'6"
<b>C</b>		7.22	23'8"	6.71	22'0"	6.26	20'6"
<b>D</b>		6.33	20'9"	5.70	18'8"	5.26	17'3"
<b>E</b>		6.91	22'8"	6.40	21'0"	5.95	19'6"
<b>F</b>		8.56	28'1"	8.28	27'2"	8.08	26'6"
<b>G</b>		9.83	32'3"	9.68	31'9"	9.48	31'1"

- Range Dimensions  
 ● 322B ● 322B L ● 322B LN  
 ● Japan/U.S. Sourced ● Belgium Sourced

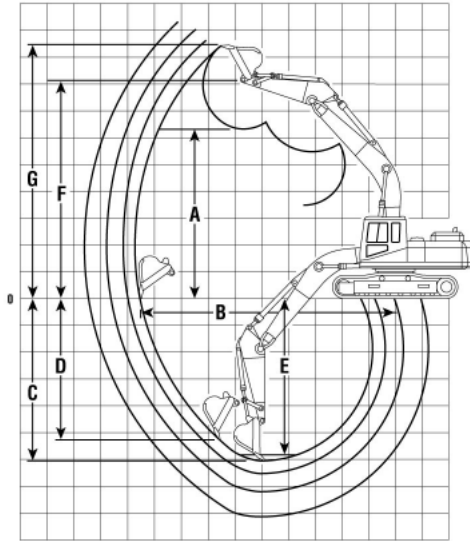

**One-Piece Boom Digging Envelope**

- Standard shoes and undercarriage

**KEY:**

- A** Maximum loading height of bucket with teeth
- B** Maximum reach at ground level
- C** Maximum digging depth
- D** Maximum vertical wall
- E** Maximum depth of cut for 2.44 m (8'0") level bottom (straight clean up)
- F** Maximum bucket hinge pin height
- G** Maximum height, to bucket teeth at highest arc

**322B, 322B L with Mass Boom**

**Japan/U.S. Sourced**

Stick	2.5 m	8'2"	2 m	6'7"
	m	ft	m	ft
<b>A</b>	5.98	19'7"	5.75	18'10"
<b>B</b>	9.12	29'11"	8.65	28'5"
<b>C</b>	5.91	19'5"	5.41	17'9"
<b>D</b>	5.18	17'0"	4.70	15'5"
<b>E</b>	5.57	18'3"	5.06	16'7"
<b>F</b>	7.63	25'0"	7.41	24'4"
<b>G</b>	9.16	30'1"	8.93	29'4"

**322B L, 322B LN with 5.9 m (19'4") Reach Boom**

**Belgium Sourced**

Stick	2.95 m	9'8"	2.5 m	8'2"
	m	ft	m	ft
<b>A</b>	6.75	22'2"	6.55	21'6"
<b>B</b>	10.00	32'10"	9.59	31'6"
<b>C</b>	6.69	21'11"	6.24	20'6"
<b>D</b>	4.43	14'6"	4.02	13'2"
<b>E</b>	6.50	21'4"	6.03	19'9"
<b>F</b>	—	—	—	—
<b>G</b>	9.62	31'7"	9.42	30'11"


**322B L, 322B LN with 5.3 m (17'5") Mass Boom**

Stick	2.5 m	8'2"	2 m	6'7"
	m	ft	m	ft
<b>A</b>	5.96	19'7"	5.74	18'10"
<b>B</b>	9.12	29'11"	8.65	28'5"
<b>C</b>	5.92	19'5"	5.42	17'9"
<b>D</b>	4.09	13'5"	3.65	12'0"
<b>E</b>	5.72	18'9"	5.19	17'0"
<b>F</b>	—	—	—	—
<b>G</b>	9.08	29'9"	8.86	29'1"

# Excavators

## Range Dimensions

- 322B L   ● 322B LN   ● 325B   ● 325B L
- Belgium Sourced   ● Japan/U.S. Sourced

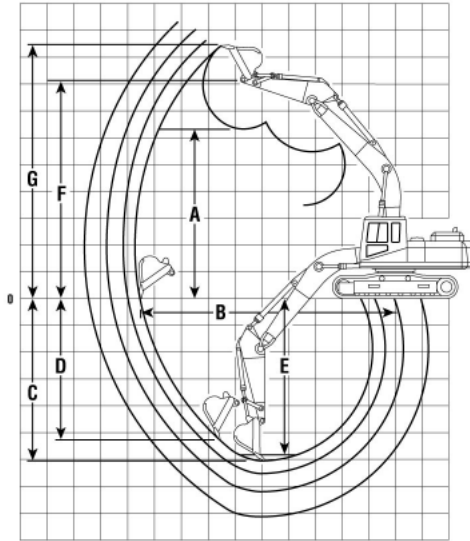

### One-Piece Boom Digging Envelope


- Standard shoes and undercarriage

#### KEY:

- A** Maximum loading height of bucket with teeth
- B** Maximum reach at ground level
- C** Maximum digging depth
- D** Maximum vertical wall
- E** Maximum depth of cut for 2.44 m (8'0") level bottom (straight clean up)
- F** Maximum bucket hinge pin height
- G** Maximum height, to bucket teeth at highest arc

<b>322B L, 322B LN with Belgium Sourced 5.66 m (18'7") VA Boom</b>				
Stick	2.5 m	8'2"	2 m	6'7"
	m	ft	m	ft
<b>A</b>	7.81	25'7"	7.40	24'3"
<b>B</b>	9.60	31'6"	9.13	29'11"
<b>C</b>	5.89	19'4"	5.40	17'9"
<b>D</b>	4.20	13'9"	3.74	12'3"
<b>E</b>	5.78	19'0"	5.28	17'4"
<b>F</b>	—	—	—	—
<b>G</b>	11.10	36'5"	10.69	35'1"

<b>325B, 325B L Japan/U.S. Sourced with Reach Boom</b>						<b>325B, 325B L with Mass Boom</b>				
Stick	3.2 m	10'6"	2.65 m	8'8"	2 m	6'7"	2.5 m	8'2"	2 m	6'7"
	m	ft	m	ft	m	ft	m	ft	m	ft
<b>A</b>	7.11	23'4"	6.90	22'8"	6.31	20'8"	6.10	20'0"	5.89	19'4"
<b>B</b>	10.52	34'6"	10.01	32'10"	9.52	31'3"	9.35	30'8"	8.89	29'2"
<b>C</b>	7.09	23'3"	6.54	21'5"	6.06	19'11"	6.01	19'9"	5.51	18'1"
<b>D</b>	6.38	20'11"	5.86	19'3"	5.27	17'3"	5.21	17'1"	4.05	13'3"
<b>E</b>	6.92	22'8"	6.35	20'10"	5.83	19'2"	5.81	19'1"	5.28	17'4"
<b>F</b>	8.60	28'3"	8.38	27'6"	7.97	26'2"	7.76	25'6"	7.55	24'9"
<b>G</b>	9.96	32'8"	9.75	32'0"	9.46	31'0"	9.24	30'4"	8.93	29'4"

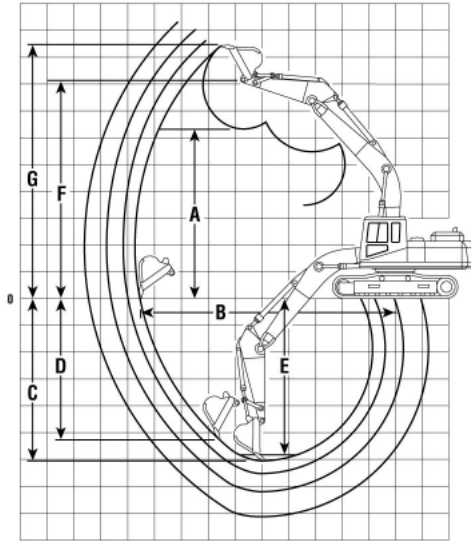

**One-Piece Boom Digging Envelope**

- Standard shoes and undercarriage

**KEY:**

- A** Maximum loading height of bucket with teeth
- B** Maximum reach at ground level
- C** Maximum digging depth
- D** Maximum vertical wall
- E** Maximum depth of cut for 2.44 m (8'0") level bottom (straight clean up)
- F** Maximum bucket hinge pin height
- G** Maximum height, to bucket teeth at highest arc

**325B L, 325B LN with  
6.15 m (20'2") Reach Boom**

Stick	3.2 m		2.65 m		2 m		2.5 m		2 m	
	m	ft	m	ft	m	ft	m	ft	m	ft
<b>A</b>	7.05	23'2"	6.84	22'5"	6.31	20'8"	6.09	20'0"	5.89	19'4"
<b>B</b>	10.57	34'8"	10.07	33'0"	9.53	31'3"	9.35	30'8"	8.89	29'2"
<b>C</b>	7.15	23'5"	6.59	21'7"	6.06	19'11"	6.02	19'9"	5.52	18'1"
<b>D</b>	5.18	17'0"	4.78	15'8"	4.13	13'7"	4.11	15'6"	3.65	12'0"
<b>E</b>	6.98	22'11"	6.40	21'1"	5.83	19'2"	5.82	19'1"	5.29	17'4"
<b>F</b>	—	—	—	—	—	—	—	—	—	—
<b>G</b>	9.95	32'8"	9.75	32'0"	9.39	30'10"	9.17	30'1"	8.97	29'5"

**325B L, 325B LN with  
5.66 m (18'7") VA Boom**


Stick	2.5 m		2 m	
	m	ft	m	ft
<b>A</b>	7.89	25'11"	7.51	24'8"
<b>B</b>	9.75	32'0"	9.28	30'5"
<b>C</b>	5.89	19'4"	5.40	17'9"
<b>D</b>	4.13	13'7"	3.67	12'0"
<b>E</b>	5.78	19'0"	5.28	17'4"
<b>F</b>	—	—	—	—
<b>G</b>	11.21	36'9"	10.83	35'6"



# Excavators

## Range Dimensions

- 330B ● 330B L ● 330B LN
- Japan/U.S. Sourced ● Belgium Sourced

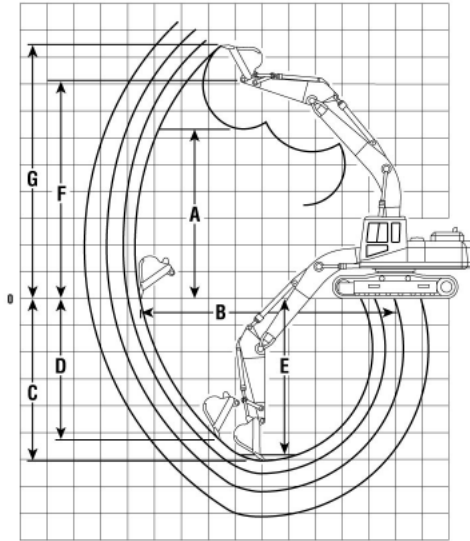

### One-Piece Boom Digging Envelope

- Standard shoes and undercarriage

#### KEY:

- A** Maximum loading height of bucket with teeth
- B** Maximum reach at ground level
- C** Maximum digging depth
- D** Maximum vertical wall
- E** Maximum depth of cut for 2.44 m (8'0") level bottom (straight clean up)
- F** Maximum bucket hinge pin height
- G** Maximum height, to bucket teeth at highest arc

Japan/U.S. Sourced				330B, 330B L with Reach Boom				330B, 330B L with Mass Boom				
Stick	3.9 m	12'10"	3.3 m	10'10"	2.8 m * 9'2"	2.15 m * 7'1"	2.55 m	8'4"	2.15 m *	7'1"		
	m	ft	m	ft	m	ft	m	ft	m	ft		
<b>A</b>	7.60	24'11"	7.29	23'11"	7.12	23'4"	6.50	21'4"	6.68	21'11"	6.25	20'6"
<b>B</b>	11.62	38'1"	11.03	36'2"	10.58	34'9"	10.09	33'1"	10.21	33'6"	9.71	31'10"
<b>C</b>	8.08	26'6"	7.49	24'7"	6.99	22'11"	6.52	21'5"	6.59	21'7"	6.19	20'4"
<b>D</b>	7.23	23'9"	6.54	22'5"	6.12	20'1"	5.14	16'10"	5.89	19'4"	4.75	15'7"
<b>E</b>	7.75	25'5"	7.15	23'5"	6.65	21'10"	6.13	20'1"	6.20	20'4"	5.80	19'0"
<b>F</b>	9.29	30'6"	8.98	29'5"	8.80	28'10"	8.37	27'6"	8.54	27'9"	8.12	26'8"
<b>G</b>	10.77	35'4"	10.44	34'3"	10.27	33'8"	9.90	32'6"	10.17	33'4"	9.65	31'8"


Belgium Sourced				330B L, 330B LN with Reach Boom				330B L, 330B LN with Mass Boom				
Stick	3.9 m	12'10"	3.3 m	10'10"	2.8 m * 9'2"	2.2 m * 7'3"	2.6 m	8'6"	2.2 m *	7'3"		
	m	ft	m	ft	m	ft	m	ft	m	ft		
<b>A</b>	7.63	25'0"	7.31	24'0"	7.13	23'5"	6.59	21'7"	6.76	22'2"	6.34	20'10"
<b>B</b>	11.62	38'1"	11.03	36'2"	10.57	34'8"	10.01	32'10"	10.14	33'3"	9.64	31'8"
<b>C</b>	8.06	25'7"	7.46	24'6"	6.96	22'10"	6.42	21'1"	6.50	21'4"	6.10	20'0"
<b>D</b>	6.02	19'9"	5.36	17'7"	4.98	16'4"	4.82	15'10"	5.38	17'8"	4.38	14'4"
<b>E</b>	7.96	26'1"	7.32	24'0"	6.77	22'3"	6.19	20'3"	6.32	20'9"	5.86	19'3"
<b>F</b>	—	—	—	—	—	—	—	—	—	—	—	—
<b>G</b>	10.73	35'2"	10.40	34'1"	10.23	33'7"	9.91	32'6"	10.17	33'4"	9.64	31'8"

\*Not available on U.S. sourced machines.

Range Dimensions

- 345B Series II — Japan Sourced
- 345B L Series II – FIX — Japan/U.S. Sourced

**Excavators**

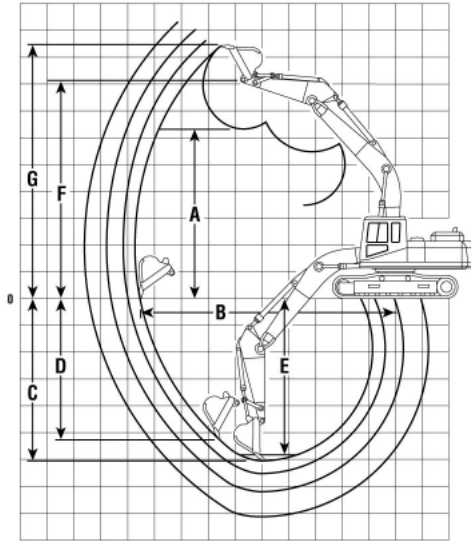

**One-Piece Boom Digging Envelope**

- Standard shoes and undercarriage

**KEY:**

- A** Maximum loading height of bucket with teeth
- B** Maximum reach at ground level
- C** Maximum digging depth
- D** Maximum vertical wall
- E** Maximum depth of cut for 2.44 m (8'0") level bottom (straight clean up)
- F** Maximum bucket hinge pin height
- G** Maximum height, to bucket teeth at highest arc

5

Stick	Japan Sourced		345B Series II with Reach Boom				345B Series II with Mass Boom			
	3.9 m	12'10"	3.35 m	11'0"	2.9 m	9'6"	3 m	9'11"	2.5 m	8'2"
	m	ft	m	ft	m	ft	m	ft	m	ft
<b>A</b>	7.32	24'0"	7.41	24'4"	7.20	23'7"	6.94	22'9"	6.66	21'10"
<b>B</b>	12.23	40'1"	11.67	38'3"	11.29	37'0"	11.03	36'2"	10.66	35'0"
<b>C</b>	8.31	27'3"	7.64	25'1"	7.23	23'9"	7.09	23'3"	6.68	21'11"
<b>D</b>	6.73	22'1"	6.48	21'3"	5.73	18'10"	5.45	17'11"	5.18	17'0"
<b>E</b>	7.90	25'11"	7.25	23'9"	6.83	22'5"	6.67	21'11"	6.22	20'5"
<b>F</b>	9.28	30'5"	9.24	30'4"	9.07	29'9"	8.80	28'10"	8.62	28'3"
<b>G</b>	10.86	35'8"	10.79	35'5"	10.60	34'9"	10.28	33'9"	10.16	33'4"


Stick	Japan/U.S. Sourced		345B L Series II – FIX with Reach Boom				345B L Series II – FIX with Mass Boom			
	4.8 m ** 15'9"	3.9 m 12'10"	3.35 m 11'0"	2.9 m 9'6"	3 m 9'11"	2.5 m * 8'2"				
	m	ft	m	ft	m	ft	m	ft	m	ft
<b>A</b>	7.54	24'9"	7.32	24'0"	7.37	24'2"	7.20	23'7"	6.95	22'10"
<b>B</b>	13.00	42'8"	12.23	40'1"	11.71	38'5"	11.29	37'0"	11.12	36'6"
<b>C</b>	9.27	30'5"	8.31	27'3"	7.68	25'2"	7.23	23'9"	7.18	23'7"
<b>D</b>	7.28	23'11"	6.73	22'1"	6.19	20'4"	5.67	18'7"	5.65	18'6"
<b>E</b>	9.16	30'1"	7.90	25'11"	7.28	23'11"	6.84	22'5"	6.72	22'1"
<b>F</b>	—	—	9.28	30'5"	9.24	30'4"	9.07	29'9"	8.80	28'10"
<b>G</b>	—	—	10.86	35'8"	10.78	35'4"	10.60	34'9"	10.35	33'11"

\*Not available on U.S. sourced machines.  
 \*\*Available only for U.S. sourced machines.

# Excavators

## Range Dimensions

- 345B L Series II – VG   ● 345B Series II – VG   ● 345B – VG
- U.S. Sourced   ● Belgium Sourced

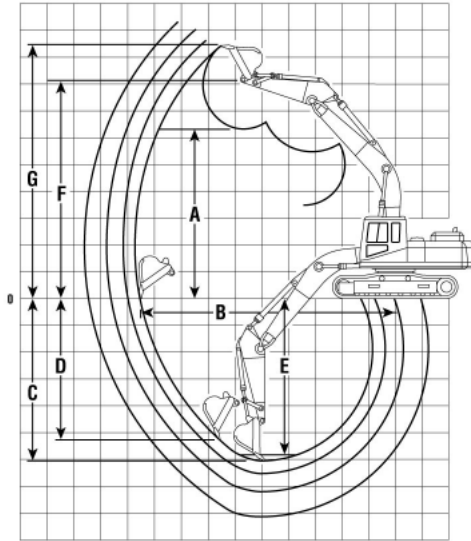

### One-Piece Boom Digging Envelope

- Standard shoes and undercarriage

#### KEY:

- A** Maximum loading height of bucket with teeth
- B** Maximum reach at ground level
- C** Maximum digging depth
- D** Maximum vertical wall
- E** Maximum depth of cut for 2.44 m (8'0") level bottom (straight clean up)
- F** Maximum bucket hinge pin height
- G** Maximum height, to bucket teeth at highest arc


U.S. Sourced*	345B L Series II – VG with Reach Boom				345B L Series II – VG with Mass Boom				
	Stick	4.8 m	15'9"	3.9 m	12'10"	3.35 m	11'0"	3 m	9'11"
		m	ft	m	ft	m	ft	m	ft
<b>A</b>		7.70	25'3"	7.51	24'8"	7.54	24'9"	7.01	23'0"
<b>B</b>		12.97	42'7"	12.17	39'11"	11.68	38'4"	11.09	36'5"
<b>C</b>		9.11	29'11"	8.12	26'8"	7.51	24'8"	7.02	23'0"
<b>D</b>		7.12	23'4"	6.36	20'10"	6.02	19'9"	5.29	17'4"
<b>E</b>		9.00	29'6"	7.72	25'4"	7.12	23'4"	6.59	21'7"
<b>F</b>		—	—	9.44	31'0"	9.41	30'10"	8.97	29'5"
<b>G</b>		—	—	10.98	36'0"	10.94	35'11"	10.51	34'6"

\*Preliminary information.

Belgium Sourced	345B – VG with Reach Boom				345B – VG with Mass Boom				
	Stick	3.35 m	11'0"	2.9 m	9'6"	3 m	9'11"	2.5 m	8'2"
		m	ft	m	ft	m	ft	m	ft
<b>A</b>		7.54	24'9"	7.37	24'2"	6.98	22'11"	6.79	22'3"
<b>B</b>		11.67	38'3"	11.25	36'11"	11.12	36'6"	10.66	35'0"
<b>C</b>		7.50	24'7"	7.05	23'2"	7.05	23'2"	6.55	21'6"
<b>D</b>		6.15	20'2"	5.70	18'8"	4.95	16'3"	4.52	14'10"
<b>E</b>		7.34	24'1"	6.89	22'7"	6.90	22'8"	6.37	20'11"
<b>F</b>		—	—	—	—	—	—	—	—
<b>G</b>		11.04	36'3"	10.87	35'8"	10.51	34'6"	10.18	33'5"

- 365B L

- Japan/Belgium Sourced

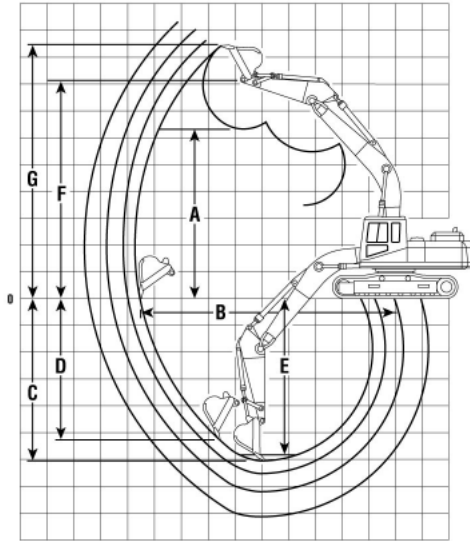

**One-Piece Boom  
Digging Envelope**

- Standard shoes and undercarriage
- Lug height not included

**KEY:**

- A** Maximum loading height of bucket with teeth
- B** Maximum reach at ground level
- C** Maximum digging depth
- D** Maximum vertical wall
- E** Maximum depth of cut for 2.44 m (8'0") level bottom (straight clean up)
- F** Maximum bucket hinge pin height
- G** Maximum height, to bucket teeth at highest arc

5

**365B L with Reach Boom**


**365B L with Mass Boom**

Stick	4.67 m		15'4"		3.6 m		11'10"		2.84 m		9'4"		3 m		9'10"		2.57 m		8'5"	
	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft
<b>A</b>	9.18	30'1"	8.59	28'2"	8.43	27'8"	7.08	23'3"	6.92	22'8"										
<b>B</b>	14.04	46'1"	12.98	42'7"	12.34	40'6"	11.24	36'11"	10.84	35'7"										
<b>C</b>	9.47	31'1"	8.40	27'7"	7.64	25'1"	7.17	23'6"	6.75	22'2"										
<b>D</b>	8.49	27'10"	7.27	23'10"	6.15	20'2"	5.50	18'1"	5.11	16'9"										
<b>E</b>	9.04	29'8"	7.97	26'2"	7.21	23'8"	6.71	22'0"	6.29	20'8"										
<b>F</b>	11.24	36'11"	10.65	34'11"	10.49	34'5"	9.18	30'1"	9.02	29'7"										
<b>G</b>	13.08	42'11"	12.46	40'11"	12.25	40'2"	10.87	35'8"	10.71	35'2"										

# Excavators

## Range Dimensions

- 375 ● 375 L
- Japan/U.S. Sourced

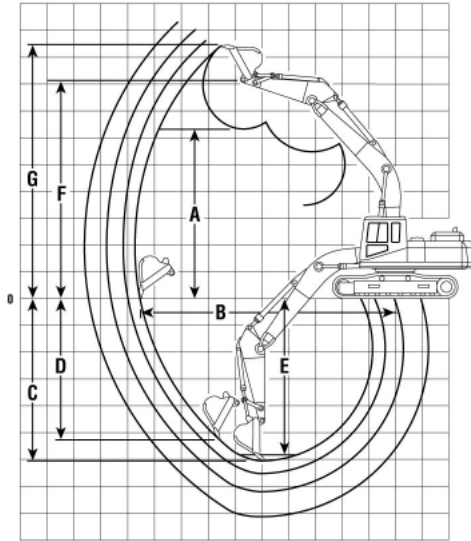

### One-Piece Boom Digging Envelope

- Standard shoes and undercarriage
- Lug height not included

#### KEY:

- A** Maximum loading height of bucket with teeth
- B** Maximum reach at ground level
- C** Maximum digging depth
- D** Maximum vertical wall
- E** Maximum depth of cut for 2.44 m (8'0") level bottom (straight clean up)
- F** Maximum bucket hinge pin height
- G** Maximum height, to bucket teeth at highest arc

### 375, 375 L with Reach Boom


### 375, 375 L with GP Boom

Stick	5.5 m 18'1"		4.4 m 14'5"		3.4 m 11'2"		2.9 m 9'6"		5.5 m 18'1"		4.4 m 14'5"	
	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft
<b>A</b>	10.35	33'11"	9.66	31'8"	9.55	31'4"	9.28	30'5"	10.31	33'10"	9.44	31'0"
<b>B</b>	15.96	52'4"	14.66	48'1"	14.78	48'6"	13.59	44'7"	15.67	51'5"	14.48	47'6"
<b>C</b>	10.84	35'7"	9.63	31'7"	9.74	32'0"	8.29	27'2"	10.58	34'9"	9.48	31'1"
<b>D</b>	9.39	30'10"	8.26	27'1"	7.79	25'7"	7.32	24'0"	9.31	30'7"	7.95	26'1"
<b>E</b>	10.75	35'3"	9.16	30'1"	9.63	31'7"	7.77	25'6"	10.48	34'5"	9.37	30'9"
<b>F</b>	12.56	41'2"	11.76	38'7"	11.76	38'7"	11.51	37'9"	12.52	41'1"	11.65	38'3"
<b>G</b>	14.50	47'2"	13.52	44'4"	13.61	44'8"	13.43	44'1"	14.52	47'8"	13.57	44'6"

### 375, 375 L with GP Boom

### 375, 375 L with Mass Boom

Stick	3.4 m 11'2"		4.1 m 13'5"		3.4 m 11'2"		2.9 m 9'6"	
	m	ft	m	ft	m	ft	m	ft
<b>A</b>	9.27	30'5"	8.76	28'9"	8.43	27'8"	8.26	27'1"
<b>B</b>	13.69	44'11"	13.08	42'11"	12.42	40'9"	12.00	39'4"
<b>C</b>	8.50	27'11"	8.11	26'7"	7.41	24'4"	6.94	22'9"
<b>D</b>	7.38	24'3"	7.13	23'5"	6.46	21'2"	5.52	18'1"
<b>E</b>	8.37	27'6"	7.59	24'11"	6.89	22'7"	6.41	21'1"
<b>F</b>	11.51	37'9"	11.00	36'1"	10.67	35'8"	10.49	34'5"
<b>G</b>	13.48	44'3"	12.95	42'6"	12.61	41'4"	12.34	40'6"

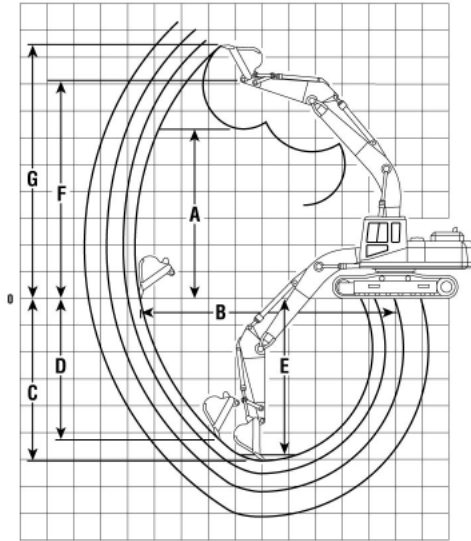

**One-Piece Boom Digging Envelope**

- Standard shoes and undercarriage
- Lug height not included

**KEY:**

- A** Maximum loading height of bucket with teeth
- B** Maximum reach at ground level
- C** Maximum digging depth
- D** Maximum vertical wall
- E** Maximum depth of cut for 2.44 m (8'0") level bottom (straight clean up)
- F** Maximum bucket hinge pin height
- G** Maximum height, to bucket teeth at highest arc

**375, 375 L with GP Boom**


**375, 375 L with Mass Boom**

Stick	5.5 m 18'1"		4.4 m 14'5"		3.4 m 11'2"		4.1 m 13'5"		3.4 m 11'2"		2.9 m 9'6"	
	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft
<b>A</b>	10.31	33'10"	9.55	31'4"	9.27	30'5"	8.76	28'8"	8.43	27'8"	8.26	27'1"
<b>B</b>	15.67	51'5"	14.37	47'1"	13.69	44'11"	13.08	42'11"	12.42	40'8"	12.00	39'5"
<b>C</b>	10.58	34'8"	9.37	30'8"	8.50	27'11"	8.11	26'7"	7.41	24'4"	6.94	22'10"
<b>D</b>	9.55	31'4"	8.39	27'6"	7.55	24'10"	7.13	23'5"	6.46	21'2"	5.52	18'1"
<b>E</b>	10.09	33'1"	8.90	29'2"	7.98	26'2"	7.59	24'11"	6.89	22'7"	6.41	21'0"
<b>F</b>	12.52	41'1"	11.65	38'2"	11.51	37'10"	11.00	36'1"	10.67	35'0"	10.49	34'5"
<b>G</b>	14.52	47'7"	13.48	44'2"	13.48	44'2"	12.95	42'6"	12.61	41'5"	12.34	40'6"

# Excavators

## Range Dimensions

- 307B ● 312B L ● 315B L
- France Sourced

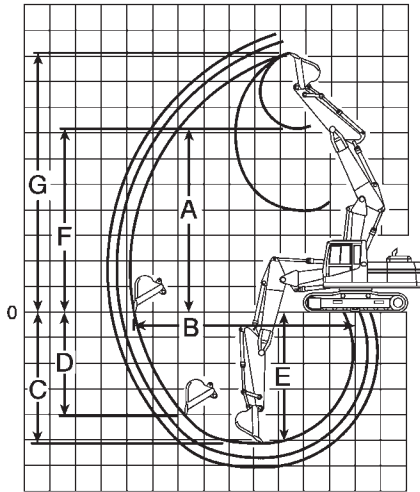

### Variable Adjustable Boom Digging Envelope

#### KEY:

- A** Maximum loading height of bucket with teeth
- B** Maximum reach at ground level
- C** Maximum digging depth
- D** Maximum vertical wall
- E** Maximum depth of cut for 2.44 m (8'0") level bottom (straight clean up)
- F** Maximum bucket hinge pin height
- G** Maximum height, to bucket teeth at highest arc


#### 307B

#### 312B L

Stick	2.21 m		7'3"		1.72 m		5'8"		3 m		9'10"		2.5 m		8'2"		2.1 m		6'11"	
	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft
<b>A</b>	6.27	20'7"	5.79	19'0"	7.57	24'10"	7.18	23'7"	6.82	22'5"										
<b>B</b>	8.18	26'10"	7.68	25'2"	8.80	28'10"	8.34	27'4"	7.96	26'1"										
<b>C</b>	4.68	15'4"	4.19	13'9"	5.73	18'10"	5.24	17'2"	4.84	15'11"										
<b>D</b>	4.06	13'4"	3.57	11'9"	3.63	11'11"	3.18	10'5"	2.88	9'5"										
<b>E</b>	4.53	14'10"	4.02	13'2"	5.61	18'5"	5.12	16'9"	4.71	15'5"										
<b>F</b>	7.31	24'0"	6.85	22'6"	8.81	28'11"	8.41	27'7"	8.05	26'5"										
<b>G</b>	8.38	27'6"	7.91	25'11"	10.04	32'11"	9.64	31'7"	9.28	30'5"										

#### 315B L

Stick	3.1 m		10'2"		2.6 m		8'6"		2.25 m		7'5"		1.85 m		6'1"	
	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft
<b>A</b>	7.75	25'5"	7.71	25'3"	7.24	23'9"	7.11	23'4"								
<b>B</b>	8.92	29'3"	8.61	28'3"	8.20	26'11"	7.90	25'11"								
<b>C</b>	3.15	10'4"	2.23	7'4"	2.72	8'11"	2.14	7'0"								
<b>D</b>	4.18	13'8"	3.71	12'2"	3.35	11'0"	2.97	9'9"								
<b>E</b>	5.68	18'7"	5.26	17'3"	4.87	16'0"	4.51	14'9"								
<b>F</b>	8.95	29'4"	8.82	28'11"	8.41	27'7"	8.21	26'11"								
<b>G</b>	10.16	33'4"	9.99	32'9"	9.62	31'7"	9.38	30'9"								

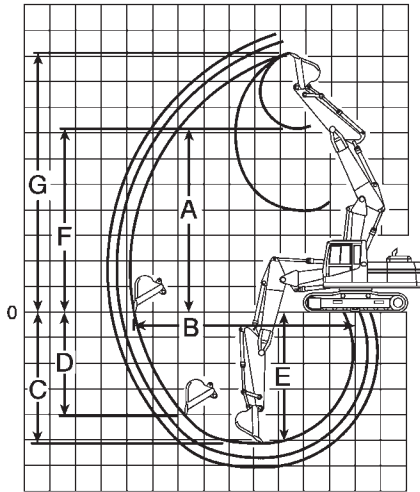

**Variable Adjustable Boom Digging Envelope**

**KEY:**

- A** Maximum loading height of bucket with teeth
- B** Maximum reach at ground level
- C** Maximum digging depth
- D** Maximum vertical wall
- E** Maximum depth of cut for 2.44 m (8'0") level bottom (straight clean up)
- F** Maximum bucket hinge pin height
- G** Maximum height, to bucket teeth at highest arc

5

**317B L, 317B LN**

Stick	1.85 m		2.25 m		2.6 m		3.1 m	
	m	ft	m	ft	m	ft	m	ft
<b>A</b>	6.95	22'9"	7.14	23'5"	7.59	24'10"	7.84	25'8"
<b>B</b>	7.98	26'2"	8.28	27'2"	8.69	28'6"	9.10	29'10"
<b>C</b>	4.71	15'5"	5.07	16'7"	5.45	17'10"	5.92	19'5"
<b>D</b>	3.58	11'9"	3.89	12'9"	4.42	14'6"	4.78	15'8"
<b>E</b>	4.58	15'2"	4.94	16'2"	5.33	17'6"	5.81	19'1"
<b>F</b>	3.69	12'1"	3.43	11'3"	3.00	9'10"	2.53	8'3"
<b>G</b>	9.51	31'2"	9.73	31'11"	10.11	33'2"	10.42	34'2"

**318B L, 318B LN**


Stick	1.8 m		2.25 m		2.7 m		3.2 m	
	m	ft	m	ft	m	ft	m	ft
<b>A</b>	6.61	21'8"	6.99	22'11"	7.40	24'3"	7.78	25'6"
<b>B</b>	8.24	27'0"	8.68	28'6"	9.14	30'0"	9.60	31'6"
<b>C</b>	5.02	16'6"	5.48	18'0"	5.93	19'5"	6.33	20'9"
<b>D</b>	3.66	11'10"	4.36	14'4"	4.90	16'1"	4.26	14'0"
<b>E</b>	4.90	16'1"	5.36	17'7"	5.82	19'1"	6.24	20'6"
<b>F</b>	3.47	11'5"	3.92	12'10"	4.38	14'5"	—	—
<b>G</b>	9.68	31'9"	10.08	33'1"	10.49	34'5"	10.85	35'7"



# Excavators

## Range Dimensions

- 320C ● 320C L ● 320C LN
- Belgium Sourced (Preliminary Information)

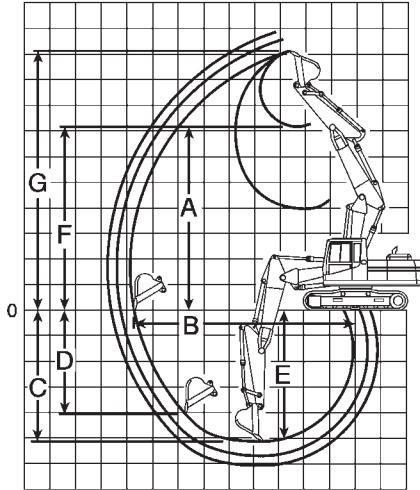

## Variable Adjustable Boom Digging Envelope

### KEY:

- A** Maximum loading height of bucket with teeth
- B** Maximum reach at ground level
- C** Maximum digging depth
- D** Maximum vertical wall
- E** Maximum depth of cut for 2.44 m (8'0") level bottom (straight clean up)
- F** Maximum bucket hinge pin height
- G** Maximum height, to bucket teeth at highest arc

### 320C, 320C L, 320C LN


Stick	2.92 m		9'7"		2.4 m		7'10"		1.9 m		6'3"	
	m	ft	m	ft	m	ft	m	ft	m	ft		
<b>A</b>	8.07	26'6"	7.50	24'7"	7.16	23'6"						
<b>B</b>	9.55	31'4"	9.19	30'2"	8.65	28'5"						
<b>C</b>	6.06	19'11"	5.69	18'8"	5.14	16'11"						
<b>D</b>	5.03	16'6"	4.58	15'0"	4.07	13'5"						
<b>E</b>	5.95	19'6"	5.58	18'4"	5.01	16'5"						
<b>F</b>	9.48	31'1"	9.05	29'8"	8.65	28'5"						
<b>G</b>	10.88	35'8"	10.59	34'8"	10.13	33'2"						

- 322B L
- 322B N
- 322B LN
- 325B L
- 325B LN
- Belgium Sourced

**Variable Adjustable Boom Digging Envelope**

**KEY:**

- A** Maximum loading height of bucket with teeth
- B** Maximum reach at ground level
- C** Maximum digging depth
- D** Maximum vertical wall
- E** Maximum depth of cut for 2.44 m (8'0") level bottom (straight clean up)
- F** Maximum bucket hinge pin height
- G** Maximum height, to bucket teeth at highest arc

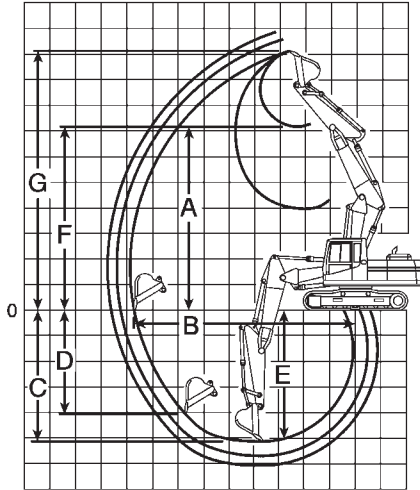


**322B L, 322B N, 322B LN with VA Boom**

Stick	2.5 m		8'2"		2 m		6'7"	
	m	ft	m	ft	m	ft	m	ft
<b>A</b>	6.99	22'11"	7.40	24'4"				
<b>B</b>	9.60	31'6"	9.13	30'0"				
<b>C</b>	5.89	19'4"	5.40	17'8"				
<b>D</b>	3.18	10'5"	2.80	9'2"				
<b>E</b>	5.78	19'0"	5.28	17'4"				
<b>F</b>	9.46	31'0"	9.05	29'8"				
<b>G</b>	11.10	36'5"	10.69	35'1"				

**325B L, 325B LN with VA Boom**

Stick	3.2 m		10'6"		2.5 m		8'2"		2 m		6'7"	
	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft
<b>A</b>	8.59	28'2"	7.89	25'11"	7.51	24'7"						
<b>B</b>	10.24	33'7"	9.75	32'0"	9.28	30'5"						
<b>C</b>	6.40	21'0"	5.89	19'4"	5.40	17'8"						
<b>D</b>	5.28	17'4"	4.71	15'6"	3.94	12'11"						
<b>E</b>	6.30	20'8"	5.78	19'0"	5.28	17'4"						
<b>F</b>	10.08	33'1"	9.55	31'4"	9.17	30'1"						
<b>G</b>	11.57	38'0"	11.21	36'10"	10.83	35'6"						

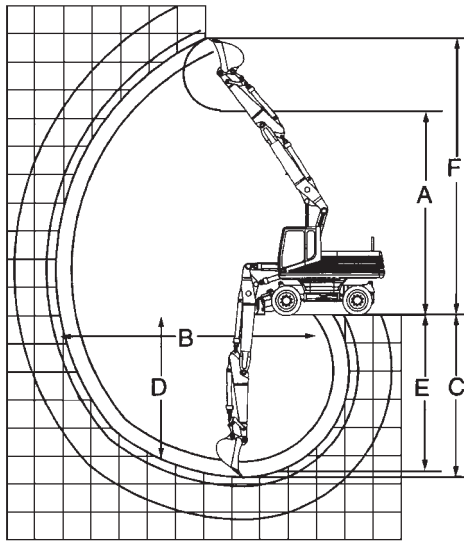

**Hydraulic Adjustable Boom Digging Envelope**

- Standard 10 × 20 tires and undercarriage
- General purpose bucket

**KEY:**


- A** Maximum loading height of bucket with teeth
- B** Maximum reach at ground level
- C** Maximum digging depth
- D** Maximum vertical wall
- E** Maximum depth of cut for 2.44 m (8'0") level bottom
- F** Maximum height, to bucket teeth at highest arc

**M312**

Stick	1.6 m		5'3"		2 m		6'6"		2.3 m		7'5"		2.6 m		8'5"		3 m		9'9"		
	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	
<b>A</b>	6.76	22'2"	7.05	23'1"	7.29	23'9"	7.54	24'7"	7.70	25'3"											
<b>B</b>	7.90	25'9"	8.30	27'2"	8.59	28'2"	8.89	29'2"	9.22	30'3"											
<b>C</b>	4.62	15'2"	5.02	16'5"	5.32	17'5"	5.62	18'4"	6.00	19'7"											
<b>D</b>	2.85	9'3"	3.84	12'6"	4.11	13'5"	4.39	14'4"	4.62	15'2"											
<b>E</b>	4.49	14'7"	4.90	16'1"	5.21	17'1"	5.51	18'1"	5.90	19'4"											
<b>F</b>	9.13	29'10"	9.49	31'3"	9.73	31'9"	9.97	32'7"	10.13	33'2"											

**M315**

Stick	1.7 m		5'7"		2.1 m		6'9"		2.4 m		7'9"		2.6 m		8'5"		3.1 m		10'1"		
	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	
<b>A</b>	7.03	23'1"	7.32	24'0"	7.56	24'10"	7.72	25'4"	8.04	26'5"											
<b>B</b>	8.19	26'10"	8.59	28'2"	8.80	28'10"	9.08	29'9"	9.53	31'3"											
<b>C</b>	4.80	13'5"	5.28	17'4"	5.58	18'4"	5.78	19'0"	6.27	20'7"											
<b>D</b>	2.96	9'9"	4.05	13'3"	4.34	14'3"	4.53	14'10"	4.91	16'1"											
<b>E</b>	4.77	15'8"	5.17	17'0"	5.48	18'0"	5.68	18'8"	6.17	20'3"											
<b>F</b>	9.40	30'10"	9.76	32'0"	10.00	32'10"	10.16	33.4"	10.47	34'4"											

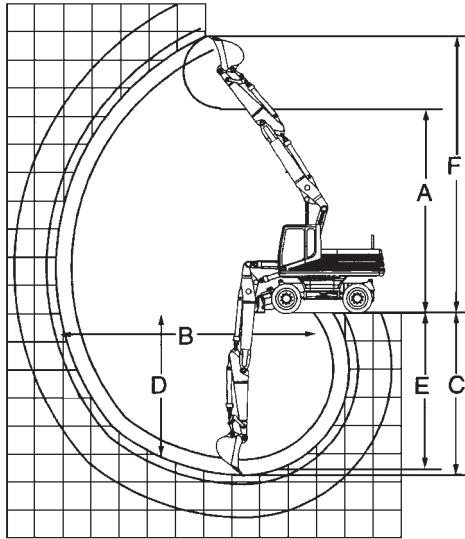

**Hydraulic Adjustable Boom Digging Envelope**

- Standard 10 × 20 tires and undercarriage
- General purpose bucket

**KEY:**

- A** Maximum loading height of bucket with teeth
- B** Maximum reach at ground level
- C** Maximum digging depth
- D** Maximum vertical wall
- E** Maximum depth of cut for 2.44 m (8'0") level bottom
- F** Maximum height, to bucket teeth at highest arc

**M318**

Stick	1.8 m		5'11"		2.4 m		7'9"		2.8 m		9'2"		4 m		13'1"	
	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft
<b>A</b>	6.78	22'3"	7.18	23'7"	7.38	24'3"	7.99	26'3"								
<b>B</b>	8.43	27'8"	9.00	29'6"	9.35	30'8"	10.55	34'7"								
<b>C</b>	5.20	17'1"	5.79	19'0"	6.18	20'3"	7.44	24'5"								
<b>D</b>	3.17	10'5"	4.43	14'6"	4.73	15'6"	5.72	18'9"								
<b>E</b>	5.08	16'8"	5.69	18'8"	6.15	20'2"	7.14	23'5"								
<b>F</b>	9.38	30'9"	9.84	32'3"	10.02	32'10"	10.79	35'5"								

**M320**

Stick	1.9 m		6'3"		2.5 m		8'2"		2.9 m		9'6"		4.2 m		13'9"	
	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft
<b>Bucket</b>	1.05 m <sup>3</sup>	1.37 yd <sup>3</sup>	0.9 m <sup>3</sup>	1.18 yd <sup>3</sup>	0.81 m <sup>3</sup>	1.06 yd <sup>3</sup>	0.55 m <sup>3</sup>	0.72 yd <sup>3</sup>								
<b>A</b>	6.66	21'10"	7.04	23'1"	7.10	23'4"	7.90	25'11"								
<b>B</b>	8.82	28'11"	9.38	30'9"	9.67	31'9"	10.96	35'11"								
<b>C</b>	5.42	17'9"	6.01	19'9"	6.38	20'11"	7.68	25'2"								
<b>D</b>	2.46	8'1"	3.85	12'8"	3.64	11'11"	5.28	17'4"								
<b>E</b>	5.00	16'5"	5.62	18'5"	6.00	19'8"	7.36	24'2"								
<b>F</b>	9.37	30'9"	9.79	32'1"	9.74	31'11"	10.63	34'11"								

**EXCAVATOR LIFTING CAPACITY**


On many sewer jobs an excavator must lift and swing heavy pipe and manboxes in and out of the trench, place manholes and unload material from trucks. In some situations the excavator’s lift requirements may be so critical that they determine the size excavator selected.

An excavator’s lift capacity depends on its weight, center of gravity, the lift point position (see sketches) and its hydraulic capability. An excavator’s lifting capability for any given lift position is limited by its tipping stability or hydraulic capacity.


Changes in boom, stick and bucket position affect attachment geometry and can drastically change a machine’s hydraulic lifting capacity. Caterpillar defines excavator lifting capabilities using the following SAE guidelines.

**Tipping Conditions** — An excavator is considered to be at the tipping point when the weight in the bucket acting at the center of gravity causes the rear rollers to lift clear of the track rails. Suspended loads are considered to be hung from the back of the excavator’s bucket or bucket linkage by a sling or chain. Weights of attachments, slings or auxiliary lifting devices are considered part of the suspended load.

Thus, the tipping load is defined as the load producing a tipping condition at a specified radius. The load radius shall be measured as the horizontal distance from the axis of upper structure rotation (before loading) to the center of vertical load line with load applied (dimension A, below). The rating height is based on the vertical distance of the bucket lift point to the ground (dimension B).



- A. Radius from swing centerline
- B. Bucket lift point height




**HYPOTHETICAL MACHINE**

**Rated Hoist Load** — The rated load is established using the vertical distance of the lifting point to the ground and the radius of load. Ratings for the ability of a specific machine attachment to lift a load slung from the designated bucket are defined as follows:

- a. The rated load will not exceed 75% of the tipping load.
- b. The rated load will not exceed 87% of the excavator’s hydraulic capacity. This means the machine should be able to lift 115% of the rated load.
- c. The rated load will not exceed the machine’s structural capability.

This drawing shows how an excavator's lifting capacity can vary with load position:

**HYPOTHETICAL MACHINE**

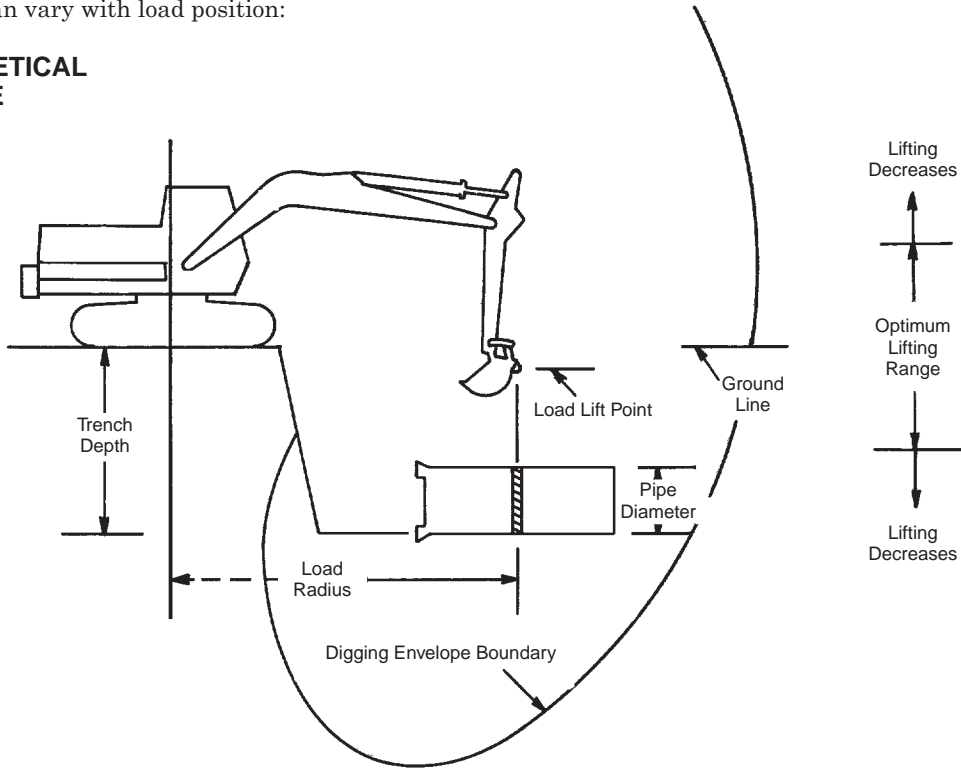

**Tips for Lifting Above Ground:**

Get the load as close to the excavator as possible.  
Use a cable short enough and position the excavator so as to put the load lift point in the “optimum lifting range” (see sketch).

*Problem:* Long reach cable — Can't lift.

*Solution:* Shorten reach and cable — Can lift.

**Tips for Lifting Below Grade:**

Use a cable for sufficient length to position the load lift point in the “optimum lifting range”.

*Problem:* Short cable, deep trench — Can't lift.

*Solution:* Lengthen cable to locate bucket hinge pin in optimum lifting area — Can lift.

**GROUND LEVEL LIFTING CAPACITIES**

The lifting capacities that are shown on the following pages are with the lifting point at ground level. These capacities are rated according to SAE Std. No. J1097.

(For lifting capacities at other heights or with other tools, refer to current Specification Sheets.)

# Excavators

## Lifting Capacity At Ground Level

- 301.5
- 301.6
- 301.8

### 301.5 ● Rubber Track ● Canopy ● Blade Raised

Stick	Bucket	1 m 3'2"		1.5 m 5'0"		2 m 6'6"		2.5 m 8'0"		3 m 10'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
890 mm 2'11"	400 mm 16"	kg lb	—	—	620 1360	420 920	410 900	280 610	300 660	210 460	230 500	160 350	190 410	140 300
1090 mm 3'6"	400 mm 16"	kg lb	350 770	350 770	590 1300	390 860	380 830	270 590	280 610	200 440	220 480	150 330	160 350	120 260

### 301.5 ● Rubber Track ● Canopy ● Blade Lowered

Stick	Bucket	1 m 3'2"		1.5 m 5'0"		2 m 6'6"		2.5 m 8'0"		3 m 10'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
890 mm 2'11"	400 mm 16"	kg lb	—	—	680 1490	490 1080	690 1520	330 720	490 1080	240 520	390 860	190 410	310 680	150 330
1090 mm 3'6"	400 mm 16"	kg lb	350 770	350 770	690 1520	460 1010	680 1490	310 680	480 1050	230 500	380 830	170 370	290 630	130 280

### 301.6 ● Rubber Track ● Canopy ● Blade Raised

Stick	Bucket	1 m 3'2"		1.5 m 5'0"		2 m 6'6"		2.5 m 8'0"		3 m 10'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
1090 mm 3'6"	400 mm 16"	kg lb	350 770	350 770	690 1520	440 970	490 1080	300 660	350 770	220 480	270 590	170 370	210 460	130 280

### 301.6 ● Rubber Track ● Canopy ● Blade Lowered

Stick	Bucket	1 m 3'2"		1.5 m 5'0"		2 m 6'6"		2.5 m 8'0"		3 m 10'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
1090 mm 3'6"	400 mm 16"	kg lb	350 770	350 770	690 1520	510 1120	670 1470	340 750	470 1030	250 550	370 810	190 410	280 610	150 330

### 301.8 ● Rubber Track ● Canopy ● Blade Lowered

Stick	Bucket	1 m 3'2"		1.5 m 5'0"		2 m 6'6"		2.5 m 8'0"		3 m 10'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
890 mm 2'11"	400 mm 16"	kg lb	—	—	680 1490	680 1490	680 1490	530 1160	490 1080	380 830	380 830	300 660	300 660	250 550
1090 mm 3'6"	400 mm 16"	kg lb	350 770	350 770	690 1520	690 1520	670 1470	530 1160	470 1030	380 830	370 810	290 630	280 610	220 480

### 301.8 ● Rubber Track ● Canopy ● Blade Raised

Stick	Bucket	1 m 3'2"		1.5 m 5'0"		2 m 6'6"		2.5 m 8'0"		3 m 10'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
890 mm 2'11"	400 mm 16"	kg lb	—	—	680 1490	680 1490	480 1050	480 1050	350 770	350 770	270 590	270 590	220 480	220 480
1090 mm 3'6"	400 mm 16"	kg lb	350 770	350 770	690 1520	690 1520	470 1030	480 1050	340 750	350 770	270 590	270 590	200 480	200 480

**302.5 ● Rubber Track ● Canopy ● Blade Raised**

Stick	Bucket	1.5 m 5'0"		2 m 6'6"		2.5 m 8'0"		3 m 10'0"		3.5 m 11'6"		4 m 13'1"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
1100 mm 3'6"	400 mm 16"	kg lb	740* 1630*	740* 1630*	1020 2240	750 1650	710 1560	540 1190	540 1190	420 920	430 940	340 740	—	—	360 600	280 310
1400 mm 4'6"	400 mm 16"	kg lb	770 1690	770 1690	1010 2220	750 1650	710 1560	540 1190	540 1190	410 900	430 940	330 720	350 770	270 590	320 700	250 550

**302.5 ● Rubber Track ● Canopy ● Blade Lowered**

Stick	Bucket	1.5 m 5'0"		2 m 6'6"		2.5 m 8'0"		3 m 10'0"		3.5 m 11'6"		4 m 13'1"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
1100 mm 3'6"	400 mm 16"	kg lb	740* 1630*	740* 1630*	1470 3240	830 1830	1150 2535	600 1323	890 1962	460 1014	710 1565	370 816	—	—	600 1323	280 683
1400 mm 4'6"	400 mm 16"	kg lb	770 1690	770 1690	1530 3370	830 1830	1140 2510	590 1300	870 1910	460 1010	700 1540	360 790	590 1300	300 660	540 1190	270 590

**303.5 ● Rubber Track ● Canopy ● Blade Raised**

Stick	Bucket	1.5 m 5'0"		2 m 6'6"		2.5 m 8'0"		3 m 10'0"		3.5 m 11'6"		4 m 13'1"		4.5 m 15'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
1240 mm 4'1"	600 mm 1'9"	kg lb	—	—	1110 2440	1030 2270	1090 2400	730 1600	820 1800	570 1250	650 1430	450 990	530 1160	370 810	—	—	460 1320	320 680
1640 mm 5'4"	600 mm 1'9"	kg lb	660 1450	660 1450	1160 2550	1070 2350	1150 2530	770 1690	860 1890	590 1300	680 1490	470 1030	560 1230	390 860	460 1010	320 700	420 920	290 630

**303.5 ● Rubber Track ● Canopy ● Blade Lowered**

Stick	Bucket	1.5 m 5'0"		2 m 6'6"		2.5 m 8'0"		3 m 10'0"		3.5 m 11'6"		4 m 13'1"		4.5 m 15'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
1240 mm 4'1"	600 mm 1'9"	kg lb	—	—	1110 2440	1110 2440	1390 3060	820 1800	1060 2330	630 1380	850 1870	510 1120	700 1540	420 920	—	—	590 1300	360 790
1640 mm 5'4"	600 mm 1'9"	kg lb	660 1450	660 1450	1160 2550	1160 2550	1380 3040	860 1890	1030 2270	660 1450	820 1800	530 1160	680 1490	430 940	580 1270	360 790	520 1140	320 700

**304.5 ● Rubber Track ● Canopy ● Blade Raised**

Stick	Bucket	1.5 m 5'0"		2 m 6'6"		2.5 m 8'0"		3 m 10'0"		3.5 m 11'6"		4 m 13'1"		4.5 m 15'0"		At Max. Reach	
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side
1430 mm 4'7"	kg lb	—	—	1650 3630	1650 3630	1750 3850	1200 2640	1300 2860	950 2090	1050 2310	750 1650	850 1870	600 1320	700 1540	550 1210	650 1430	450 990
1830 mm 6'0"	kg lb	1100 2420	1100 2420	1650 3630	1650 3630	1750 3850	1200 2640	1300 2860	950 2090	1050 2310	750 1650	850 1870	600 1320	700 1540	500 1100	550 1210	400 880

**304.5 ● Rubber Track ● Canopy ● Blade Lowered**

Stick	Bucket	1.5 m 5'0"		2 m 6'6"		2.5 m 8'0"		3 m 10'0"		3.5 m 11'6"		4 m 13'1"		4.5 m 15'0"		At Max. Reach	
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side
1430 mm 4'7"	kg lb	—	—	1650 3630	1650 3630	2200 4850	1400 3080	1650 3630	1100 2420	1350 2970	850 1870	1100 2420	750 1650	950 2090	600 1320	850 1870	550 1210
1830 mm 6'0"	kg lb	1100 2420	1100 2420	1650 3630	1650 3630	2150 4740	1400 3080	1600 3520	1050 2310	1250 2750	850 1870	1050 2310	700 1540	900 2090	600 1320	750 1650	450 990

\*Load limited by hydraulic capacity rather than tipping.



**307B ● 450 mm (18") Track Shoes**

Stick	Bucket		3 m 10'0"		4.5 m 15'0"		6 m 20'0"		At Max. Reach	
			Front	Side	Front	Side	Front	Side	Front	Side
1665 mm 5'6"	800 mm 2'7"	kg lb	2550 5450	2050 4350	1350 2900	1100 2350	—	—	700* 1500*	700* 1500*
2210 mm 7'3"	600 mm 2'0"	kg lb	2550 5450	2050 4350	1350 2900	1100 2350	—	—	750* 1650*	650 1350

**307B SB ● 450 mm (18") Track Shoes ● Swing Boom ● Japan Sourced**

Stick	Bucket		3 m 10'0"		4.5 m 15'0"		6 m 20'0"		At Max. Reach	
			Front	Side	Front	Side	Front	Side	Front	Side
1665 mm 5'6"	800 mm 2'7"	kg lb	2700 5800	2150 4600	1500 3150	1200 1550	—	—	850 1900	700 1500
2210 mm 7'3"	600 mm 2'0"	kg lb	2700 5800	2100 4450	1450 3100	1150 2500	950 2000	750 1600	750 1600	600 1250

**307B SB ● 450 mm (18") Track Shoes ● Swing Boom ● France Sourced**

Stick	Bucket		3 m 10'0"		4.5 m 15'0"		6 m 20'0"		At Max. Reach	
			Front	Side	Front	Side	Front	Side	Front	Side
1750 mm 5'9"	800 mm 2'7"	kg lb	2640 5820	2210 4870	1440 3170	1220 2690	—	—	780 1710	700 1540
2150 mm 7'1"	600 mm 2'0"	kg lb	2610 5750	2170 4780	1410 3100	1190 2620	900 1980	750 1650	690 1520	580 1270

**311B ● 500 mm (20") Track Shoes**

Stick	Bucket		3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		At Max. Reach	
			Front	Side	Front	Side	Front	Side	Front	Side	Front	Side
1950 mm 6'5"	925 mm 3'0"	kg lb	6030 12,910	4160 8940	3060 6570	2210 4750	1930 4130	1390 2980	—	—	1180* 2590*	1130 2490
2250 mm 7'5"	775 mm 2'6"	kg lb	6130 13,120	4250 9130	3110 6670	2260 4850	1960 4200	1420 3050	—	—	1210* 2660*	1080 2380
2800 mm 9'2"	625 mm 2'0"	kg lb	6200 13,260	4310 9250	3120 6690	2270 4870	1950 4180	1410 3030	—	—	950* 2090*	930 2050

**312B ● 500 mm (20") Track Shoes**

Stick	Bucket		3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		At Max. Reach	
			Front	Side	Front	Side	Front	Side	Front	Side	Front	Side
2100 mm 6'11"	1075 mm 3'6"	kg lb	6160* 14,320*	5080 10,290	4070 8740	2730 5870	2580 5550	1750 3760	—	—	1770* 3910*	1270 2790
2500 mm 8'2"	925 mm 3'0"	kg lb	6730* 15,630*	5220 11,220	4150 8910	2810 6040	2630 5660	1800 3870	—	—	1500* 3300*	1190 2630
3000 mm 9'10"	775 mm 2'6"	kg lb	7810* 17,900*	5280 11,350	4170 8960	2830 6080	2640 5670	1810 3880	1830 4040	1230 2710	1400* 3080*	1080 2370

\*Load limited by hydraulic capacity rather than tipping.

**312B L ● 600 mm (24") Track Shoes**

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
2100 mm 6'11"	1075 mm 3'6"	kg lb	6160* 14,320*	5290 11,360	4850 10,400	2850 6130	3060 6570	1830 3930	—	—	1770* 3910*	1330 2930
2500 mm 8'2"	925 mm 3'0"	kg lb	6730* 15,630*	5430 11,670	4930 10,580	2920 6290	3110 6680	1880 4040	—	—	1500* 3300*	1250 2760
3000 mm 9'10"	925 mm 3'0"	kg lb	7760* 18,060*	5460 11,740	4930 10,590	2920 6280	3090 6640	1860 3990	2090 4600	1270 2790	1360* 3000*	1100 2420

**312B L France Sourced ● 500 mm (20") Track Shoes — 2100/2500 mm (6'11"/8'2") Stick  
 ● 920 mm (3'0") Bucket ● 600 mm (24") Track Shoes — 3000 mm (9'10") Stick**

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		At Max. Reach	
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side
2100 mm 6'11"	kg lb	6250 2840	5080 2310	4660 2120	2760 1250	2970 1350	1800 820	—	—	1770 800	1290 590
2500 mm 8'2"	kg lb	6810 3100	5220 2370	4740 2150	2820 1280	3000 1360	1830 830	—	—	1490 680	1200 540
3000 mm 9'10"	kg lb	7480 3400	5450 2480	4940 2240	2930 1330	3110 1410	1880 850	2160 980	1300 590	1360 620	1110 500

**313B CR ● R-Boom**

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
3000 mm 9'10"	775 mm 2'7"	kg lb	6600* 14,250*	5100 10,900	3900 8350	2750 5850	2450 5250	1750 3700	—	—	1250* 2800*	1050 2300
2500 mm 8'2"	925 mm 3'0"	kg lb	6600* 14,350*	5050 10,800	4250* 9150*	2700 5800	3050* 6550*	1750 3700	—	—	1350* 3000*	1200 2550

**315B ● 500 mm (20") Track Shoes**

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
1850 mm 6'1"	1220 mm 4'0"	kg lb	—	—	5300 11,350	3400 7350	3400 7250	2200 4750	—	—	2400 5250	1550 3400
2250 mm 7'5"	1070 mm 3'6"	kg lb	5500* 12,700*	5500* 12,700*	5450 11,750	3600 7700	3500 7500	2300 4950	—	—	2250* 5000*	1500 3250
2600 mm 8'6"	1070 mm 3'6"	kg lb	5900* 13,600*	5900* 13,600*	5500 11,750	3600 7700	3500 7450	2300 4950	2400 5300	1600 3500	1950* 4250*	1350 3000
3100 mm 10'2"	770 mm 2'6"	kg lb	7000* 16,100*	6700 14,400	5500 11,850	3600 7750	3500 7500	2350 5000	2450 5250	1600 3450	1800* 3950*	1300 2800

\*Load limited by hydraulic capacity rather than tipping.

# Excavators

## Lifting Capacity At Ground Level

● 315B L ● 317B L ● 317B LN

### 315B L ● 600 mm (24") Track Shoes

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
1850 mm 6'1"	1220 mm 4'0"	kg lb	— —	6250 13,450	3500 7500	3950 8500	2300 4850	— —	— —	2700* 5950*	1600 3500	
2250 mm 7'5"	1070 mm 3'6"	kg lb	5500* 12,700*	5500* 12,700*	6550 14,050	3700 8000	4150 8850	2400 5200	— —	2250* 5000*	1550 3450	
2600 mm 8'6"	1070 mm 3'6"	kg lb	5900* 13,600*	5900* 13,600*	6550 14,050	3750 8000	4150 8850	2400 5150	2900 6350	1650 3650	1950* 4250*	1450 3150
3100 mm 10'2"	770 mm 2'6"	kg lb	7000* 16,100*	6950 14,950	6600 14,150	3750 8100	4150 8900	2450 5200	2900 6250	1700 3600	1800* 3950*	1350 2950

### France Sourced

### 315B L ● 0.93 m<sup>3</sup> (1.22 yd<sup>3</sup>) Bucket ● 600 mm (24") Track Shoes

Stick		3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		At Max. Reach	
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side
1850 mm 6'1"	kg lb	— —	— —	6570 14,480	4080 8990	4150 9150	2640 5820	— —	— —	2550* 5620*	1840 4050
2250 mm 7'5"	kg lb	— —	— —	6760 14,900	4260 9390	4250 9370	2740 6040	— —	— —	2760 6080	1770 3900
2600 mm 8'6"	kg lb	5290* 11,660	5290* 11,660	6780 14,950	4270 9410	4240 9340	2730 6020	2940 6480	1880 4140	1830* 4030*	1600 3520
3100 mm 10'2"	kg lb	6340* 13,980*	6340* 13,980*	6800 14,990	4280 9430	4230 9320	2720 5990	2920 6430	1860 4100	1620* 3570*	1430 3150

### 317B L ● 0.68-0.93 m<sup>3</sup> (0.89-1.22 yd<sup>3</sup>) Bucket ● 600 mm (24") Track Shoes

Stick		3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		At Max. Reach	
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side
1850 mm 6'1"	kg lb	— —	— —	7330 16,160	4370 9630	4600 10,140	2820 6210	— —	— —	2490* 5490*	1950 4290
2250 mm 7'5"	kg lb	5720* 12,610*	5720* 12,610*	7420* 16,360*	4520 9960	4690 10,340	2900 6390	— —	— —	2840* 6260*	1870 4120
2600 mm 8'6"	kg lb	5720* 12,610*	5720* 12,610*	7330* 16,160*	4580 10,090	4730 10,420	2950 6500	3300 7270	2040 4490	1810* 3990*	1740 3830
3100 mm 10'2"	kg lb	6820* 15,030*	6820* 15,030*	7100* 15,650*	4630 10,200	4770 15,510	2980 6570	3330 7340	2070 4560	1680* 3700*	1620 3570

### 317B LN ● 0.68-0.93 m<sup>3</sup> (0.89-1.22 yd<sup>3</sup>) Bucket ● 500 mm (20") Track Shoes

Stick		3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		At Max. Reach	
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side
1850 mm 6'1"	kg lb	— —	— —	7320 16,140	3840 8460	4590 10,120	2490 5490	— —	— —	2490* 5490*	1710 3770
2250 mm 7'5"	kg lb	5720* 12,610*	5720* 12,610*	7420* 16,360*	3990 8790	4680 10,310	2570 5660	— —	— —	2840* 6260*	1640 3610
2600 mm 8'6"	kg lb	5720* 12,610*	5720* 12,610*	7330* 16,160*	4040 8900	4720 10,400	2610 5750	3300 7270	1800 3960	1810* 3990*	1530 3370
3100 mm 10'2"	kg lb	6820* 15,030*	6820* 15,030*	7100* 15,650*	4100 9040	4760 10,490	2640 5820	3320 7320	1830 4030	1680* 3700*	1420 3130

\*Load limited by hydraulic capacity rather than tipping.

Japan Sourced

318B L ● 600 mm (24") Track Shoes

Stick	Bucket		3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		At Max. Reach	
			Front	Side	Front	Side	Front	Side	Front	Side	Front	Side
3200 mm 10'6"	775 mm 30"	kg lb	5450* 12,650*	5450* 12,650*	7700 16,500	4600 9850	4800 10,250	2950 6250	3300 7100	2000 4250	2200* 4800*	1400 3050
2700 mm 8'10"	932 mm 36"	kg lb	5400* 12,450*	5400* 12,450*	7600 16,250	4500 9650	4700 10,100	2850 6100	3250 7000	1950 4150	2600* 5650*	1550 3350
2250 mm 7'5"	932 mm 36"	kg lb	—	—	7500 16,050	4400 9450	4650 10,000	2800 6050	—	—	2850 6200	1650 3650
1800 mm 5'11"	1075 mm 42"	kg lb	—	—	7350 15,700	4250 9150	4600 9800	2750 5850	—	—	3500 6700	1800 3900

France Sourced

318B L ● 0.8 m<sup>3</sup> (1.05 yd<sup>3</sup>) Bucket ● 600 mm (24") Track Shoes

Stick			3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		At Max. Reach	
			Front	Side	Front	Side	Front	Side	Front	Side	Front	Side
1800 mm 5'11"		kg lb	—	—	8920* 19,660*	5030 11,090	5700 12,560	3260 7180	—	—	3820 8420	2200 4850
2250 mm 7'5"		kg lb	—	—	8830* 19,470*	5070 11,170	5700 12,560	3260 7180	—	—	3190* 7030*	1980 4360
2700 mm 8'10"		kg lb	5380* 11,860*	5380* 11,860*	8630* 19,020*	5100 11,240	5700 12,560	3260 7180	3950 8710	2250 4960	2240* 4930*	1770 3900
3200 mm 10'6"		kg lb	6850* 15,100*	6850* 15,100*	8440* 18,610*	5040 11,110	5570 12,280	3200 7050	3840 8460	2200 4850	2440* 5380	1620 3570

Japan Sourced

318B LN ● 500 mm (20") Track Shoes

Stick	Bucket		3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		At Max. Reach	
			Front	Side	Front	Side	Front	Side	Front	Side	Front	Side
3200 mm 10'6"	775 mm 30"	kg lb	5450* 12,650*	5450* 12,650*	7550 16,200	3950 8500	4700 10,100	2500 5400	3250 6950	1700 3600	2200* 4800*	1150 2550
2700 mm 8'10"	775 mm 30"	kg lb	5450* 12,600*	5450* 12,600*	7500 16,050	3900 8400	4700 10,050	2500 5350	3250 6950	1700 3650	2600 5700	1350 2900
2250 mm 7'5"	775 mm 30"	kg lb	—	—	7400 15,800	3800 8150	4600 9900	2450 5200	—	—	2800 6150	1450 3150
1800 mm 5'11"	932 mm 36"	kg lb	—	—	7250 15,550	3700 7950	4550 9750	2400 5100	—	—	3050 6700	1550 3450

France Sourced

318B LN ● 0.8 m<sup>3</sup> (1.05 yd<sup>3</sup>) Bucket ● 500 mm (20") Track Shoes

Stick			3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		At Max. Reach	
			Front	Side	Front	Side	Front	Side	Front	Side	Front	Side
1800 mm 5'11"		kg lb	—	—	7420 16,360	3860 8510	4680 10,310	2510 5530	—	—	3150 6940	1680 3700
2250 mm 7'5"		kg lb	—	—	7490 16,510	3910 8620	4700 10,360	2520 5550	—	—	2870 6320	1510 3320
2700 mm 8'10"		kg lb	5410* 11,920*	5410* 11,920*	7560 16,660	3970 8750	4730 10,420	2550 5620	3290 7250	1740 3830	2610* 5750*	1360 2990
3200 mm 10'6"		kg lb	6850* 15,100*	6850* 15,100*	7590 16,730	3980 8770	4720 10,400	2540 5600	3270 7210	1720 3870	2440* 5380*	1250 2750

\*Load limited by hydraulic capacity rather than tipping.

**M312 ● 4-Point Outriggers Down ● 1000 mm (3'3") Bucket ● One-Piece Boom**

Stick		3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		At Max. Reach	
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side
1600 mm 5'3"	kg lb	—	—	5500* 12,120*	5250 11,580	3950* 8710*	3350 7390	—	—	2350* 5180*	2350 5180
2000 mm 6'6"	kg lb	—	—	5500* 12,130*	5300 11,690	3900* 8600*	3300 7280	—	—	1500* 3310*	1500* 3310*
2300 mm 7'5"	kg lb	2700* 5950*	2700* 5950*	5500* 12,120*	5300 11,680	3900* 8590*	3300 7270	—	—	1260* 2780*	1260* 2780*
2600 mm 8'5"	kg lb	2900* 6390*	2900* 6390*	5400* 11,900*	5300 11,680	3900* 8590*	3330 7340	2100* 4630*	2100* 4630*	1100* 2420*	1100* 2420*
3000 mm 9'9"	kg lb	3600* 7930*	3600* 7930*	5360* 11,810*	5300 11,680	3800 8370	3360 7400	2600* 5730*	2300 5070	1000* 2200*	1000 2200

**M312 ● Free On Wheels ● 1000 mm (3'3") Bucket ● One-Piece Boom**

Stick		3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		At Max. Reach	
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side
1600 mm 5'3"	kg lb	—	—	3900 8590	2100 4630	2500 5510	1400 3080	—	—	1800 2860	900 1980
2000 mm 6'6"	kg lb	—	—	4000 8820	2200 4850	2500 5510	1400 3090	—	—	1500* 3310*	900 1980
2300 mm 7'5"	kg lb	2700* 5950*	2700* 5950*	4000 8820	2200 4850	2600 5730	1400 3080	—	—	1300* 2860*	800 1760
2600 mm 8'5"	kg lb	2300* 5070*	2300* 5070*	4000 8820	2100 4630	2500 5510	1960 4320	1800 3960	300 660	1160* 2550*	700 1540
3000 mm 9'9"	kg lb	3600* 7930*	3600* 7930*	4000 8820	2100 4630	2500 5510	1400 3080	1800 3960	360 790	1000* 2200*	740 1630

**M312 ● 4-Point Outriggers Down ● 1000 mm (3'3") Bucket ● VA Boom**

Stick		3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		At Max. Reach	
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side
1600 mm 5'3"	kg lb	7900* 17,410*	7900* 17,410*	5400* 11,900*	5300 11,680	3800* 8370*	3400 7500	—	—	2300* 5070*	2200 4850
2000 mm 6'6"	kg lb	7900* 17,420*	7900* 17,420*	5400* 11,910*	5300* 11,690*	3900* 8600*	3500 7720	—	—	1500* 3310*	1500* 3310*
2300 mm 7'5"	kg lb	7600* 16,750*	7600* 16,750*	5900* 13,000*	5300 11,680	3900* 8590*	3500 3300	2400* 5290*	2400* 5290*	1300* 2860*	1300 2860
2600 mm 8'5"	kg lb	7100* 15,650*	7100* 15,650*	5300* 11,680	5300 11,680	3860* 8510*	3560 7840	2300* 5070*	2400 5290	1100* 2420*	1100* 2420*
3000 mm 9'9"	kg lb	7100* 15,650*	7100* 15,650*	5200* 11,460*	5200 11,460	3740* 8240*	3440* 7580*	2900* 6390*	2400 5290	1040* 2290*	1040* 2290*

**M312 ● Free On Wheels ● 1000 mm (3'3") Bucket ● VA Boom**

Stick		3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		At Max. Reach	
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side
1600 mm 5'3"	kg lb	7900* 17,410*	4700 10,360	4400 9700	2500 5510	2600 5730	1400 3080	—	—	1600 3520	800 1760
2000 mm 6'6"	kg lb	7900* 17,420*	4800 10,580	4400 9700	2600 5730	2700 5950	1500 3310	—	—	1500* 3310*	800 1760
2300 mm 7'5"	kg lb	7600* 16,750*	4900 10,800	4300 9480	2600 5730	2800 6170	1600 3520	1800 3960	900 1980	1300* 2860*	800 1760
2600 mm 8'5"	kg lb	7100* 15,650*	4800 10,580	4300 9480	2700 5950	2800 6170	1600 3520	1800 3960	900 1980	1100* 2420*	700 1100
3000 mm 9'9"	kg lb	7100* 15,650*	4900* 10,800*	4300 9480	2600 5730	2800 6170	1700 3740	1800 3960	1000 2200	1060* 2330*	700 1100

\*Load limited by hydraulic capacity rather than tipping.

**M315 ● 4-Point Outriggers Down ● 1100 mm (3'7") Bucket ● One-Piece Boom**

Stick		3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		At Max. Reach	
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side
1700 mm 5'10"	kg lb	—	—	6700* 14,770*	6400 14,110	4800* 10,580*	4100 9040	—	—	2600* 5730*	2600* 5730*
2100 mm 6'11"	kg lb	—	—	6700* 14,770*	6500 14,330	4800* 10,580*	4100 9040	—	—	1700* 3740*	1700* 3740*
2400 mm 7'10"	kg lb	2500* 5510*	2500* 5510*	6700* 14,770*	6500 14,330	4800* 10,580*	4100 9040	2900* 6390*	2900* 6390*	1500* 3300*	1500* 3300*
2600 mm 8'6"	kg lb	2700* 5950*	2700* 5950*	6700* 14,770*	6500 14,330	4800* 10,580*	4100 9040	3300* 7270*	2900* 6390*	1300* 2860*	1300* 2860*

**M315 ● Free On Wheels ● 1100 mm (3'7") Bucket ● One-Piece Boom**

Stick		3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		At Max. Reach	
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side
1700 mm 5'10"	kg lb	—	—	4700 10,360	2600 5730	3100 6830	1700 3740	—	—	2000 4410	1100 2420
2100 mm 6'11"	kg lb	—	—	4800 10,580	2700 5950	3100 6830	1700 3740	—	—	1700* 3740*	1000 2200
2400 mm 7'10"	kg lb	2500* 5510*	2500* 5510*	4800 10,580	2700 5950	3100 6830	1700 3740	2200 4850	1200 2640	1500* 3300*	1000 2200
2600 mm 8'6"	kg lb	2700* 5950*	2700* 5950*	4800 10,580	2700 5950	3100 6830	1700 3740	2200 4850	1200 2640	1300* 2860*	900 1980

**M315 ● 4-Point Outriggers Down ● 1100 mm (3'7") Bucket ● VA Boom**

Stick		3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		At Max. Reach	
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side
1700 mm 5'10"	kg lb	9500* 20,940*	9500* 20,940*	6600* 14,550*	6600* 14,550*	4700* 10,360*	4300 9430	—	—	2400* 5290*	2400* 5290*
2100 mm 6'11"	kg lb	8900* 19,620*	8900* 19,620*	6600* 14,550*	6500 14,330	4700* 10,360*	4300 9480	3000* 6610*	2900 6390	1600* 3520*	1600* 3520*
2400 mm 7'10"	kg lb	8300* 18,300*	8300* 18,300*	6500* 14,330*	6500* 14,330	4700* 10,360*	4300 9480	3000* 6610*	2900 6390	1400* 3080*	1400* 3080*
2600 mm 8'6"	kg lb	8500* 18,740*	8500* 18,740*	6500* 14,330*	6500* 14,330*	4600* 10,140*	4200 9260	3000* 6610*	2900 6390	1300* 2860*	1300* 2860*

**M315 ● Free On Wheel ● 1100 mm (3'7") Bucket ● VA Boom**

Stick		3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		At Max. Reach	
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side
1700 mm 5'10"	kg lb	9500* 20,940*	5800 12,780	5200 11,460	3200 7050	3200 7050	1800 3960	—	—	1900 4180	1000 2200
2100 mm 6'11"	kg lb	8900* 19,620*	5900 13,000	5200 11,460	3200 7050	3300 7270	2000 4410	2200 4850	1200 2640	1600* 3520*	1000 2200
2400 mm 7'10"	kg lb	8300* 18,300*	6000 13,230	5200 11,460	3200 7050	3400 7490	2000 4410	2200 4850	1200 2640	1400* 3080*	900 1980
2600 mm 8'6"	kg lb	8500* 18,740*	5800 12,780	5200 11,460	3300 7270	3400 7490	2000 4410	2200 4850	1200 2640	1300* 2860*	900 1980

\*Load limited by hydraulic capacity rather than tipping.

**M318 ● 4-Point Outriggers Down ● 1200 mm (3'11") Bucket ● One-Piece Boom**

Stick		3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		At Max. Reach	
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side
1800 mm 5'11"	kg lb	—	—	7700* 16,970*	7200 15,870	5500* 12,120*	4600 10,140	—	—	3100* 6830*	2700 5950
2400 mm 7'10"	kg lb	—	—	7700* 16,970*	7300 16,090	5500* 12,120*	4600 10,140	4200* 9260*	3200 7050	1800* 3960*	1800* 3960*
2800 mm 9'2"	kg lb	3800* 8370*	3800* 8370*	7600* 16,750*	7400 16,310	5400* 11,900*	4600 10,140	4200* 9260*	3200 7050	1600* 3520*	1600* 3520*
4000 mm 13'2"	kg lb	5100* 11,240*	5100* 11,240*	6900* 15,210*	6900* 15,210*	4900 10,800	4600 10,140	3800* 8370*	3200 7050	900* 1980*	900* 1980*

**M318 ● Free On Wheels ● 1200 mm (3'11") Bucket ● One-Piece Boom**

Stick		3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		At Max. Reach	
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side
1800 mm 5'11"	kg lb	—	—	5900 13,000	2900 6390	3700 8150	1900 4180	—	—	2200 4850	1100 2420
2400 mm 7'10"	kg lb	—	—	5900 13,000	3000 6610	3800 8370	1900 4180	2600 5730	1300 2860	1800* 3960*	1000 2200
2800 mm 9'2"	kg lb	3800* 8370*	3800* 8370*	5900 13,000	3000 6610	3800 8370	1900 4180	2600 5730	1300 2860	1600* 3520*	900 1980
4000 mm 13'2"	kg lb	5100* 11,240*	5100* 11,240*	6000 13,230	3100 6830	3800 8370	1900 4180	2600 5730	1300 2860	900 1980	600 1320

**M318 ● 4-Point Outriggers Down ● 1200 mm (3'11") Bucket ● VA Boom**

Stick		3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		At Max. Reach	
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side
1800 mm 5'11"	kg lb	10 800* 23,810*	10 800* 23,810*	7600* 16,750*	7400* 16,310*	5400* 11,900*	4900 10,800	—	—	2900* 6390*	2800 6170
2400 mm 7'10"	kg lb	10 200* 22,490*	10 200* 22,490*	7500* 16,530*	7400* 16,310*	5300* 11,680*	4800 10,580	4100* 9040*	3300 7270	1600* 3520*	1600* 3520*
2800 mm 9'2"	kg lb	10 200* 22,490*	10 200* 22,490*	7400* 16,310*	7400* 16,310*	5200* 11,460*	4800 10,580	4100* 9040*	3300 7270	1400* 3080*	1400* 3080*
4000 mm 13'2"	kg lb	6500* 14,330*	6500* 14,330*	4600* 10,140*	4600* 10,140*	3600* 7930*	3300 7270	2300* 5070*	2300* 5070*	800 1760	800 1760

**M318 ● Free On Wheels ● 1200 mm (3'11") Bucket ● VA Boom**

Stick		3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		At Max. Reach	
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side
1800 mm 5'11"	kg lb	10 800* 23,810*	6800 14,990	6400 14,110	3700 8150	4100 9040	2200 4850	—	—	2200 4850	1100 2420
2400 mm 7'10"	kg lb	10 200* 22,490*	6900 15,210	6400 14,110	3800 8370	4200 9260	2300 5070	2700 5950	1400 3080	1600 3520	1000 2200
2800 mm 9'2"	kg lb	10 200* 22,490*	6900 15,210	6300 13,890	3800 8370	4100 9040	2400 5290	2800 6170	1400 3080	1400* 2200*	900 1980
4000 mm 13'2"	kg lb	—	—	6100 13,450	3600 7930	4000 8820	2400 5290	2800 6170	1600 3520	800* 1760*	600 1320

\*Load limited by hydraulic capacity rather than tipping.

**M320 ● Rear Dozer Up ● One-Piece 5.65 m (18'6") Boom**

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
1900 mm 6'3"	1.05 m <sup>3</sup> 1.37 yd <sup>3</sup>	kg lb	—	—	6600 14,550	3500 7700	4800 10,580	2300 5070	2900 6350	1500 3300	—	—	2200 4850	1100 2400
2500 mm 8'2"	0.9 m <sup>3</sup> 1.17 yd <sup>3</sup>	kg lb	—	—	6700 14,750	3600 7930	4200 9250	2300 5050	3000 6600	1600 3500	—	—	1300* 2850	1000 2200
2900 mm 9'6"	0.81 m <sup>3</sup> 1.06 yd <sup>3</sup>	kg lb	—	—	6700 14,750	3600 7900	4200 9250	2300 5050	3000 6600	1600 3500	—	—	1100* 2400	900 1950
4200 mm 13'9"	0.55 m <sup>3</sup> 0.72 yd <sup>3</sup>	kg lb	—	—	6900 15,200	3700 8150	4300 9450	2400 5250	3000 6600	1600 3500	2200 4850	1100 2400	600* 1300	600* 1300

**M320 ● Rear Dozer Down ● One-Piece 5.65 m (18'6") Boom**

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
1900 mm 6'3"	1.05 m <sup>3</sup> 1.37 yd <sup>3</sup>	kg lb	—	—	9000* 19,800*	4200 9250	6400* 14,100*	2700 5950	4800* 10,550*	1900 4150	—	—	3000* 6600*	1400 3050
2500 mm 8'2"	0.9 m <sup>3</sup> 1.17 yd <sup>3</sup>	kg lb	—	—	9000* 19,800*	4300 9450	6300* 13,850*	2800 6150	4900* 10,800*	1900 4150	—	—	1300* 2850*	1300 2850
2900 mm 9'6"	0.81 m <sup>3</sup> 1.06 yd <sup>3</sup>	kg lb	—	—	8900* 19,600*	4300 9450	6200* 13,650*	2800 6150	4800* 10,550*	1900 4150	—	—	1100* 2400*	1100* 2400*
4200 mm 13'9"	0.55 m <sup>3</sup> 0.72 yd <sup>3</sup>	kg lb	—	—	8100* 17,850*	4500 9900	5600* 12,300*	2900 6350	4400* 9700*	1900 4150	3600* 7900*	1400 3050	600* 1300*	600 1300*

**M320 ● Rear Stabilizer Down ● One-Piece 5.65 m (18'6") Boom**

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach		
		Front	Rear	Front	Rear	Front	Rear	Front	Rear	Front	Rear	Front	Rear	
1900 mm 6'3"	1.05 m <sup>3</sup> 1.37 yd <sup>3</sup>	kg lb	—	—	9000* 19,800*	5400 11,900	6200 13,650	3500 7700	4300 9450	2400 5250	—	—	3000* 6600*	1800 3960
2500 mm 8'2"	0.9 m <sup>3</sup> 1.17 yd <sup>3</sup>	kg lb	—	—	9000* 19,800*	5500 12,100	6300 13,850	3500 7700	4300 9450	2400 5250	—	—	1300* 2850*	1300* 2850*
2900 mm 9'6"	0.81 m <sup>3</sup> 1.06 yd <sup>3</sup>	kg lb	—	—	8900* 19,600*	5500 12,100	6200* 13,650*	3500 7700	4300 9450	2500 5500	—	—	1100* 2400*	1100* 2400*
4200 mm 13'9"	0.55 m <sup>3</sup> 0.72 yd <sup>3</sup>	kg lb	—	—	8100* 17,850*	5700 12,550	5600* 12,300*	3600 7900	4400 9700	2500 5500	3200 7050	1800 3950	600* 1300*	600* 1300*

**M320 ● 4-Point Stabilizers Down ● One-Piece 5.65 m (18'6") Boom**

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
1900 mm 6'3"	1.05 m <sup>3</sup> 1.37 yd <sup>3</sup>	kg lb	—	—	9000* 19,800*	9000* 19,800*	6400* 14,100*	5600 12,300	4800* 10,550*	3900 8550	—	—	3000* 6600*	3000 6600
2500 mm 8'2"	0.9 m <sup>3</sup> 1.17 yd <sup>3</sup>	kg lb	—	—	9000* 19,800*	9000* 19,800*	6300* 13,850	5700 12,550	4900* 10,800*	4000 8800	—	—	1300* 2850*	1300* 2850*
2900 mm 9'6"	0.81 m <sup>3</sup> 1.06 yd <sup>3</sup>	kg lb	—	—	8900* 19,600*	8900* 19,600*	6200* 13,650*	5700 12,550	4800* 10,550*	4000 8800	—	—	1100* 2400*	1100* 2400*
4200 mm 13'9"	0.55 m <sup>3</sup> 0.72 yd <sup>3</sup>	kg lb	—	—	8100* 17,850*	8100* 17,850*	5600* 12,300*	5600* 12,300*	4400* 9700*	4000 8800	3600* 7900*	3000 6600	600* 1300*	600* 1300*

**M320 ● Dozer and Stabilizer Down ● One-Piece 5.65 m (18'6") Boom**

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
1900 mm 6'3"	1.05 m <sup>3</sup> 1.37 yd <sup>3</sup>	kg lb	—	—	9000* 19,800*	7200 15,850	6400* 14,100*	4600 10,100	4800* 10,550*	3200 7050	—	—	3000* 6600*	2400 5250
2500 mm 8'2"	0.9 m <sup>3</sup> 1.17 yd <sup>3</sup>	kg lb	—	—	9000* 19,800*	7300 16,050	6300* 13,850*	4600 10,100	4900* 10,800*	3300 7250	—	—	1300* 2850*	1300* 2850*
2900 mm 9'6"	0.81 m <sup>3</sup> 1.06 yd <sup>3</sup>	kg lb	—	—	8900* 19,600*	7300 16,050	6200* 13,650*	4600 10,100	4800* 10,550*	3200 7050	—	—	1100* 2400*	1100* 2400*
4200 mm 13'9"	0.55 m <sup>3</sup> 0.72 yd <sup>3</sup>	kg lb	—	—	8100* 19,600*	7500 16,500	5600* 12,300*	4700 10,350	4400* 9700*	3300 7250	3600* 7900*	2400 5250	600* 1300*	600* 1300*

\*Load limited by hydraulic capacity rather than tipping.



# Excavators

## Lifting Capacity At Ground Level

### ● M320

#### M320 ● Rear Dozer Up ● VA Boom @ 5.41 m (17'9") Max.

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
1900 mm 6'3"	1.05 m <sup>3</sup> 1.37 yd <sup>3</sup>	kg lb	12 800* 28,200*	8300 18,300	7400 16,300	4500 9900	4800 10,550	2700 5950	3000 6600	1600 3500	—	—	2400 5250	1200 2600
2500 mm 8'2"	0.9 m <sup>3</sup> 1.17 yd <sup>3</sup>	kg lb	12 400* 27,300*	8600 18,950	7300 16,050	4600 10,100	4700 10,350	2900 6350	3200 7050	1700 3700	—	—	1400* 3050*	1100 2400
2900 mm 9'6"	0.81 m <sup>3</sup> 1.06 yd <sup>3</sup>	kg lb	12 100* 26,650*	8400 18,500	7200* 15,850*	4500 9900	4700 10,350	2900 6350	3200 7050	1800 3950	—	—	1200* 2600*	1000 2200
4200 mm 13'9"	0.55 m <sup>3</sup> 0.72 yd <sup>3</sup>	kg lb	10 800* 23,800*	8300 18,300	7100* 15,650*	4400 9700	4600 10,100	2900 6350	3300 7250	2000 4400	2300 5050	1200 2600	600* 1300*	600* 1300*

#### M320 ● Rear Dozer Down ● VA Boom @ 5.41 m (17'9") Max.

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
1900 mm 6'3"	1.05 m <sup>3</sup> 1.37 yd <sup>3</sup>	kg lb	12 800* 28,200*	10 100 22,250	8900* 19,600*	5300 11,650	6300* 13,850*	3200 7050	4800* 10,550*	1900 4150	—	—	3000* 6600*	1500 3300
2500 mm 8'2"	0.9 m <sup>3</sup> 1.17 yd <sup>3</sup>	kg lb	12 400* 27,300*	10 000 22,050	8800* 19,400*	5300 11,650	6200* 13,650*	3400 7450	4800* 10,550*	2100 4600	—	—	1400* 3050*	1400 3050
2900 mm 9'6"	0.81 m <sup>3</sup> 1.06 yd <sup>3</sup>	kg lb	12 100* 26,650*	9900 21,800	8600* 18,950*	5200 11,450	6000* 13,200*	3400 7400	4700* 10,350*	2100 4600	—	—	1200* 2600*	1200 2600
4200 mm 13'9"	0.55 m <sup>3</sup> 0.72 yd <sup>3</sup>	kg lb	10 800* 23,800*	9700* 21,350*	7600* 16,750*	5100 11,200	5300* 11,650*	3300 7250	4200* 9250*	2400 5250	3400* 7450*	1500 3300	600* 1300*	600* 1300*

#### M320 ● Rear Stabilizer Down ● VA Boom @ 5.41 m (17'9") Max.

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
1900 mm 6'3"	1.05 m <sup>3</sup> 1.37 yd <sup>3</sup>	kg lb	12 800* 28,200*	12 400 27,300	8900* 19,600*	6400 14,100	6300* 13,850*	4000 8800	4400 9700	2500 5500	—	—	3000* 6600*	1900 4150
2500 mm 8'2"	0.9 m <sup>3</sup> 1.17 yd <sup>3</sup>	kg lb	12 400* 27,300*	12 300 27,100	8800* 19,400*	6300 13,850	6200* 13,650*	4200* 9250*	4500 9900	2600 5700	—	—	1400* 3050*	1400* 3050*
2900 mm 9'6"	0.81 m <sup>3</sup> 1.06 yd <sup>3</sup>	kg lb	12 100* 26,650*	12 100* 26,650*	8600* 18,950*	6200 13,650	6000* 13,200*	4100 9000	4500* 9900*	2700 5950	—	—	1200* 2600*	1200* 2600*
4200 mm 13'9"	0.55 m <sup>3</sup> 0.72 yd <sup>3</sup>	kg lb	10 800* 23,800*	10 800* 23,800*	7600* 16,750	6100 13,450	5300* 11,650*	4000 8800	4200* 9250*	2800 6150	3300 7250	1900 4150	600* 1300*	600* 1300*

#### M320 ● 4-Point Stabilizers Down ● VA Boom @ 5.41 m (17'9") Max.

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
1900 mm 6'3"	1.05 m <sup>3</sup> 1.37 yd <sup>3</sup>	kg lb	12 800* 28,200*	12 800* 28,200*	8900* 19,600*	8900* 19,600*	6300* 13,850*	6000 13,200	4800* 10,550*	4000 8800	—	—	3000* 6600*	3000* 6600*
2500 mm 8'2"	0.9 m <sup>3</sup> 1.17 yd <sup>3</sup>	kg lb	12 400* 27,300*	12 400* 27,300*	8800* 19,400*	8800* 19,400*	6200* 13,650*	5900 13,000	4800* 10,550*	4200 9250	—	—	1400* 3050*	1400* 3050*
2900 mm 9'6"	0.81 m <sup>3</sup> 1.06 yd <sup>3</sup>	kg lb	12 100* 26,650*	12 100* 26,650*	8600* 18,950*	8600* 18,950*	6000* 13,200*	5800* 12,750*	4700* 10,350*	4200 9250	—	—	1200* 2600*	1200* 2600*
4200 mm 13'9"	0.55 m <sup>3</sup> 0.72 yd <sup>3</sup>	kg lb	10 800* 23,800*	10 800* 23,800*	7600* 16,750*	7600* 16,750*	5300* 11,650*	5300* 11,650*	4200* 9250*	4100 9000	3400* 7450*	3000 6600	600* 1300*	600* 1300*

#### M320 ● Dozer and Stabilizer Down ● VA Boom @ 5.41 m (17'9") Max.

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
1900 mm 6'3"	1.05 m <sup>3</sup> 1.37 yd <sup>3</sup>	kg lb	12 800* 28,200*	12 800* 28,200*	8900* 19,600*	7900* 17,400*	6300* 13,850*	4900 10,800	4800* 10,550*	3300 7250	—	—	3000* 6600*	2600 5700
2500 mm 8'2"	0.9 m <sup>3</sup> 1.17 yd <sup>3</sup>	kg lb	12 400* 27,300*	12 400* 27,300*	8800* 19,400*	7800 17,150	6200* 13,650*	5100 11,200	4800* 10,550*	3400 7450	—	—	1400* 3050*	1400* 3050*
2900 mm 9'6"	0.81 m <sup>3</sup> 1.06 yd <sup>3</sup>	kg lb	12 100* 26,650*	12 100* 26,650*	8600* 18,950*	7700 16,950	6000* 13,200*	5000 11,000	4700* 10,350*	3500 7700	—	—	1200* 2600*	1200* 2600*
4200 mm 13'9"	0.55 m <sup>3</sup> 0.72 yd <sup>3</sup>	kg lb	10 800* 23,800*	10 800* 23,800*	7600* 16,750*	7600* 16,750*	5300* 11,650*	4900 10,800	4200* 9250*	3500 7700	3400* 3050*	2500 5500	600* 1300*	600* 1300*

\*Load limited by hydraulic capacity rather than tipping.

Japan Sourced

**320C ● Reach Boom ● 600 mm (24") Track Shoes**

Stick	Bucket		3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach	
			Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side
3900 mm 12'10"	B1100X 3'7"	kg lb	6750* 15,500*	6750* 15,500*	8600 18,450	5200 11,100	5400 11,550	3350 7150	3750 8050	2300 4950	2750 5900	1650 3500	1950* 4250*	1350 2950
2900 mm 9'6"	B1100X 3'7"	kg lb	5450* 12,500*	5450* 12,500*	8650 18,500	5200 11,200	5450 11,700	3400 7300	3850 8250	2400 5150	—	—	2400* 5300*	1700 3750
2500 mm	B1220X 4'0"	kg lb	8550 18,300	5150 11,050	5400 11,650	3350 7250	3850 8200	2400 5100	—	—	—	—	3000 6550	1850 4050
1900 mm 6'3"	C1370X 4'6"	kg lb	8050 17,250	4650 10,050	5050 10,850	3050 6500	—	—	—	—	—	—	3100 6800	1800 3950

**320C ● Mass Boom ● 600 mm (24") Track Shoes**

Stick	Bucket		3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach	
			Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side
2400 mm 7'10"	C1370X 4'6"	kg lb	7700* 17,800*	7700* 17,800*	8450 18,100	5000 10,750	5250 11,250	3200 6800	—	—	—	—	3150 6900	1850 4100

**320C L ● Reach Boom ● 800 mm (32") Track Shoes**

Stick	Bucket		3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach	
			Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side
3900 mm 12'10"	B1100X 3'7"	kg lb	6750* 15,500*	6750* 15,500*	9000* 19,400*	6100 13,100	6450* 13,900*	3950 8400	4700 10,050	2750 5850	3500 7300*	2000 4250	1950* 4250*	1650 3600
2900 mm 9'6"	B1220X 4'0"	kg lb	5400* 12,450*	5400* 12,450*	9750* 21,100*	6100 13,100	6800 14,550	4000 8550	4750 10,200	2800 6000	—	—	2400* 5250*	2000 4450
2500 mm 8'2"	B1280X 4'2"	kg lb	—	—	9900* 21,400*	6050 12,950*	6750 14,450	3950 8450	4750 10,150	2800 6000	—	—	3100* 6850*	2150 4750
1900 mm 6'3"	C1470X 4'10"	kg lb	—	—	9500* 20,550*	5550 11,950	6400 13,700	3600 7700	—	—	—	—	3900 8550	2150 4750

**320C L ● Mass Boom ● 800 mm (32") Track Shoes**

Stick	Bucket		3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach	
			Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side
2400 mm 7'10"	C1470X 4'10"	kg lb	7650* 17,700*	7650* 17,700*	9650* 20,850*	5900 12,650	6600 14,100	3750 8050	—	—	—	—	3950 8700	2250 4900

\*Load limited by hydraulic capacity rather than tipping.

# Excavators

## Lifting Capacity At Ground Level

- 320C Belgium Sourced

### Belgium Sourced\*\*

#### 320C ● Reach Boom ● 600 mm (24") Track Shoes

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
1.9 m 6'3"	1.15 m <sup>3</sup> 1.5 yd <sup>3</sup>	kg lb	—	—	8590 18,900	5080 11,200	5410 11,900	3280 7200	—	—	—	—	3230 7100	1940 4250
2.5 m 8'2"	1.05 m <sup>3</sup> 1.37 yd <sup>3</sup>	kg lb	—	—	8960 19,750	5420 11,950	5640 12,400	3510 7700	3950 8700	2450 5400	—	—	2930* 6450*	1860 4100
2.9 m 9'6"	0.8 m <sup>3</sup> 1.04 yd <sup>3</sup>	kg lb	5290* 11,650*	5290* 11,650*	9020 19,850	5480 12,050	5680 12,500	3550 7800	3990 8750	2480 5450	—	—	2270* 5000	1750 3850

#### 320C ● Mass Boom ● 600 mm (24") Track Shoes

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
1.9 m 6'3"	1.25 m <sup>3</sup> 1.63 yd <sup>3</sup>	kg lb	—	—	8840 19,450	5290 11,650	5540 12,200	3400 7450	—	—	—	—	3640 8000	2220 4850
2.4 m 7'10"	1.15 m <sup>3</sup> 1.5 yd <sup>3</sup>	kg lb	7690* 16,950*	7690* 16,950*	8920 19,650	5350 11,750	5570 12,250	3430 7550	—	—	—	—	3300 7250	2000 4400

#### 320C ● VA Boom ● 600 mm (24") Track Shoes

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
1.9 m 6'3"	1.15 m <sup>3</sup> 1.5 yd <sup>3</sup>	kg lb	8610* 18,950*	5030 11,050	5420 11,950	3240 7100	—	—	—	—	—	—	3290* 7250*	1970 4300
2.4 m 7'10"	0.95 m <sup>3</sup> 1.24 yd <sup>3</sup>	kg lb	8730 19,200	5130 11,300	5490 12,100	3310 7250	3840 8450	2290 5000	—	—	—	—	3060 16,700	1820 4000

\*Load limited by hydraulic capacity rather than tipping.

\*\*Preliminary information.

**Belgium Sourced**

**320C L ● Reach Boom ● 600 mm (24") Track Shoes**

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach	
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side
1.9 m 6'3"	1.15 m <sup>3</sup> 1.5 yd <sup>3</sup> kg lb	—	—	9500* 20,900*	5820 12,800	6570 14,450	3760 8250	—	—	—	—	3910 8600	2240 4900
2.5 m 8'2"	1.05 m <sup>3</sup> 1.37 yd <sup>3</sup> kg lb	—	—	9730* 21,450*	6170 13,600	6800 14,950	3990 8750	4750 10,450	2800 6150	—	—	2930* 6450*	2130 4650
2.9 m 9'6"	0.8 m <sup>3</sup> 1.04 yd <sup>3</sup> kg lb	5290* 11,650*	5290* 11,650*	9590* 21,100*	6230 13,700	6840* 15,050	4020 8850	4780 10,500	2830 6200	—	—	2270 5000	2000 4400

**320C L ● Mass Boom ● 600 mm (24") Track Shoes**

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach	
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side
1.9 m 6'3"	1.25 m <sup>3</sup> 1.63 yd <sup>3</sup> kg lb	—	—	9660* 21,300*	6040 13,300	6710 14,750	3880 8550	—	—	—	—	4380 9650	2550 5600
2.4 m 7'10"	1.15 m <sup>3</sup> 1.5 yd <sup>3</sup> kg lb	7690* 16,950*	7690* 16,950*	9580* 21,100*	6110 13,450	6740 14,850	3900 8550	—	—	—	—	3810* 8400*	2300 5050

**320C L ● VA Boom ● 600 mm (24") Track Shoes**

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach	
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side
1.9 m 6'3"	1.15 m <sup>3</sup> 1.5 yd <sup>3</sup> kg lb	8610* 18,950*	5790 12,750	6350* 14,000*	3720 8200	—	—	—	—	—	—	3290* 7250*	2280 5000
2.4 m 7'10"	0.95 m <sup>3</sup> 1.24 yd <sup>3</sup> kg lb	9120* 20,100*	5890 12,950	6640* 14,600*	3790 8350	4660 10,250	2650 5800	—	—	—	—	3290* 7250*	2110 4650

**320C LN ● Reach Boom ● 500 mm (20") Track Shoes**

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach	
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side
1.9 m 6'3"	1.15 m <sup>3</sup> 1.5 yd <sup>3</sup> kg lb	—	—	9500* 20,900*	4730 10,400	6680 14,700	3080 6750	—	—	—	—	3980 8750	1820 4000
2.5 m 8'2"	1.05 m <sup>3</sup> 1.37 yd <sup>3</sup> kg lb	—	—	9730* 21,450*	5070 11,150	6910 15,200	3310 7250	4830 10,650	2310 5050	—	—	2930* 6450*	1750 3850
2.9 m 9'6"	0.8 m <sup>3</sup> 1.04 yd <sup>3</sup> kg lb	5290* 11,650*	5290* 11,650*	9590* 21,100*	5120 11,250	6840* 15,050*	3340 7350	4870 10,700	2340 5150	—	—	2270* 5000*	1650 3600

**320C LN\*\* ● Mass Boom ● 500 mm (20") Track Shoes**

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach	
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side
1.9 m 6'3"	1.25 m <sup>3</sup> 1.63 yd <sup>3</sup> kg lb												
2.4 m 7'10"	1.15 m <sup>3</sup> 1.5 yd <sup>3</sup> kg lb												

\*Load limited by hydraulic capacity rather than tipping.

\*\*Information unavailable.

Belgium Sourced

320C LN ● VA Boom ● 500 mm (20") Track Shoes

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
1.9 m 6'3"	1.15 m <sup>3</sup> 1.5 yd <sup>3</sup>	kg lb	8610* 18,950*	4660 10,250	6350* 14,000*	3000 6650	—	—	—	—	—	—	3290* 7250*	1840 4050
2.4 m 7'10"	0.95 m <sup>3</sup> 1.24 yd <sup>3</sup>	kg lb	9120* 20,100*	4770 10,500	6640* 14,600*	3090 6800	4740 10,450	2140 4700	—	—	—	—	3290* 7250*	1700 3700

320C S ● Reach Boom ● 550 mm (22") Track Shoes

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
1.9 m 6'3"	1.15 m <sup>3</sup> 1.5 yd <sup>3</sup>	kg lb	—	—	9500* 20,900*	4630 10,200	6440 14,200	3020 6650	—	—	—	—	3890 8550	1810 3950
2.5 m 8'2"	1.05 m <sup>3</sup> 1.37 yd <sup>3</sup>	kg lb	—	—	9750* 21,450*	4970 10,950	6670 14,700	3250 7150	4690 10,300	2280 5000	—	—	2950* 6500*	1740 3800
2.9 m 9'6"	0.8 m <sup>3</sup> 1.04 yd <sup>3</sup>	kg lb	5440* 11,950*	5440* 11,950*	9620* 21,200*	5020 11,050	6710 14,750	3290 7250	4720 10,400	2310 5050	—	—	2280* 5000*	1630 3950

320C S ● Mass Boom ● 550 mm (22") Track Shoes

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
1.9 m 6'3"	1.25 m <sup>3</sup> 1.63 yd <sup>3</sup>	kg lb	—	—	9660* 21,300*	4830 10,650	6580 14,500	3140 6900	—	—	—	—	4360 9600	2070 4550
2.4 m 7'10"	1.15 m <sup>3</sup> 1.5 yd <sup>3</sup>	kg lb	7920* 17,450*	7920* 17,450*	9600* 21,150*	4890 10,750	6610 14,550	3160 6950	—	—	—	—	3840* 8450*	1860 4100

320C S ● VA Boom ● 550 mm (22") Track Shoes

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
1.9 m 6'3"	1.15 m <sup>3</sup> 1.5 yd <sup>3</sup>	kg lb	8550* 18,850	4560 10,050	6310* 13,900*	2970 6500	—	—	—	—	—	—	3250* 7150*	1820 4000
2.4 m 7'10"	0.95 m <sup>3</sup> 1.24 yd <sup>3</sup>	kg lb	9070* 19,950*	4660 10,250	6530 14,350	3030 6650	4580 10,050	2110 4650	—	—	—	—	3260* 7150*	1680 3700

\*Load limited by hydraulic capacity rather than tipping.

Japan/U.S. Sourced

322B ● Reach Boom ● 600 mm (24") Track Shoes

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
2500 mm 8'2"	S1355X 4'5"	kg lb	—	—	10 500 22,450	6500 13,950	6550 14,050	4200 9000	4600 9850	2950 6350	—	—	3450 7550	2200 4800
2950 mm 9'8"	S1225X 4'0"	kg lb	5200*	5200*	10 600 22,700	6600 14,150	6600 14,200	4250 9150	4650 9950	3000 6400	—	—	3200 7050	2050 4450
3600 mm 11'10"	B1260X 4'2"	kg lb	6050*	6050*	10 650 22,800	6600 14,200	6650 14,250	4250 9150	4650 9950	3000 6400	3450 7350	2150 4600	2900 6400	1800 4000

322B ● Mass Boom ● 600 mm (24") Track Shoes

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
2000 mm 6'7"	D1345X 4'5"	kg lb	—	—	10 200 21,850	6150 13,250	6250 13,400	3900 8350	—	—	—	—	3900 8600	2400 5250
2500 mm 8'2"	D1345X 4'5"	kg lb	—	—	10 250 21,950	6200 13,300	6250 13,400	3900 8300	4300 9150	2600 5500	—	—	3500 7700	2100 4650

322B L ● Reach Boom ● 800 mm (32") Track Shoes

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
2500 mm 8'2"	S1315X 4'4"	kg lb	—	—	12,150*	7650	8100 17,350	4950 10,550	5650 12,100	3500 7450	—	—	4200 9300	2600 5650
2950 mm 9'8"	S1355X 4'5"	kg lb	5150*	5150*	12 000*	7700	8150 17,450	4950 10,650	5650 12,150	3500 7500	—	—	3700 8150	2400 5250
3600 mm 11'10"	B1260X 4'2"	kg lb	6050*	6050*	11 600*	7750	8150 17,550	5000 10,700	5700 12,200	3500 7500	4250 9050	2600 5500	3150 6850	2200 4800

322B L ● Mass Boom ● 800 mm (32") Track Shoes

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
2000 mm 6'7"	D1500X 4'11"	kg lb	—	—	11 750 25,350	7300 15,600	7750 16,650	4600 9800	—	—	—	—	4800 10,600	2850 6250
2500 mm 8'2"	D1430X 4'8"	kg lb	—	—	11 550 24,950	7250 15,550	7750 16,550	4550 9750	5300 11,350	3100 6600	—	—	4350 9550	2550 5600

Belgium Sourced

322B L ● Reach Boom ● 800 mm (32") Track Shoes

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
2500 mm 8'2"	1.25 m <sup>3</sup> 1.63 yd <sup>3</sup>	kg lb	—	—	11 980*	8040	8430 18,580	5180 11,420	5880 12,960	3650 8040	—	—	4310 9500	2670 5880
2950 mm 9'8"	1.15 m <sup>3</sup> 1.5 yd <sup>3</sup>	kg lb	5050*	5050*	11 850*	8130	8430*	5220 11,510	5910 13,030	3680 8110	—	—	3560* 7840*	2480 5460

\*Load limited by hydraulic capacity rather than tipping.

**Belgium Sourced**

**322B L ● Mass Boom ● 800 mm (32") Track Shoes**

Stick	Bucket	3 m (10'0")		4.5 m (15'0")		6 m (20'0")		7.5 m (25'0")		9 m (30'0")		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
2000 mm 6'7"	1.5 m <sup>3</sup> 1.96 yd <sup>3</sup>	kg lb	—	—	11 660* 25,710*	7770 17,130	8190 18,050	4910 10,820	—	—	—	—	4950* 10,910*	2970 6540
2500 mm 8'2"	1.45 m <sup>3</sup> 1.9 yd <sup>3</sup>	kg lb	—	—	11 580* 25,530*	7860 17,330	8230 18,140	4940 10,890	5630 12,410	3380 7450	—	—	4100* 9040*	2690 5930

**322B L ● VA Boom ● 800 mm (32") Track Shoes**

Stick	Bucket	3 m (10'0")		4.5 m (15'0")		6 m (20'0")		7.5 m (25'0")		9 m (30'0")		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
2 m 6'7"	1.5 m <sup>3</sup> 1.96 yd <sup>3</sup>	kg lb	—	—	10 170* 22,420*	7430 16,380	7590* 16,730*	4720 10,400	5260* 11,590*	3260 7180	—	—	3540* 7800*	2590 5710
2.5 m 8'2"	1.45 m <sup>3</sup> 1.9 yd <sup>3</sup>	kg lb	—	—	10 810* 23,830*	7520 16,580	7880* 17,370*	4750 10,470	5570 12,280	3270 7210	—	—	3500* 7710*	2340 5150

**322B LN ● Reach Boom ● 600 mm (24") Track Shoes**

Stick	Bucket	3 m (10'0")		4.5 m (15'0")		6 m (20'0")		7.5 m (25'0")		9 m (30'0")		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
2.5 m 8'2"	1.15 m <sup>3</sup> 1.5 yd <sup>3</sup>	kg lb	—	—	12 000* 26,460*	7030 15,500	8190 18,050	4550 10,030	5710 12,590	3210 7070	—	—	4190 9230	2340 5150
2.95 m 12'8"	0.95 m <sup>3</sup> 1.24 yd <sup>3</sup>	kg lb	5130* 11,310*	5130* 11,310*	11 920* 26,280	7160 15,780	8290 18,270	4640 10,230	5790 12,760	3280 7230	—	—	3620* 7980*	2210 4870

**322B LN ● Mass Boom ● 600 mm (24") Track Shoes**

Stick	Bucket	3 m (10'0")		4.5 m (15'0")		6 m (20'0")		7.5 m (25'0")		9 m (30'0")		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
2 m 6'7"	1.45 m <sup>3</sup> 1.9 yd <sup>3</sup>	kg lb	—	—	11 710* 25,820*	6780 14,940	7970 17,570	4300 9480	—	—	—	—	4830 10,650	2600 5730
2.5 m 8'2"	1.3 m <sup>3</sup> 1.7 yd <sup>3</sup>	kg lb	—	—	11 600* 25,570*	6840 15,080	7990 17,610	4320 9520	5470 12,060	2940 6480	—	—	4120* 9080*	2330 5130

**322B LN ● VA Boom ● 600 mm (24") Track Shoes**

Stick	Bucket	3 m (10'0")		4.5 m (15'0")		6 m (20'0")		7.5 m (25'0")		9 m (30'0")		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
2 m 6'7"	1.45 m <sup>3</sup> 1.9 yd <sup>3</sup>	kg lb	—	—	10 230* 22,550*	6440 14,200	7640* 16,840*	4110 9060	5310* 11,700*	2830 6240	—	—	3600* 7930*	2250 4960
2.5 m 8'2"	1.3 m <sup>3</sup> 1.7 yd <sup>3</sup>	kg lb	—	—	10 830* 23,880*	6500 14,330	7860 17,330	4120 9080	5400 11,900	2820 6210	—	—	3530* 7780*	2000 4410

**Japan/U.S. Sourced**

**325B ● Reach Boom ● 600 mm (24") Track Shoes**

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
2000 mm 6'7"	D1430X 4'8"	kg lb	—	—	11 850 25,400	7150 15,350	7400 15,900	4650 9950	5200 11,150	3250 6950	—	—	3950 8700	2450 5400
2650 mm 8'8"	C1470X 4'10"	kg lb	—	—	12 400 26,500	7650 16,500	7750 16,650	5000 10,700	5450 11,750	3550 7600	—	—	3800 8350	2450 5300
3200 mm 10'6"	C1370X 4'6"	kg lb	4300* 9850*	4300* 9850*	12 450 26,700	7750 16,600	7800 16,750	5000 10,800	5500 11,750	3550 7600	4100 8750	2600 5550	3300* 7200*	2200 4800

**325B ● Mass Boom ● 600 mm (24") Track Shoes**

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
2000 mm 6'7"	D1520MX 5'0"	kg lb	—	—	12 300 26,300	7500 16,150	7650 16,400	4850 10,400	—	—	—	—	4600 10,100	2900 6350
2500 mm 8'2"	D1500X 4'11"	kg lb	—	—	12 350 26,450	7550 16,250	7650 16,350	4850 10,350	5300 11,300	3550 7100	—	—	4150 9100	2600 5650

\*Load limited by hydraulic capacity rather than tipping.

Japan/U.S. Sourced

325B L ● Reach Boom ● 800 mm (32") Track Shoes

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach	
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side
2000 mm 6'7"	D1520MX 5'0" kg lb	—	—	14 100 31,100	8500 18,300	8950 19,150	5500 11,800	6250 13,400	3850 8300	—	—	4750 10,450	2950 6450
2650 mm 8'8"	C1440MX 4'9" kg lb	—	—	15 100 32,350	9050 19,450	9300 20,000	5850 12,600	6550 14,050	4150 8950	—	—	4100* 9050*	2900 6300
3200 mm 10'6"	C1470X 4'10" kg lb	4250* 9800*	4250* 9800*	15 200 32,500	9100 19,550	9350 20,050	5900 12,650	6550 14,050	4150 8950	4900 10,450	3100 6600	3250* 7150*	2600 5750

325B L ● Mass Boom ● 800 mm (32") Track Shoes

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach	
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side
2000 mm 6'7"	D1700MX 5'7" kg lb	—	—	15 000 32,050	8850 19,000	9150 19,600	5650 12,150	—	—	—	—	5450 12,000	3400 7450
2500 mm 8'2"	D1520MX 5'0" kg lb	—	—	15 100 32,300	8950 19,200	9200 19,700	5700 12,200	6350 13,600	3950 8450	—	—	4700* 10,300*	3100 6750

Belgium Sourced

325B L ● Reach Boom ● 800 mm (32") Track Shoes

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach	
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side
2 m 6'7"	1.45 m <sup>3</sup> 1.89 yd <sup>3</sup> kg lb	—	—	14 070* 31,020*	8730 19,240	9160 20,190	5630 12,410	6410 14,130	3970 8750	—	—	4790 10,560	2960 6520
2.65 m 8'8"	1.45 m <sup>3</sup> 1.9 yd <sup>3</sup> kg lb	—	—	15 080* 33,250*	9270 20,440	9530 21,010	6000 13,230	6690 14,750	4260 9390	—	—	3930* 8660*	2890 6370
3.2 m 10'6"	1.15 m <sup>3</sup> 1.5 yd <sup>3</sup> kg lb	4180* 9210*	4180* 9210*	15 460* 34,080*	9320 20,550	9560 21,070	6020 13,270	6700 14,770	4260 9390	5000 11,020	3160 6960	3130* 6900*	2630 5790

325B L ● Mass Boom ● 800 mm (32") Track Shoes

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach	
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side
2 m 6'7"	1.7 m <sup>3</sup> 2.22 yd <sup>3</sup> kg lb	—	—	15 290 33,710	9030 19,910	9340 20,590	5770 12,720	—	—	—	—	5460 12,030	3390 7470
2.5 m 8'2"	1.5 m <sup>3</sup> 1.96 yd <sup>3</sup> kg lb	—	—	15 400 33,950	9120 20,100	9360 20,630	5790 12,760	6470 14,260	4010 8840	—	—	4450* 9810*	3070 6760

325B L ● VA Boom ● 800 mm (32") Track Shoes

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach	
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side
2 m 6'7"	1.7 m <sup>3</sup> 2.22 yd <sup>3</sup> kg lb	—	—	13 040* 28,750*	8500 18,740	9040 19,930	5440 11,990	6290 13,860	3800 8370	—	—	4800* 10,580*	2950 6500
2.5 m 8'2"	1.45 m <sup>3</sup> 1.89 yd <sup>3</sup> kg lb	—	—	14 000* 30,870*	8610 18,980	9100 20,060	5490 12,100	6310 13,910	3820 8420	—	—	4240* 9340*	2700 5950

\*Load limited by hydraulic capacity rather than tipping.



**Belgium Sourced**

**325B LN ● Reach Boom ● 800 mm (32") Track Shoes**

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
2 m 6'7"	1.45 m <sup>3</sup> 1.89 yd <sup>3</sup>	kg lb	—	—	14 070* 31,020*	7470 16,470	8790 19,380	4840 10,670	6140 13,530	3400 7490	—	—	4580 10,090	2510 5530
2.65 m 8'8"	1.15 m <sup>3</sup> 1.5 yd <sup>3</sup>	kg lb	—	—	14 920 32,890	8020 17,680	9180 20,240	5220 11,510	6440 14,200	3700 8150	—	—	3950* 8700*	2500 5510
3.2 m 10'6"	0.95 m <sup>3</sup> 1.24 yd <sup>3</sup>	kg lb	4260* 9390*	4260* 9390*	15 030 33,140	8120 17,900	9250 20,390	5290 11,660	6490 14,310	3750 8260	4850 10,690	2770 6100	3200* 7050*	2310 5090

**325B LN ● Mass Boom ● 600 mm (24") Track Shoes**

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
2 m 6'7"	1.5 m <sup>3</sup> 1.96 yd <sup>3</sup>	kg lb	—	—	14 770 32,560	7820 17,240	9030 19,910	5030 11,090	—	—	—	—	5290 11,660	2950 6500
2.5 m 8'2"	1.45 m <sup>3</sup> 1.89 yd <sup>3</sup>	kg lb	—	—	14 860 32,760	7880 17,370	9030 19,910	5030 11,090	6240 13,750	3480 7670	—	—	4500* 9920*	2650 5840

**325B LN ● VA Boom ● 600 mm (24") Track Shoes**

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
2 m 6'7"	1.7 m <sup>3</sup> 2.22 yd <sup>3</sup>	kg lb	—	—	13 040* 28,750*	7220 15,920	8680 19,130	4630 10,200	6020 13,270	3210 7070	—	—	4700* 10,360*	2480 5460
2.5 m 8'2"	1.45 m <sup>3</sup> 1.89 yd <sup>3</sup>	kg lb	—	—	14 000* 30,870*	7340 16,180	8730 19,240	4690 10,340	6040 13,310	3240 7140	—	—	4240* 9340*	2260 4980

**Japan/U.S. Sourced**

**330B ● Reach Boom ● 600 mm (24") Track Shoes**

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
2150 mm 7'1"	E1470X 4'10"	kg lb	—	—	15 600 33,450	10 150 21,750	9700 20,800	6500 14,000	6800 14,600	4600 9850	—	—	4750 10,450	3200 6950
2800 mm 9'2"	D1500X 4'11"	kg lb	—	—	16 200 34,750	10 700 22,450	10 100 21,650	6900 14,850	7100 15,250	4900 10,500	5300 11,550	3600 7900	4650 10,200	3150 6900
3300 mm 10'10"	D1430X 4'8"	kg lb	7000* 15,900*	7000* 15,900*	16 300 34,900	10 750 23,050	10 100 21,750	6950 14,350	7100 15,250	4900 10,500	5300 11,650	3600 7700	4050* 8850*	2850 6250
3900 mm 12'10"	D1345X 4'5"	kg lb	7550* 17,200*	7550* 17,200*	16 400 35,200	10 850 23,300	10 200 21,900	7000 15,000	7150 15,300	4900 10,550	5300 11,350	3600 7700	3250* 7200*	2500 5550

**330B ● Mass Boom ● 600 mm (24") Track Shoes**

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
2150 mm 7'1"	E1600X 5'3"	kg lb	—	—	16 000 34,250	10 450 22,450	9900 21,250	6700 14,400	6900 14,850	4700 10,100	—	—	5200 11,400	3500 7700
2550 mm 8'4"	E1470X 4'10"	kg lb	—	—	16 100 34,500	10 550 22,650	9950 21,300	6750 14,450	6900 14,800	4700 10,050	—	—	4700 10,350	3150 6900

\*Load limited by hydraulic capacity rather than tipping.

Japan/U.S. Sourced

330B L ● Reach Boom ● 750 mm (30") Track Shoes

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
2150 mm 7'1"	E1470X 4'10"	kg lb	—	—	16 900* 36,600*	10 600 22,700	12 100 25,950	6800 14,650	8450 18,100	4800 10,350	—	—	5900 13,000	3350 7350
2800 mm 9'2"	D1520MX 5'0"	kg lb	—	—	17 500* 37,900*	11 100 23,850	12 450 26,750	7200 15,400	8700 18,650	5100 10,900	6500 13,900	3750 8050	5600 12,350	3250 7150
3300 mm 10'10"	D1500X 4'11"	kg lb	6950* 15,900*	6950* 15,900*	17 350* 37,550*	11 150 24,000	12 350* 26,700*	7200 15,500	8700 18,700	5100 10,900	6500 13,900	3800 8050	4100* 9000*	3000 6600
3900 mm 12'10"	D1345X 4'5"	kg lb	7550* 17,200*	7550* 17,200*	16 950* 36,600*	11 300 24,250	12 000* 25,950*	7300 15,650	8750 18,800	5150 11,050	6500 13,950	3800 8100	3250* 7200*	2650 5850

330B L ● Mass Boom ● 750 mm (30") Track Shoes

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
2150 mm 7'1"	E1735MX 5'8"	kg lb	—	—	17 100 37,100	10 800 23,250	12 250 26,250	6950 14,900	8500 18,200	4850 10,400	—	—	6350 13,950	3600 7900
2550 mm 8'4"	E1600X 5'3"	kg lb	—	—	17 250 37,350	10 950 23,450	12 300 26,350	7000 15,000	8500 18,200	4850 10,450	—	—	5650* 12,400*	3250 7150

Belgium Sourced

330B L ● Reach Boom ● 750 mm (30") Track Shoes

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
2.2 m 7'3"	1.7 m <sup>3</sup> 2.2 yd <sup>3</sup>	kg lb	—	—	17 110* 37,720*	12 120 26,720	12 530* 27,620*	7800 17,190	8920 19,660	5540 12,210	—	—	6210 13,690	3840 8460
2.8 m 9'2"	1.5 m <sup>3</sup> 1.96 yd <sup>3</sup>	kg lb	—	—	17 620* 38,850*	12 490 27,540	12 660* 27,910*	8050 17,750	9110 20,080	5730 12,630	6810 15,010	4270 9410	5470* 12,060*	3590 7910
3.3 m 10'10"	1.45 m <sup>3</sup> 1.89 yd <sup>3</sup>	kg lb	6660* 14,680*	6660* 14,680*	17 510* 38,600*	12 570 27,710	12 460* 27,470*	8100 17,860	9140 20,150	5750 12,670	6820 15,030	4280 9430	3800* 8370*	3320 7320
3.9 m 12'9"	1.3 m <sup>3</sup> 1.7 yd <sup>3</sup>	kg lb	7280* 16,050*	7280* 16,050*	17 070* 37,630*	12 660 27,910	12 080* 26,630*	8140 17,940	9150 20,170	5760 12,700	6810 15,010	4270 9410	3160* 6960*	2980 6570

330B L ● Mass Boom ● 750 mm (30") Track Shoes

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
2.2 m 7'3"	1.9 m <sup>3</sup> 2.4 yd <sup>3</sup>	kg lb	—	—	17 460* 38,490*	12 490 27,540	12 720* 28,040*	8010 17,660	9050 19,950	5650 12,450	—	—	6740 14,860	4200 9260
2.6 m 8'6"	1.7 m <sup>3</sup> 2.2 yd <sup>3</sup>	kg lb	—	—	17 600* 38,800*	12 560 27,690	12 650* 27,890*	8030 17,700	9050 19,950	5650 12,450	—	—	5570* 12,280*	3820 8420

\*Load limited by hydraulic capacity rather than tipping.

Belgium Sourced

330B LN ● Reach Boom ● 600 mm (24") Track Shoes

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
2.2 m 7'3"	1.7 m <sup>3</sup> 2.2 yd <sup>3</sup>	kg lb	—	—	17 110* 37,720*	11 240 24,780	12 530* 27,620*	7300 16,090	9080 20,020	5190 11,440	—	—	6330 13,950	3600 7930
2.8 m 9'2"	1.5 m <sup>3</sup> 1.96 yd <sup>3</sup>	kg lb	—	—	17 620* 38,850*	11 600 25,570	12 660* 27,910*	7540 16,620	9270 20,440	5380 11,860	6930 15,280	4010 8840	5470* 12,060*	3370 7430
3.3 m 10'10"	1.45 m <sup>3</sup> 1.89 yd <sup>3</sup>	kg lb	6660* 14,680*	6660* 14,680*	17 510* 38,600*	11 670 25,730	12 460* 27,470*	7590 16,730	9290 20,480	5400 11,900	6940 15,300	4020 8860	3800* 8370*	3110 6850
3.9 m 12'9"	1.3 m <sup>3</sup> 1.7 yd <sup>3</sup>	kg lb	7280* 16,050*	7280* 16,050*	17 070* 37,630*	11 760 25,930	12 080* 26,630*	7620 16,800	9310 20,520	5410 11,920	6930 10,870	4010 8840	3160* 6960*	2790 6150

330B LN ● Mass Boom ● 600 mm (24") Track Shoes

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
2.2 m 7'3"	1.9 m <sup>3</sup> 2.4 yd <sup>3</sup>	kg lb	—	—	17 460* 38,490*	11 590 25,550	12 720* 28,040*	7500 16,530	9210 20,300	5310 11,700	—	—	6860 15,120	3940 8680
2.6 m 8'6"	1.7 m <sup>3</sup> 2.2 yd <sup>3</sup>	kg lb	—	—	17 600* 38,800*	11 660 25,700	12 650* 27,390*	7520 16,580	9210 20,300	5310 11,700	—	—	5570* 12,280*	3590 7910

Japan Sourced

345B Series II ● Reach Boom ● 600 mm (24") Track Shoes

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		
		Front	Side	Front	Side	Front	Side	Front	Side	
2900 mm 9'6"	F1555X 5'1"	kg lb	—	—	18 050* 42,100*	15 550 33,350	15 650* 33,800*	9950 21,450	11 350 24,350	7050 15,200
3400 mm 11'2"	T1545X 5'1"	kg lb	—	—	19 200* 44,600*	15 750 33,850	15 600* 33,700*	10 100 21,700	11 400 24,500	7150 15,300
3900 mm 12'10"	F1218T 4'0"	kg lb	7750* 17,600*	7750* 17,600*	21 600* 47,600*	16 200 34,850	15 550* 33,600*	10 450 22,450	11 700 25,100	7400 15,850

Stick	Bucket	9 m 30'0"		10.5 m 35'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	
2900 mm 9'6"	F1555X 5'1"	kg lb	8450 18,150	5250 11,250	—	—	5600* 12,350*	4000 8750
3400 mm 11'2"	T1545X 5'1"	kg lb	8500 18,200	5300 11,300	—	—	4850* 10,650*	3750 8250
3900 mm 12'10"	F1218T 4'0"	kg lb	8700 18,650	5450 11,700	6700 14,750	4150 9100	4750* 10,450*	3550 7800

345B Series II ● Mass Boom ● 600 mm (24") Track Shoes

Stick	Bucket	3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		
		Front	Side	Front	Side	Front	Side	Front	Side	
2500 mm 8'2"	G1730X 5'8"	kg lb	—	—	20 800* 45,150*	15 150 32,550	15 150* 32,700*	9650 20,650	11 050 23,700	6700 14,400
3000 mm 9'10"	U1605X 5'3"	kg lb	—	—	21 200* 45,900*	15 350 32,950	15 100* 32,700*	9750 20,900	11 100 23,850	6800 14,550

Stick	Bucket	9 m 30'0"		10.5 m 35'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	
2500 mm 8'2"	G1730X 5'8"	kg lb	—	—	—	—	7000 15,350	4150 9100
3000 mm 9'10"	U1605X 5'3"	kg lb	8150 17,500	4900 10,500	—	—	5650* 12,400*	3800 8400

\*Load limited by hydraulic capacity rather than tipping.

**Japan/U.S. Sourced**  
**345B L Series II – FIX ● Reach Boom ● 750 mm (30") Track Shoes**

Stick	Bucket		3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"	
			Front	Side	Front	Side	Front	Side	Front	Side
2900 mm 9'6"	F1735X 5'8"	kg lb	—	—	17 950* 41,850*	15 750 33,750	15 550* 33,600*	10 100 21,700	11 900* 25,750*	7150 15,350
3400 mm 11'2"	F1555X 5'1"	kg lb	—	—	19 100* 44,450*	16 000 34,400*	15 550* 33,650*	10 250 22,100	11 900* 25,700*	7250 15,600
3900 mm 12'10"	F1218T 4'0"	kg lb	7750* 17,600*	7750* 17,600*	21 600* 47,600*	16 450 35,400	15 550* 33,600*	10 600 22,800*	11 950* 25,800*	7500 16,150

Stick	Bucket		9 m 30'0"		10.5 m 35'0"		At Max. Reach	
			Front	Side	Front	Side	Front	Side
2900 mm 9'6"	F1735X 5'8"	kg lb	9500* 20,500	5300 11,300	—	—	5500* 12,150*	4000 8800
3400 mm 11'2"	F1555X 5'1"	kg lb	9550* 20,650*	5350 11,500	—	—	4750* 10,450*	3750 8300
3900 mm 12'10"	F1218T 4'0"	kg lb	9650* 20,850*	5600 11,950	7050* 15,450*	4250 9300	4750* 10,450*	3650 8000

**345B L Series II – FIX ● Mass Boom ● 750 mm (30") Track Shoes**

Stick	Bucket		3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"	
			Front	Side	Front	Side	Front	Side	Front	Side
2500 mm 8'2"	G1730X 5'8"	kg lb	—	—	20 800* 45,150*	15 400 33,100	15 150* 32,700*	9800 21,050	11 550* 24,900*	6850 14,650
3000 mm 9'10"	G1615X 5'4"	kg lb	—	—	21 300* 46,050*	15 650 33,650	15 200* 32,800*	9950 21,400	11 550* 25,000*	6950 14,900

Stick	Bucket		9 m 30'0"		10.5 m 35'0"		At Max. Reach	
			Front	Side	Front	Side	Front	Side
2500 mm 8'2"	G1730X 5'8"	kg lb	—	—	—	—	7150* 15,750*	4200 9300
3000 mm 9'10"	G1615X 5'4"	kg lb	9150* 19,700*	5050 10,800	—	—	5600* 12,300*	3900 8600

\*Load limited by hydraulic capacity rather than tipping.

**U.S. Sourced**

**345B L Series II – VG ● Reach Boom ● 600 mm (24") Track Shoes**

Stick	Bucket		3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"	
			Front	Side	Front	Side	Front	Side	Front	Side
3350 mm 11'0"	F1590X 5'3"	kg lb	—	—	19 550* 45,350*	19 150 41,100	15 650* 33,800*	12 250 26,350	12 000* 25,900*	8700 18,700
3900 mm 12'10"	F1410T 4'8"	kg lb	8050* 18,300*	8050* 18,300*	21 500* 47,450*	19 450 41,800	15 500* 33,550*	12 450 26,750	11 850* 25,650*	8850 18,950
4800 mm 15'9"	F1220GP 4'0"	kg lb	9150* 20,750*	9150* 20,750*	21 000* 45,350*	18 700 40,150	14 750* 31,650*	11 950 25,650	11 300* 24,450*	8450 18,150

Stick	Bucket		9 m 30'0"		10.5 m 35'0"		At Max. Reach	
			Front	Side	Front	Side	Front	Side
3350 mm 11'0"	F1590X 5'3"	kg lb	9600* 20,750*	6500 13,950	—	—	4850* 10,650*	4700 10,400
3900 mm 12'10"	F1410T 4'8"	kg lb	9550* 20,650*	6600 14,100	6650* 14,650*	5050 11,100	4700* 10,350*	4400 9650
4800 mm 15'9"	F1220GP 4'0"	kg lb	9200* 19,650*	6300 13,450	7750* 16,700*	4800 10,250	4150* 9150*	3650 8000

**345B L Series II – VG ● Mass Boom ● 600 mm (24") Track Shoes**

Stick	Bucket		3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"	
			Front	Side	Front	Side	Front	Side	Front	Side
3000 mm 9'10"	G1895M 6'0"	kg lb	—	—	20 600* 44,700*	18 400 39,450	15 000* 32,400*	11 650 25,000	11 400* 24,600*	8150 17,500

Stick	Bucket		9 m 30'0"		10.5 m 35'0"		At Max. Reach	
			Front	Side	Front	Side	Front	Side
3000 mm 9'10"	G1895M 6'0"	kg lb	—	—	—	—	7150* 15,750*	5200 11,400

\*Load limited by hydraulic capacity rather than tipping.

**Belgium Sourced\*\***

**345B L – VG ● Reach Boom ● 600 mm (24") Track Shoes**

Stick	Bucket		3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"	
			Front	Side	Front	Side	Front	Side	Front	Side
2900 mm 9'6"	F1735X 5'8"	kg lb								
3350 mm 11'0"	F1590X 5'3"	kg lb								
3900 mm 12'10"	F1410T 4'8"	kg lb								

Stick	Bucket		9 m 30'0"		10.5 m 35'0"		At Max. Reach	
			Front	Side	Front	Side	Front	Side
2900 mm 9'6"	F1735X 5'8"	kg lb						
3350 mm 11'0"	F1590X 5'3"	kg lb						
3900 mm 12'10"	F1410T 4'8"	kg lb						

**345B L – VG ● Mass Boom ● 600 mm (24") Track Shoes**

Stick	Bucket		3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"	
			Front	Side	Front	Side	Front	Side	Front	Side
2500 mm 8'2"	G1770X 5'10"	kg lb								
3000 mm 9'10"	G1895M 6'0"	kg lb								

Stick	Bucket		9 m 30'0"		10.5 m 35'0"		At Max. Reach	
			Front	Side	Front	Side	Front	Side
2500 mm 8'2"	G1770X 5'10"	kg lb						
3000 mm 9'10"	G1895M 6'0"	kg lb						

\*\*Information unavailable.

Japan Sourced

**365B L ● Reach Boom ● 750 mm (30") Triple Grousers**

Stick	Bucket		3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"	
			Front	Side	Front	Side	Front	Side	Front	Side
4670 mm 15'4"	1530 5'0"	kg lb	—	—	14 200* 32,950*	14 200* 32,950*	21 700* 46,900*	17 700 38,050	16 500* 35,650*	12 450 26,800
3000 mm 11'10"	1785 5'10"	kg lb	—	—	12 600* 29,400*	12 600* 29,400*	22 300* 48,250*	17 600 37,850	17 150* 37,050*	12 450 26,800
2840 mm 9'4"	1885 6'2"	kg lb	—	—	—	—	22 000* 47,700*	17 400 37,400	17 100* 37,000*	12 350 26,500

Stick	Bucket		9 m 30'0"		10.5 m 35'0"		12 m 40'0"		At Max. Reach	
			Front	Side	Front	Side	Front	Side	Front	Side
4670 mm 15'4"	1530 5'0"	kg lb	13 200* 28,550*	9250 19,850	10 950* 23,650*	7100 15,150	9100 17,500*	5500 11,700	5350* 11,750*	4600 10,100
3000 mm 11'10"	1785 5'10"	kg lb	13 700* 29,650*	9350 20,000	11 250* 24,200*	7200 15,400	—	—	7600* 16,700*	5550 12,200
2840 mm 9'4"	1885 6'2"	kg lb	13 700* 29,600*	9250 19,850	11 000* 24,150*	7150 15,700	—	—	7500* 16,550*	6150 13,500

**365B L ● Mass Boom ● 600 mm (24") Triple Grousers**

Stick	Bucket		3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"	
			Front	Side	Front	Side	Front	Side	Front	Side
3000 mm 9'10"	1990 6'6"	kg lb	—	—	30 550* 66,150*	28 700 61,450	21 950* 47,450*	17 700 38,000	16 700* 36,100*	12 250 26,300
2570 mm 8'5"	2150 7'1"	kg lb	—	—	30 050* 66,250*	28 550 61,200	21 950* 47,500*	17 650 37,850	16 750* 36,200*	12 250 26,250

Stick	Bucket		9 m 30'0"		10.5 m 35'0"		12 m 40'0"		At Max. Reach	
			Front	Side	Front	Side	Front	Side	Front	Side
3000 mm 9'10"	1990 6'6"	kg lb	13 150* 28,300*	8950 19,150	—	—	—	—	6800* 15,000*	6800* 15,000*
2570 mm 8'5"	2150 7'1"	kg lb	12 950* 28,500*	8950 19,750	—	—	—	—	7950* 17,550*	7650 16,800

\*Load limited by hydraulic capacity rather than tipping.

**Belgium Sourced**

**365B L ● Reach Boom ● 750 mm (30") Triple Grousers**

Stick	Bucket		3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"	
			Front	Side	Front	Side	Front	Side	Front	Side
4670 mm 15'4"	1500 4'1"	kg lb	—	—	13 890* 30,630*	13 890* 30,630*	20 680* 45,600*	17 530 38,650	15 640* 34,490*	12 270 27,060
3600 mm 11'10"	1800 5'0"	kg lb	—	—	12 030* 26,530*	12 030* 26,530*	21 050* 46,420*	17 240 38,010	16 050* 35,390*	12 090 26,660
2840 mm 9'4"	1900 6'2"	kg lb	—	—	—	—	20 570* 45,360*	16 820 37,090	15 910* 35,080*	11 830 26,090

Stick	Bucket		9 m 30'0"		10.5 m 35'0"		12 m 40'0"		At Max. Reach	
			Front	Side	Front	Side	Front	Side	Front	Side
4670 mm 15'4"	1500 4'1"	kg lb	12 430* 27,410*	9040 19,930	10 210* 22,510*	6840 15,080	8440* 18,610*	5230 11,530	4780* 10,540*	4230 9330
3600 mm 11'10"	1800 5'0"	kg lb	12 730* 28,070*	8940 19,710	10 310* 22,730*	6770 14,930	—	—	6710* 14,800*	5010 11,050
2840 mm 9'4"	1900 6'2"	kg lb	12 620* 27,830*	8770 19,340	9950* 21,940*	6660 14,690	—	—	6590* 14,530*	5510 12,150

**365B L ● Mass Boom ● 750 mm (30") Triple Grousers**

Stick	Bucket		3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"	
			Front	Side	Front	Side	Front	Side	Front	Side
3000 mm 9'10"	2200 7'2"	kg lb	—	—	28 890* 63,700*	28 300 62,400	20 690* 45,620*	17 310 38,170	15 490* 34,160*	11 820* 26,060
2570 mm 8'5"	2300 7'6"	kg lb	—	—	28 190* 62,160*	27 950 61,630	20 430* 45,050*	17 100 37,710	15 370* 33,890*	11 670 25,730

Stick	Bucket		9 m 30'0"		10.5 m 35'0"		12 m 40'0"		At Max. Reach	
			Front	Side	Front	Side	Front	Side	Front	Side
3000 mm 9'10"	2200 7'2"	kg lb	11 980* 26,420*	8430 18,590	—	—	—	—	5450* 12,020*	5450* 12,020*
2570 mm 8'5"	2300 7'6"	kg lb	11 610* 25,600*	8290 18,280	—	—	—	—	6340* 13,980*	6340* 13,980*

\*Load limited by hydraulic capacity rather than tipping.



Japan/U.S. Sourced

375 ● Reach Boom ● 610 mm (24") Double Grousers

Stick	Bucket		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"	
			Front	Side	Front	Side	Front	Side	Front	Side
5500 mm 18'1"	H1380T 4'6"	kg lb	10 400* 24,050*	10 400* 24,050*	27 400* 59,200*	23 650 50,850	20 850* 45,500*	16 800 36,100	16 650* 36,000*	12 650 27,150
4400 mm 14'5"	H1800X 5'10"	kg lb	9600* 22,250*	9600* 22,250*	25 900* 59,200*	22 850 49,100	21 050* 45,500*	16 200 34,850	16 900* 36,450*	12 250 26,300
3400 mm 11'2"	J1780X 5'10"	kg lb	—	—	20 050* 47,650*	20 050* 46,700	20 350* 43,950*	15 350 32,950	16 300* 35,000	11 500 24,750
2900 mm 9'6"	J1865X 6'1"	kg lb	—	—	17 600* 42,450*	17 600* 42,450*	20 150* 43,550*	15 200 32,650	16 200 34,800	11 400 24,500

Stick	Bucket		10.5 m 35'0"		12 m 40'0"		13.5 m 45'0"		At Max. Reach	
			Front	Side	Front	Side	Front	Side	Front	Side
5500 mm 18'1"	H1380T 4'6"	kg lb	13 650 29,300	9850 21,100	10 950 23,450	7800 16,700	8900 19,050	6250 13,350	5200* 11,450*	5100 11,250
4400 mm 14'5"	H1800X 5'10"	kg lb	13 350 28,600	9550 20,500	10 700 22,950	7600 16,200	—	—	8050* 17,750*	5900 12,950
3400 mm 11'2"	J1780X 5'10"	kg lb	12 700 27,250	8950 19,150	10 150 22,350	7050 15,500	—	—	8750 19,300	6000 13,250
2900 mm 9'6"	J1865X 6'1"	kg lb	12 650 27,100	8850 18,950	—	—	—	—	9250 20,350	6350 14,000

375 ● GP Boom ● 610 mm (24") Double Grousers

Stick	Bucket		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"	
			Front	Side	Front	Side	Front	Side	Front	Side
5500 mm 18'1"	H1380T 4'6"	kg lb	13 700* 31,600*	13 700* 31,600*	27 700* 59,800*	24 350 52,300	21 100* 45,500*	17 200 37,050	16 900* 36,600*	12 950 27,800
4400 mm 14'5"	H1800X 5'10"	kg lb	13 100* 30,250*	13 100* 30,250*	27 900* 60,350*	23 500 50,550	21 400* 46,300*	16 650 35,850	17 200* 37,150*	12 550 27,000
3400 mm 11'2"	J1780X 5'10"	kg lb	—	—	26 700* 57,900*	22 450 48,200	20 800* 44,950*	15 800 33,950	16 650* 35,750	11 850 25,450

Stick	Bucket		10.5 m 35'0"		12 m 40'0"		13.5 m 45'0"		At Max. Reach	
			Front	Side	Front	Side	Front	Side	Front	Side
5500 mm 18'1"	H1380T 4'6"	kg lb	13 850 29,750	10 100 21,600	11 100 23,800	8000 17,100	7800* 12,800*	6400 12,800*	4150* 9100*	4150* 9100*
4400 mm 14'5"	H1800X 5'10"	kg lb	13 550 29,150	9800 21,000	10 900 23,350	7750 16,600	—	—	6750* 14,850*	6300 13,900
3400 mm 11'2"	J1780X 5'10"	kg lb	12 950 27,800	9200 19,650	—	—	—	—	7850* 17,250*	6550 14,350

375 ● Mass Boom ● 610 mm (24") Double Grousers

Stick	Bucket		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		10.5 35'0"		At Max. Reach	
			Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side
4100 mm 13'5"	J2040X 6'8"	kg lb	23 650* 54,750*	23 650* 54,750*	27 950* 60,400*	22 650 48,600	21 350* 46,100*	15 700 33,700	16 300 34,950	11 550 24,750	12 500 26,700	8750 18,650	7050* 15,500*	6650 14,700
3400 mm 11'2"	J2210X 7'3"	kg lb	22 450* 52,050*	22 450* 52,050*	27 750* 60,050*	22 350 47,950	21 350* 46,150*	15 550 33,400	16 250 34,800	11 500 24,600	—	—	8900* 19,550*	7500 16,500
2900 mm 9'6"	J2390MX 7'10"	kg lb	20 850* 48,450*	20 850* 48,450*	27 100* 58,650*	21 900* 47,000	20 950* 45,200*	15 250 32,700	15 950 34,250	11 250 24,050	—	—	9400* 20,750*	7850 17,300

\*Load limited by hydraulic capacity rather than tipping.

**Japan/U.S. Sourced**

**375 Heavy Lift ● Reach Boom ● 750 mm (30") Double Grousers**  
● 11.6 t (25,600 lb) Counterweight with C/W removal

Stick	Bucket		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"	
			Front	Side	Front	Side	Front	Side	Front	Side
5500 mm 18'1"	H1380T 4'6"	kg lb	11 300 26,050	11 300 26,050	29 600 64,400	24 500 52,700	22 700 49,100	17 400 37,450	18 050 38,800	13 150 28,250
4400 mm 14'5"	H1800X 5'10"	kg lb	10 400 24,150	10 400 24,150	27 750 64,500	23 700 50,950	23 000 49,700	16 850 36,200	17 650 37,900	12 750 27,350
3400 mm 11'2"	J1780X 5'10"	kg lb	—	—	21 550 51,150	21 550 48,550	22 250 48,150	15 950 34,300	16 900 36,300	12 000 25,800
2900 mm 9'6"	J1865X 6'1"	kg lb	—	—	18 950 45,650	18 950 45,650	22 050 47,750	15 850 34,000	16 800 36,050	11 900 25,600

Stick	Bucket		10.5 m 35'0"		12 m 40'0"		13.5 m 45'0"		At Max. Reach	
			Front	Side	Front	Side	Front	Side	Front	Side
5500 mm 18'1"	H1380T 4'6"	kg lb	14 100 30,300	10 250 22,000	11 350 24,300	8150 17,450	9250 19,850	6550 14,000	5700* 12,600*	5350 11,800
4400 mm 14'5"	H1800X 5'10"	kg lb	13 800 29,650	9950 21,350	11 100 23,800	7950 17,000	—	—	8750* 19,250*	6200 13,600
3400 mm 11'2"	J1780X 5'10"	kg lb	13 200 28,300	9350 20,000	10 550 23,250	7400 16,250	—	—	9150 20,100	6350 13,950
2900 mm 9'6"	J1865X 6'1"	kg lb	13 100 28,150	9250 19,850	—	—	—	—	9650 21,200	6700 14,750

**375 Heavy Lift ● GP Boom ● 750 mm (30") Double Grousers**  
● 11.6 t (25,600 lb) Counterweight with C/W removal

Stick	Bucket		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"	
			Front	Side	Front	Side	Front	Side	Front	Side
5500 mm 18'1"	H1380T 4'6"	kg lb	14 800 34,050	14 800 34,050	30 050 64,950	25 200 54,150	22 950 49,600	17 850 38,400	18 350 39,450	13 450 28,900
4400 mm 14'5"	H1800X 5'10"	kg lb	14 150 32,600	14 150 32,600	30 300 65,600	24 350 52,400	23 350 50,450	17 300 37,200	17 950 38,600	13 050 28,050
3400 mm 11'2"	J1780X 5'10"	kg lb	—	—	29 150 63,150	23 300 50,000	22 700 49,150	16 450 35,350	17 250 37,050	12 350 26,500

Stick	Bucket		10.5 m 35'0"		12 m 40'0"		13.5 m 45'0"		At Max. Reach	
			Front	Side	Front	Side	Front	Side	Front	Side
5500 mm 18'1"	H1380T 4'6"	kg lb	14 350 30,800	10 500 22,500	11 500 24,700	8350 17,850	8500 14,050	6700 14,050	4600* 10,050*	4600* 10,050*
4400 mm 14'5"	H1800X 5'10"	kg lb	14 050 30,200	10 200 21,850	11 300 24,200	8100 17,350	—	—	7350* 16,200*	6600 14,550
3400 mm 11'2"	J1780X 5'10"	kg lb	13 450 28,850	9600 20,550	—	—	—	—	8550* 18,800*	6850 15,050

**375 Heavy Lift ● Mass Boom ● 750 mm (30") Double Grousers**  
● 11.6 t (25,600 lb) Counterweight with C/W removal

Stick	Bucket		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		10.5 35'0"		At Max. Reach	
			Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side
4100 mm 13'5"	J2040X 6'8"	kg lb	25 450 58,800	25 450 58,800	30 350 65,700	24 950 53,550	23 250 50,300	17 400 37,350	17 850 38,250	12 850 27,600	13 750 29,400	9850 21,000	7700* 16,950*	7600 16,700
3400 mm 11'2"	J2210X 7'3"	kg lb	24 150 55,900	24 150 55,900	30 200 65,350	24 600 52,850	23 300 50,350	17 250 37,000	17 750 38,150	12 800 27,500	—	—	9650* 21,300*	8500 18,650
2900 mm 9'6"	J2390MX 7'10"	kg lb	22 400 52,100	22 400 52,100	29 500 63,900	24 200 51,950	22 850 49,400	16 900 36,350	17 500 37,550	12 550 26,900	—	—	10 250* 22,550*	8900 19,550

\*Load limited by hydraulic capacity rather than tipping.

**Belgium Sourced**

**375 ● GP Boom ● 610 mm (24") Track Shoes**

Stick	Bucket	4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		
		Front	Side	Front	Side	Front	Side	Front	Side	
3.4 m 11'2"	3.6 m <sup>3</sup> 4.7 yd <sup>3</sup>	kg lb	—	—	26 120* 57,590*	22 200 48,950	20 270* 44,690*	15 600 34,390	16 180* 35,670*	11 660 25,710
4.4 m 14'5"	3.2 m <sup>3</sup> 4.1 yd <sup>3</sup>	kg lb	12 880* 28,400*	12 880* 28,400*	27 500* 60,630*	23 510 51,830	21 080* 46,480*	16 640 36,690	16 890* 37,240*	12 510 27,580
5.5 m 18'1"	2.8 m <sup>3</sup> 3.6 yd <sup>3</sup>	kg lb	13 390* 29,520*	13 390* 29,520*	27 090* 59,730*	24 130 53,200	20 560* 45,330*	17 010 37,500	16 440* 36,250*	12 730 28,060

Stick	Bucket	10.5 m 35'0"		12 m 40'0"		13.5 m 45'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	
3.4 m 11'2"	3.6 m <sup>3</sup> 4.7 yd <sup>3</sup>	kg lb	12 760 28,130	8970 19,770	—	—	—	—	7520* 16,580*	6240 13,750
4.4 m 14'5"	3.2 m <sup>3</sup> 4.1 yd <sup>3</sup>	kg lb	13 510* 29,780*	9720 21,430	10 800 23,800	7680 16,930	—	—	6590* 14,530*	6160 13,580
5.5 m 18'1"	2.8 m <sup>3</sup> 3.6 yd <sup>3</sup>	kg lb	13 640* 30,070*	9840 21,690	10 870 23,960	7740 17,060	7630* 16,820*	6150 13,560	3930* 8660*	3930 8660

**375 ● Mass Boom ● 610 mm (24") Track Shoes**

Stick	Bucket	4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		10.5 m 35'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
2.9 m 9'6"	4.4 m <sup>3</sup> 5.75 yd <sup>3</sup>	kg lb	20 590* 45,400*	20 590* 45,400*	26 750* 58,980*	23 340 51,460	20 650* 45,530*	16 290 35,910	16 250* 35,830*	12 050 26,570	—	—	9250* 20,390*	8390 18,490
3.4 m 11'2"	4.4 m <sup>3</sup> 5.75 yd <sup>3</sup>	kg lb	21 910* 48,310*	21 910* 48,310*	27 100* 59,750*	23 520 51,860	20 770* 45,790*	16 350 36,050	16 390* 36,130*	12 050 26,570	12 720* 28,040*	9130 20,130	8480* 18,690*	7740 17,060
4.1 m 13'5"	3.6 m <sup>3</sup> 4.7 yd <sup>3</sup>	kg lb	23 620* 52,080*	23 620* 52,080*	27 600* 60,850*	24 090 53,110	21 060* 46,430*	16 770 36,970	16 740* 36,910*	12 370 27,270	13 230* 29,170*	9410 20,740	6930* 15,280*	6930* 15,280*

**Japan/U.S. Sourced**

**375 ● Reach Boom ● 750 mm (30") Double Grousers**

Stick	Bucket	4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		
		Front	Side	Front	Side	Front	Side	Front	Side	
5500 mm 18'1"	H1380T 4'6"	kg lb	10 450* 24,100*	10 450* 24,100*	27 400* 59,200*	24 900 53,500	20 850* 45,000*	17 700 38,050	16 700* 36,050*	13 350 28,700
4400 mm 14'5"	H1800X 5'11"	kg lb	9650* 22,350*	9650* 22,350*	25 900* 59,200*	24 100 51,750	21 050* 45,500*	17 150 36,850	16 900* 36,450*	12 950 27,850
3400 mm 11'2"	J1780X 5'10"	kg lb	—	—	20 100* 47,750*	20 100* 47,750*	20 350* 43,950*	16 250 34,950	16 300* 35,200*	12 250 26,300
2900 mm 9'6"	J1865X 6'1"	kg lb	—	—	17 700* 42,650*	17 700* 42,650*	20 150* 43,550*	16 100 34,650	16 200* 35,000*	12 150 26,050

Stick	Bucket	10.5 m 35'0"		12 m 40'0"		13.5 m 45'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	
5500 mm 18'1"	H1380T 4'6"	kg lb	13 850* 29,900*	10 450 22,400	11 750 25,400	8300 17,800	10 100* 20,650*	6700 14,300	5200* 11,450*	5200* 11,450*
4400 mm 14'5"	H1800X 5'11"	kg lb	13 950* 30,150*	10 150 21,750	11 750* 25,250*	8100 17,300	—	—	8050* 17,750*	6300 13,900
3400 mm 11'2"	J1780X 5'10"	kg lb	13 350* 28,800*	9500 20,400	10 900* 24,000*	7550 16,600	—	—	9200* 20,250*	6500 14,250
2900 mm 9'6"	J1865X 6'1"	kg lb	13 250* 28,500*	9450 20,250	—	—	—	—	9450* 20,750*	6850 15,100

\*Load limited by hydraulic capacity rather than tipping.

Japan/U.S. Sourced

375 L ● GP Boom ● 750 mm (30") Double Grousers

Stick	Bucket		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"	
			Front	Side	Front	Side	Front	Side	Front	Side
5500 mm 18'1"	H1380T 4'6"	kg lb	13 700* 31,650*	13 700* 31,650*	27 700* 59,850*	25 550 54,950	21 100* 45,550*	18 150 39,000	16 950* 36,600*	13 650 29,350
4400 mm 14'5"	H1800X 5'10"	kg lb	13 150* 30,350*	13 150* 30,350*	27 900* 60,350*	24 750 53,200	21 400* 46,300*	17 600 37,800	17 200* 37,150*	13 300 28,550
3400 mm 11'2"	J1865X 6'1"	kg lb	—	—	26 600* 57,600*	23 550 50,600	20 650* 44,700*	16 600 35,700	16 550* 35,700*	12 500 26,800
2900 mm 9'6"	J1865X 6'1"	kg lb	—	—	25 850* 56,750*	23 500 50,500	20 650* 44,600*	16 600 35,650	16 550* 35,750*	12 500 26,800

Stick	Bucket		10.5 m 35'0"		12 m 40'0"		13.5 m 45'0"		At Max. Reach	
			Front	Side	Front	Side	Front	Side	Front	Side
5500 mm 18'1"	H1380T 4'6"	kg lb	14 100* 30,500*	10 650 22,900	12 000* 25,950*	8500 18,200	7800* 12,750*	6850 12,750*	4150* 9100*	4150 9100*
4400 mm 14'5"	H1800X 5'10"	kg lb	14 250* 30,750*	10 400 22,250	11 950* 25,650*	8300 17,700	—	—	6750* 14,900*	6750 14,850
3400 mm 11'2"	J1865X 6'1"	kg lb	13 550* 29,150*	9700 20,750	—	—	—	—	7750* 17,100*	6900 15,200
2900 mm 9'6"	J1865X 6'1"	kg lb	13 450* 28,950*	9700 20,800	—	—	—	—	8250* 18,150*	7400 16,350

375 L Heavy Lift ● GP Boom ● 750 mm (30") Double Grousers  
● 11.6 t (25,600 lb) Counterweight with C/W removal

Stick	Bucket		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"	
			Front	Side	Front	Side	Front	Side	Front	Side
5500 mm 18'1"	H1380T 4'6"	kg lb	11 300 26,100	11 300 26,100	29 550 64,400	25 450 54,700	22 700 49,100	18 100 38,900	18 250 39,400	13 700 29,400
4400 mm 14'5"	H1800X 5'10"	kg lb	10 450 24,250	10 450 24,250	27 750 64,500	24 650 52,950	23 000 49,700	17 550 37,700	18 450 39,900	13 300 28,550
3400 mm 11'2"	J1865X 6'1"	kg lb	—	—	21 600 51,300	21 600 50,600	22 250 48,150	16 650 35,800	17 900 38,700	12 550 26,950
2900 mm 9'6"	J1865X 6'1"	kg lb	—	—	19 050 45,650	19 050 45,850	22 050 47,750	16 500 35,500	17 800 38,450	12 450 26,750

Stick	Bucket		10.5 m 35'0"		12 m 40'0"		13.5 m 45'0"		At Max. Reach	
			Front	Side	Front	Side	Front	Side	Front	Side
5500 mm 18'1"	H1380T 4'6"	kg lb	15 200 32,800	10 700 22,950	12 950 28,000	8550 18,300	11 150 22,400	6900 14,750	5700* 12,600*	5650 12,450
4400 mm 14'5"	H1800X 5'10"	kg lb	15 300 33,100	10 400 22,300	12 950 27,850	8300 17,800	—	—	8750* 19,300*	6500 14,300
3400 mm 11'2"	J1865X 6'1"	kg lb	14 750 31,800	9800 20,950	12 100 26,650	7750 17,100	—	—	10 150* 22,300*	6700 14,700
2900 mm 9'6"	J1865X 6'1"	kg lb	14 600 31,500	9700 20,800	—	—	—	—	10 500* 23,150*	7050 15,550

\*Load limited by hydraulic capacity rather than tipping.

Japan/U.S. Sourced

375 L Heavy Lift ● GP Boom ● 750 mm (30") Double Grousers  
● 11.6 t (25,600 lb) Counterweight with C/W removal

Stick	Bucket	4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		
		Front	Side	Front	Side	Front	Side	Front	Side	
5500 mm 18'1"	H1380T 4'6"	kg lb	14 800 34,100	14 800 34,100	30 050 65,000	26 100 56,150	22 950 49,600	18 550 39,850	18 500 39,950	14 000 30,050
4400 mm 14'5"	H1800X 5'10"	kg lb	14 200 32,700	14 200 32,700	30 350 65,600	25 300 54,400	23 350 50,450	18 000 38,650	18 800 40,600	13 600 29,200
3400 mm 11'2"	J1865X 6'1"	kg lb	—	—	29 150 63,150	24 200 52,050	22 700 49,150	17 100 36,800	18 250 39,450	12 900 27,700
2900 mm 9'6"	J1865X 6'1"	kg lb	—	—	27 750 61,950	24 050 51,700	22 550 48,800	17 000 36,500	18 150 39,250	12 800 27,500

Stick	Bucket	10.5 m 35'0"		12 m 40'0"		13.5 m 45'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	
5500 mm 18'1"	H1380T 4'6"	kg lb	15 450 33,400	10 950 23,450	13 200 28,550	8700 18,650	8500 14,000	7050 14,000	4600* 10,100*	4600* 10,100*
4400 mm 14'5"	H1800X 5'10"	kg lb	15 600 33,700	10 650 22,850	13 150 28,250	8500 18,200	—	—	7400* 16,250*	6950 15,250
3400 mm 11'2"	J1865X 6'1"	kg lb	15 000 32,350	10 050 21,500	—	—	—	—	8550* 18,800*	7200 15,850
2900 mm 9'6"	J1865X 6'1"	kg lb	14 850 31,900	9950 21,350	—	—	—	—	8950* 19,750*	7650 16,800

Belgium Sourced

375 L ● GP Boom ● 610 mm (24") Track Shoes

Stick	Bucket	4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		
		Front	Side	Front	Side	Front	Side	Front	Side	
3.4 m 11'2"	3.6 m <sup>3</sup> 4.7 yd <sup>3</sup>	kg lb	—	—	26 120* 57,590*	23 130 51,000	20 270* 44,690*	16 280 35,890	16 180* 35,670*	12 190 26,870
4.4 m 14'5"	3.2 m <sup>3</sup> 4.1 yd <sup>3</sup>	kg lb	12 880* 28,400*	12 880* 28,400*	27 500* 60,630*	24 430 53,860	21 080* 46,480*	17 310 38,160	16 890* 37,240*	13 040 28,750
5.5 m 18'1"	2.8 m <sup>3</sup> 3.6 yd <sup>3</sup>	kg lb	13 390* 29,520*	13 390* 29,520*	27 090* 59,730*	25 060 55,250	20 560* 45,330*	17 690 39,000	16 440* 36,250*	13 260 29,230

Stick	Bucket	10.5 m 35'0"		12 m 40'0"		13.5 m 45'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	
3.4 m 11'2"	3.6 m <sup>3</sup> 4.7 yd <sup>3</sup>	kg lb	13 190* 29,080*	9410 20,740	—	—	—	—	7520* 16,580*	6590 14,530
4.4 m 14'5"	3.2 m <sup>3</sup> 4.1 yd <sup>3</sup>	kg lb	13 950* 30,750*	10 160 22,400	11 670* 25,730*	8060 17,770	—	—	6590* 14,530*	6480 14,280
5.5 m 18'1"	2.8 m <sup>3</sup> 3.6 yd <sup>3</sup>	kg lb	13 640* 30,070*	10 280 22,660	11 570* 25,510*	8120 17,900	7630* 16,820*	6480 14,280	3930* 8660*	3930* 8660*

375 L ● Mass Boom ● 610 mm (24") Track Shoes

Stick	Bucket	4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		10.5 m 35'0"		At Max. Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	
2.9 m 9'6"	4.4 m <sup>3</sup> 5.75 yd <sup>3</sup>	kg lb	20 590* 45,400*	20 590* 45,400*	26 750* 58,980*	24 260 53,490	20 650* 45,530*	16 960 37,390	16 250* 35,830*	12 580 27,730	—	—	9250* 20,390*	8800 19,400
3.4 m 11'2"	4.4 m <sup>3</sup> 5.75 yd <sup>3</sup>	kg lb	21 910* 48,310*	21 900* 48,310*	27 100* 59,750*	24 440 53,890	20 770* 45,790*	17 030 37,550	16 390* 36,130*	12 580 27,730	12 720* 28,040*	9570 21,100	8480* 18,690*	8140 17,940
4.1 m 13'5"	3.6 m <sup>3</sup> 4.7 yd <sup>3</sup>	kg lb	23 620* 52,080*	23 620* 52,080*	27 600* 60,850*	25 010 55,140	21 060* 46,430*	17 440 38,450	16 740* 36,910*	12 900 28,440	13 490* 29,740*	9850 21,710	6930* 15,280*	6930* 15,280*


\*Load limited by hydraulic capacity rather than tipping.

## EXCAVATOR BUCKET CAPACITIES

Caterpillar rates excavator buckets to conform with both PCSA standard No. 3 and SAE standard J-296. Buckets are rated on both their struck and heaped capacities as follows:

### Struck Capacity

Volume actually enclosed inside the outline of the sideplates and rear and front bucket enclosures without any consideration for any material supported or carried by the spillplate or bucket teeth.

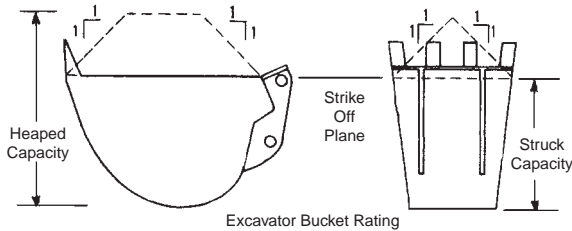


### Heaped Capacity

Volume in the bucket under the strike off plane plus the volume of the heaped material above the strike off plane, having an angle of repose of 1:1 without any consideration for any material supported or carried by the spillplate or bucket teeth.

The Committee on European Construction Equipment (CECE) rates heaped bucket pay loads on a 2:1 angle of repose for material above the strike off plane.

## CURL AND CROWD FORCES

Bucket penetration into a material is achieved by the bucket curling force ( $F_B$ ) and stick crowd force ( $F_S$ ). Rated digging forces are the digging forces that can be exerted at the outermost cutting point. These forces can be calculated by applying working relief hydraulic pressure to the cylinder(s) providing the digging force. The digging forces listed on next page conform with SAE Standard J1179 and PCSA Standard No. 3. The values may not be directly comparable to forces for machines rated by other methods than those described below.

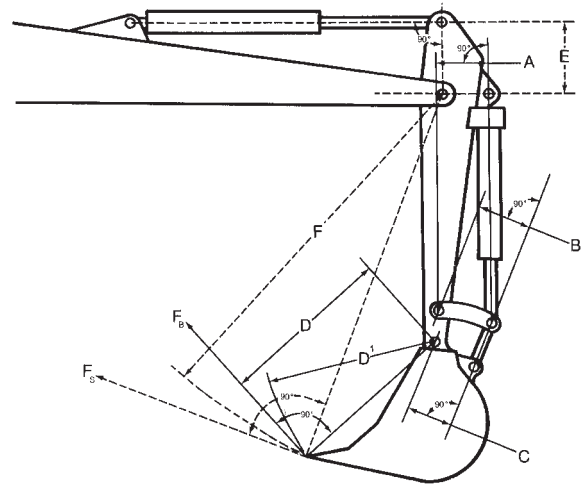

$$F_B = \text{Radial tooth force due to bucket cylinder} \\ = \frac{\text{Bucket cylinder force}}{\text{Arm D length}} \left( \frac{\text{Arm A} \times \text{Arm C}}{\text{Arm B}} \right)$$

$$\text{Cylinder force} = (\text{Pressure}) \times \\ (\text{End area of cylinder head}) \\ \text{Arm D} = \text{Bucket tip radius}$$

Maximum radial tooth force due to bucket cylinder (bucket curling force) is the digging force generated by the bucket cylinder(s) and tangent to the arc of radius  $D^1$ . The bucket shall be positioned to obtain maximum output moment from the bucket cylinder(s) and connecting linkages. When calculating, maximum  $F_B$  occurs when the factor — Arm A times Arm C divided by Arm B — becomes the maximum.

$$F_S = \text{Radial tooth force due to stick cylinder} \\ = \frac{(\text{Stick cylinder force}) \times (\text{Arm E length})}{(\text{Arm F length})}$$

$$\text{Arm F} = \text{Bucket tip radius} + \text{stick length}$$

Maximum radial tooth force due to stick cylinder (stick crowd force) is the digging force generated by the stick cylinder(s) and tangent to the arc of radius  $F$ . The stick shall be positioned to obtain the maximum output moment from the arm cylinder and the bucket positioned as described in the bucket force rating. When calculating, maximum  $F_S$  occurs when the axis in the stick cylinder working direction is at a right angle to the line connecting the stick cylinder pin and the boom nose pin.

### Bucket Selection Considering Bucket Curl and Stick Crowd Forces


The combination of the excavator's stick crowd force and bucket curling force give this machine configuration more effective bucket penetration force per mm (inch) of bucket cutting edge than is available with other machine types such as wheel and track loaders.

As a result of high penetration force, an excavator bucket is comparatively easy to load. Also, the higher unit breakout forces allow the excavator's economic application range to be extended farther into the tougher soils (coral, caliche, shale, limestone) before blasting or ripping is required.

To take full advantage of an excavator's high penetration forces, buckets should be selected so they are well matched to soil conditions that are encountered. The two important things to consider are bucket width and bucket tip radius.

As a general rule, wide buckets are used in easily dug soil and narrow buckets in harder material. In hard rocky soils, tip radius also has to be considered in bucket selection. Because the shorter tip radius buckets provide more total bucket curling force than the long tip radius buckets, they are generally the easiest to load. A good rule of thumb when selecting a Caterpillar bucket for hard material is to choose the narrowest bucket that has a short tip radius.

Other factors such as trench bottom width specifications, manbox size, or the desire to conserve bedding material may also influence excavator bucket selection.

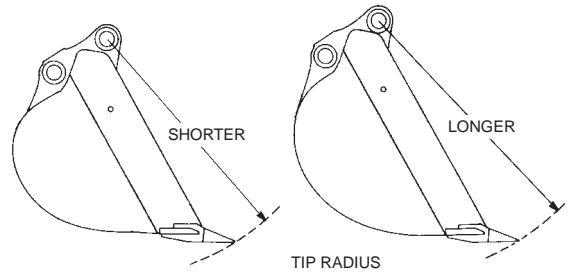

**NOTE: See the following pages for listing of Caterpillar buckets by tip radius and cutting edge width.**

Model	Source	Bucket Tip Radius		Bucket Curling Forces		Stick Crowd Forces							
						Short		Medium		Long		Extra Long	
		mm	ft	kN	lb	kN	lb	kN	lb	kN	lb	kN	lb
301.5	U.K.	500	1'8"	12.6	2830	—	—	8.9	2000	8	1790	—	—
301.6	U.K.	500	1'8"	12.6	2830	—	—	—	—	8	1790	—	—
301.8	U.K.	500	1'8"	12.6	2830	—	—	8.9	2000	8	1790	—	—
302.5	U.K.	650	2'2"	22	4940	—	—	14	3140	12.1	2720	—	—
303.5	U.K.	761	2'6"	25.6	5750	—	—	18.3	4110	13.7	3080	—	—
304.5	U.K.	833	2'9"	39.5	8880	—	—	23	5170	19.4	4360	—	—
307B	Japan	1070	3'6"	44	9890	—	—	35	7870	31	6970	—	—
307B SB	Japan	1070	3'6"	44	9890	—	—	35	7870	31	6970	—	—
307B SB	France	1220	4'0"	44	9890	—	—	35	7870	31	6970	—	—
311B	Japan	1220	4'0"	80	17,980	62	13,930	58	13,030	50	11,240	—	—
312B	Japan	1220	4'0"	84	18,880	65	14,610	63	14,170	57	12,810	—	—
312B	France	1220	4'0"	84	18,880	71	15,970	63	14,170	57	12,810	—	—
312B L	France	1220	4'0"	84	18,880	71	15,970	63	14,170	57	12,810	—	—
313B CR	Japan	1220	4'0"	77	17,300	—	—	57	12,810	52	11,690	—	—
315B	Japan	1340	4'5"	99	22,250	95	21,370	84	18,880	76	17,080	68	15,280

\*Information unavailable at time of printing.

### 315B L, 317B L, 317B LN France Sourced

Boom		1-Piece Boom			
Stick		Short	Medium	Long	Extra Long
Bucket Tip Radius	mm ft	1310 4'4"	1310 4'4"	1310 4'4"	1310 4'4"
Bucket Curling Forces	kN lb	122 27,400	102 22,900	102 22,900	102 22,900
Stick Crowd Forces	kN lb	95 21,300	87 19,500	79 17,700	70 15,700

### 318B L, 318B LN

Boom		1-Piece Boom			
Stick		Short	Medium	Long	Extra Long
Bucket Tip Radius	mm ft	1420 4'8"	1420 4'8"	1420 4'8"	1420 4'8"
Bucket Curling Forces	kN lb	148 33,260	145 32,580	124 27,870	125 28,090
Stick Crowd Forces	kN lb	124 27,870	106 23,820	91 20,450	81 18,200

### 318B L, 318B LN France Sourced

Boom		1-Piece Boom			
Stick		Short	Medium	Long	Extra Long
Bucket Tip Radius	mm ft	1410 4'8"	1410 4'8"	1410 4'8"	1410 4'8"
Bucket Curling Forces	kN lb	132 29,700	132 29,700	112 25,200	112 25,200
Stick Crowd Forces	kN lb	122 27,400	105 23,600	88 19,800	80 18,000



**M312**

Boom		1-Piece/VA Boom				
Stick		1600 mm 5'3"	2000 mm 6'6"	2300 mm 7'5"	2600 mm 8'5"	3000 mm 9'9"
Bucket Tip Radius	mm ft	1240/1518 4'1"/5'0"	1100 3'7"	1000 3'3"	1000 3'3"	900 2'11"
Bucket Curling Forces	kN lb	88 22,440	80 20,400	80 20,400	80 20,400	80 20,400
Stick Crowd Forces	kN lb	72 18,360	57 14,535	52 13,260	48 12,240	44 11,220

**M315**

Boom		1-Piece/VA Boom			
Stick		1700 mm 5'7"	2100 mm 6'11"	2400 mm 7'10"	2600 mm 8'6"
Bucket Tip Radius	mm ft	1220/1290 4'0"/4'3"	1220 4'0"	1220 4'0"	1220 4'0"
Bucket Curling Forces	kN lb	108 24,300	99 22,200	99 22,200	99 22,200
Stick Crowd Forces	kN lb	84 18,900	67 15,000	67 15,000	58 13,000

**M318**

Boom		1-Piece/VA Boom			
Stick		1800 mm 5'11"	2400 mm 7'10"	2800 mm 9'2"	4000 mm 13'1"
Bucket Tip Radius	mm ft	1340/1420 4'5"/4'8"	1340 4'5"	1340 4'5"	1340 4'5"
Bucket Curling Forces	kN lb	122 27,400	114 25,600	114 25,600	107 24,000
Stick Crowd Forces	kN lb	108 24,300	83 18,600	75 16,800	57 12,800

**M320**

Boom		1-Piece/VA Boom			
Stick		1900 mm 6'3"	2500 mm 8'2"	2900 mm 9'6"	4200 mm 13'9"
Bucket Tip Radius	mm ft	1423 4'8"	1423 4'8"	1423 4'8"	1423 4'8"
Bucket Curling Forces	kN lb	137 30,800	127 28,500	127 28,500	127 28,500
Stick Crowd Forces	kN lb	130 29,200	99 22,200	90 20,200	69 15,500

### 320C & 320C L

Boom		Reach Boom			
Stick		R1.9C	R2.5B	R2.9B	R3.9B
Bucket Tip Radius	mm ft	1487 4'11"	1411 4'8"	1411 4'8"	1477 4'10"
Bucket Curling Forces	kN lb	159 35,750	131 29,440	131 29,440	125 28,090
Stick Crowd Forces	kN lb	145 32,580	113 25,390	100 22,470	83 18,650
Boom		Mass Boom			
Stick		Medium			
Bucket Tip Radius	mm ft	1487 4'11"			
Bucket Curling Forces	kN lb	160 35,960			
Stick Crowd Forces	kN lb	126 28,310			

### Belgium Sourced 320C & 320C L

Boom		VA Boom*	
Stick		M1.9C	M2.4C
Bucket Tip Radius	mm ft	1550 5'1"	1550 5'1"
Bucket Curling Forces	kN lb	153 34,400	132 29,700
Stick Crowd Forces	kN lb	144 32,400	113 25,400

\*Preliminary information.

**Japan/U.S. Sourced  
322B**

Boom		Reach Boom		
Stick		R2.5S	R2.95S	R3.6B
Bucket Tip Radius	mm ft	1550 5'1"	1550 5'1"	1409 4'7.5"
Bucket Curling Forces	kN lb	151 33,950	151 33,950	131 29,500
Stick Crowd Forces	kN lb	136 30,640	116 26,230	104 23,400
Boom		Mass Boom		
Stick		M2.0D	M2.5D	
Bucket Tip Radius	mm ft	1660 5'5.4"	1660 5'5.4"	
Bucket Curling Forces	kN lb	189 42,550	189 42,550	
Stick Crowd Forces	kN lb	151 33,950	133 29,980	

**Belgium Sourced  
322B**

Boom		Reach Boom		
Stick		R2.5S	R2.95S	
Bucket Tip Radius	mm ft	1550 5'1"	1550 5'1"	
Bucket Curling Forces	kN lb	149 33,500	149 33,500	
Stick Crowd Forces	kN lb	141 31,700	121 27,200	
Boom		Mass Boom		
Stick		M2.0D	M2.5D	
Bucket Tip Radius	mm ft	1670 5'5.7"	1670 5'5.7"	
Bucket Curling Forces	kN lb	187 42,000	187 42,000	
Stick Crowd Forces	kN lb	155 34,800	136 30,600	
Boom		VA Boom*		
Stick		M2.0D	M2.5D	
Bucket Tip Radius	mm ft	1670 5'5.7"	1670 5'5.7"	
Bucket Curling Forces	kN lb	187 42,000	187 42,000	
Stick Crowd Forces	kN lb	155 34,800	136 30,600	

\*Preliminary information.

**Japan/U.S. Sourced  
325B**

Boom		Reach Boom		
Stick		R2.0D	R2.7C	R3.2C
Bucket Tip Radius	mm ft	1660 5'5.4"	1487 4'10.5"	1487 5'1"
Bucket Curling Forces	kN lb	189 42,470	160 35,960	160 35,960
Stick Crowd Forces	kN lb	161 36,180	136 30,560	118 26,520
Boom		Mass Boom		
Stick		M2.0D	M2.5D	
Bucket Tip Radius	mm ft	1660 5'5.4"	1660 5'5.4"	
Bucket Curling Forces	kN lb	198 44,490	189 42,470	
Stick Crowd Forces	kN lb	162 36,400	140 31,460	

**Belgium Sourced  
325B**

Boom		Reach Boom		
Stick		R2.0C	R2.65C	R3.2C
Bucket Tip Radius	mm ft	1670 5'5.7"	1550 5'1"	1550 5'1"
Bucket Curling Forces	kN lb	188 42,300	152 34,200	151 33,900
Stick Crowd Forces	kN lb	166 37,300	137 30,800	120 27,000
Boom		Mass Boom		
Stick		M2.0D	M2.5D	
Bucket Tip Radius	mm ft	1670 5'5.7"	1670 5'5.7"	
Bucket Curling Forces	kN lb	188 42,300	188 42,300	
Stick Crowd Forces	kN lb	165 37,100	144 32,400	
Boom		VA Boom*		
Stick		M2.0D	M2.5D	
Bucket Tip Radius	mm ft	1670 5'5.7"	1670 5'5.7"	
Bucket Curling Forces	kN lb	188 42,300	188 42,300	
Stick Crowd Forces	kN lb	165 37,100	144 32,400	

\*Preliminary information.

**Japan/U.S. Sourced  
330B**

Boom		Reach Boom			
Stick		R2.2E*	R2.8D*	R3.3D	R3.9D
Bucket Tip Radius	mm ft	1845 6'0.1"	1600 5'3"	1600 5'3"	1600 5'3"
Bucket Curling Forces	kN lb	227 51,000	189 42,470	189 42,470	190 42,670
Stick Crowd Forces	kN lb	209 46,970	175 39,330	151 33,930	134 30,110
Boom		Mass Boom			
Stick		M2.2E*	M2.6E	M3.5D**	
Bucket Tip Radius	mm ft	1845 6'0.1"	1845 6'0.1"	1440 4'9"	
Bucket Curling Forces	kN lb	227 51,000	227 51,000	195 43,800	
Stick Crowd Forces	kN lb	239 53,700	173 38,880	146 32,800	

**Belgium Sourced  
330B**

Boom		Reach Boom			
Stick		R2.2E	R2.8D	R3.3D	R3.9D
Bucket Tip Radius	mm ft	1730 5'8.1"	1660 5'5.3"	1660 5'5.3"	1660 5'5.3"
Bucket Curling Forces	kN lb	232 52,200	187 42,000	187 42,000	187 42,000
Stick Crowd Forces	kN lb	216 48,600	179 40,200	155 34,800	138 42,300
Boom		Mass Boom			
Stick		M2.15E		M2.6E	
Bucket Tip Radius	mm ft	1780 5'8.1"		1780 5'8.1"	
Bucket Curling Forces	kN lb	232 52,200		232 52,200	
Stick Crowd Forces	kN lb	216 48,600		179 40,200	

\*Available from Japan only.

\*\*Available from U.S. only.

**Japan/U.S. Sourced  
345B Series II**

Boom		Reach Boom		
Stick		Short	Medium	Long
Bucket Tip Radius	mm ft	1870 6'2"	1830 6'0"	1960 6'5"
Bucket Curling Forces	kN lb	231 51,910	227 51,010	221 49,660
Stick Crowd Forces	kN lb	209 46,970	193 43,370	174 39,100
Boom		Mass Boom		
Stick		Short	Medium	
Bucket Tip Radius	mm ft	1960 6'5"	1870 6'2"	
Bucket Curling Forces	kN lb	252 56,630	259 58,200	
Stick Crowd Forces	kN lb	230 51,690	208 46,740	

**Japan Sourced  
345B Series II**

Boom		Reach Boom		
Stick		Short	Medium	Long
Bucket Tip Radius	mm ft	1870 6'2"	1870 6'2"	1960 6'5"
Bucket Curling Forces	kN lb	231 51,910	231 51,910	221 49,660
Stick Crowd Forces	kN lb	209 46,970	191 42,920	174 39,100
Boom		Mass Boom		
Stick		Short	Medium	
Bucket Tip Radius	mm ft	1960 6'5"	1960 6'5"	
Bucket Curling Forces	kN lb	252 56,630	252 56,630	
Stick Crowd Forces	kN lb	230 51,690	203 45,620	

**Belgium Sourced  
345B**

Boom		Reach Boom			
Stick		R2.9F*	R3.35T	R3.9F	R4.8F**
Bucket Tip Radius	mm ft	1870 6'1.6"	1820 5'11.7"	1925 6'3.8"	2030 6'8"
Bucket Curling Forces	kN lb	231 51,900	229 51,460	225 50,560	232 52,200
Stick Crowd Forces	kN lb	209 46,970	194 43,600	175 39,330	156 35,100
Boom		Mass Boom			
Stick		M2.5G*		M3.0V	
Bucket Tip Radius	mm ft	1958 6'5.1"		1860 6'1.2"	
Bucket Curling Forces	kN lb	252 56,630		260 58,430	
Stick Crowd Forces	kN lb	230 51,690		208 46,740	

**Japan/U.S. Sourced  
365B L**

Boom		Reach Boom		
Stick		Short	Medium	Long
Bucket Tip Radius	mm ft	2060 6'9"	2060 6'9"	2060 6'9"
Bucket Curling Forces	kN lb	277 62,250	264 59,330	265 59,550
Stick Crowd Forces	kN lb	253 56,850	230 51,690	193 43,370
Boom		Mass Boom		
Stick		Short	Medium	
Bucket Tip Radius	mm ft	2100 6'11"	2100 6'11"	
Bucket Curling Forces	kN lb	330 74,160	330 74,160	
Stick Crowd Forces	kN lb	276 62,020	253 56,850	

\*Available from Japan only.

\*\*Available from U.S. only.

**Belgium Sourced  
 SAE, Teeth Force  
 365B L**

<b>Boom</b>		<b>Reach Boom</b>		
<b>Stick</b>		<b>Short</b>	<b>Medium</b>	<b>Long</b>
Bucket Tip Radius	<b>mm</b> <b>ft</b>	2128 <b>6'11"</b>	2128 <b>6'11"</b>	2128 <b>6'11"</b>
Bucket Curling Forces	<b>kN</b> <b>lb</b>	269 <b>60,450</b>	271 <b>60,900</b>	271 <b>60,900</b>
Stick Crowd Forces	<b>kN</b> <b>lb</b>	268 <b>60,220</b>	247 <b>55,510</b>	212 <b>47,640</b>
<b>Boom</b>		<b>Mass Boom</b>		
<b>Stick</b>		<b>Short</b>	<b>Medium</b>	
Bucket Tip Radius	<b>mm</b> <b>ft</b>	2239 <b>7'4"</b>	2239 <b>7'4"</b>	
Bucket Curling Forces	<b>kN</b> <b>lb</b>	322 <b>72,360</b>	322 <b>72,360</b>	
Stick Crowd Forces	<b>kN</b> <b>lb</b>	286 <b>64,270</b>	265 <b>59,550</b>	



## Japan/U.S. Sourced 375

Boom		Reach Boom*			
Stick		R2.9J	R3.4J	R4.4H	R5.5H
Bucket Tip Radius	mm ft	2235 7'4"	2235 7'4"	2100 6'10.7"	2210 7'3"
Bucket Curling Forces	kN lb	421 94,500	422 94,800	335 75,400	317 71,400
Stick Crowd Forces	kN lb	325 73,100	301 67,600	259 58,200	212 47,600
Boom		General Purpose Boom			
Stick		R2.9J*	R3.4J	R4.4H	R5.5H
Bucket Tip Radius	mm ft	2235 7'4"	2235 7'4"	2100 6'10.7"	2210 7'3"
Bucket Curling Forces	kN lb	421 94,500	422 94,800	335 75,400	317 71,400
Stick Crowd Forces	kN lb	325 73,100	301 67,600	259 58,200	212 47,600
Boom		Mass Boom			
Stick		M2.9J	M3.4J	M4.1J	
Bucket Tip Radius	mm ft	2235 7'4"	2235 7'4"	2235 7'4"	2235 7'4"
Bucket Curling Forces	kN lb	435 97,600	422 94,800	423 95,000	
Stick Crowd Forces	kN lb	326 73,100	301 67,600	266 59,700	

## Belgium Sourced 375

Boom		General Purpose Boom			Mass Boom		
Stick		R3.4J	R4.4H	R5.5H	M2.9J	M3.4J	M4.1J
Bucket Tip Radius	mm ft	2236 7'4"	2100 6'10.7"	2100 6'10.7"	2236 7'4"	2236 7'4"	2236 7'4"
Bucket Curling Forces	kN lb	371 83,500	309 69,500	297 66,800	383 86,100	384 86,300	372 83,600
Stick Crowd Forces	kN lb	291 65,400	251 56,400	209 47,100	313 70,400	291 65,500	258 58,100

\*Not available in all sales areas.

Caterpillar offers a very comprehensive list of high strength steel buckets. High strength steel allows thinner components which helps keep the weight down, maintains durability and improves loadability. The wrong bucket can reduce production 30-40% or more. Caterpillar's in-depth knowledge of machine design, bucket design and application experience

allows offering **machine matched** packages that optimize performance.

Additional buckets may be available and the listed buckets may not be available in all sales areas. Contact your Caterpillar Dealer for your specific bucket needs.

Model	Bucket Type	Teeth	Bucket Bite Width		Bucket Tip Radius		Heaped Capacity		Bucket Weight With Teeth			
			mm	in	mm	in	L	yd <sup>3</sup>	kg	lb		
301.5 301.6 301.8	Digging	0	230	9	440	17	18	0.023	25	55		
		3	230	9	500	20	18	0.023	29	64		
		0	300	12	440	17	22	0.029	27	60		
		3	300	12	500	20	22	0.029	31	68		
		0	400	16	440	17	33	0.043	31	68		
		3	400	16	500	20	33	0.043	35	77		
		0	457	18	440	17	40	0.052	34	75		
		3	457	18	500	20	40	0.052	38	84		
		0	500	20	440	17	45	0.059	36	79		
		4	500	20	500	20	45	0.059	41	90		
		0	600	24	440	17	56	0.073	40	88		
		4	600	24	500	20	56	0.073	45	99		
		Ditching		0	800	32	353	14	44	0.057	41	90
		Ditching		0	1000	40	353	14	56	0.073	43	95
302.5	Digging	0	260	10	568	22	35	0.046	43	96		
		3	260	10	640	26	35	0.046	48	105		
		0	300	12	568	22	41	0.053	44	97		
		3	300	12	640	26	41	0.053	51	112		
		0	400	16	568	22	54	0.070	49	107		
		3	400	16	640	26	54	0.070	55	121		
		0	457	18	568	22	65	0.085	53	116		
		3	457	18	650	26	65	0.085	59	130		
		0	500	20	568	22	73	0.095	55	122		
		4	500	20	640	26	73	0.095	64	140		
		0	600	24	568	22	92	0.120	62	136		
		4	600	24	640	26	92	0.120	70	155		
		0	700	28	568	22	111	0.145	69	152		
		4	700	28	640	26	111	0.145	77	170		
Ditching		0	800	32	482	19	80	0.105	82	178		
Ditching		0	1000	40	482	19	102	0.133	78	172		
Ditching		0	1200	48	482	19	116	0.217	88	193		

Model	Bucket Type	Teeth	Bucket Bite Width		Bucket Tip Radius		Heaped Capacity		Bucket Weight With Teeth	
			mm	in	mm	in	L	yd <sup>3</sup>	kg	lb
303.5	Digging	0	300	12	682	29	49	0.0645	54	119
		3	300	12	761	30	49	0.0645	60	133
		0	400	16	682	29	65	0.0849	58	129
		3	400	16	761	30	65	0.0849	65	142
		0	500	20	682	29	89	0.1160	65	142
		4	500	20	761	30	89	0.1160	74	162
		0	600	24	682	29	113	0.1482	72	159
		4	600	24	761	30	113	0.1482	81	178
		0	650	26	682	29	126	0.1645	76	167
		4	650	26	761	30	126	0.1645	84	185
	Ditching	0	1000	40	510	20	111	0.1452	107	236
		0	1200	48	510	20	135	0.1766	101	222
		0	1400	55	510	20	159	0.2080	113	249
304.5	Digging	0	300	12	742	29	58	0.076	62	136
		3	300	12	833	33	58	0.076	73	162
		0	400	16	742	29	76	0.099	67	147
		3	400	16	833	33	76	0.099	78	173
		0	500	20	742	29	04	0.136	75	165
		4	500	20	833	33	104	0.136	90	199
		0	600	24	742	29	133	0.174	83	184
		4	600	24	833	33	133	0.174	99	217
		0	700	28	742	29	162	0.212	100	220
		4	700	28	833	33	162	0.212	115	253
	Ditching	0	1000	40	530	21	139	0.182	117	258
		0	1300	51	530	21	184	0.241	114	253
		0	1600	63	530	21	229	0.299	135	296

Model	Bucket Type	Teeth	Bucket Bite Width		Bucket Tip Radius		Heaped Capacity		Bucket Weight With Teeth		
			mm	in	mm	in	L	yd <sup>3</sup>	kg	lb	
307B, 307B SB	General Purpose		460	18.0	1070	42.0	150	0.20	150	330	
			500	20.0	1070	42.0	180	0.24	180	397	
			600	24.0	1070	42.0	230	0.30	195	430	
			610	24.0	1070	42.0	230	0.30	200	440	
			700	28.0	1070	42.0	240	0.31	215	474	
			760	30.0	1070	42.0	310	0.40	230	510	
			800	31.0	1070	42.0	280	0.37	225	496	
			915	36.0	1070	42.0	370	0.45	250	550	
	Excavation		300	12.0	1070	42.0	90	0.12	122	270	
			450	18.0	1070	42.0	160	0.21	168	370	
			600	24.0	1070	42.0	230	0.30	191	420	
			750	30.0	1070	42.0	300	0.39	208	460	
			800	31.0	1070	42.0	325	0.42	215	470	
			850	33.0	1070	42.0	350	0.46	222	490	
	Extreme Service Excavation		300	12.0	1070	42.0	90	0.12	133	290	
			450	18.0	1070	42.0	160	0.21	174	380	
			600	24.0	1070	42.0	230	0.30	197	430	
			750	30.0	1070	42.0	300	0.39	214	470	
			800	31.0	1070	42.0	325	0.42	228	500	
	311B	General Purpose		625	24.0	1220	48.0	350	0.46	336	740
				775	30.0	1220	48.0	460	0.60	372	820
925				36.0	1220	48.0	570	0.75	415	914	
1075				42.0	1220	48.0	670	0.88	459	1011	
1225				48.0	1220	48.0	780	1.02	495	1091	
312B	General Purpose		450	18.0	1220	48.0	235	0.31	250	550	
			600	24.0	1220	48.0	330	0.43	270	594	
			625	24.0	1220	48.0	350	0.46	336	740	
			700	28.0	1220	48.0	400	0.52	295	649	
			775	30.0	1220	48.0	460	0.60	372	820	
			900	35.0	1220	48.0	540	0.71	340	748	
			925	36.0	1220	48.0	570	0.75	415	914	
			1000	39.0	1220	48.0	610	0.79	358	787	
			1075	42.0	1220	48.0	670	0.88	459	1011	
			1100	43.0	1220	48.0	680	0.89	385	847	
			1200	47.0	1220	48.0	750	0.98	403	886	
			1225	48.0	1220	48.0	780	1.02	495	1091	

Model	Bucket Type	Bucket Bite Width		Bucket Tip Radius		Heaped Capacity		Bucket Weight With Teeth	
		mm	in	mm	in	L	yd³	kg	lb
312B (cont'd)	Heavy Duty	450	17.7	1220	48.0	235	0.31	270	594
		600	23.6	1220	48.0	330	0.43	300	660
		700	27.6	1220	48.0	400	0.52	322	708
		750	29.5	1220	48.0	400	0.52	338	743
		900	35.4	1220	48.0	540	0.71	374	822
		1000	39.4	1220	48.0	610	0.79	400	880
	Excavation	450	18.0	1220	48.0	235	0.31	236	520
		600	24.0	1220	48.0	330	0.43	263	580
		700	28.0	1220	48.0	400	0.52	286	630
		750	30.0	1220	48.0	440	0.58	321	710
		900	35.0	1220	48.0	540	0.70	329	725
		1000	39.0	1220	48.0	550	0.72	332	730
		1000	39.0	1220	48.0	610	0.80	348	770
		1100	43.0	1220	48.0	680	0.89	371	820
	Extreme Service Excavation	450	18.0	1220	48.0	235	0.31	236	520
		600	24.0	1220	48.0	330	0.43	263	580
		700	28.0	1220	48.0	400	0.52	287	630
		750	30.0	1220	48.0	440	0.58	330	730
		900	35.0	1220	48.0	540	0.70	329	725
		1000	39.0	1220	48.0	610	0.80	348	770
	Ditch Cleaning	1500	59.0		N/S	400	0.52	340	750
		1600	63.0		N/S	330	0.43	350	770
		1800	71.0		N/S	370	0.48	380	840
		2000	79.0		N/S	330	0.43	350	770
	Utility	1200	47.0		N/S	395	0.52	400	880
		1400	55.0		N/S	465	0.61	440	970
		1600	63.0		N/S	530	0.69	480	1060
		1800	71.0		N/S	605	0.79	530	1170
	Utility Light	1200	47.0		N/S	395	0.52	300	660
		1400	55.0		N/S	465	0.61	330	730
1600		63.0		N/S	530	0.69	360	790	
1800		71.0		N/S	605	0.79	400	880	
313B CR	XA	625	24.0	1224	48.0	350	0.46	306	680
		775	31.0	1220	48.0	460	0.60	343	760
		925	36.0	1220	48.0	570	0.75	377	830
		1075	42.0	1220	48.0	670	0.88	423	930
		1225	48.0	1220	48.0	780	1.02	459	1010

N/S = Not Significant for Utility, Utility Light and Ditch Cleaning Bucket.

Model	Bucket Type	Bucket Bite Width		Bucket Tip Radius		Heaped Capacity		Bucket Weight With Teeth	
		mm	in	mm	in	L	yd <sup>3</sup>	kg	lb
315B/315B L	General Purpose	610	24.0	1340	53.0	380	0.50	419	924
		760	30.0	1340	53.0	500	0.65	471	1038
		914	36.0	1340	53.0	610	0.80	517	1140
		1067	42.0	1340	53.0	690	0.90	566	1248
		1219	48.0	1340	53.0	840	1.10	609	1343
	Excavation	600	24.0	1310	52.0	350	0.46	365	800
		600	24.0	1310	52.0	350	0.46	390	860
		750	30.0	1310	52.0	470	0.61	417	920
		750	30.0	1310	52.0	470	0.61	435	960
		850	33.0	1310	52.0	560	0.73	455	1000
		850	33.0	1310	52.0	560	0.73	495	1090
		1000	39.0	1310	52.0	680	0.89	502	1100
		1000	39.0	1310	52.0	680	0.89	544	1200
		1100	43.0	1310	52.0	770	1.01	540	1190
		1100	43.0	1310	52.0	770	1.01	542	1195
		1200	47.0	1310	52.0	860	1.12	570	1260
		1200	47.0	1310	52.0	860	1.12	590	1300
		1300	51.0	1310	52.0	930	1.22	609	1340
		1300	51.0	1310	52.0	930	1.22	620	1370
		1300	51.0	1310	52.0	1000	1.31	647	1430
	1300	51.0	1310	52.0	1000	1.31	695	1530	
	Extreme Service Excavation	600	24.0	1310	52.0	350	0.46	373	820
		600	24.0	1310	52.0	350	0.46	400	880
		750	30.0	1310	52.0	470	0.61	425	940
		750	30.0	1310	52.0	470	0.61	445	980
		850	33.0	1310	52.0	560	0.73	464	1020
		850	33.0	1310	52.0	560	0.73	495	1090
		1000	39.0	1310	52.0	680	0.89	510	1120
		1000	39.0	1310	52.0	680	0.89	555	1220
		1100	43.0	1310	52.0	770	1.01	548	1210
		1200	47.0	1310	52.0	860	1.12	579	1280
	1200	47.0	1310	52.0	860	1.12	630	1390	
	Ditch Cleaning	1600	63.0	1310	52.0	330	0.43	360	790
		1800	71.0		N/S	370	0.48	380	840
		1800	71.0	1310	52.0	370	0.48	390	860
		2000	79.0		N/S	410	0.54	410	910
		2000	79.0	1310	52.0	410	0.54	450	990
	Utility	1200	47.0		N/S	395	0.52	410	900
		1400	55.0		N/S	465	0.61	450	990
		1600	63.0		N/S	535	0.70	490	1080
		1800	71.0		N/S	605	0.79	540	1190
	Trapezoidal	500	20.0		Slope:1/1.0	380	0.50	345	760
		500	20.0		Slope:1/1.5	510	0.67	405	890
		2400	94.5	1310	52.0	380	0.50	360	790
		3350	131.0	1310	52.0	510	0.67	420	930
	Weed Cutting	4000	157.0	—	—	—	—	—	—

N/S = Not Significant for Utility, Utility Light and Ditch Cleaning Bucket.

Model	Bucket Type	Bucket Family	Bucket Bite Width		Bucket Tip Radius		Heaped Capacity		Bucket Weight With Teeth		
			mm	in	mm	in	L	yd <sup>3</sup>	kg	lb	
317B L	Excavation		600	24.0	1310	52.0	350	0.46	389	860	
			750	30.0	1310	52.0	470	0.61	435	960	
			850	33.0	1310	52.0	560	0.73	495	1090	
			1000	39.0	1310	52.0	680	0.89	544	1200	
			1050	41.0	1310	52.0	725	0.95	542	1195	
			1100	43.0	1310	52.0	770	1.01	589	1300	
			1200	47.0	1310	52.0	860	1.12	620	1370	
	Extreme Excavation			600	24.0	1310	52.0	350	0.46	398	880
				750	30.0	1310	52.0	470	0.61	445	980
				850	33.0	1310	52.0	560	0.73	495	1090
				1000	39.0	1310	52.0	680	0.89	555	1220
				1200	47.0	1310	52.0	860	1.12	630	1390
	Utility			Contact your Caterpillar Dealer							
	Trapezoidal										
	Ditch Cleaning										
	Weedcutting										
	318B L, 318B LN	Heavy Duty	B	620	24.0	1420	56.0	400	0.52	565	1250
B			772	30.0	1420	56.0	540	0.71	650	1430	
B			926	36.0	1420	56.0	700	0.92	720	1590	
B			1078	42.0	1420	56.0	860	1.12	760	1680	
B			1230	48.0	1420	56.0	1000	1.31	845	1860	
Excavation and Excavation Quick Coupling				600	24.0	1410	55.5	410	0.54	473	1040
				750	30.0	1410	55.5	550	0.72	525	1160
				1000	39.0	1410	55.5	800	1.05	654	1440
				1250	49.0	1410	55.5	1050	1.37	753	1660
				1400	55.0	1410	55.5	1200	1.57	833	1840
Extreme Excavation and Extreme Excavation Quick Coupling				600	24.0	1410	55.5	410	0.54	519	1140
				750	30.0	1410	55.5	550	0.72	562	1240
				1000	39.0	1410	55.5	800	1.05	702	1550
				1250	49.0	1410	55.5	1050	1.37	819	1810
				1400	55.0	1410	55.5	1200	1.57	878	1940
Utility and Utility Light				1400	55.0	1410	55.5	605	0.79	620	1370
				1600	63.0	1410	55.5	700	0.92	680	1500
				1800	71.0	1410	55.5	790	1.03	740	1630
				2000	79.0	1410	55.5	880	1.15	800	1760
Ditch Cleaning				1800	71.0	1410	55.5	490	0.64	545	1200
	2000			79.0	1410	55.5	550	0.72	585	1290	
Rock and Rock Quick Coupling			600	24.0	1410	55.5	410	0.54	547	1210	
			750	30.0	1410	55.5	550	0.72	645	1420	
			1000	39.0	1410	55.5	810	1.06	751	1660	
			1250	49.0	1410	55.5	1050	1.37	875	1930	

Model	Bucket Type	Bucket Family	Bucket Bite Width		Bucket Tip Radius		Heaped Capacity		Bucket Weight With Teeth	
			mm	in	mm	in	L	yd <sup>3</sup>	kg	lb
M312/ M315	Excavation		450	17.7	1240	48.8	240	0.31	271	600
			600	23.6	1240	48.8	330	0.43	304	800
			700	27.6	1240	48.8	400	0.52	340	750
			750	29.5	1318	51.9	470	0.61	430	950
			850	33.5	1318	51.9	560	0.73	473	1040
			900	35.4	1240	48.8	540	0.71	366	810
			1000	39.4	1318	51.9	610	0.80	410	900
			1100	43.3	1240	48.8	680	0.89	438	970
	1200	47.2	1318	51.9	860	1.12	458	1010		
	Extreme Service Excavation		1100	43.3	1240	48.8	680	0.89	472	1040
1200			47.2	1240	48.8	750	0.98	493	1090	
M318	Excavation		600	23.6	1419	55.9	400	0.52	540	1190
			750	29.5	1419	55.9	550	0.72	560	1235
			1000	39.4	1340	52.7	700	0.92	600	1320
			1000	39.4	1419	55.9	800	1.05	650	1430
			1100	43.3	1340	52.7	800	1.05	640	1410
			1200	47.2	1340	52.7	900	1.18	660	1455
			1250	49.2	1419	55.9	1050	1.37	740	1630
	Extreme Service Excavation		1200	47.2	1340	52.7	900	1.18	710	1570
	Excavation	B	600	24.0	1410	55.5	410	0.54	524	1155
			750	30.0	1410	55.5	550	0.72	550	1210
			1000	39.0	1410	55.5	800	1.05	635	1400
			1250	49.0	1410	55.5	1050	1.37	716	1580
			1400	55.0	1410	55.5	1200	1.57	752	1660
			1500	59.0	1410	55.5	1350	1.77	770	1700
	Extreme Service Excavation	B	600	24.0	1410	55.5	410	0.54	552	1220
			750	30.0	1410	55.5	550	0.72	606	1340
			1000	39.0	1410	55.5	800	1.05	697	1540
			1250	49.0	1410	55.5	1050	1.37	772	1700
			1400	55.0	1410	55.5	1200	1.57	818	1800
	Rock	B	600	24.0	1410	55.5	410	0.54	565	1245
			750	30.0	1410	55.5	550	0.72	625	1380
			1000	39.0	1410	55.5	800	1.05	775	1710
			1250	49.0	1410	55.5	1050	1.37	898	1980
Ditch Cleaning	B	1800	71.0	1250	49.2	480	0.63	477	1050	
		2000	79.0	1400	55.1	580	0.76	680	1500	
		2200	87.0	1250	49.2	620	0.81	563	1240	
Utility	B	1400	55.0	N/S		605	0.79	620	1370	
		1600	63.0	N/S		700	0.92	680	1500	
		1800	71.0	N/S		790	1.03	740	1630	
		2000	79.0	N/S		880	1.15	800	1760	
Utility Light	B	1400	55.0	N/S		605	0.79	470	1040	
		1600	63.0	N/S		700	0.92	510	1125	
		1800	71.0	N/S		790	1.03	550	1210	
		2000	79.0	N/S		880	1.15	600	1320	

N/S = Not Significant for Utility, Utility Light and Ditch Cleaning Bucket.



Model	Bucket Type	Bucket Family	Bucket Bite Width		Bucket Tip Radius		Heaped Capacity		Bucket Weight With Teeth	
			mm	in	mm	in	L	yd <sup>3</sup>	kg	lb
M320	General Purpose		600	23.6	1423	56.0	410	0.54	540	1190
			750	29.5	1423	56.0	550	0.72	560	1230
			1000	39.4	1423	56.0	810	1.06	600	1320
			1100	43.3	1423	56.0	900	1.18	685	1510
			1250	49.2	1423	56.0	1050	1.37	740	1630
			1400	55.1	1423	56.0	1200	1.57	780	1920
			1500	59.0	1423	56.0	1350	1.77	810	1790
	Extreme Service		1200	47.2	1340	52.8	900	1.18	710	1565
			1250	49.2	1423	56.0	1050	1.37	750	1650
	Ditch Cleaning		1800	70.9	1244	49.0	480	0.63	477	1050
			2000	78.7	1300	51.2	580	0.76	680	1500
			2000	78.7	1400	55.1	700	0.92	720	1590
			2300	90.6	1244	49.0	620	0.81	570	1260
			2000	78.7	896	35.3	700	0.92	640	1410
	320C	General Purpose	B	775	30.0	1626	64.0	700	0.88	665
B			932	36.0	1626	64.0	900	1.12	741	1634
B			1082	42.0	1626	64.0	1100	1.50	777	1713
B			1230	48.0	1626	64.0	1300	1.75	906	1998
C			775	30.0	1778	70.0	800	1.12	807	1779
C			948	36.0	1778	70.0	1100	1.50	909	2004
C			1098	42.0	1778	70.0	1300	1.75	966	2130
C			1248	48.0	1778	70.0	1600	2.12	1052	2320
C			1395	54.0	1778	70.0	1900	2.50	1138	2509
Excavation		B	1130	44.0	1480	58.2	800	1.05	640	1410
		B	1260	50.0	1411	56.0	900	1.18	675	1490
		B	1370	54.0	1411	56.0	1000	1.31	701	1550
		B	600	23.6	1410	55.5	410	0.54	524	1155
		B	750	29.5	1410	55.5	550	0.72	550	1210
		B	1000	39.4	1410	55.5	800	1.05	635	1400
		B	1250	49.2	1410	55.5	1050	1.37	716	1580
		B	1400	55.1	1410	55.5	1200	1.57	752	1660
		B	1500	59.1	1410	55.5	1350	1.77	770	1700
		C	1370	54.0	1488	59.0	1100	1.44	824	1820
		C	1470	58.0	1487	58.5	1200	1.57	895	1970
		C	750	29.5	1550	61.0	630	0.82	694	1530
		C	1000	39.4	1550	61.0	950	1.24	780	1720
		C	1150	45.3	1550	61.0	1150	1.50	874	1930
C	1250	49.2	1550	61.0	1250	1.63	903	1990		
C	1350	53.1	1550	61.0	1400	1.83	940	2070		
C	1450	57.1	1550	61.0	1500	1.96	990	2180		
C	1600	63.0	1550	61.0	1700	2.22	1045	2300		

Model	Bucket Type	Bucket Family	Bucket Bite Width		Bucket Tip Radius		Heaped Capacity		Bucket Weight With Teeth	
			mm	in	mm	in	L	yd <sup>3</sup>	kg	lb
320C (cont'd)	Extreme Service Excavation	B	600	23.6	1410	55.5	410	0.54	552	1220
		B	750	29.5	1410	55.5	550	0.72	606	1340
		B	1000	39.4	1410	55.5	800	1.05	697	1540
		B	1100	43.0	1409	55.4	800	1.05	760	1670
		B	1250	49.2	1410	55.5	1050	1.37	772	1700
		B	1400	55.1	1410	55.5	1200	1.57	818	1800
		C	750	29.5	1550	61.0	630	0.82	722	1590
		C	1000	39.4	1550	61.0	950	1.24	863	1900
		C	1150	45.3	1550	61.0	1150	1.50	940	2070
		C	1250	49.2	1550	61.0	1250	1.63	980	2160
		C	1350	53.1	1550	61.0	1400	1.83	1025	2260
		C	1450	57.1	1550	61.0	1500	1.96	1085	2390
		C	1600	63.0	1550	61.0	1700	2.22	1154	2545
		Heavy Duty	B	625	24.0	1563	61.5	450	0.59	600
	B		775	30.0	1563	61.5	560	0.73	685	1510
	B		932	36.0	1564	62.0	800	1.05	760	1680
	B		1082	43.0	1564	62.0	1000	1.31	820	1790
	B		1227	48.0	1542	60.0	1200	1.57	920	2010
	B		1382	54.0	1542	60.0	1400	1.83	970	2140
	B		1519	60.0	1542	60.0	1500	1.96	1060	2320
	B		1725	68.0	1203	47.3	1200	1.60	715*	1580
	C		775	30.0	1638	64.5	700	0.88	792	1720
	C		948	36.0	1638	64.4	900	1.18	950	2100
	C		1098	42.0	1638	64.4	1100	1.44	1060	2340
	C		1248	49.0	1635	64.0	1300	1.70	1040	2290
	C		1378	54.0	1518	60.0	1200	1.50	1088	2400
	C		1395	55.0	1635	64.0	1500	1.96	1120	2470
	C		1522	60.0	1638	64.5	1700	2.25	1119	2620
	C	1680	66.0	1638	64.5	1900	2.50	1195	2825	
	Mass Excavation	C	1440	57.0	1487	58.5	1300	1.70	940	2060
	Rock	B	600	23.6	1410	55.5	410	0.54	565	1245
		B	750	29.5	1410	55.5	550	0.72	625	1380
		B	1000	39.4	1410	55.5	800	1.05	775	1710
		B	1250	49.2	1410	55.5	1050	1.37	898	1980
		C	750	29.5	1550	61.0	630	0.82	764	1685
		C	1000	39.4	1550	61.0	950	1.24	552	1220
C		1350	53.1	1550	61.0	1400	1.83	1076	2370	
Heavy Duty Rock	B	625	24.0	1564	62.0	450	0.59	730	1610	
	B	775	30.0	1564	62.0	600	0.78	760	1680	
	B	932	36.0	1564	62.0	800	1.05	850	1870	
	B	1075	42.0	1564	62.0	1000	1.31	880	1940	
	C	948	36.0	1638	64.5	900	1.25	988	2180	
	C	1098	42.0	1638	64.5	1100	1.50	1084	2390	
	C	1248	48.0	1638	64.5	1300	1.75	1165	2570	

\*Weight without teeth.

Model	Bucket Type	Bucket Family	Bucket Bite Width		Bucket Tip Radius		Heaped Capacity		Bucket Weight With Teeth		
			mm	in	mm	in	L	yd <sup>3</sup>	kg	lb	
320C (cont'd)	Ditch Cleaning	B	1800	70.9	N/S		490	0.64	545	1200	
		B	2000	78.7	N/S		550	0.72	585	1290	
		B	2200	86.6	N/S		610	0.80	625	1380	
		C	2000	78.7	N/S		730	0.95	820	1810	
		C	2200	86.6	N/S		805	1.05	880	1940	
		C	2400	94.5	N/S		880	1.15	980	2160	
		B	1422	60.0	1143	45.0	900	1.12	681	1500	
		B	1727	72.0	1143	45.0	1100	1.50	786	1733	
		C	1676	66.0	1130	44.5	1100	1.50	739	1629	
	C	1829	72.0	1130	44.5	1200	1.62	857	1890		
	Utility	B	1400	55.1	N/S		605	0.79	620	1370	
		B	1600	63.0	N/S		700	0.92	680	1500	
		B	1800	70.9	N/S		790	1.03	740	1630	
		B	2000	78.7	N/S		880	1.15	800	1760	
		C	1600	63.0	N/S		940	1.23	970	2140	
		C	1800	70.9	N/S		1065	1.39	1060	2340	
		C	2000	78.7	N/S		1190	1.56	1140	2510	
		C	2200	86.6	N/S		1315	1.72	1220	2690	
	Utility Light	B	1400	55.1	N/S		605	0.79	470	1040	
		B	1600	63.0	N/S		700	0.92	510	1125	
		B	1800	70.9	N/S		790	1.03	550	1210	
		B	2000	78.7	N/S		880	1.15	600	1320	
		C	1600	63.0	N/S		940	1.23	730	1610	
		C	1800	70.9	N/S		1065	1.39	800	1760	
		C	2000	78.7	N/S		1190	1.56	860	1900	
		C	2200	86.6	N/S		1315	1.72	920	2030	
	322B	General Purpose	B	775	30.0	1626	64.0	700	0.88	665	1466
			B	932	36.0	1626	64.0	900	1.12	741	1634
B			1082	42.0	1626	64.0	1100	1.50	777	1713	
B			1230	48.0	1626	64.0	1300	1.75	906	1998	
S			625	24.0	1778	70.0	600	0.75	691	1524	
S			775	30.0	1778	70.0	800	1.12	807	1779	
S			948	36.0	1778	70.0	1100	1.50	909	2004	
S			1098	42.0	1778	70.0	1300	1.75	966	2130	
S			1248	48.0	1778	70.0	1600	2.12	1052	2320	
S			1395	54.0	1778	70.0	1900	2.50	1138	2509	
D			775	30.0	1854	73.0	800	1.12	953	2101	
D			925	36.0	1854	73.0	1100	1.50	1043	2300	
D			1098	42.0	1854	73.0	1400	1.88	1122	2474	
D			1246	48.0	1854	73.0	1700	2.25	1202	2650	
D			1400	55.0	1854	73.0	2000	2.62	1315	2900	
D	1540	60.0	1854	73.0	2200	3.00	1400	3087			

N/S = Not Significant for Utility, Utility Light and Ditch Cleaning Bucket.

Model	Bucket Type	Bucket Family	Bucket Bite Width		Bucket Tip Radius		Heaped Capacity		Bucket Weight With Teeth	
			mm	in	mm	in	L	yd <sup>3</sup>	kg	lb
322B (cont'd)	Excavation	B	1260	50.0	1409	55.4	900	1.18	760	1680
		S	1225	48.0	1550	61.0	1000	1.30	780	1720
		S	1355	53.0	1550	61.0	1100	1.40	850	1870
		S	1315	52.0	1550	61.0	1200	1.60	870	1920
		S	750	29.5	1550	61.0	630	0.82	694	1530
		S	1000	39.4	1550	61.0	950	1.24	780	1720
		S	1150	45.3	1550	61.0	1150	1.50	874	1930
		S	1250	49.2	1550	61.0	1250	1.64	903	1990
		S	1350	53.1	1550	61.0	1400	1.83	940	2070
		S	1600	63.0	1550	61.0	1700	2.22	1120	2470
		D	1345	53.0	1660	65.4	1300	1.70	1115	2460
		D	1430	56.0	1660	65.4	1400	1.80	1180	2600
		D	1500	59.0	1660	65.4	1500	2.00	1190	2630
		D	750	29.5	1660	65.4	660	0.86	924	2040
		D	1000	39.4	1660	65.4	1000	1.31	1015	2240
		D	1150	45.3	1660	65.4	1300	1.70	1120	2470
		D	1300	51.2	1660	65.4	1450	1.90	1150	2540
		D	1350	53.1	1660	65.4	1500	1.96	1214	2680
	D	1500	59.1	1660	65.4	1700	2.22	1307	2880	
	D	1650	65.0	1660	65.4	1900	2.49	1390	3065	
	Extreme Service Excavation	S	750	29.5	1550	61.0	630	0.82	722	1590
		S	1000	39.4	1550	61.0	950	1.24	865	1910
		S	1150	45.3	1550	61.0	1150	1.50	940	2070
		S	1250	49.2	1550	61.0	1250	1.64	980	2160
		S	1350	53.1	1550	61.0	1400	1.83	1025	2260
		S	1450	57.1	1550	61.0	1500	1.96	1085	2390
		S	1600	63.0	1550	61.0	1700	2.22	1150	2535
		D	750	29.5	1660	65.4	660	0.86	924	2040
		D	1000	39.4	1660	65.4	1000	1.31	1108	2440
		D	1150	45.3	1660	65.4	1300	1.70	1260	2780
		D	1250	49.2	1660	65.4	1500	1.96	1370	3020
		D	1500	59.1	1660	65.4	1700	2.22	1480	3260
	D	1650	65.0	1660	65.4	1900	2.49	1571	3460	
Heavy Duty	B	625	24.0	1563	61.5	500	0.62	578	1274	
	B	775	30.0	1563	61.5	600	0.75	656	1446	
	B	932	36.0	1563	61.5	800	1.00	785	1730	
	B	1082	42.0	1563	61.5	1000	1.30	850	1870	
	B	1230	48.0	1551	61.0	1200	1.60	955	2100	
	B	1377	54.0	1551	61.0	1400	1.80	1020	2250	
	B	1507	60.0	1551	61.0	1500	2.00	1075	2370	
	B	1725	68.0	1203	47.3	1200	1.60	715*	1580	

\*Weight without teeth.

Model	Bucket Type	Bucket Family	Bucket Bite Width		Bucket Tip Radius		Heaped Capacity		Bucket Weight With Teeth	
			mm	in	mm	in	L	yd³	kg	lb
322B (cont'd)	Heavy Duty	S	625	24.0	1551	61.0	500	0.62	630	1390
		S	775	30.0	1638	64.4	700	0.90	840	1850
		S	948	36.0	1638	64.4	900	1.20	955	2100
		S	1098	42.0	1638	64.4	1100	1.40	1055	2330
		S	1248	48.0	1638	64.4	1300	1.70	1135	2500
		S	1378	54.0	1518	60.0	1200	1.50	1088	2399
		S	1395	54.0	1638	64.4	1500	2.00	1235	2720
		S	1522	60.0	1638	64.4	1700	2.20	1330	2930
		D	775	30.0	1764	69.4	700	1.00	875	1929
		D	925	36.0	1764	69.4	900	1.25	968	2134
		D	1098	42.0	1764	69.4	1200	1.60	1150	2530
		D	1246	49.0	1764	69.4	1400	1.80	1290	2840
		D	1400	55.0	1764	69.4	1600	2.10	1435	3170
		D	1440	57.0	1695	66.7	1500	2.00	1368	3016
	D	1540	60.0	1764	69.4	1800	2.40	1565	3450	
	D	1695	66.0	1764	69.4	2000	2.75	1493	3292	
	D	1820	72.0	1764	69.4	2200	3.00	1620	3572	
	Rock	S	750	29.5	1550	61.0	630	0.82	764	1685
		S	1000	39.4	1550	61.0	950	1.24	904	1990
		S	1350	53.1	1550	61.0	1400	1.83	1076	2370
		D	750	29.5	1660	65.4	660	0.86	974	2150
		D	1000	39.4	1660	65.4	1000	1.31	1160	2560
		D	1650	65.0	1660	65.4	1900	2.49	1632	3600
	Heavy Duty Rock	B	775	30.0	1563	61.5	600	0.75	759	1674
		B	932	36.0	1563	61.5	800	1.00	863	1903
		B	1082	42.0	1563	61.5	1000	1.25	949	2093
		S	948	36.0	1638	64.5	900	1.25	988	2179
		S	1098	42.0	1638	64.5	1100	1.50	1084	2390
S		1248	48.0	1638	64.5	1300	1.75	1165	2569	
D		1098	42.0	1764	69.4	1200	1.50	1293	2851	
D		1246	48.0	1764	69.4	1400	1.88	1436	3166	
D		1400	55.0	1764	69.4	1600	2.12	1552	3422	
Ditch Cleaning	S	2000	78.7	N/S		730	0.95	820	1810	
	S	2200	86.6	N/S		805	1.05	880	1940	
	S	2400	94.5	N/S		880	1.15	980	2160	
	D	2200	86.6	N/S		1080	1.41	1210	2670	
	D	2400	94.5	N/S		1180	1.54	1290	2840	
	D	2600	102.4	N/S		1280	1.67	1370	3020	
	B	1422	60.0	1143	45.0	900	1.12	681	1502	
	B	1727	72.0	1143	45.0	1100	1.50	786	1733	
	S	1575	60.0	1130	44.5	1000	1.38	739	1629	
	S	1829	72.0	1130	44.5	1200	1.62	857	1890	
	D	1676	66.0	1410	55.5	1700	2.25	1188	2620	
	D	1829	72.0	1410	55.5	1800	2.38	1247	2750	

N/S = Not Significant for Utility, Utility Light and Ditch Cleaning Bucket.

Model	Bucket Type	Bucket Family	Bucket Bite Width		Bucket Tip Radius		Heaped Capacity		Bucket Weight With Teeth	
			mm	in	mm	in	L	yd³	kg	lb
322B (cont'd)	Utility	S	1600	63.0	N/S		940	1.23	970	2140
		S	1800	70.9	N/S		1065	1.39	1060	2340
		S	2000	78.7	N/S		1190	1.56	1140	2510
		S	2200	86.6	N/S		1315	1.72	1220	2690
		D	1800	70.9	N/S		1385	1.81	1490	3285
		D	2100	82.7	N/S		1630	2.13	1600	3530
		D	2400	94.5	N/S		1875	2.45	1840	4060
	D	2700	106.3	N/S		2120	2.77	2020	4450	
	Utility Light	S	1600	63.0	N/S		940	1.23	730	1610
		S	1800	70.9	N/S		1065	1.39	800	1760
		S	2000	78.7	N/S		1190	1.56	860	1900
		S	2200	86.6	N/S		1315	1.72	920	2030
		D	1800	70.9	N/S		1385	1.81	1120	2470
		D	2100	82.7	N/S		1630	2.13	1250	2760
D		2400	94.5	N/S		1875	2.45	1380	3040	
D	2700	106.3	N/S		2120	2.77	1510	3330		
325B	General Purpose	C	775	30.0	1778	70.0	800	1.12	803	1767
		C	948	36.0	1778	70.0	1100	1.50	890	1958
		C	1098	42.0	1778	70.0	1300	1.75	951	2092
		C	1248	48.0	1778	70.0	1600	2.12	1046	2301
		C	1395	54.0	1778	70.0	1900	2.50	1116	2455
		D	775	30.0	1854	73.0	800	1.12	947	2083
		D	925	36.0	1854	73.0	1100	1.50	1024	2253
		D	1098	42.0	1854	73.0	1400	1.88	1116	2455
		D	1246	48.0	1854	73.0	1700	2.25	1146	2521
		D	1400	55.0	1854	73.0	1900	2.50	1192	2622
	D	1540	60.0	1854	73.0	2200	3.00	1400	3080	
	Excavation	C	750	29.5	1550	61.0	630	0.82	694	1530
		C	1000	39.4	1550	61.0	950	1.24	780	1720
		C	1150	45.3	1550	61.0	1150	1.50	874	1930
		C	1250	49.2	1550	61.0	1250	1.64	903	1990
		C	1350	53.1	1550	61.0	1400	1.83	940	2070
		C	1370	54.0	1487	58.5	1100	1.44	940	2070
		C	1450	57.1	1550	61.0	1500	1.96	990	2180
		C	1470	58.0	1487	58.5	1200	1.57	895	1970
		C	1600	63.0	1550	61.0	1700	2.22	1045	2300
D		750	29.5	1660	65.3	660	0.86	924	2040	
D	1000	39.4	1660	65.3	1000	1.31	1015	2240		
D	1150	45.3	1660	65.3	1300	1.70	1120	2470		
D	1300	51.2	1660	65.3	1450	1.90	1150	2540		
D	1350	53.1	1660	65.3	1500	1.96	1214	2680		
D	1430	56.0	1660	65.4	1400	1.83	1195	2640		
D	1500	59.0	1660	65.4	1500	1.96	1160	2560		
D	1500	59.1	1660	65.3	1700	2.22	1307	2880		
D	1650	65.0	1660	65.3	1900	2.49	1390	3060		

N/S = Not Significant for Utility, Utility Light and Ditch Cleaning Bucket.

Model	Bucket Type	Bucket Family	Bucket Bite Width		Bucket Tip Radius		Heaped Capacity		Bucket Weight With Teeth		
			mm	in	mm	in	L	yd³	kg	lb	
325B (cont'd)	Extreme Service Excavation	C	775	30.0	1638	64.4	700	0.92	850	1880	
		C	948	36.0	1638	64.4	900	1.18	970	2130	
		C	1098	42.0	1638	64.4	1100	1.44	1060	2340	
		C	1248	48.0	1638	64.4	1300	1.70	1140	2510	
		C	1395	54.0	1638	64.4	1500	1.96	1240	2730	
		C	1522	60.0	1638	64.4	1700	2.22	1335	2940	
		C	1680	66.0	1638	64.4	1900	2.49	1470	3240	
		C	750	29.5	1550	61.0	630	0.82	722	1590	
		C	1000	39.4	1550	61.0	950	1.24	863	1900	
		C	1150	45.3	1550	61.0	1150	1.50	940	2070	
		C	1250	49.2	1550	61.0	1250	1.64	980	2160	
		C	1350	53.1	1550	61.0	1400	1.83	1025	2260	
		C	1450	57.1	1550	61.0	1500	1.96	1085	2390	
		C	1600	63.0	1550	61.0	1700	2.22	1154	2540	
		D	1098	42.0	1764	69.4	1200	1.50	1150	2530	
		D	1246	48.0	1764	69.4	1400	1.88	1290	2840	
		D	1400	55.0	1764	69.4	1600	2.12	1390	3060	
		D	1540	60.0	1764	69.4	1800	2.50	1500	3310	
		D	1695	66.0	1764	69.4	2000	2.62	1650	3640	
		D	1820	72.0	1764	69.4	2200	2.88	1800	3970	
	D	750	29.5	1660	65.3	660	0.86	924	2040		
	D	1000	39.4	1660	65.3	1000	1.31	1108	2440		
	D	1150	45.3	1660	65.3	1300	1.70	1260	2780		
	D	1250	49.2	1660	65.3	1500	1.96	1370	3020		
	D	1500	59.1	1660	65.3	1700	2.22	1480	3260		
	D	1650	65.0	1660	65.3	1900	2.49	1571	3460		
	Mass Excavation		C	1440	57.0	1487	58.5	1300	1.70	940	2060
			C	1530	60.0	1487	58.5	1500	1.96	1050	2310
			D	1520	60.0	1660	65.4	1600	2.09	1330	2930
			D	1700	67.0	1660	65.4	1900	2.49	1325	2920
	Heavy Duty		C	775	30.0	1638	64.5	700	0.88	792	1742
			C	948	36.0	1638	64.5	900	1.25	888	1954
			C	1098	42.0	1638	64.5	1100	1.50	962	2116
			C	1378	54.0	1518	60.0	1200	1.50	1082	2380
			C	1248	48.0	1638	64.5	1300	1.75	1037	2281
			C	1395	54.0	1638	64.5	1500	2.00	1119	2462
			C	1522	60.0	1638	64.5	1700	2.25	1195	2629
			C	1680	66.0	1638	64.5	1900	2.50	1281	2818
			D	775	30.0	1764	69.0	700	1.00	875	1925
			D	925	36.0	1764	69.0	900	1.25	968	2130
			D	1098	42.0	1764	69.0	1200	1.50	1079	2374
			D	1246	48.0	1764	69.0	1400	1.88	1206	2653
			D	1440	57.0	1695	67.0	1500	2.00	1330	2926
		D	1400	55.0	1764	69.0	1600	2.12	1306	2873	
		D	1540	60.0	1764	69.0	1800	2.50	1407	3095	
		D	1695	66.0	1764	69.0	2000	2.75	1493	3285	
		D	1820	72.0	1764	69.0	2200	3.00	1620	3564	

Model	Bucket Type	Bucket Family	Bucket Bite Width		Bucket Tip Radius		Heaped Capacity		Bucket Weight With Teeth	
			mm	in	mm	in	L	yd³	kg	lb
325B (cont'd)	Trenching	C	1075	42.0	1550	61.0	1000	1.31	800	1760
		D	1225	48.0	1730	68.1	1400	1.83	1165	2560
		D	1400	55.1	1730	68.1	1600	2.09	1120	2470
	Rock	C	750	29.5	1550	61.0	630	0.82	764	1680
		C	1000	39.4	1550	61.0	950	1.24	552	1220
		C	1350	53.1	1550	61.0	1400	1.83	1076	2370
		D	750	29.5	1660	65.3	660	0.86	974	2150
		D	1000	39.4	1660	65.3	1000	1.31	1160	2560
		D	1650	65.0	1660	65.3	1900	2.49	1632	3600
	Heavy Duty Rock	C	948	36.0	1638	64.5	900	1.25	1000	2200
		C	1098	42.0	1638	64.5	1100	1.50	1084	2385
		C	1248	48.0	1638	64.5	1300	1.75	1168	2570
		D	1098	42.0	1764	69.0	1200	1.50	1294	2847
		D	1246	48.0	1764	69.0	1400	1.88	1437	3161
		D	1400	55.0	1764	69.0	1600	2.12	1553	2417
	Rock Ripping	C	850	33.0	1660	65.0	600	0.75	1084	2385
		D	900	35.0	1746	69.0	700	0.88	1123	2471
	Ditch Cleaning	C	2000	78.7	N/S		730	0.95	820	1810
		C	2200	86.6	N/S		805	1.05	880	1940
		C	2400	94.5	N/S		880	1.15	980	2160
		C	1676	66.0	1132	45.0	1100	1.50	813	1789
		C	1829	72.0	1132	45.0	1200	1.62	860	1892
		D	2200	86.6	N/S		1080	1.41	1210	2670
		D	2400	94.5	N/S		1180	1.54	1290	2840
		D	2600	102.4	N/S		1280	1.67	1370	3020
		D	1676	66.0	1424	56.0	1700	2.25	1192	2622
		D	1829	72.0	1424	56.0	1800	2.50	1239	2726
	Utility	C	1600	63.0	N/S		940	1.23	970	2140
		C	1800	70.9	N/S		1065	1.39	1060	2340
		C	2000	78.7	N/S		1190	1.56	1140	2510
C		2200	86.6	N/S		1315	1.72	1220	2690	
D		1800	70.9	N/S		1385	1.81	1490	3285	
D		2100	82.7	N/S		1630	2.13	1600	3530	
D		2400	94.5	N/S		1875	2.45	1840	4060	
D		2700	106.3	N/S		2120	2.77	2020	4450	
Utility Light	C	1600	63.0	N/S		940	1.23	730	1610	
	C	1800	70.9	N/S		1065	1.39	800	1760	
	C	2000	78.7	N/S		1190	1.56	860	1900	
	C	2200	86.6	N/S		1315	1.72	920	2030	
	D	1800	70.9	N/S		1385	1.81	1120	2470	
	D	2100	82.7	N/S		1630	2.13	1250	2760	
	D	2400	94.5	N/S		1875	2.43	1380	3040	
	D	2700	106.3	N/S		2120	2.77	1510	3330	

N/S = Not Significant for Utility, Utility Light and Ditch Cleaning Bucket.



Model	Bucket Type	Bucket Family	Bucket Bite Width		Bucket Tip Radius		Heaped Capacity		Bucket Weight With Teeth	
			mm	in	mm	in	L	yd <sup>3</sup>	kg	lb
<b>330B</b>	General Purpose	D	775	<b>30.0</b>	1854	<b>73.0</b>	800	<b>1.12</b>	947	<b>2083</b>
		D	925	<b>36.0</b>	1854	<b>73.0</b>	1100	<b>1.50</b>	1024	<b>2253</b>
		D	1098	<b>42.0</b>	1854	<b>73.0</b>	1400	<b>1.88</b>	1116	<b>2455</b>
		D	1246	<b>48.0</b>	1854	<b>73.0</b>	1700	<b>2.25</b>	1146	<b>2521</b>
		D	1400	<b>55.0</b>	1854	<b>73.0</b>	2000	<b>2.62</b>	1192	<b>2622</b>
		D	1540	<b>60.0</b>	1854	<b>73.0</b>	2200	<b>3.00</b>	1400	<b>3080</b>
	Excavation	D	1345	<b>53.0</b>	1660	<b>65.4</b>	1300	<b>1.70</b>	1115	<b>2460</b>
		D	1430	<b>56.0</b>	1660	<b>65.4</b>	1400	<b>1.83</b>	1195	<b>2640</b>
		D	1500	<b>59.0</b>	1660	<b>65.4</b>	1500	<b>1.96</b>	1160	<b>2560</b>
		D	750	<b>29.5</b>	1660	<b>65.4</b>	660	<b>0.86</b>	924	<b>2040</b>
		D	1000	<b>39.4</b>	1660	<b>65.4</b>	1000	<b>1.31</b>	1015	<b>2240</b>
		D	1150	<b>45.3</b>	1660	<b>65.4</b>	1300	<b>1.70</b>	1120	<b>2470</b>
		D	1300	<b>51.2</b>	1660	<b>65.4</b>	1450	<b>1.90</b>	1150	<b>2540</b>
		D	1350	<b>53.1</b>	1660	<b>65.4</b>	1500	<b>1.96</b>	1214	<b>2680</b>
		D	1500	<b>59.1</b>	1660	<b>65.4</b>	1700	<b>2.22</b>	1307	<b>2880</b>
		D	1650	<b>65.0</b>	1660	<b>65.4</b>	1900	<b>2.49</b>	1390	<b>3065</b>
		E	1470	<b>58.0</b>	1845	<b>72.1</b>	1700	<b>2.22</b>	1470	<b>3240</b>
		E	1600	<b>63.0</b>	1845	<b>72.1</b>	1900	<b>2.49</b>	1545	<b>3410</b>
		E	1400	<b>55.1</b>	1780	<b>70.0</b>	1700	<b>2.22</b>	1490	<b>3285</b>
		E	1500	<b>59.1</b>	1780	<b>70.0</b>	1900	<b>2.49</b>	1590	<b>3505</b>
	E	1650	<b>65.0</b>	1780	<b>70.0</b>	2100	<b>2.75</b>	1730	<b>3815</b>	
	Extreme Service Excavation	D	775	<b>30.0</b>	1764	<b>69.4</b>	700	<b>1.00</b>	955	<b>2100</b>
		D	925	<b>36.0</b>	1764	<b>69.4</b>	900	<b>1.25</b>	1045	<b>2310</b>
		D	1098	<b>42.0</b>	1764	<b>69.4</b>	1200	<b>1.50</b>	1185	<b>2610</b>
		D	1246	<b>48.0</b>	1764	<b>69.4</b>	1400	<b>1.88</b>	1335	<b>2950</b>
		D	1400	<b>55.0</b>	1764	<b>69.4</b>	1600	<b>2.12</b>	1435	<b>3170</b>
		D	1540	<b>60.0</b>	1764	<b>69.4</b>	1800	<b>2.50</b>	1565	<b>3450</b>
		D	1695	<b>66.0</b>	1764	<b>69.4</b>	2000	<b>2.62</b>	1650	<b>3640</b>
		D	1820	<b>72.0</b>	1764	<b>69.4</b>	2200	<b>2.88</b>	1800	<b>3970</b>
		D	750	<b>29.5</b>	1660	<b>65.4</b>	660	<b>0.86</b>	924	<b>2040</b>
		D	1000	<b>39.4</b>	1660	<b>65.4</b>	1000	<b>1.31</b>	1108	<b>2440</b>
		D	1150	<b>45.3</b>	1660	<b>65.4</b>	1300	<b>1.70</b>	1260	<b>2780</b>
		D	1250	<b>49.2</b>	1660	<b>65.4</b>	1500	<b>1.96</b>	1370	<b>3020</b>
		D	1500	<b>59.1</b>	1660	<b>65.4</b>	1700	<b>2.22</b>	1480	<b>3260</b>
		D	1650	<b>65.0</b>	1660	<b>65.4</b>	1900	<b>2.49</b>	1571	<b>3460</b>
		E	1400	<b>55.1</b>	1780	<b>70.0</b>	1700	<b>2.22</b>	1490	<b>3285</b>
E		1500	<b>59.1</b>	1780	<b>70.0</b>	1900	<b>2.49</b>	1590	<b>3505</b>	
E		1650	<b>65.0</b>	1780	<b>70.0</b>	2100	<b>2.75</b>	1730	<b>3815</b>	
Mass Excavation		D	1520	<b>60.0</b>	1660	<b>65.4</b>	1600	<b>2.09</b>	1330	<b>2930</b>
	D	1700	<b>67.0</b>	1660	<b>65.4</b>	1900	<b>2.49</b>	1325	<b>2920</b>	
	E	1735	<b>68.0</b>	1845	<b>72.1</b>	2100	<b>2.75</b>	1710	<b>3770</b>	

Model	Bucket Type	Bucket Family	Bucket Bite Width		Bucket Tip Radius		Heaped Capacity		Bucket Weight With Teeth	
			mm	in	mm	in	L	yd <sup>3</sup>	kg	lb
330B (cont'd)	Heavy Duty	D	775	30.0	1764	69.0	700	1.00	875	1925
		D	925	36.0	1764	69.0	900	1.25	968	2130
		D	1098	42.0	1764	69.0	1200	1.50	1079	2374
		D	1246	48.0	1764	69.0	1400	1.88	1206	2653
		D	1440	57.0	1695	67.0	1500	2.00	1330	2926
		D	1440	55.0	1764	69.0	1600	2.12	1306	2873
		D	1540	60.0	1764	69.0	1800	2.50	1407	3095
		D	1695	66.0	1764	69.0	2000	2.75	1493	3285
		D	1820	72.0	1764	69.0	2200	2.88	1620	3564
		E	1695	66.0	1870	73.6	2400	3.14	2119	4660
	E	1820	72.0	1870	73.6	2600	3.40	2246	4940	
	Trenching	D	1400	55.0	1730	68.1	1600	2.09	1120	2470
	Rock	D	750	29.5	1660	65.4	660	0.86	974	2150
		D	1000	39.4	1660	65.4	1000	1.31	1160	2560
		D	1650	65.0	1660	65.4	1900	2.49	1632	3600
		E	1500	59.1	1780	70.0	1900	2.49	1690	3730
	Heavy Duty Rock	D	1098	42.0	1764	69.0	1200	1.50	1294	2847
		D	1246	48.0	1764	69.0	1400	1.88	1437	3161
		D	1400	55.0	1764	69.0	1600	2.12	1552	3414
	Rock Ripping	D	900	35.0	1764	69.0	700	0.88	1123	2471
	Ditch Cleaning	D	2200	86.6	N/S		1080	1.41	1210	2670
		D	2400	94.5	N/S		1180	1.54	1290	2840
		D	2600	102.4	N/S		1280	1.67	1370	3020
		D	1676	66.0	1410	55.5				
		D	1829	72.0	1410	55.5				
	Utility	D	1800	70.9	N/S		1385	1.81	1490	3285
		D	2100	82.7	N/S		1630	2.13	1600	3530
		D	2400	94.5	N/S		1875	2.45	1840	4060
D		2700	106.3	N/S		2120	2.77	2020	4450	
Utility Light	D	1800	70.9	N/S		1385	1.81	1120	2470	
	D	2100	82.7	N/S		1630	2.13	1250	2760	
	D	2400	94.5	N/S		1875	2.45	1380	3040	
	D	2700	106.3	N/S		2120	2.77	1510	3330	

N/S = Not Significant for Utility, Utility Light and Ditch Cleaning Bucket.

Model	Bucket Type	Bucket Family	Bucket Bite Width		Bucket Tip Radius		Heaped Capacity		Bucket Weight With Teeth	
			mm	in	mm	in	L	yd <sup>3</sup>	kg	lb
345B	Trenching	F	1218	48.0	1925	75.8	1600	2.09	1563	3450
	Excavation	T	1580	62.0	1820	71.7	1900	2.49	1728	3810
		T	1545	61.0	1820	71.7	1900	2.49	1813	4000*
		U	1650	65.0	1860	73.2	2100	2.75	2212	4880
		U	1605	63.0	1860	73.2	2100	2.75	2273	5010*
		F	1590	63.0	1870	73.6	2000	2.62	1814	4000
		F	1555	61.0	1870	73.6	2000	2.62	1848	4070*
		F	1735	68.0	1870	73.6	2200	2.88	1921	4240
		F	1690	67.0	1870	73.6	2200	2.88	1964	4110*
		G	1655	65.0	1958	77.1	2200	2.88	2172	4790
	G	1615	64.0	1958	77.1	2200	2.88	2222	4900*	
	Extreme Excavation	T	1560	61.0	1862	73.3	1900	2.49	1950	4300
		T	1525	60.0	1862	73.3	1900	2.49	1991	4390*
		T	1605	63.0	1862	73.3	2000	2.62	2091	4610
		T	1590	63.0	1862	73.3	2000	2.62	2059	4540*
		T	1665	66.0	1862	73.3	2100	2.75	2138	4710
	T	1655	65.0	1862	73.3	2100	2.75	2124	4680*	
	V-Type Excavation	U	1830	72.0	1860	73.2	2100	2.75	2394	5280
		U	1720	68.0	1860	73.2	2100	2.75	2385	5260*
		G	1750	69.0	1972	77.6	2200	2.89	2519	5550
		G	1740	69.0	1972	77.6	2200	2.89	2470	5450*
		G	1880	74.0	1972	77.6	2400	3.14	2630	5800
		G	1880	74.0	1972	77.6	2400	3.14	2575	5680*
345B Series II	General Purpose	F	780	30.7	2030	80.0	1000	1.30	1382	3040
		F	925	36.4	2030	80.0	1300	1.69	1542	3392
		F	1098	43.2	2030	80.0	1600	2.08	1638	3604
		F	1246	49.1	2030	80.0	2000	2.60	1758	3868
		F	1400	55.1	2030	80.0	2300	2.99	1867	4107
		F	1562	61.5	2030	80.0	2600	3.38	2025	4455
		F	1737	68.4	2030	80.0	3000	3.90	2143	4715
		G	1900	74.8	2150	85.0	3400	4.42	3008	6618
	Excavation	T	1580	62.0	1832	72.0	1900	2.00	1630	3580
		U	1650	65.0	1866	73.0	2100	3.00	2060	4530
		F	1590	63.0	1904	75.0	2000	3.00	1700	3740
		F	1735	68.0	1904	75.0	2200	3.00	1810	3980
		G	1655	65.0	1991	78.0	2200	3.00	2060	4540
		G	1770	70.0	1991	78.0	2400	3.00	2160	4760
	Extreme Service Excavation	T	1560	61.0	1862	73.0	1900	2.00	1830	4020
		T	1645	65.0	1862	73.0	2000	3.00	1880	4130
		T	1710	67.0	1862	73.0	2100	3.00	1920	4220
	V-Type Excavation	U	1830	72.0	1850	72.0	2100	3.00	2240	4930
		G	1750	69.0	1976	78.0	2200	3.00	2400	5290
		G	1880	74.0	1997	79.0	2400	3.00	2500	5510

\*New Adapter.

Model	Bucket Type	Bucket Family	Bucket Bite Width		Bucket Tip Radius		Heaped Capacity		Bucket Weight With Teeth		
			mm	in	mm	in	L	yd <sup>3</sup>	kg	lb	
345B Series II (cont'd)	Heavy Duty	F	925	36.4	1870	74.0	1100	1.43	1562	3440	
		F	1098	43.2	1870	74.0	1300	1.69	1659	3650	
		F	1246	49.1	1870	74.0	1600	2.08	1760	3870	
		F	1400	55.1	1870	74.0	1900	2.47	1899	4180	
		F	1540	60.6	1870	74.0	2100	2.73	2032	4470	
		F	1695	66.7	1870	74.0	2400	3.12	2160	4750	
		F	1820	71.7	1870	74.0	2600	3.38	2284	5020	
	Trenching	F	1218	48.0	1958	77.0	1600	2.00	1470	3240	
	Heavy Duty Rock	F	925	36.4	1870	74.0	1060	1.38	1590	3500	
		F	1098	43.2	1870	74.0	1300	1.69	1764	3880	
		F	1246	49.1	1870	74.0	1600	2.08	1894	4170	
		F	1400	55.1	1870	74.0	1900	2.47	2035	4480	
		F	1540	60.6	1870	74.0	2120	2.75	2175	4780	
		F	1820	71.7	1870	74.0	2690	3.50	2463	5420	
		G	1900	74.8	1994	79.0	3000	3.90	2699	5940	
	Rock Ripping	F	953	38.0	1870	74.0	900	1.25	2056	4520	
	365B L	General Purpose	V	925	36.4	2150	85.0	1540	2.00	1778	3910
			V	1230	48.4	2150	85.0	2080	2.70	2134	4690
			V	1400	55.1	2150	85.0	2310	3.00	2298	5060
V			1545	60.8	2150	85.0	2780	3.61	2465	5420	
V			1690	66.5	2150	85.0	2880	3.75	2600	5720	
V			1905	75.0	2195	86.0	3850	5.00	2841	6250	
Excavation		V	1500	59.0	2107	83.0	2500	3.00	2601	5730	
		V	1800	71.0	2107	83.0	3200	4.00	2778	6120	
		V	1900	75.0	2107	83.0	3500	5.00	3006	6630	
		W	1500	59.0	2239	88.0	2700	4.00	3338	7360	
		W	1850	72.0	2239	88.0	3600	5.00	3785	8340	
		W	2140	84.0	2239	88.0	4200	5.00	4128	9100	
		W	2250	89.0	2239	88.0	4600	6.00	4286	9450	
		W	2300	91.0	2239	88.0	5000	7.00	4202	9260	
		W	2450	96.0	2239	88.0	5300	7.00	4393	9680	
Extreme Service Excavation		V	1500	59.0	2128	84.0	2500	3.00	2860	5730	
		V	1680	66.0	2099	83.0	2500	3.00	2313	5100	
		V	1785	70.0	2057	81.0	2700	4.00	2415	5320	
		V	1800	71.0	2128	84.0	3200	4.00	3129	6900	
		V	1885	74.0	2099	83.0	2900	4.00	2506	5525	
		V	1900	75.0	2128	84.0	3500	5.00	3385	7460	
		W	1500	59.0	2239	88.0	2700	4.00	3404	7500	
		W	1850	72.0	2239	88.0	3600	5.00	3868	8530	
		W	1990	78.0	2098	83.0	3200	4.00	2950	6500	
		W	2000	79.0	2239	88.0	4000	5.00	4055	8940	
		W	2200	87.0	2239	88.0	4400	6.00	4342	9570	
		W	2320	91.0	2239	88.0	4800	6.00	4533	9990	

Model	Bucket Type	Bucket Family	Bucket Bite Width		Bucket Tip Radius		Heaped Capacity		Bucket Weight With Teeth	
			mm	in	mm	in	L	yd <sup>3</sup>	kg	lb
365B L (cont'd)	V-Type Excavation	W	2035	80.0	2116	83.0	3200	4.00	2159	6520
		W	2270	89.0	2098	83.0	3500	5.00	3313	7300
	Heavy Duty	V	925	36.4	2060	81.0	1250	1.63	1851	4072
		V	1230	48.4	2060	81.0	1860	2.42	2217	4878
		V	1400	55.1	2060	81.0	2200	2.86	2387	5251
		V	1545	60.8	2060	81.0	2460	3.20	2559	5629
		V	1690	66.5	2060	81.0	2830	3.68	2700	5939
	Rock	V	1905	75.0	2060	81.0	3310	4.30	2926	6437
		V	1500	59.0	2232	88.0	2500	3.00	3068	6760
		V	1750	69.0	2232	88.0	3200	4.00	3157	6960
		W	1850	72.0	2334	92.0	3600	5.00	4205	9270
		W	2000	79.0	2334	92.0	4000	5.00	4413	9730
	Heavy Duty Rock	W	2200	87.0	2334	92.0	4400	6.00	4758	10,490
		W	2380	94.0	2334	92.0	4800	6.00	5016	11,060
		V	925	36.4	2060	81.0	1250	1.63	2024	4450
		V	1230	48.4	2060	81.0	1860	2.42	2330	5130
		V	1400	55.1	2060	81.0	2200	2.86	2515	5530
	Heavy Duty Rock	V	1545	60.8	2060	81.0	2460	3.20	2697	5930
		V	1690	66.5	2060	81.0	2830	3.68	2847	6260
		V	1905	75.0	2060	81.0	3310	4.30	3087	6790
W		2000	79.0	2334	92.0	4000	5.00	5105	11,260	
W		2390	94.1	2350	93.0	5400	7.02	4808	10,580	
375	General Purpose	J	2390	94.1	2350	93.0	5400	7.02	4808	10,580
	Excavation	H	1800	70.9	2100	82.7	2800	3.66	2490	5490
		H	1990	78.3	2100	82.7	3200	4.25	2667	5880
		H	1990	78.3	2210	87.0	3800	5.00	2975	6560
		H	1750	68.9	2100	82.7	3200	4.19	3280	7230
		H	1900	74.8	2100	82.7	3600	4.71	3430	7560
		H	1800	70.9	2300	90.5	4200	5.49	3720	8200
		J	1750	68.9	2235	88.0	3000	3.92	2602	5780
		J	1865	73.4	2235	88.0	3200	4.19	3026	6670
		J	2040	80.3	2235	88.0	3600	4.75	3223	7110
		J	2210	87.0	2235	88.0	4000	5.25	3403	7500
		J	2200	86.6	2200	86.6	4400	5.76	4030	8890
		J	2140	84.3	2200	86.6	5100	6.67	4120	9090
		J	2300	90.6	2200	86.6	5600	7.32	4350	9590

Model	Bucket Type	Bucket Family	Bucket Bite Width		Bucket Tip Radius		Heaped Capacity		Bucket Weight With Teeth		
			mm	in	mm	in	L	yd <sup>3</sup>	kg	lb	
375 (cont'd)	Extreme Service Excavation	J	2380	93.7	2200	86.6	4500	5.89	4420	9750	
		J	2380	93.7	2200	86.6	5200	6.80	4150	9150	
		J	2380	93.7	2200	86.6	5200	6.80	4790	10,560	
		J*	2390	94.1	2234	88.0	4400	5.72	4460	9810	
		J	2400	94.5	2200	86.6	5200	6.80	4450	9810	
	V-Type Excavation	J	2080	81.9	2235	88.0	3600	4.75	3879	8550	
	Mass Excavation	J	2390	94.1	2235	88.0	4400	5.75	3818	8420	
		J*	2390	94.1	2234	88.0	4400	6.00	4531	9990	
		J*	2390	94.1	2234	88.0	5400	7.00	4835	10,660	
	V-Type Mass Excavation	J*	2260	89.0	2235	88.0	4000	5.25	4168	9170	
	Trenching	H	1380	54.3	2290	90.2	2300	3.25	2218	4890	
		H*	1535	60.4	2290	90.2	2800	3.75	2576	5680	
		H	1560	61.4	2210	87.0	2700	3.53	2348	5180	
		J*	1680	66.1	2350	92.5	3200	4.25	3103	6840	
	Extreme Service Trenching	H*	1225	48.2	2309	90.9	2000	2.63	2251	4950	
	Heavy Duty			mm	in	mm	in	m <sup>3</sup>	yd <sup>3</sup>	kg	lb
		H	1380	54.3	2290	90.0	2.40	3.12	2115	4650	
		H	1535	60.4	2290	90.0	2.80	3.64	2300	5060	
	Rock	H	1990	78.3	2290	90.0	3.80	4.94	2882	6340	
		H	1190	46.9	2137	84.1	1600	2.00	3254	6590	
H		1220	48.0	2046	80.6	1500	1.96	3131	6900		
J		1850	72.8	2350	92.5	4200	5.49	3900	8600		
J		1950	76.8	2350	92.5	4000	5.23	4420	9750		
J		2000	78.7	2350	92.5	4300	5.62	4830	10,650		
J		2380	93.7	2350	92.5	5200	6.80	5220	11,510		
J	2380	93.7	2350	92.5	5200	6.80	5300	11,690			
Heavy Duty Rock	J	2380	93.7	2350	92.5	5200	6.80	6032	13,300		

\*Available only from U.S.A.


- Bucket Fill Factors
- Bucket & Payload

### BUCKET PAYLOAD

An excavator's bucket payload (actual amount of material in the bucket on each digging cycle) is dependent on bucket size, shape, curl force, and certain soil characteristics, i.e., the fill factor for that soil. Fill factors for several types of material are listed below.

$$\text{Average Bucket Payload} = (\text{Heaped Bucket Capacity}) \times (\text{Bucket Fill Factor})$$

Material	Fill Factor Range (Percent of heaped bucket capacity)
Moist Loam or Sandy Clay	<b>A</b> — 100-110%
Sand and Gravel	<b>B</b> — 95-110%
Hard, Tough Clay	<b>C</b> — 80-90%
Rock — Well Blasted	60-75%
Rock — Poorly Blasted	40-50%

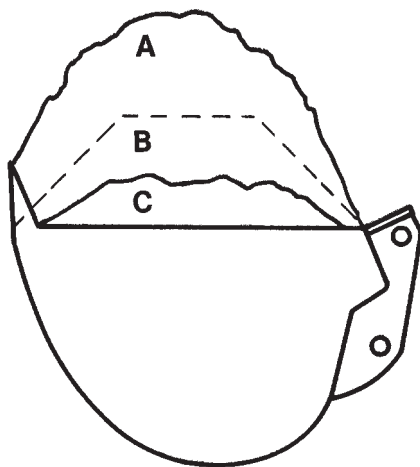

### Working Weights — Bucket & Payload

The following tables give maximum “bucket plus payload” weights to assist in selecting the correct bucket for a specific application. These weights are based on actual job conditions. In better than average conditions the excavator may be able to achieve rated lift capacities listed in this section.

**NOTE:** Bucket sizes are suitable for a maximum material density of 1800 kg/m<sup>3</sup> (3035 lb/yd<sup>3</sup>). Payloads shown are calculated at 1500 kg/m<sup>3</sup> (2530 lb/yd<sup>3</sup>).

Model	Stick Length		Working Weights† Buckets & Payload	
	mm	ft	kg	lb
<b>307B</b>	1665	5'6"	1050	2310
	2210	7'3"	860	1900
<b>307B SB</b>	1665	5'6"	1030	2270
	2210	7'3"	750	1650
<b>307B SB*</b>	1720	5'8"	1130	2490
	2210	7'3"	750	1650
<b>311B</b>	1950	6'5"	1560	3440
	2250	7'5"	1470	3240
	2800	9'2"	1230	2710
<b>312B</b>	2100	6'11"	1580	3480
	2500	8'2"	1460	3220
	3000	9'10"	1280	2820
<b>312B L</b>	2100	6'11"	1770	3900
	2500	8'2"	1640	3620
	3000	9'10"	1450	3200
<b>312B L*</b>	2100	6'11"	1740	3830
	2500	8'2"	1595	3510
	3000	9'10"	1450	3190
<b>313B CR</b>	2500	8'2"	1390	3060
	3000	9'10"	1210	2670
<b>315B</b>	1850	6'1"	2070	4570
	2250	7'5"	1980	4360
	2600	8'6"	1810	4000
	3100	10'2"	1630	3590
<b>315B L</b>	1850	6'1"	2160	4760
	2250	7'5"	2060	4540
	2600	8'6"	1890	4170
	3100	10'2"	1700	3750
<b>317B L*/ 317B LN*</b>	1850	6'1"	2160	4760
	2250	7'5"	2060	4540
	2600	8'6"	1890	4170
	3100	10'2"	1700	3750
<b>318B L</b>	1800	5'11"	2640	5820
	2250	7'5"	2410	5310
	2700	8'10"	2190	4830
	3200	10'6"	1930	4250
<b>318B LN</b>	1800	5'11"	2280	5030
	2250	7'5"	2080	4590
	2700	8'10"	1890	4170
	3200	10'6"	1660	3660
<b>318B L*/ 318B LN*</b>	1800	5'11"	2440	5380
	2250	7'5"	2250	4960
	2700	8'10"	2160	4760
	3200	10'6"	1810	3990

\*France sourced.

†Working weights may vary depending on machine configuration and geographic location. Contact your Caterpillar Dealer for specific information.

Model	Boom	Stick Length		Working Weights† Buckets & Payload		
		m	ft	kg	lb	
320C	Reach	1.90	6'3"	2550	5620	
		2.50	8'2"	2430	5360	
		2.90	9'6"	2240	4940	
		3.90	12'10"	1770	3900	
	Mass	2.40	7'10"	2640	5820	
	VA	2.40	7'10"	2620	5780	
		2.92	9'7"	2460	5420	
320C L	Reach	1.90	6'3"	3030	6680	
		2.50	8'2"	2860	6310	
		2.90	9'6"	2640	5820	
		3.90	12'10"	2120	4670	
	Mass	2.40	7'10"	3120	6880	
	VA	2.40	7'10"	2990	6590	
		2.92	9'7"	2790	6150	
320C N	Reach	1.90	6'3"	2300	5070	
		2.50	8'2"	2270	5000	
		2.92	9'7"	2090	4610	
		3.86	12'8"	1800	3970	
	Mass	2.40	7'10"	2350	5180	
	VA	2.40	7'10"	2410	5310	
		2.92	9'7"	2280	5030	
322B	Reach	2.50	8'2"	2910	6420	
		2.95	9'8"	2690	5930	
		3.60	11'10"	2320	5120	
	Mass	2.00	6'7"	3390	7480	
		2.50	8'2"	3030	6680	
322B L	Reach	2.50	8'2"	3410	7520	
		2.95	9'8"	3160	6970	
		3.60	11'10"	2760	6090	
	Mass	2.00	6'7"	4010	8840	
			2.50	8'2"	3630	8010
	VA	2.00	6'7"	3750	8270	
		2.50	8'2"	3390	7470	
322B N	Reach	2.50	8'2"	2610	5760	
		2.95	9'8"	2410	5320	
		3.60	11'10"	2070	4570	
	Mass	2.00	6'7"	3010	6640	
			2.50	8'2"	2690	5930
	VA	2.00	6'7"	2830	6240	
		2.50	8'2"	2540	5600	

Model	Boom	Stick Length		Working Weights† Buckets & Payload		
		m	ft	kg	lb	
322B LN	Reach	2.00	6'7"	3240	7140	
		2.50	8'2"	3150	6940	
		2.95	9'8"	2910	6420	
		3.60	11'10"	2710	5970	
	Mass	2.00	6'7"	3850	8490	
			2.50	8'2"	3430	7560
	VA	2.00	6'7"	3260	7190	
		2.50	8'2"	2950	6500	
325B	Reach	2.00	6'7"	3450	7610	
		2.65	8'8"	3140	6930	
		3.20	10'6"	2840	6270	
	Mass	2.00	6'7"	4090	9020	
			2.50	8'2"	3650	8050
	VA	2.00	6'7"	3430	7560	
		2.50	8'2"	3130	6900	
		3.20	10'6"	2820	6220	
325B L	Reach	2.00	6'7"	4060	8950	
		2.65	8'8"	3680	8120	
		3.20	10'6"	3360	7410	
	Mass	2.00	6'7"	4810	10,610	
			2.50	8'2"	4290	9460
	VA	2.00	6'7"	4090	9020	
		2.50	8'2"	3740	8250	
		3.20	10'6"	3360	7410	
325B LN	Reach	2.00	6'7"	3530	7790	
		2.65	8'8"	3210	7080	
		3.20	10'6"	2910	6420	
	Mass	2.00	6'7"	4180	9220	
			2.50	8'2"	3730	8230
	VA	2.00	6'7"	3490	7690	
		2.50	8'2"	3190	7030	
		3.20	10'6"	2870	6330	

†Working weights may vary depending on machine configuration and geographic location. Contact your Caterpillar Dealer for specific information.



Model	Boom	Stick Length		Working Weights† Buckets & Payload	
		m	ft	kg	lb
330B	Reach	2.15	7'1"	4500	9920
		2.80	9'2"	4000	8820
		3.30	10'10"	3690	8140
		3.90	12'10"	3250	7170
	Mass	2.15	7'1"	5030	11,090
		2.55	8'4"	4440	9790
330B L	Reach	2.15	7'1"	4700	10,360
		2.80	9'2"	4160	9170
		3.30	10'10"	3830	8440
		3.90	12'10"	3240	7540
	Mass	2.15	7'1"	5210	11,490
		2.55	8'4"	4640	10,230
330B LN	Reach	2.15	7'1"	4150	9150
		2.80	9'2"	3700	8160
		3.30	10'10"	3410	7520
		3.90	12'10"	3000	6610
	Mass	2.15	7'1"	4660	10,270
		2.55	8'4"	4100	9040
		3.50	11'6"	3530	7780
345B Series II	Reach	3.90	12'10"	4760	10,490
		3.40	11'2"	5080	11,200
		2.90	9'6"	5440	11,990
	Mass	3.00	9'10"	5700	12,570
		2.50	8'2"	6140	13,540
345B	Reach	2.90	9'6"	5280	11,640
		3.35	11'0"	4960	10,930
		3.90	12'10"	4620	10,190
	Mass	2.50	8'2"	5880	12,960
		3.00	9'10"	5360	11,820
345B Series II L – FIX	Reach	3.90	12'10"	4850	10,690
		3.40	11'2"	5180	11,420
		2.90	9'6"	5550	12,240
	Mass	3.00	9'10"	5790	12,760
		2.50	8'2"	6260	13,800
345B L – FIX	Reach	2.90	9'6"	5530	12,190
		3.35	11'0"	5170	11,400
		3.90	12'1"	4840	10,670
		4.80	15'9"	4770	10,500
	Mass	2.50	8'2"	6160	13,580
		3.00	9'10"	5620	12,390
345B L – VG	Reach	2.90	9'6"	6830	15,060
		3.35	11'0"	6930	15,280
		3.90	12'10"	6000	13,230
		4.80	15'9"	5440	12,000
	Mass	2.50	8'2"	7550	16,640
		3.00	9'10"	6980	15,390

Model	Boom	Stick Length		Working Weights† Buckets & Payload	
		m	ft	kg	lb
365B L	Reach	4.67	15'4"	6240	13,760
		3.60	11'10"	7620	16,800
		2.84	9'4"	8250	18,190
	Mass	3.00	9'10"	9820	21,650
		2.57	8'5"	10 650	23,480
375	Reach	2.90	9'6"	8450	18,630
		3.40	11'2"	7930	17,480
		4.40	14'5"	7570	16,690
		5.50	18'1"	6360	14,020
	General Purpose	3.40	11'2"	8550	18,850
4.40		14'5"	8080	17,810	
5.50		18'1"	6770	14,930	
Mass	2.90	9'6"	11 120	24,520	
	3.40	11'2"	10 430	22,990	
	4.10	13'5"	9220	20,330	
375 L	Reach	2.90	9'6"	8860	19,530
		3.40	11'2"	8330	18,360
		4.40	14'5"	7930	17,480
		5.50	18'1"	6680	14,730
	General Purpose	3.40	11'2"	8970	19,780
4.40		14'5"	8450	18,630	
5.50		18'1"	7100	15,650	
Mass	2.90	9'6"	11 610	25,600	
	3.40	11'2"	10 890	24,010	
	4.10	13'5"	9650	21,270	

†Working weights may vary depending on machine configuration and geographic location.

Contact your Caterpillar Dealer for specific information.


- Long Reach
- Introduction
- Range Dimensions
- Bucket Information

**INTRODUCTION**

Long reach excavators are designed purposely for light duty digging that requires reach capability well above that of normal digging machines. To be able to have high enough digging forces together with an acceptable size bucket, the long reach excavators have a smaller digging envelope than the ditch cleaning machines. Long reach excavators are ideally suited for deep digging in gravel or sand pits then feeding directly into a hopper.

Caterpillar's long reach hydraulic excavators use purpose-built booms and sticks designed by Caterpillar for maximum performance and durability in light duty applications.

Long Reach Excavation Fronts include: boom, stick, linkage cylinders (boom, stick, and bucket), hydraulic lines, additional counterweight for stability over the side and heavy duty wide undercarriage. Dimensions include light excavation bucket.

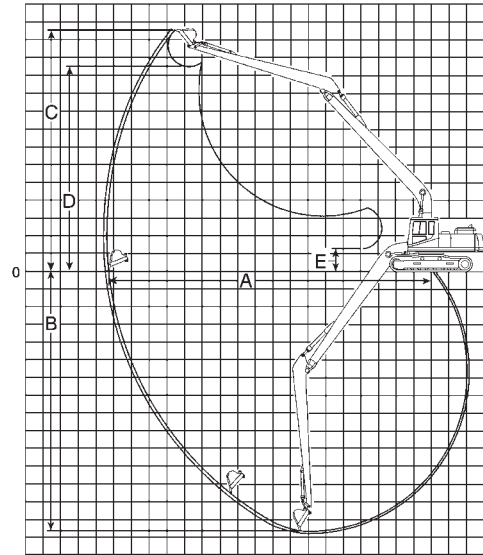

Long Reach Model	312B*		320B L		320C L	
	m	ft	m	ft	m	ft
<b>A</b> Maximum Reach at Ground Level	12.54	41'2"	15.72	51'7"	15.73	51'7"
<b>B</b> Maximum Digging Depth	9.80	32'2"	11.88	39'0"	11.88	39'0"
<b>C</b> Maximum Cutting Height	11.00	36'1"	13.29	43'7"	13.29	43'7"
<b>D</b> Maximum Dumping Height	9.01	29'7"	11.01	36'1"	11.01	36'1"
<b>E</b> Minimum Loading Height	2.15	7'1"	1.97	6'6"	1.97	6'6"

	322B L		325B L*		330B L*	
	m	ft	m	ft	m	ft
<b>A</b> Maximum Reach at Ground Level	18.43	60'6"	18.42	60'5"	20.94	68'8"
<b>B</b> Maximum Digging Depth	14.72	48'4"	14.75	48'5"	16.19	53'2"
<b>C</b> Maximum Cutting Height	14.23	46'8"	13.61	44'8"	16.52	54'2"
<b>D</b> Maximum Dumping Height	12.00	39'4"	11.42	37'6"	14.33	47'0"
<b>E</b> Minimum Loading Height	1.36	4'6"	1.16	3'10"	2.28	7'6"

**Long Reach**


Model	Bucket Type	Bucket Width		SAE Heaped Cap.		Bucket Weight		No. of Teeth	Bucket Curl Force		Stick Crowd Force	
		mm	ft	L	yd <sup>3</sup>	kg	lb		kN	lb	kN	lb
312B*	General Purpose	610	2'0"	230	0.30	200	440	4	44	9900	37	8300
320B L	Excavation	810	2'8"	450	0.59	340	750	5	54	12,100	47	10,600
320C L	Excavation	810	2'8"	450	0.59	340	750	5	54	12,100	47	10,600
322B L	Excavation	700	2'4"	380	0.50	335	740	4	54	12,100	50	11,200
322B L	Excavation	810	2'8"	450	0.59	340	750	5	54	12,100	50	11,200
325B L*	Excavation	810	2'8"	450	0.59	340	750	5	54	12,100	50	11,200
330B L*	Excavation	810	2'8"	450	0.59	340	750	5	61	13,700	43	9700

\*Custom product.

## Excavators

### Long Reach

- Shipping Dimensions
- Major Component Weights

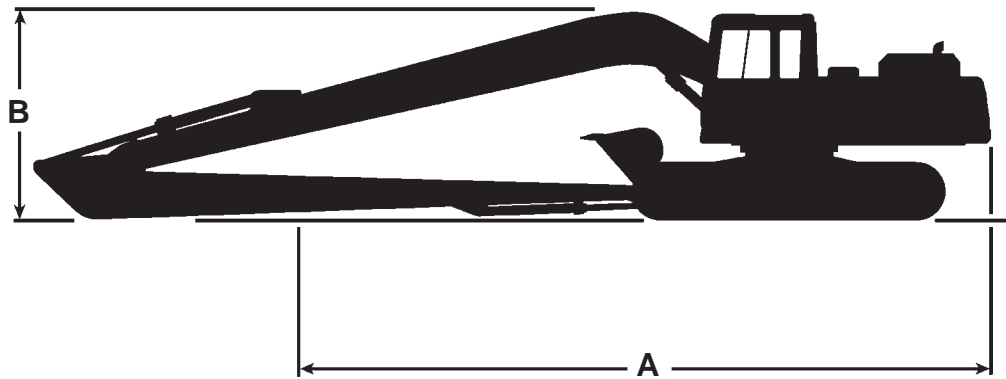

Long Reach, Dimensions	312B*		320B L		320C L	
	m	ft	m	ft	m	ft
<b>A</b> Overall Length (Front Folded)	10.22	33'6"	12.65	41'6"	12.66	41'6"
<b>B</b> Overall Height	2.80	9'2"	3.21	10'6"	3.21	10'6"
<b>C</b> Overall Width	2.69	8'10"	2.98	9'9"	3.01	9'11"

	322B L		325B L*		330B L*	
	m	ft	m	ft	m	ft
<b>A</b> Overall Length (Front Folded)	14.24	46'9"	14.38	47'2"	16.62	54'6"
<b>B</b> Overall Height	3.17	10'5"	3.25	10'8"	3.59	11'9"
<b>C</b> Overall Width	3.19	10'6"	3.19	10'6"	3.19	10'6"

Long Reach, Component Weights	312B*		320B L		320C L	
	kg	lb	kg	lb	kg	lb
Total Component Weight Includes additional over standard	2450	5400	4810	10,600	4810	10,600
Long Reach Boom	1140	2510	2185	4820	2185	4820
Long Reach Stick	640	1410	1260	2780	1260	2780

	322B L		325B L*		330B L*	
	kg	lb	kg	lb	kg	lb
Total Component Weight Includes additional over standard	5900	13,010	6500	14,330	7390	16,290
Long Reach Boom	3130	6900	3200	7055	4190	9240
Long Reach Stick	1570	3460	1570	3460	2130	4700

\*Custom product.


- Introduction
- Range Dimensions
- Bucket Information

**INTRODUCTION**

Ditch cleaning excavators are designed specifically for those jobs requiring maximum reach well beyond the range of normal excavators. Those machines are designed to drag a small bucket at about 90 degrees over the side of the tracks towards the excavator; they are not suited for digging work. Caterpillar offers the Long Reach excavators for light digging applications with a much larger digging envelope than normal excavators. Ditch cleaning excavators are suited for ditch cleaning, slope finishing, river conservation and other work formerly reserved to draglines.

Caterpillar's ditch cleaning hydraulic excavators use purpose-built booms and sticks designed by Caterpillar for maximum performance and durability in dragging applications.

Ditch Cleaning Fronts include: boom, stick, linkage cylinders (boom, stick, and bucket), hydraulic lines and additional counterweight for stability while working over the side. Dimensions include ditch cleaning bucket.

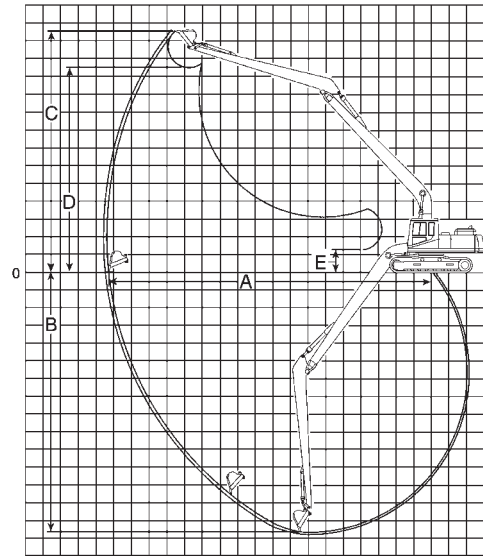

Ditch Cleaning Model	312B*		315B L/317B L*		320B L		320C L	
	m	ft	m	ft	m	ft	m	ft
<b>A</b> Maximum Reach at Ground Level	12.54	41'2"	13.00	42'8"	15.59	51'2"	15.60	51'2"
<b>B</b> Maximum Digging Depth	9.80	32'2"	10.10	33'2"	11.75	38'7"	11.75	38'7"
<b>C</b> Maximum Cutting Height	10.96	35'11"	11.64	38'2"	13.23	43'5"	13.24	43'5"
<b>D</b> Maximum Dumping Height	9.01	29'9"	9.58	31'5"	11.14	36'6"	11.14	36'7"
<b>E</b> Minimum Loading Height	2.15	7'1"	2.55	8'4"	2.09	6'10"	2.10	6'10"

	322B L		325B L*		330B L*	
	m	ft	m	ft	m	ft
<b>A</b> Maximum Reach at Ground Level	18.30	60'0"	18.29	60'0"	20.81	68'3"
<b>B</b> Maximum Digging Depth	14.59	47'11"	14.63	48'0"	16.07	52'9"
<b>C</b> Maximum Cutting Height	14.19	46'7"	13.58	44'7"	16.49	54'1"
<b>D</b> Maximum Dumping Height	12.13	39'10"	11.55	37'11"	14.46	47'5"
<b>E</b> Minimum Loading Height	1.49	4'11"	1.29	4'3"	2.41	8'0"

**Ditch Cleaning**


Model	Bucket Type	Bucket Width		SAE Heaped Cap.		Bucket Weight		No. of Teeth	Bucket Curl Force		Stick Crowd Force	
		mm	ft	L	yd <sup>3</sup>	kg	lb		kN	lb	kN	lb
312B*	Ditch Cleaning	920	3'0"	480	0.63	230	510	0	44	9900	37	8300
320B L	Ditch Cleaning	1140	3'9"	600	0.78	290	640	0	60	13,500	46	10,300
320C L	Ditch Cleaning	1140	3'9"	600	0.78	290	640	0	60	13,500	46	10,300
322B L	Ditch Cleaning	1140	3'9"	600	0.78	290	640	0	61	13,700	51	11,500
325B L*	Ditch Cleaning	1140	3'9"	600	0.78	290	640	0	61	13,700	51	11,500
330B L*	Ditch Cleaning	1140	3'9"	600	0.78	290	640	0	61	13,700	43	9700

\*Custom product.

## Excavators

### Ditch Cleaning

- Shipping Dimensions
- Major Component Weights

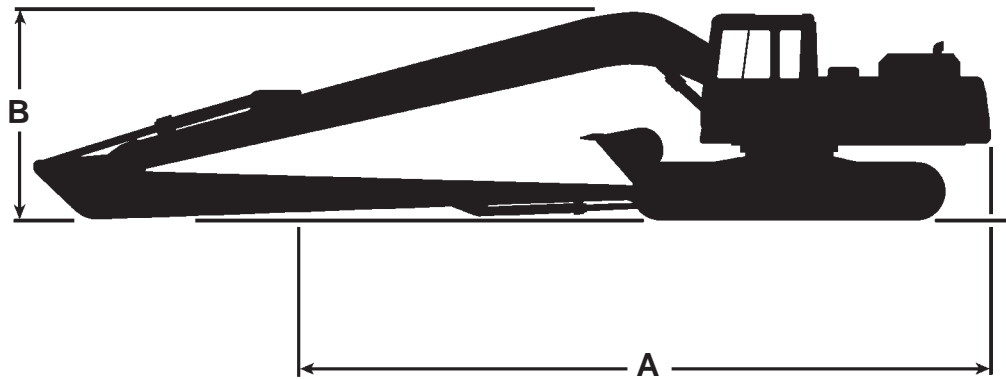


Ditch Cleaning, Dimensions	312B*		315B L/317B L*		320B L		320C L	
	m	ft	m	ft	m	ft	m	ft
<b>A</b> Overall Length (Front Folded)	10.22	33'6"	11.23	36'10"	12.65	41'6"	12.66	41'6"
<b>B</b> Overall Height	2.80	9'2"	2.92	9'7"	3.21	10'6"	3.21	10'6"
<b>C</b> Overall Width	2.76	9'1"	2.75	9'0"	2.98	9'9"	3.01	9'11"

	322B L		325B L*		330B L*	
	m	ft	m	ft	m	ft
<b>A</b> Overall Length (Front Folded)	14.24	46'9"	14.38	47'2"	16.62	54'6"
<b>B</b> Overall Height	3.17	10'5"	3.25	10'8"	3.59	11'9"
<b>C</b> Overall Width	3.19	10'6"	3.19	10'6"	3.19	10'6"

Ditch Cleaning, Component Weights	312B*		315B L/317B L		320B L		320C L	
	kg	lb	kg	lb	kg	lb	kg	lb
Total Component Weight Includes additional over standard	3100	6830	3050	6725	4810	10,600	4840	10,670
Long Reach Boom	1140	2510	1210	2670	2185	4820	2185	4820
Long Reach Stick	640	1410	780	1720	1260	2780	1260	2780

	322B L		325B L*		330B L*	
	kg	lb	kg	lb	kg	lb
Total Component Weight Includes additional over standard	5900	13,000	6500	14,330	7390	16,290
Long Reach Boom	3130	6900	3200	7055	4190	9240
Long Reach Stick	1570	3460	1570	3460	2130	4700


\*Custom product.

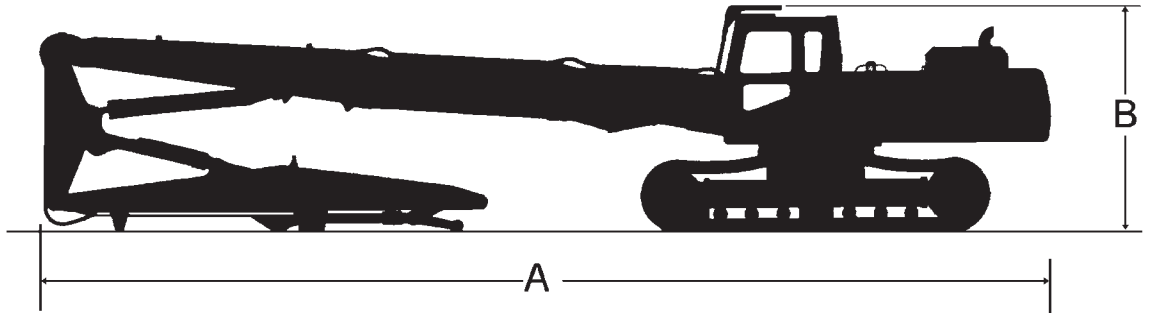

5

Model	325B L		330B L	
	m	ft	m	ft
<b>A</b> Overall Transport Length	12.56	41'2"	14.90	48'11"
<b>B</b> Transport Height	3.33	10'11"	3.34	10'11"
Transport Width with 600 mm (24") Shoe	3.19	10'6"	3.19	10'6"

Model	330B LN Hydraulic Gauge		345B L		345B LN Hydraulic Gauge	
	m	ft	m	ft	m	ft
<b>A</b> Overall Transport Length	14.90	48'11"	16.25	53'4"	16.25	53'4"
<b>B</b> Transport Height	3.34	10'11"	3.67	12'0"	3.67	12'0"
Transport Width with 600 mm (24") Shoe	2.99	9'10"	2.99	9'10"	2.99	9'10"

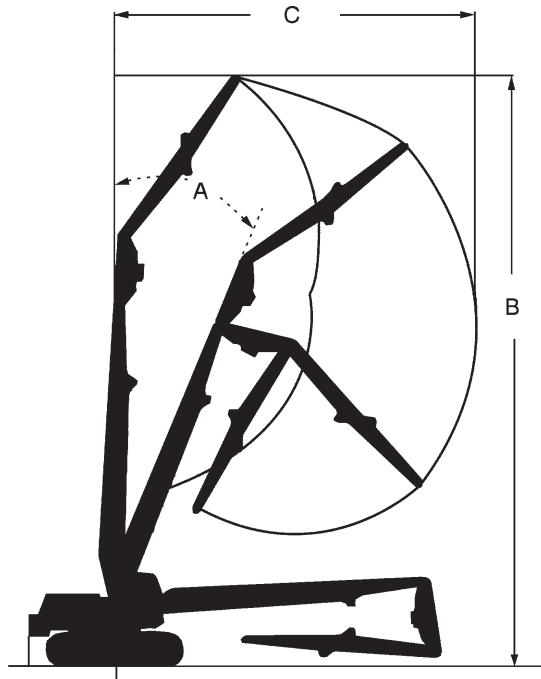


<b>Model</b>	<b>325B L</b>	
<b>A</b> Max. Boom Angle	25°	
	<b>m</b>	<b>ft</b>
<b>B</b> Max. Height	17.10	56'1"
<b>C</b> Max. Reach	11.10	36'5"
Max. Tool Weight	2300 kg	5070 lb

<b>Model</b>	<b>330B L</b>		<b>330B LN Variable Gauge</b>		<b>345B L</b>		<b>345B LN Variable Gauge</b>	
<b>A</b> Boom Angle	25°		25°		25°		25°	
	<b>m</b>	<b>ft</b>	<b>m</b>	<b>ft</b>	<b>m</b>	<b>ft</b>	<b>m</b>	<b>ft</b>
<b>B</b> Max. Height	20.90	68'7"	20.90	68'7"	22.80	74'10"	22.80	74'10"
<b>C</b> Max. Reach	13.80	45'3"	13.80	45'3"	15.30	50'2"	15.30	50'2"
Max. Tool Weight	2300 kg	5070 lb	3000 kg	6610 lb	2300 kg	5070 lb	3000 kg	6610 lb

- Demolition Arrangements
- Straight Boom
  - Shipping Dimensions
  - Belgium Sourced

## Excavators

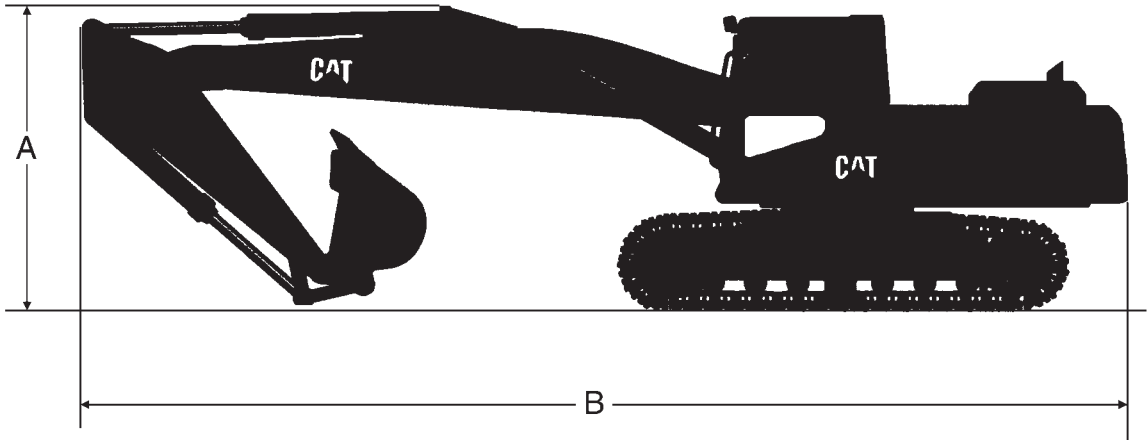

5

Model	320B				322B			
	m	ft	m	ft	m	ft	m	ft
Stick	2.50	8'2"	2.90	9'6"	2.50	8'2"	2.95	9'8"
A Shipping Height	3.07	10'1"	3.07	10'1"	3.10	10'2"	3.13	10'3"
B Shipping Length	9.70	31'10"	9.70	31'10"	10.42	34'2"	10.36	34'0"

Model	325B				330B			
	m	ft	m	ft	m	ft	m	ft
Stick	2.65	8'8"	3.20	10'6"	3.30	10'10"	3.90	12'10"
A Shipping Height	3.15	10'4"	3.15	10'4"	3.60	11'10"	3.60	11'10"
B Shipping Length	10.30	33'10"	10.30	33'10"	10.50	34'5"	10.70	35'1"


Model	345B L				375 L					
	m	ft	m	ft	m	ft	m	ft		
Stick	2.90	9'6"	3.40	11'2"	4.00	13'1"	2.90	9'6"	3.40	11'2"
A Shipping Height	3.35	11'0"	3.50	11'6"	3.75	12'4"	4.35	14'3"	4.60	15'1"
B Shipping Length	12.10	39'8"	12.05	39'6"	12.00	39'4"	14.80	48'7"	14.55	47'9"



# Excavators

## Demolition Arrangements

- Straight Booms
- Range Dimensions
- Belgium Sourced

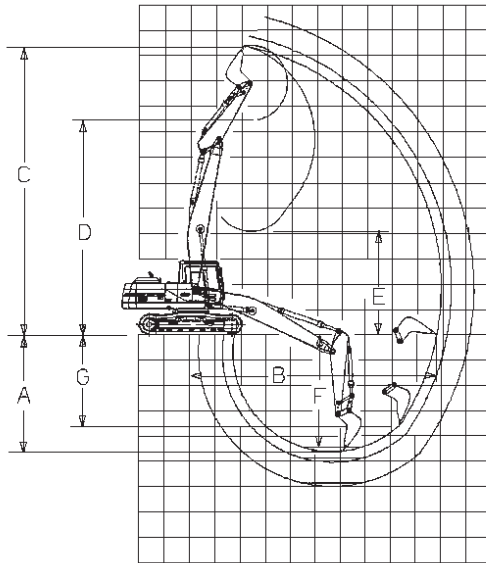


### KEY:

- A** Maximum digging depth
- B** Maximum reach @ ground line
- C** Maximum cutting height
- D** Maximum loading height
- E** Minimum loading height
- F** Maximum depth at 2.44 m (8'0") level bottom
- G** Maximum vertical wall depth

Model	320B L				322B			
	m	ft	m	ft	m	ft	m	ft
Boom	6.02	19'9"	6.02	19'9"	6.20	20'4"	6.20	20'4"
Stick	2.50	8'2"	2.92	9'6"	2.50	8'2"	2.95	9'8"
Bucket Tip radius	1.50	4'11"	1.50	4'11"	1.55	5'1"	1.55	5'1"
A	4.64	15'3"	5.06	16'7"	4.50	14'9"	4.94	16'2"
B	9.77	32'1"	10.18	33'5"	10.02	32'10"	10.47	34'4"
C	11.36	37'3"	11.72	38'5"	11.62	38'1"	12.00	39'4"
D	8.45	27'9"	8.81	28'11"	8.54	28'0"	8.92	29'3"
E	4.07	13'4"	3.59	11'9"	4.42	14'6"	3.83	12'7"
F	4.44	14'7"	4.88	16'0"	4.30	14'1"	4.74	15'7"
G	3.60	11'10"	3.93	12'11"	3.40	11'2"	3.80	12'6"

Model	325B				330B			
	m	ft	m	ft	m	ft	m	ft
Boom	6.48	21'3"	6.48	21'3"	6.87	22'6"	6.87	22'6"
Stick	2.65	8'8"	3.20	10'6"	3.30	10'10"	3.90	12'10"
Bucket Tip radius	1.60	5'3"	1.60	5'3"	1.85	6'1"	1.85	6'1"
A	5.54	18'2"	6.09	20'0"	6.06	19'11"	6.66	21'10"
B	10.48	34'5"	11.01	36'1"	11.54	37'10"	12.13	39'10"
C	11.84	38'10"	12.24	40'2"	13.15	43'2"	13.67	44'10"
D	8.63	28'4"	9.03	29'8"	9.70	31'10"	10.23	33'7"
E	4.05	13'3"	3.47	11'5"	3.87	12'8"	3.35	11'0"
F	5.36	17'7"	5.93	19'5"	5.91	19'5"	6.53	21'5"
G	4.76	15'7"	5.24	17'2"	5.04	16'6"	5.52	18'1"

- Straight Booms
- Range Dimensions
- Belgium Sourced

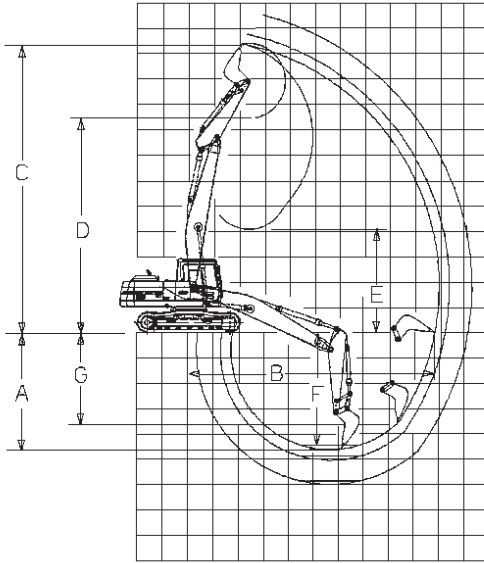

**KEY:**

- A** Maximum digging depth
- B** Maximum reach @ ground line
- C** Maximum cutting height
- D** Maximum loading height
- E** Minimum loading height
- F** Maximum depth at 2.44 m (8'0") level bottom
- G** Maximum vertical wall depth

Model	345B L						375 L					
	m	ft	m	ft	m	ft	m	ft	m	ft	m	ft
Boom	7.20	23'7"	7.20	23'7"	7.20	23'7"	8.80	28'10"	8.80	28'10"	8.80	28'10"
Stick	2.90	9'6"	3.40	11'2"	4.00	13'1"	2.92	9'7"	3.40	11'2"	4.10	13'5"
Bucket Tip radius	1.90	6'3"	1.90	6'3"	1.90	6'3"	2.23	7'4"	2.23	7'4"	2.23	7'4"
<b>A</b>	5.20	17'1"	5.65	18'6"	6.30	20'8"	6.52	21'5"	6.98	22'11"	7.69	25'3"
<b>B</b>	11.80	38'9"	12.25	40'2"	12.90	42'4"	13.85	45'5"	14.30	46'11"	15.00	49'3"
<b>C</b>	13.55	44'5"	13.95	45'9"	14.50	47'7"	15.79	51'10"	16.13	54'11"	16.72	54'10"
<b>D</b>	9.80	32'2"	10.20	33'6"	10.70	35'1"	11.34	37'2"	11.68	38'4"	12.27	40'3"
<b>E</b>	4.75	15'7"	4.35	14'3"	3.75	12'4"	9.29	30'6"	8.86	29'1"	8.23	27'0"
<b>F</b>	5.00	16'5"	5.45	17'11"	6.10	20'0"	6.37	20'11"	6.85	22'6"	7.57	24'10"
<b>G</b>	4.90	16'1"	5.20	17'1"	5.70	18'8"	4.85	15'11"	5.37	17'7"	5.81	19'1"

# Excavators

## Demolition Arrangements

- Belgium Sourced
- Lift Capacity at Ground Line

### 320B L

- Straight Boom
- 600 mm (24") Track Shoes
- 0.8 m<sup>3</sup> (1.05 yd<sup>3</sup>) Bucket

Stick		3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach	
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side
2.50 m 8'2"	kg lb	—	—	9320* 20,550*	6340 13,990	6980* 15,390*	4160 9180	4960 10,930	2970 6550	—	—	2740* 6040*	2070 4560
2.92 m 9'7"	kg lb	—	—	9600* 21,170*	6350 14,010	7000 15,440	4140 9130	4920 10,850	2930 6470	3040* 6710*	2165 4770	2050* 4530*	1880 4150

### 322B LN

- Straight Boom
- 600 mm (24") Track Shoes
- 1.25 m<sup>3</sup> (1.64 yd<sup>3</sup>) Bucket

Stick		3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach	
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side
2.50 m 8'2"	kg lb	—	—	10 680* 23,550*	6800 15,000	8000 17,650	4390 9680	5570 12,290	3070 6780	—	—	3600* 7940*	2040 4500
2.95 m 9'8"	kg lb	—	—	11 480* 25,320*	6840 15,090	8020 17,700	4400 9700	5570 12,300	3070 6780	4130 9110	2230 4930	3130* 6910*	1860 4100

### 325B LN

- Straight Boom
- 600 mm (24") Track Shoes
- 1.2 m<sup>3</sup> (1.57 yd<sup>3</sup>) Bucket

Stick		3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach	
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side
2.65 m 8'8"	kg lb	—	—	8510* 18,770*	7400 16,330	8650 19,070	4790 10,570	6060 13,360	3390 7470	4520 9970	2490 5490	3760* 8300*	2110 4660
3.20 m 10'6"	kg lb	—	—	10 040* 22,150*	7400 16,330	8650 19,070	4780 10,550	6040 13,320	3360 7420	4490 9900	2450 5420	2960* 6530*	1870 4140

\*Load limited by hydraulic capacity rather than tipping.

**330B LN**

- Straight Boom    ● 600 mm (24") Track Shoes    ● 1.2 m<sup>3</sup> (1.57 yd<sup>3</sup>) Bucket

Stick		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		10.5 m 35'0"		At Max. Reach	
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side
2.80 m 9'2"	kg lb	—	—	12 290* 27,110*	6810 15,020	8630 19,040	4870 10,750	6470 14,270	3630 8020	—	—	5000 11,040	2770 6110
3.30 m 10'10"	kg lb	11 870* 26,170*	10 460 23,060	12 330 27,180	6810 15,020	8620 19,010	4850 10,700	6440 14,200	3600 7940	—	—	3520* 7770*	2500 5530
3.90 m 12'10"	kg lb	12 750* 28,130*	10 510 23,170	12 580* 27,740*	6830 15,060	8610 19,000	4840 10,670	6410 14,140	3570 7870	4650 10,250	2680 5910	2920* 6450*	2200 4860

**345B L**

- Straight Boom    ● 600 mm (24") Track Shoes    ● 2.0 m<sup>3</sup> (2.62 yd<sup>3</sup>) Bucket

Stick		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		10.5 m 35'0"		At Max. Reach	
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side
2.90 m 9'6"	kg lb	—	—	13 480* 29,720*	10 780 23,760	10 450* 23,040*	7510 16,550	7900* 17,410*	5530 12,190	—	—	4240* 9340*	4050 8930
3.40 m 11'2"	kg lb	10 790* 23,790*	10 790* 23,790*	14 060* 31,000*	10 780 23,760	10 780* 23,760*	7550 16,640	8240* 18,160*	5530 12,190	5660* 12,480*	4180 9210	4140* 9120*	3720 8200
4.00 m 13'1"	kg lb	12 000* 26,460*	12 000* 26,460*	14 410* 31,770*	10 790 23,790	10 930* 24,100*	7460 16,440	8410* 18,540*	5410 11,920	6270* 13,820*	4020 8860	3180* 7010*	3180* 7010*

\*Load limited by hydraulic capacity rather than tipping.

- Track vs. Wheels
- Stick/Bucket Combinations

### EXCAVATOR SELECTION: TRACKS VERSUS WHEELS

#### Features:

##### Tracks

- Flotation
- Traction
- Maneuverability
- Severe underfoot
- Faster machine repositioning

##### Wheels

- Mobility and speed
- No pavement damage
- Better stability with outriggers or dozers
- Leveling machine with outriggers
- Dozing capability

#### 307–375

Unless the application calls for a lot of travel to, from, and around the job sites, a track-type excavator could be the better choice. Track-type excavators provide good traction and flotation in almost all kinds of underfoot conditions. Consistently good drawbar power provides excellent maneuverability. The tracked undercarriage also provides good overall stability. If the job calls for frequent machine repositioning, a track-type excavator will provide better operating efficiency — where raising and lowering outriggers would take extra time.

#### Wheels (M312 and M320)

Looking for a highly versatile machine? A machine that can do more than mass excavation and trenching. Consider a Wheel Excavator.

A Wheel Excavator combines traditional excavator features such as 360° swing, long reach, deep digging depth, high loading height, high digging forces and high lift capacities, with the mobility of

a wheeled undercarriage. The rubber tires allow the excavator to travel paved roads, work in shopping malls, squares, parking lots and other paved areas without damaging the pavement. It's mobility allows fast independent travel between jobsites as well as on the jobsite giving you more job planning flexibility. The Wheel Excavator is the ideal tool for truck loading in tight quarters, undercutting concrete or asphalt, patching, shoulder work, curb and gutter repair, landscaping, spreading top soil, fine grading, laying pipe, placing manholes or ditch cleaning.

A Wheel Excavator is also an ideal machine in material handling. It can load or unload trucks and carry loads around the job site. Stabilizers and a dozer blade can be pinned to the undercarriage increasing the machines stability during lifting.

Equip the Wheel Excavator with dedicated special attachments such as cab riser, material handling stick and boom. Add the additional hydraulic circuit option and your ready for a complete range of special tools. Ditch cleaning bucket, clamshell, grapples, hammers to name a few.


Caterpillar Wheel Excavators offer a load independent, load-sensing, flow distribution hydraulic system that gives the operator absolute precision and control no matter what the application.

Machine weight is the key to selecting a Wheel Excavator. Following are some additional factors that need to be considered.

Choose the proper boom and stick for your reach, digging depth and lifting requirements. Stability can be greatly enhanced by adding outriggers and/or a dozer blade. Additional hydraulic circuits can be added depending on your application and stick end attachments.

#### Acceptable Bucket/Stick Combinations

The following charts identify the acceptable bucket and stick combinations for Caterpillar Wheel Excavators and are based on stability. Minimum stability occurs with the linkage oriented over the side and positioned as shown in the visual. Dozer and/or stabilizers (if equipped) are raised and the bucket contains a full load. The longest stick is shown that has acceptable stability for each bucket. That stability is 1.1 moment ratio or better. Once this stability factor is established, all shorter sticks are then acceptable with the listed bucket.

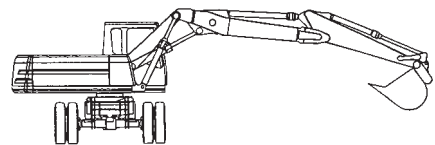

**FOR USE WITH 1-PIECE BOOM — UNIQUE M312/M315 BUCKETS**

Bucket Bite Width	<b>mm</b> <b>ft/in</b>	450 17.7"	600 1'11.6"	700 2'3.6"	900 2'11.4"	1000 3'3.4"	1100 3'7.3"	1100 3'7.3"	1200 3'11.2"	1200* 3'11.2"
ISO Bucket Capacity	<b>m<sup>3</sup></b> <b>yd<sup>3</sup></b>	0.24 0.31	0.33 0.43	0.40 0.52	0.54 0.70	0.61 0.79	0.68 0.88	0.68 0.88	0.75 0.98	0.86 1.12
Bucket Tip Radius	<b>mm</b> <b>ft/in</b>	1240 4'0.8"	1240 4'0.8"	1240 4'0.8"	1240 4'0.8"	1240 4'0.8"	1240 4'0.8"	1220 4'0"	1220 4'0"	1318 4'3.9"
Number of Tips		3	3	4	5	5	6	6	6	5
Weight with Tips	<b>kg</b> <b>lb</b>	271 596	304 669	340 748	365 803	410 902	438 964	472 1038	458 1008	592 1305
Bucket Type <sup>1</sup>		T	T	T	X	X	X	EX	X	EX
Longest Acceptable Stick:										
Dozer Only — Up (FOW <sup>2</sup> )	<b>m</b> <b>ft/in</b>	3.1 10'2"	3.1 10'2"	3.1 10'2"	3.1 10'2"	3.1 10'2"	2.6 8'6"	2.6 8'6"	2.4 7'11"	2.4 7'11"
Dozer Only — Down	<b>m</b> <b>ft/in</b>	3.1 10'2"	3.1 10'2"	3.1 10'2"	3.1 10'2"	3.1 10'2"	3.1 10'2"	3.1 10'2"	2.6 8'6"	2.6 8'6"
Rear Outriggers — Down	<b>m</b> <b>ft/in</b>	3.1 10'2"	3.1 10'2"	3.1 10'2"	3.1 10'2"	3.1 10'2"	3.1 10'2"	3.1 10'2"	3.1 10'2"	3.1 10'2"
2 Sets Outriggers — Down	<b>m</b> <b>ft/in</b>	3.1 10'2"	3.1 10'2"	3.1 10'2"	3.1 10'2"	3.1 10'2"	3.1 10'2"	3.1 10'2"	3.1 10'2"	3.1 10'2"
Dozer/Outriggers — Down	<b>m</b> <b>ft/in</b>	3.1 10'2"	3.1 10'2"	3.1 10'2"	3.1 10'2"	3.1 10'2"	3.1 10'2"	3.1 10'2"	3.1 10'2"	3.1 10'2"

**FOR USE WITH VA BOOM — UNIQUE M312/M315 BUCKETS**

Bucket Bite Width	<b>mm</b> <b>ft/in</b>	450 17.7"	600 1'11.6"	700 2'3.6"	900 2'11.4"	1000 3'3.4"	1100 3'7.3"	1100 3'7.3"	1200 3'11.2"	1200* 3'11.2"
ISO Bucket Capacity	<b>m<sup>3</sup></b> <b>yd<sup>3</sup></b>	0.24 0.31	0.33 0.43	0.40 0.52	0.54 0.70	0.61 0.79	0.68 0.88	0.68 0.88	0.75 0.98	0.86 1.12
Bucket Tip Radius	<b>mm</b> <b>ft/in</b>	1220 4'0"	1220 4'0"	1220 4'0"	1220 4'0"	1220 4'0"	1220 4'0"	1220 4'0"	1220 4'0"	1318 4'3.9"
Number of Tips		3	3	4	5	5	6	6	6	5
Weight with Tips	<b>kg</b> <b>lb</b>	271 596	304 669	340 748	365 803	410 902	438 964	472 1038	458 1008	592 1305
Bucket Type <sup>1</sup>		T	T	T	X	X	X	EX	X	EX
Longest Acceptable Stick:										
Dozer Only — Up (FOW <sup>2</sup> )	<b>m</b> <b>ft/in</b>	3.1 10'2"	3.1 10'2"	3.1 10'2"	3.1 10'2"	2.6 8'6"	2.4 7'11"	2.4 7'11"	2.1 6'11"	1.7 5'7"
Dozer Only — Down	<b>m</b> <b>ft/in</b>	3.1 10'2"	3.1 10'2"	3.1 10'2"	3.1 10'2"	3.1 10'2"	3.1 10'2"	2.6 8'6"	2.6 8'6"	2.6 8'6"
Rear Outriggers — Down	<b>m</b> <b>ft/in</b>	3.1 10'2"	3.1 10'2"	3.1 10'2"	3.1 10'2"	3.1 10'2"	3.1 10'2"	3.1 10'2"	3.1 10'2"	3.1 10'2"
2 Sets Outriggers — Down	<b>m</b> <b>ft/in</b>	3.1 10'2"	3.1 10'2"	3.1 10'2"	3.1 10'2"	3.1 10'2"	3.1 10'2"	3.1 10'2"	3.1 10'2"	3.1 10'2"
Dozer/Outriggers — Down	<b>m</b> <b>ft/in</b>	3.1 10'2"	3.1 10'2"	3.1 10'2"	3.1 10'2"	3.1 10'2"	3.1 10'2"	3.1 10'2"	3.1 10'2"	3.1 10'2"

\*Requires J300 tips. All other buckets require J250 tips.

<sup>1</sup>T = Trenching

X = Excavation

EX = Extreme Service Excavation

<sup>2</sup>Free on wheels

**FOR USE WITH 1-PIECE & VA BOOMS — UNIQUE M318 BUCKETS**

Bucket Bite Width	1000 mm <b>3'3"</b>	1100 mm <b>3'7"</b>	1200 mm <b>3'11"</b>	1200 mm <b>3'11"</b>
ISO Bucket Capacity	0.70 m <sup>3</sup> <b>0.92 yd<sup>3</sup></b>	0.80 m <sup>3</sup> <b>1.05 yd<sup>3</sup></b>	0.90 m <sup>3</sup> <b>1.18 yd<sup>3</sup></b>	0.90 m <sup>3</sup> <b>1.18 yd<sup>3</sup></b>
Bucket Tip Radius	1340 mm <b>4'5"</b>	1340 mm <b>4'5"</b>	1340 mm <b>4'5"</b>	1340 mm <b>4'5"</b>
Number of Tips	5	5	5	5
Weight with Tips	600 kg <b>1323 lb</b>	640 kg <b>1411 lb</b>	660 kg <b>1455 lb</b>	713 kg <b>1569 lb</b>
Bucket Type <sup>1</sup>	X	X	X	X
Longest Acceptable Stick:				
Dozer Only — Up (FOW <sup>2</sup> )	2.8 m <b>9'2"</b>	2.4 m <b>7'10"</b>	1.8 m <b>5'11"</b>	1.8 m <b>5'11"</b>
Dozer Only — Down	4.0 m <b>13'1"</b>	2.8 m <b>9'2"</b>	2.4 m <b>7'10"</b>	2.4 m <b>7'10"</b>
Rear Outriggers — Down	4.0 m <b>13'1"</b>	2.8 m <b>9'2"</b>	2.4 m <b>7'10"</b>	2.4 m <b>7'10"</b>
2 Sets Outriggers — Down	4.0 m <b>13'1"</b>	4.0 m <b>13'1"</b>	4.0 m <b>13'1"</b>	4.0 m <b>13'1"</b>
Dozer/Outriggers — Down	4.0 m <b>13'1"</b>	4.0 m <b>13'1"</b>	4.0 m <b>13'1"</b>	4.0 m <b>13'1"</b>

<sup>1</sup>T = Trenching      X = Excavation      EX = Extreme Service Excavation  
<sup>2</sup>Free on wheels

**FOR USE WITH 1-PIECE & VA BOOMS — UNIQUE M320 BUCKETS**

Bucket Bite Width	600 mm <b>2'0"</b>	750 mm <b>2'6"</b>	1000 mm <b>3'3"</b>	1100 mm <b>3'7"</b>	1250 mm <b>4'1"</b>
ISO Bucket Capacity	0.41 m <sup>3</sup> <b>0.54 yd<sup>3</sup></b>	0.55 m <sup>3</sup> <b>0.72 yd<sup>3</sup></b>	0.81 m <sup>3</sup> <b>1.06 yd<sup>3</sup></b>	0.90 m <sup>3</sup> <b>1.18 yd<sup>3</sup></b>	1.05 m <sup>3</sup> <b>1.37 yd<sup>3</sup></b>
Bucket Tip Radius	1423 mm <b>4'8"</b>	1423 mm <b>4'8"</b>	1423 mm <b>4'8"</b>	1423 mm <b>4'8"</b>	1423 mm <b>4'8"</b>
Number of Tips	3	3	4	5	5
Weight with Tips	540 kg <b>1190 lb</b>	560 kg <b>1230 lb</b>	600 kg <b>1320 lb</b>	685 kg <b>1510 lb</b>	740 kg <b>1630 lb</b>
Bucket Type	GP	GP	GP	GP	GP

Bucket Bite Width	1400 mm <b>4'7"</b>	1500 mm <b>4'11"</b>	1200 mm <b>3'11"</b>	1250 mm <b>4'1"</b>	1800 mm <b>5'11"</b>
ISO Bucket Capacity	1.20 m <sup>3</sup> <b>1.57 yd<sup>3</sup></b>	1.35 m <sup>3</sup> <b>1.77 yd<sup>3</sup></b>	0.90 m <sup>3</sup> <b>1.18 yd<sup>3</sup></b>	1.05 m <sup>3</sup> <b>1.37 yd<sup>3</sup></b>	0.48 m <sup>3</sup> <b>0.63 yd<sup>3</sup></b>
Bucket Tip Radius	1423 mm <b>4'8"</b>	1423 mm <b>4'8"</b>	1340 mm <b>4'4"</b>	1423 mm <b>4'8"</b>	1244 mm <b>4'1"</b>
Number of Tips	6	6	5	5	—
Weight with Tips	780 kg <b>1720 lb</b>	810 kg <b>1785 lb</b>	710 kg <b>1565 lb</b>	750 kg <b>1655 lb</b>	477 kg* <b>1050 lb*</b>
Bucket Type	GP	GP	ES	ES	DC

Bucket Bite Width	2000 mm <b>6'7"</b>	2000 mm <b>6'7"</b>	2300 mm <b>7'7"</b>	2000 mm <b>6'7"</b>
ISO Bucket Capacity	0.58 m <sup>3</sup> <b>0.76 yd<sup>3</sup></b>	0.70 m <sup>3</sup> <b>0.92 yd<sup>3</sup></b>	0.62 m <sup>3</sup> <b>0.81 yd<sup>3</sup></b>	0.70 m <sup>3</sup> <b>0.92 yd<sup>3</sup></b>
Bucket Tip Radius	1300 mm <b>4'3"</b>	1400 mm <b>4'7"</b>	1244 mm <b>4'1"</b>	896 mm <b>2'11"</b>
Number of Tips	—	—	—	—
Weight with Tips	680 kg* <b>1500 lb*</b>	720 kg* <b>1590 lb*</b>	569 kg* <b>1255 lb*</b>	640 kg <b>1410 lb</b>
Bucket Type	DC	DC	DC	DC

\*Not including adapter and cylinders.  
 GP = General Purpose      DC = Ditch Cleaning      ES = Extreme Service

**EXCAVATOR SHOE SELECTION**

Undercarriage life can be extended by equipping the machine properly for the application.

Many excavators work on pavement or flat, soft ground and experience few undercarriage problems. But if those same machines (usually equipped with wide track pads) were placed in severe underfoot conditions, undercarriage destruction could occur very rapidly.

The rule, used for other track-type machines — *“Whenever possible use the narrowest shoes available”* — is even more valid for excavators.

The best general purpose track shoe is the triple grouser. It has a good section modulus and offers the best compromise between traction and minimum disturbance to paved surface.

The double grouser shoe has a better section modulus and is more aggressive than the triple grouser section. Single grouser shoes are offered for maximum traction. Some users like single grousers for added mobility in hilly terrain.

The following table lists ground pressures for various width shoes (reach boom, medium stick and bucket):

Model	Shoe Type	Shoe Width		Pressure	
		mm	in	kPa	psi
<b>301.5</b>	Steel Double Grouser	230	9	29.9	4.33
	Rubber Belt	230	9	28.7	4.16
<b>301.6</b>	Steel Double Grouser	230	9	28.2	4.09
	Rubber Belt	230	9	27.2	3.94
<b>301.8</b>	Steel Double Grouser	230	9	28.8	4.17
	Rubber Belt	230	9	27.7	4.01
<b>302.5</b>	Steel Double Grouser	300	12	26.6	3.85
	Rubber Belt	300	12	25.6	3.71
<b>303.5</b>	Steel Double Grouser	300	12	31.8	4.61
	Rubber Belt	300	12	31.0	4.49
<b>304.5</b>	Steel Double Grouser	400	15	26.4	3.83
	Rubber Belt	400	15	25.7	3.72
<b>307B</b>	Triple	450	18	30.0	4.35
	Triple	600	24	23.0	3.34
	Segment Rubber	450	18	30.0	4.35
<b>307B SB</b>	Triple	450	18	34.0	4.93
	Triple	600	24	26.0	3.77
	Segment Rubber	450	18	34.0	4.93
<b>307B SB*</b>	Triple	450	18	41.0	5.95
	Triple	550	21	35.0	5.08
	Triple	600	24	33.0	4.78
	Rubber	450	18	41.0	5.95
	Rubber	600	24	33.0	4.78
<b>311B</b>	Triple	500	20	38.0	5.51
	Triple	600	24	32.0	4.64
	Triple	700	28	28.0	4.06
	Triple	770	30	26.0	3.77
	Segment Rubber	500	20	38.2	5.54
<b>312B</b>	Triple	500	20	39.0	5.66
	Triple	600	24	33.0	4.79
	Triple	700	28	29.0	4.21
	Triple	770	30	26.0	3.77
	Segment Rubber	500	20	40.2	5.83

\*France sourced.



Model	Shoe Type	Shoe Width		Pressure	
		mm	in	kPa	psi
<b>312B L</b>	Triple	500	20	38.0	5.51
	Triple	600	24	32.0	4.64
	Triple	700	28	28.0	4.10
	Triple	770	30	26.0	3.77
	Triple	850	34	24.0	3.60
	Segment Rubber	500	20	40.2	5.83
<b>313B CR</b>	Triple	500	20	41.3	6.00
	Triple	600	24	35.1	5.10
	Triple	700	28	30.6	4.40
	Segment Rubber	500	20	41.0	5.90
<b>315B</b>	Triple	500	20	48.0	6.96
	Triple	600	24	41.0	5.95
	Triple	700	28	35.0	5.08
<b>315B L</b>	Triple	500	20	46.0	6.67
	Triple	600	24	39.0	5.67
	Triple	700	28	33.0	4.79
<b>317B L*</b>	Triple	600	24	43.0	6.23
	Triple	700	28	38.0	5.51
	Triple	800	32	33.0	4.78
<b>317B LN*</b>	Triple	500	20	51.0	7.39
	Triple	600	24	43.0	6.23
<b>318B L</b>	Triple	500	20	49.0	7.10
	Triple	500	20	44.0	6.39
	Triple*	600	24	49.0	7.10
	Triple	600	24	42.0	6.09
	Triple	600	24	44.0	6.39
	Triple*	700	28	43.0	6.23
	Triple	700	28	37.2	5.40
	Triple	700	28	38.0	5.54
	Triple*	800	32	38.0	5.51
	Triple	800	32	33.0	4.78
<b>318B LN</b>	Triple*	500	20	56.0	8.12
	Triple	500	20	50.0	7.25
	Triple	500	20	49.0	7.10
	Triple*	600	24	47.0	6.81
	Triple	600	24	44.0	6.39
	Triple	600	24	42.1	6.13
	Triple	700	28	38.0	5.54
	Triple	700	28	36.8	5.34
<b>320C</b>	Triple	600	24	46.1	6.70
	Triple	700	28	40.3	5.80
	Triple	800	32	35.6	5.20
<b>320C L</b>	Triple	600	24	47.5	6.90
	Triple	700	28	37.7	5.50
	Triple	800	32	33.1	4.80
<b>322B</b>	Triple	600	24	49.8	7.22
	Triple	700	28	43.4	6.29
	Triple	800	32	38.3	5.55
<b>322B L</b>	Triple	600	24	46.4	6.73
	Triple	700	28	40.3	5.85
	Triple	800	32	35.8	5.19

**NOTE:** Belgium sourced excavators have different ground pressures. See Technical Data Sheets.

\*France sourced.


Model	Shoe Type	Shoe Width		Pressure	
		mm	in	kPa	psi
<b>322B LN</b>	Triple	600	24	46.3	6.72
<b>325B</b>	Triple	600	24	55.8	8.09
	Triple	700	28	48.4	7.02
	Triple	800	32	43.3	6.29
<b>325B L</b>	Triple	600	24	52.9	7.67
	Triple	700	28	45.9	6.66
	Triple	800	32	41.1	5.96
<b>325B LN</b>	Triple	600	24	52.7	7.64
<b>330B</b>	Triple	600	24	67.0	9.70
	Triple	750	30	54.0	7.80
	Triple	850	33	49.0	7.10
<b>330B L</b>	Triple	600	24	62.0	9.0
	Triple	750	30	50.0	7.3
	Triple	850	33	45.0	6.5
<b>330B LN</b>	Triple	600	24	62.0	9.0
<b>345B</b>	Triple	600	24	80.3	11.6
	Triple	750	30	65.8	9.5
	Triple	900	35	55.7	8.1
<b>345B Series II</b>	Triple	750	30	62.8	9.1
	Triple	900	35	53.2	7.7
	Triple	600	24	76.6	11.1
	Double	600	24	77.1	11.2
	Double	750	30	62.8	9.1
<b>345B L – FIX</b>	Triple	600	24	76.0	11.0
	Triple	750	30	62.3	9.0
	Triple	900	35	52.8	7.7
<b>345B Series II LC – FIX</b>	Triple	750	30	66.3	9.6
	Triple	900	35	56.1	8.1
	Triple	600	24	81.0	11.7
	Double	600	24	81.4	11.8
	Double	750	30	66.3	9.6
<b>345B L – VG</b>	Triple	600	24	81.8	11.9
	Triple	750	30	67.0	9.7
	Triple	900	35	56.7	8.2
<b>365B L</b>	Double Grouser	750	30	83.5	12.1
	Double Grouser	650	26	95.5	13.8
	Double Grouser	900	35	70.7	10.3
<b>375</b>	Double	610	24	120.7	17.5
	Double	750	30	99.3	14.4
	Double	900	35	83.4	12.1
	Single	610	24	122.1	17.7
<b>375 L</b>	Double	610	24	113.1	16.4
	Double	750	30	93.1	13.5
	Double	900	35	78.6	11.4
	Single	610	24	113.1	16.4
<b>5130B ME</b>	Double	650	26	179.0	26.0
	Double	800	32	218.0	31.6
	Double	1000	39	145.0	21.0
<b>5230 ME</b>	Double	1100	43	151.0	21.9
	Double	1300	51	172.0	25.0
	Double	1500	59	202.0	29.4

NOTE: Belgium sourced excavators have different ground pressures. See Technical Data Sheets.

## QUICK COUPLER SYSTEMS

Quick couplers can greatly increase a machine's versatility and productivity. They make it much easier to switch attachments which can increase utilization. Quick couplers also encourage changing buckets when the application changes, rather than continue to use a less efficient bucket. Example: An application that is predominately dirt with occasional pockets or seams of rock. Without a quick coupler the owner may choose to live with a rock bucket but, rock buckets are normally smaller and heavier which reduces performance in a dirt application. A quick coupler allows the use of the rock bucket in the rock and a GP bucket in the dirt.

There are two types of quick couplers. The first is a dedicated type. A typical system substitutes hooks on the bucket for the pin-on hinges used with conventional buckets. The mating portion is pinned on the stick and bucket linkage. It slips into the hooks to secure the bucket or other attachment.



Dedicated  
Hook-type

### Advantages:


Bucket tip radius (distance from the bucket pivot point to the bucket tip) does not increase. Increased tip radius reduces curl and stick forces which can reduce the loadability of the bucket. The hook type coupler also does not add appreciable weight at the end of the stick. Keeping the tip radius and weight the same ensure no compromise in performance. The machine portion of the hook type coupler can be designed to allow more than one machine to use the same buckets.

### Disadvantages:

The hook type system requires special buckets. Conventional pin-on buckets cannot be used. The ability to use buckets on more than one machine

requires careful application analysis. Larger machines generate forces that can destroy the wrong buckets. Smaller machines with the wrong bucket may develop loads in excess of the machine's capability. Even if the machine can handle the loads, the tip radius may be too large to allow the bucket to load properly. With the flexibility of a quick coupler comes the responsibility to make sure the bucket or other attachments are properly sized for each application.

The second type of quick coupler is the pin grabber type. This device pins on the stick and bucket linkage and grabs the bucket pins on standard pin-on buckets.

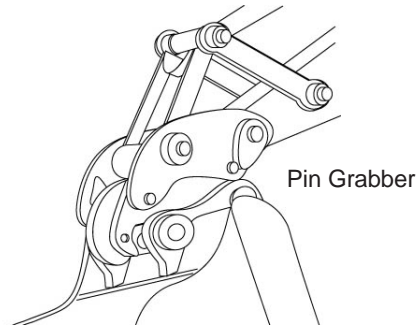

### Advantages:

The advantage of the pin grabber is that it will pick up standard pin-on buckets. No need to purchase new attachments that will fit the system.

### Disadvantages:

The pin grabber is mounted between the stick and the bucket which increases the tip radius. The amount of increase depends on the pin grabber's manufacturer. Increasing tip radius can compromise performance by decreasing bucket forces. The coupler also adds weight and reduces the payload capability.

Pin grabbers are required to mate up with existing bucket pins. Because different machines require different pin spreads and diameters, they offer very limited ability to match with buckets from other machines.

Both types of quick couplers offer two types of actuation. Mechanical ... which requires manual activity to release and engage the attachment. This process can take from one to five minutes depending on the coupler design. The other type is cab activated ... this type can usually allow an attachment change in 30 seconds or less.

EQUIPMENT FOR ...	301.5	301.6	301.8	302.5
<b>Undercarriage:</b>				
Standard	●	●	—	●
Variable Width	—	—	●	—
<b>Booms:</b>				
One-Piece Reach	—	—	—	—
Swing	●	●	●	●
Parallel Offset	—	—	—	—
Variable Adjustable	—	—	—	—
<b>Sticks:</b>				
Short	—	—	—	—
Medium	●	—	●	●
Long	●	●	●	●
<b>Buckets (No. of)</b>	14	14	14	17
<b>Teeth:</b>				
Abrasion	—	—	—	—
Long	●	●	●	●
Short	—	—	—	—
Penetration	—	—	—	—
Wide (Spade)	—	—	—	—
Sharp	—	—	—	—
<b>Side Cutters:</b>				
One-Piece Blade	●	●	●	●
<b>Augers</b>	●	●	●	●
<b>Hydraulic Hammers</b>	●	●	●	●
<b>Shears</b>	—	—	—	●
<b>Crushers</b>	—	—	—	●
<b>Hydraulic Brooms</b>	—	—	—	—
<b>Track Shoes:</b>	Steel Double Grouser 230 mm (9") Rubber Belt 230 mm (9")	Steel Double Grouser 230 mm (9") Rubber Belt 230 mm (9")	Steel Double Grouser 230 mm (9") Rubber Belt 230 mm (9")	Steel Double Grouser 300 mm (12") Rubber Belt 300 mm (12")

**NOTE:** Number of buckets includes Gen. Purpose, Trenching and Rock. Other types of buckets have not been included.  
 All attachments may not be available in all sales areas.

EQUIPMENT FOR ...	303.5	304.5	307B		307B SB	
<b>Undercarriage:</b>						
Standard	●	●	●		●	
Variable Width	—	—	—		—	
<b>Booms:</b>						
One-Piece Reach	—	—	●		—	
Swing	●	●	—		●	
Parallel Offset	—	—	●		—	
Variable Adjustable	—	—	●		—	
<b>Sticks:</b>			<b>mm</b>	<b>ft</b>	<b>mm</b>	<b>ft</b>
Short	—	—	1670	5'6"	1670	5'6"
Medium	●	●		—	1720	5'8"
Long	●	●	2210	7'3"	2210	7'3"
<b>Buckets (No. of)</b>	13	13	3		3	
<b>Teeth:</b>						
Abrasion	—	—	—		●	
Long	●	●	●		●	
Short	—	—	●		●	
Penetration	—	—	—		●	
Wide (Spade)	—	—	—		●	
Sharp	—	—	—		●	
<b>Side Cutters:</b>						
One-Piece Blade	●	●	●		●	
<b>Augers</b>	●	●	—		—	
<b>Hydraulic Hammers</b>	●	●	●		●	
<b>Shears</b>	●	●	—		—	
<b>Crushers</b>	●	●	—		—	
<b>Hydraulic Brooms</b>	—	—	—		—	
<b>Track Shoes:</b>	Steel Double Grouser 300 mm (12") Rubber Belt 300 mm (12")	Steel Double Grouser 400 mm (15") Rubber Belt 300 mm (15")	Triple Grouser 450, 600 mm (18", 24") Rubber Segments 450 mm (18") Rubber Belt 450 mm (18")	Triple Grouser 450, 550, 600 mm (18", 21", 24") Rubber Pads 450, 600 mm (18", 24") Rubber Segments 450 mm (18")		

**NOTE:** Number of buckets includes Gen. Purpose, Trenching and Rock. Other types of buckets have not been included.  
All attachments may not be available in all sales areas.

Summary of Major Attachments  
 ● 311B ● 312B ● 312B L ● 313B CR  
 ● 315B ● 315B L ● 317B L/LN

**Excavators**

5

EQUIPMENT FOR ...	311B		312B 312B L		313B CR		315B 315B L		317B L 317B LN	
<b>Undercarriage:</b>										
Standard	●		●		●		●		—	
Long (L) — FIX	—		●		—		●		●	
Long — VG	—		—		—		—		—	
Narrow (N)	—		—		—		—		●	
<b>Booms:</b>										
One-Piece Reach	●		●		●		●		●	
<b>Sticks:</b>	mm	ft	mm	ft	mm	ft	mm	ft	mm	ft
Short	1950	6'5"	2100	6'11"	—	—	1850	6'1"	1850	6'1"
●	2250	7'5"	2500	8'2"	2500	8'2"	2250	7'5"	2250	7'5"
●	2800	9'2"	3000	9'10"	3000	9'10"	2600	8'6"	2600	8'6"
Long	—		—		—		3100	10'2"	3100	10'2"
<b>Booms:</b>										
One-Piece Reach	●		●		●		●		●	
Two-Piece VA	—		●		—		●		●	
<b>Sticks:</b>										
Short	—		2100	6'11"	—		1850	6'1"	1850	6'1"
●	—		2500	8'2"	—		2250	7'5"	2250	7'5"
●	—		3000	9'10"	—		2600	8'6"	2600	8'6"
Long	—		—		—		3100	10'2"	3100	10'2"
<b>Buckets (No. of)</b>	5		5		5		5		—	
<b>Teeth:</b>										
Abrasion — HD	●		●		●		●		●	
Long (G.P.)	●		●		●		●		●	
Long — HD	—		—		●		—		—	
Short (Rock)	●		●		●		●		●	
Penetration	●		●		●		●		●	
Wide (Spade)	●		●		●		●		●	
Sharp — Center	●		●		●		●		●	
Sharp — Corner	—		—		●		—		—	
<b>Side Cutters:</b>										
One-Piece Blade	●		●		●		●		●	
<b>Track Shoes:</b>										
	Triple Grouser 500, 600, 700, 770 mm (20", 24", 28", 30")		Triple Grouser 500, 600, 700, 770, 850, 900, 1400 mm (20", 24", 28", 30", 34", 36", 56")		Triple Grouser 600, 700 mm (24", 28")		Triple Grouser 500, 600, 700, 900 mm (20", 24", 28", 36")		Triple Grouser 500, 600, 700, 900*, 1400* mm (20", 24", 28", 36"*, 56"*)	
	Rubber Pads 500 mm (20")		Rubber Pads 500 mm (20")		Rubber Pads 500 mm (20")		Rubber Pads 500, 600 mm (20", 24")		Rubber Pads 500, 600 mm (20", 24")	

\*Custom product, France sourced.

**NOTE:** Number of buckets includes Gen. Purpose, Trenching and Rock. Other types of buckets have not been included.  
 All attachments may not be available in all sales areas.

# Excavators

## Summary of Major Attachments

- 318B L/LN ● 320C ● 320C L/LN ● 322B ● 322B L/LN
- 325B ● 325B L/LN ● 330B ● 330B L/LN

EQUIPMENT FOR ...	318B L		320C		322B		325B		330B	
	318B LN		320C LN		322B LN		325B LN		330B LN	
<b>Undercarriage:</b>										
Standard	—		●		●		●		●	
Long (L) — FIX	●		●		●		●		●	
Narrow (N)	●		—		—		—		—	
Long Narrow (LN)	●		●		●*		●*		●*	
<b>Booms:</b>										
One-Piece Reach	●		●		●		●		●	
One-Piece Reach — HD	—		●		—		—		—	
<b>Sticks:</b>	<b>mm ft</b>		<b>mm ft</b>		<b>mm ft</b>		<b>mm ft</b>		<b>mm ft</b>	
Short	1800	5'11"	1900	6'3"	—	—	2000	6'7"	2150	7'1"
●	2250	7'5"	2500	8'2"	2500	8'2"	2650	8'8"	2800	9'2"
●	2700	8'10"	2900	9'6"	2950	9'8"	3200	10'6"	3300	10'10"
●	—	—	—	—	3600	11'10"	4200	13'9"	3900	12'10"
Long	3200	10'6"	3900	12'10"	—	—	—	—	—	—
Short — HD	—		—		—		—		—	
● — HD	—		2500	8'2"	—		—		—	
● — HD	—		2900	9'6"	—		—		—	
<b>Booms:</b>										
One-Piece Mass	—		●		●		●		●	
Two-Piece VA	—		—		●		—		—	
<b>Sticks:</b>										
Short	—		1900	6'3"	2000	6'7"	2000	6'7"	2150	7'1"
●	—		2400	7'10"	2500	8'2"	2500	8'2"	2550	8'4"
●	—		—	—	—	—	3200	10'6"	—	—
<b>Bucket Family</b>	—		B, C		B, S, D		B, C, D		D, E	
<b>Buckets (No. of)</b>	5		10		24		24		17	
<b>Teeth:</b>										
Abrasion — HD	●		●		●		●		●	
Long (G.P.)	●		●		●		●		●	
Long — HD	●		●		—		—		—	
Short (Rock)	●		●		●		●		●	
Penetration	●		●		●		●		●	
Wide (Spade)	●		●		●		●		●	
Sharp — Center	●		●		●		●		●	
Sharp — Corner	●		●		—		—		—	
<b>Side Cutters:</b>										
One-Piece Blade	●		●		●		●		●	
<b>Track Shoes:</b>	Triple Grouser 600, 700, 800 mm (24", 28", 32")		Triple Grouser 600, 700, 800, 900 mm (24", 28", 31", 35") Double Grouser 600, 700 mm (24", 28")		Triple Grouser 600, 700, 800 mm (24", 28", 32")		Triple Grouser 600, 700, 800 mm (24", 28", 32") Double Grouser 600, 700 mm (24", 28")		Triple Grouser 600, 750, 850 mm (24", 30", 34") Double Grouser 700 mm (28")	
<b>Quick Coupler</b>	—		—		*		*		*	

\*Custom product, France sourced.

**NOTE:** Number of buckets includes Gen. Purpose, Trenching and Rock. Other types of buckets have not been included. All attachments may not be available in all sales areas.

Summary of Major Attachments  
 ● 345B Series II ● 345B L Series II  
 ● 365B L ● 375 ● 375 L

**Excavators**

EQUIPMENT FOR ...	345B Series II 345B L Series II		365B L		375 375 L	
<b>Undercarriage:</b>						
Standard	●		—		●	
Long (L)	—		—		●	
Long (L) — FIX	●		—		—	
Long — VG	●		●		—	
<b>Booms:</b>						
One-Piece Reach	●		●		●	
One-Piece Reach — HD	●		—		—	
One-Piece GP	—		—		●	
<b>Sticks:</b>						
	mm	ft	mm	ft	mm	ft
Short	—		2840	9'4"	2900*	9'6"
●	—		3600	11'10"	3400*	11'2"
●	—		4670	15'4"	4400	14'5"
●	—		—		5500	18'1"
Short — HD	2900	9'6"	—		—	
● — HD	3350	11'0"	—		—	
● — HD	3900	12'10"	—		—	
<b>Booms:</b>						
One-Piece Mass	—		●		●	
One-Piece Mass — HD	●		—		—	
<b>Sticks:</b>						
	mm	ft	mm	ft	mm	ft
Short	2500	8'2"	2570	8'5.18"	2900	9'6"
●	3000	9'10"	3000	9'10.1"	3400	11'2"
Long	—		—		4100	13'5"
<b>Bucket Family</b>						
	F, G, T, U		V, W		H, J	
<b>Buckets (No. of)</b>						
	13		7		23	
<b>Teeth:</b>						
Abrasion	●		—		●	
Abrasion — HD	—		●		—	
Long (G.P.)	●		●		●	
Long — HD	●		●		—	
Short (Rock)	●		●		●	
Penetration	●		●		●	
Wide (Spade)	●		●		●	
Sharp	—		—		●	
Sharp — Center	●		●		—	
Sharp — Corner	●		●		—	
<b>Side Cutters:</b>						
One-Piece Blade	●		●		●	
Side Bar Protector	●		●		—	
<b>Track Shoes:</b>						
	Triple Grouser 600, 750, 900 mm (24", 30", 35")		Double Grouser 650, 750, 900 mm (26", 30", 35")		Double Grouser 610, 750, 900 mm (24", 30", 36") Single Grouser 610 mm (24")	

\*All attachments may not be available in all sales areas.

**NOTE:** Number of buckets includes Gen. Purpose, Trenching and Rock. Other types of buckets have not been included.



EQUIPMENT FOR ...	M312		M315		M318		M320	
<b>Undercarriage:</b>								
Wheeled	●		●		●		●	
<b>Booms:</b>								
One-piece	●		●		●		●	
VA	●		●		●		●	
<b>Backhoe Sticks:</b>	mm	ft	mm	ft	mm	ft	mm	ft
Short	1600	5'3"	1700	5'7"	1800	5'11"	1900	6'3"
Medium	2000	6'6"	2100	6'9"	2400	7'9"	2500	8'2"
Medium Long	2300	7'5"	2400	7'9"	—	—	—	—
Long	2600	8'5"	2600	8'5"	2800	9'2"	2900	9'6"
Extra Long	3000	9'9"	3100	10'1"	4000	13'1"	4200	13'9"
<b>Material Handling Stick</b>	—		—		3200 10'6"		—	
<b>Buckets (No. of)</b>	13		13		8		14	
<b>Teeth:</b>								
Abrasion	●		●		●		●	
Long (G.P.)	●		●		●		●	
Short (Rock)	●		●		●		●	
Penetration	●		●		●		●	
Wide	—		—		—		●	
Sharp	—		—		—		●	
<b>Side Cutters:</b>								
One-Piece Blade	●		●		●		—	
<b>Tires:</b>	Duals 10.00-20 11.00-20		Duals 10.00-20 11.00-20		Duals 10.00-20 11.00-20		Duals 11.00-20 10.00-20 Solid	
	Singles 18-19.5		Singles 18-19.5 18R-22.5XF		Singles 18-19.5 18-22.5		Singles 18R-19.5XF 18R-22.5XF	

**NOTE:** Number of buckets shown includes general purpose, rock and trenching. Not included are ditch cleaning, ditch grading and trapezoidal ditching.

Work Tools	M312	M315	M318	M320
Clamshell*	X	X	X	
Ditch Cleaning Bucket	X	X	X	X
Grapples*	X	X	X	
Hammer Installation Kit	X	X	X	

\*With hydraulic rotator.

Work Tools	301.5/301.6/ 301.8	302.5/303.5/ 304.5	307B/ 307B SB	311B/ 312B L	315B/315B LJ/ 317B L/317B LN	318B LJ/ 318B LN	320B	322B	325B	330B	345B	365B	375
Augers	X	X											
Brooms													
Quick Coupler	X	X	X	X	X	X	X	X	X	X	X		
Ditch Cleaning Bucket	X	X	X	X	X	X	X	X	X	X	X		
General Purpose Bucket	X	X	X	X	X	X	X	X	X	X	X	X	X
Rock Bucket			X	X	X	X	X	X	X	X	X	X	X
Tilt Bucket			X	X	X	X	X	X	X	X			
Thumb			X	X	X	X	X	X	X	X	X	X	X
Construction Grapple				X	X	X	X	X	X	X	X		
Contractor's Grapple						X	X	X	X	X	X		
Sorting & Demolition Grapple								X	X	X	X	X	X
Mechanical Pulverizer						X	X	X	X	X	X	X	X
Mechanical Shear						X	X	X	X	X	X		
Medium Grapple				X	X	X	X	X	X	X	X		
Trash Grapple				X	X	X	X	X	X	X	X		
Hydraulic Hammer	X	X	X	X	X	X	X	X	X	X	X	X	X
Vibratory Plate Compactor			X	X	X	X	X	X	X				
Shear		X					X	X	X	X	X	X	X
Crusher		X					X	X	X	X	X	X	
Pulverizer							X	X	X	X	X	X	X
Rock Drill					X		X						
Multi-Processor							X	X	X	X	X		

NOTE: Other attachments available upon request. Contact your Caterpillar Dealer.

### CYCLE TIME ESTIMATING CHARTS

The digging cycle of the excavator is composed of four segments:

1. Load Bucket
2. Swing Loaded
3. Dump Bucket
4. Swing Empty

Total excavator cycle time is dependent on machine size (small machines can cycle faster than large machines) and job conditions. With excellent job conditions the excavator can cycle fast. As job conditions become more severe (tougher digging, deeper trench, more obstacles, etc.), the excavator slows down accordingly. As the soil gets harder to dig, it takes longer to fill the bucket. As the trench gets deeper and the spoil pile larger, the bucket has to travel farther and the upper structure has to swing farther on each digging cycle.

Spoil pile or truck location also affects cycle time. If a truck is located on the floor of the excavation beside material being moved, 10 to 17 second cycles are practical. The other extreme would be a truck or spoil pile located above the excavator 180° from the excavation.

In sewer construction work the operator may not be able to work at full speed because he has to dig around existing utilities, load the bucket inside a trench shield, or avoid people working in the area.

**The Cycle Time Estimating Chart** outlines the range of total cycle time that can be expected as job conditions range from excellent to severe. Many variables affect how fast the excavator is able to work. The chart defines the range of cycle times frequently experienced with a machine and provides a guide to what is an “easy” or a “hard” job. The estimator can then evaluate the conditions of his job and use the Cycle Time Estimating Chart to select the appropriate working range. A practical method of further calibrating the Cycle Time Estimating Chart is to observe excavators working in the field and correlate measured cycle times to job conditions, operator ability, etc.

The following table breaks down what experience has shown to be typical Caterpillar excavator cycle times with

- no obstruction in the right of way
- above average job conditions
- an operator of average ability and
- 60°-90° swing angle.

These times would decrease as job conditions or operator ability improved and would get slower as conditions become less favorable.

### CYCLE TIME -vs- JOB CONDITION DESCRIPTION

**Fastest Possible**

**Fastest Practical**

**Typical Range**

**Slow**



**KEY**

- A — Excellent
- B — Above Average
- C — Average
- D — Below Average
- E — Severe

- Easy digging (unpacked earth, sand gravel, ditch cleaning, etc.). Digging to less than 40% of machine’s maximum depth capability. Swing angle less than 30°. Dump onto spoil pile or truck in excavation. No obstructions. Good operator.
- Medium digging (packed earth, tough dry clay, soil with less than 25% rock content). Depth to 50% of machine’s maximum capability. Swing angle to 60°. Large dump target. Few obstructions.
- Medium to hard digging (hard packed soil with up to 50% rock content). Depth to 70% of machine’s maximum capability. Swing angle to 90°. Loading trucks with truck spotted close to excavator.
- Hard digging (shot rock or tough soil with up to 75% rock content). Depth to 90% of machine’s maximum capability. Swing angle to 120°. Shored trench. Small dump target. Working over pipe crew.
- Toughest digging (sandstone, caliche, shale, certain limestones, hard frost). Over 90% of machine’s maximum depth capability. Swing over 120°. Loading bucket in man box. Dump into small target requiring maximum excavator reach. People and obstructions in the work area.

**Cycle Time Estimating Chart**


Model	307B	311B	312B, 312B L	315B, 315B L	317B L, 317B LN	318B L, 318B LN	320B	322B	325B	330B	345B*	365B	375
Bucket Size L (yd <sup>3</sup> )	280 0.37	450 0.59	520 0.68	520 0.68	520 0.68	800 1.05	800 1.05	1000 1.31	1100 1.44	1400 1.83		1900 2.5	2800 3.66
Soil Type	← Packed Earth →						← Hard Clay →						
Digging Depth (m) (ft)	1.5 5	1.5 5	1.8 6	3.0 10	3.0 10	3.0 10	2.3 8	3.2 10	3.2 10	3.4 11		4.2 14	5.2 17
Load Bucket (min)	0.08	0.07	0.07	0.10	0.10	0.09	0.09	0.09	0.09	0.09		0.10	0.11
Swing Loaded (min)	0.05	0.06	0.06	0.04	0.04	0.06	0.06	0.06	0.06	0.07		0.09	0.10
Dump Bucket (min)	0.03	0.03	0.03	0.02	0.02	0.04	0.03	0.04	0.04	0.04		0.04	0.04
Swing Empty (min)	0.06	0.05	0.05	0.05	0.05	0.06	0.05	0.06	0.06	0.07		0.07	0.09
Total Cycle Time (min)	0.22	0.21	0.21	0.21	0.21	0.25	0.23	0.25	0.25	0.27		0.30	0.34

\*Information not available at time of printing.


CYCLE TIME ESTIMATING CHART														
CYCLE TIME	MACHINE SIZE CLASS												CYCLE TIME	
	307	311B	312B	315B L 317B L	318B L	320C	322B	325B	330B	345B Series II	365B L	375		
10 SEC.														0.17 min.
15														0.25 min.
20 SEC.														0.33 min.
25														0.42 min.
30 SEC.														0.50 min.
35														0.58 min.
40 SEC.														0.67 min.
45														0.75 min.
50 SEC.														0.83 min.
55														0.92 min.
60 SEC.														1.0 min.

Caterpillar 300 Series Mass Excavation booms and buckets coupled with the proper stick will help you move material faster and more efficiently in production excavation and loading applications. With the largest bucket, shortest stick and long undercarriage your excavator can often do the work of a larger machine. A longer stick and standard undercarriage make it ideal for loading on-highway trucks and general construction jobs.


## MAXIMIZING PRODUCTION WITH A MASS EXCAVATOR

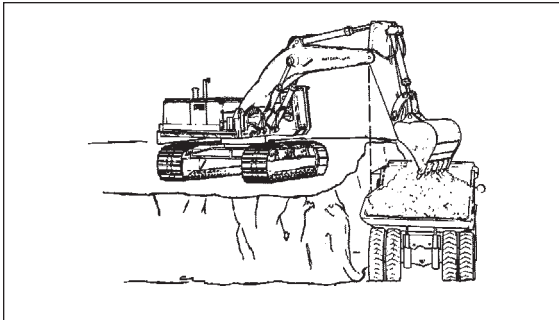

**Ideal Bench Height and Truck Distance** — For stable or consolidated materials, bench height should be about equal to stick length. For unstable materials it should be less. The most useful truck position is when the inside truck body rail is below the boomstick hinge pin.

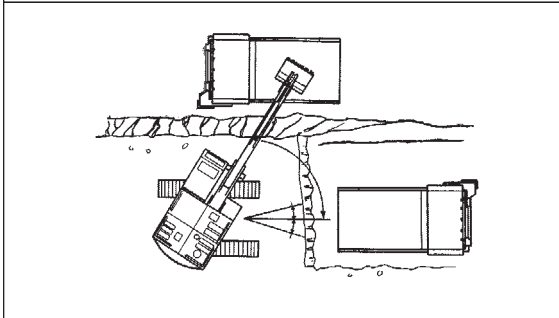

**Optimum Work Zone and Swing Angle** — For maximum production, the work zone should be limited to 15° either side of machine center or about equal to undercarriage width. Trucks should be positioned as close as possible to machine centerline. Two alternatives shown here.

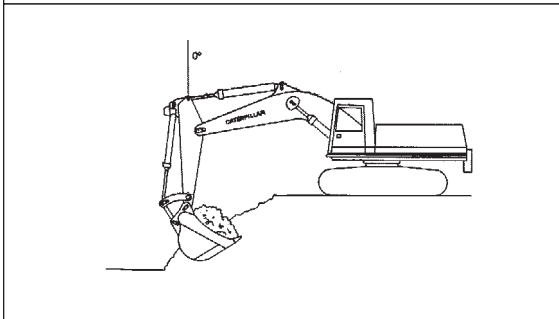

**Best Distance from the Edge** — The machine should be positioned so that the stick is vertical when the bucket reaches full load. If the unit is farther back, breakout force is reduced. If it is closer to the edge, undercutting may occur and time is wasted bringing the stick back out. Also, the operator should begin boom-up when the bucket is 75% of the way through the curl cycle. This should be as the stick nears the vertical position.

This example reflects the ideal situation. Not all points are usable on each job, but incorporation of as many of these points as possible will positively affect production.

**EARTHMOVING PRODUCTION**

As with any other piece of material handling equipment, excavator earthmoving production is dependent on average bucket payload, average cycle time and job efficiency. If an estimator can accurately predict excavator cycle time and bucket payload, a machine's earthmoving production can be derived from the following formula.

$$\begin{aligned}
 \text{m}^3 \text{ (yd}^3\text{)}/60 \text{ min hr} &= \text{Cycles}/60 \text{ min hr} \times \text{Avg. Bucket Payload in m}^3 \text{ (yd}^3\text{)} \\
 \frac{\text{m}^3 \text{ (yd}^3\text{)}/60 \text{ min hr}}{60 \text{ min/hr}} &= \\
 \frac{\text{Cycle Time} - \text{min}}{\text{Cycle Time} - \text{min}} &\times \text{Avg. Bucket Payload in m}^3 \text{ (yd}^3\text{)} \\
 \text{Avg. Bucket Payload} &= \text{Heaped Bucket Capacity} \times \text{Bucket Fill Factor} \\
 \text{Actual m}^3 \text{ (yd}^3\text{)}/\text{hr} &= \text{m}^3 \text{ (yd}^3\text{)}/60 \text{ min hr} \times \text{Job Efficiency Factor}
 \end{aligned}$$

The Production Estimating Tables (next page) will provide theoretical earthmoving production in cubic meters (yards) per hour if bucket size and cycle time can be estimated. The use of an average cycle time allows adjusting the estimated production for specific job sites and applications. For instance, estimating truck loading applications should include truck exchange times which extends the average cycle time and reduces production potential. The values in the table are based on a 60 minute work hour or 100% efficiency (a condition that is never achieved in reality). The estimator should apply a job efficiency factor to the figures in the table based on his judgment or knowledge of actual job conditions.

Areas outlined on the Production Estimating Table define the work ranges of excavators in the size classes of Caterpillar 307 through 5230 ME Excavators. The upper limit on each area corresponds to the "fastest practical" cycle time for the machines. The width of each area corresponds to the range of bucket payload sizes the machine can handle. An unshaded box has been provided in each machine area to provide a guide indicating that the upper limit of earthmoving production is being approached. When working beyond the values in the white area, the estimator should be certain that excellent job conditions will be encountered (easy digging, shallow trench, good operator, etc.).

The Production Estimating Table can also serve as a guide when selecting the proper size machine to do a job, as is shown in the following example.

Example problem (Metric)

Contractor has a job to move 15 300 Bm<sup>3</sup> (19 100 Lm<sup>3</sup> considering 25% swell factor) of wet sandy loam material in rear dump on-highway trucks which will be loaded by an excavator. Average face depth will be 2.4 m with 60-90 degree average swing angle. Ten days are available to do the work. Contractor plans to work 10 hrs/day and estimates a 50 min. work hour (83% job efficiency). He has two excavators that could be made available to do the work — a 320 with 1.0 m<sup>3</sup> bucket or a 330 with 1.9 m<sup>3</sup> bucket. Experience has shown that either machine can get its rated capacity in the sandy loam soil. Could this job be done with either machine or will the 330 have to be used?

*Solution:* The excavator must produce 1900 Lm<sup>3</sup>/Day (19 100 Lm<sup>3</sup> ÷ 10 Days) which means the required average hourly rate will be 190 Lm<sup>3</sup>/60 Min. Hr. (1900 Lm<sup>3</sup>/Day ÷ 10 hrs/day). Further considering the 83% job efficiency, the excavator's capability will have to be 230 Lm<sup>3</sup>/50 min hr.

The production estimating table shows that the 320 with a 1.0 m<sup>3</sup> bucket would have to achieve a 17.1 sec. average cycle time to produce the required 190 Lm<sup>3</sup>/60 min. hr. With job efficiency applied a 15.0 second average cycle time is required to produce the 230 Lm<sup>3</sup>/50 min. hr. The 330 with a 1.9 m<sup>3</sup> bucket could obtain the same 60 min. hr. production level with a 35 second average cycle, or 30 second cycles to meet the 50 min. hr. production requirement. The cycle times estimating chart shows that the 320 would be working near its maximum capability to meet the production requirement, whereas, the 330 could handle the job easily. This information can then be weighed against what else is known about the job (reach requirements, job conditions, operator ability, etc.) to decide whether or not the larger machine is needed.

---

Example problem (English)

Substitute these English values in the preceding problem:

Job — 20,000 BCY (25,000 LCY considering 25% swell).

Average face depth — 8-12 ft

320 L with 1.25 yd<sup>3</sup> bucket or 330 with 2.5 yd<sup>3</sup> bucket.

*Solution:* The excavator must produce 2500 LCY/Day, which means the required average hourly rate will be 250 LCY/60 min hr. Further considering the 83% job efficiency the excavator's capability will have to be 300 LCY/50 min hr.

The same concluding comments regarding the Production Estimating Table apply here as in the Metric example.

**Cubic Meters per 60 Minute Hour\***

ESTIMATED CYCLE TIMES		ESTIMATED BUCKET PAYLOAD** — LOOSE CUBIC METERS																		ESTIMATED CYCLE TIMES			
Cycle Time		0.2	0.3	0.5	0.7	0.9	1.1	1.3	1.5	1.7	1.9	2.1	2.3	2.5	2.7	2.9	3.1	3.3	3.5	4.0	Cycles Per Min.	Cycles Per Hr.	
Seconds	Min.																						
10.0	0.17																					6.0	360
11.0	0.18																					5.5	330
12.0	0.20	60	90	150	210	270																5.0	300
13.3	0.22	54	81	135	189	243	297	351	405	459	513	567	621	675	729	783	837	891	945	1080	4.5	270	
15.0	0.25	48	72	120	168	216	264	312	360	408	456	504	552	600	648	696	744	792	840	960	4.0	240	
17.1	0.29	42	63	105	147	189	231	273	315	357	399	441	483	525	567	609	651	693	735	840	3.5	210	
20.0	0.33	36	54	90	126	162	198	234	270	306	342	378	414	450	486	522	558	544	630	720	3.0	180	
24.0	0.40	30	45	75	105	135	165	195	225	255	285	315	345	375	405	435	465	495	525	600	2.5	150	
30.0	0.50	24	36	60	84	108	132	156	180	204	228	252	276	300	324	348	372	396	420	480	2.0	120	
35.0	0.58	20	31	51	71	92	112	133	153	173	194	214	235	255	275	296	316	337	357	408	1.7	102	
40.0	0.67					81	99	177	135	153	171	189	207	225	243	261	279	297	315	360	1.5	90	
45.0	0.75									133	148	164	179	195	211	226	242	257	273	312	1.3	78	
50.0	0.83																				1.2	72	

**Cubic Yards per 60 Minute Hour\***

ESTIMATED CYCLE TIMES		ESTIMATED BUCKET PAYLOAD** — LOOSE CUBIC YARDS																		ESTIMATED CYCLE TIMES			
Cycle Time		0.25	0.50	0.75	1.00	1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.50	5.00	5.25	Cycles Per Min.	Cycles Per Hr.	
Seconds	Min.																						
10.0	0.17																					6.0	360
11.0	0.18																					5.5	330
12.0	0.20	75	150	225	300	375																5.0	300
13.3	0.22	67	135	202	270	337	404	472	540	607	675	742	810	877	945	1012	1080	1215	1350	1417	4.5	270	
15.0	0.25	60	120	180	240	300	360	420	480	540	600	660	720	780	840	900	960	1080	1200	1260	4.0	240	
17.1	0.29	52	105	157	210	262	315	367	420	472	525	577	630	682	735	787	840	945	1050	1102	3.5	210	
20.0	0.33	45	90	135	180	225	270	315	360	405	450	495	540	585	630	675	720	810	900	945	3.0	180	
24.0	0.40	37	75	112	150	187	225	262	300	337	375	412	450	487	525	562	600	675	750	787	2.5	150	
30.0	0.50	30	60	90	120	150	180	210	240	270	300	330	360	390	420	450	480	510	600	630	2.0	120	
35.0	0.58	36	51	77	102	128	154	180	205	231	256	282	308	333	360	385	410	462	513	535	1.7	102	
40.0	0.67					112	135	157	180	202	225	247	270	292	315	337	360	405	450	472	1.5	90	
45.0	0.75									180	200	220	240	260	280	300	320	360	400	409	1.3	78	
50.0	0.83																				1.2	72	

**Job Efficiency Estimator**

Work Time/Hour	Efficiency
60 Min	100%
55	91%
50	83%
45	75%
40	67%

\*Actual hourly production = (60 min. hr. production) × (Job Efficiency Factor)  
 \*\*Estimated Bucket Payload = (Amount of Material in the Bucket)  
 = (Heaped Bucket Capacity) × (Bucket Fill Factor)  
 Unshaded area indicates average production.



Cubic Meters/Yards per 60 Minute Hour\*

ESTIMATED CYCLE TIMES		ESTIMATED BUCKET PAYLOAD** — LOOSE CUBIC METERS/YARDS											ESTIMATED CYCLE TIMES	
Cycle Time		5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0	13.0	14.0	15.0	Cycles Per Min.	Cycles Per Hr.
Seconds	Min.													
15.0	0.25	1200	1440	1680	1920	2160	2400	2640	2880	3120	3360	3600	4.0	240
17.1	0.29	1050	1260	1470	1680	1890	2100	2310	2520	2730	2940	3150	3.5	210
20.0	0.33	900	1080	1260	1440	1620	1800	1980	2160	2340	2520	2700	3.0	180
24.0	0.40	750	900	1050	1200	1350	1500	1650	1800	1950	2100	2250	2.5	150
30.0	0.50	600	720	840	960	1080	1200	1320	1440	1560	1680	1800	2.0	120
35.0	0.58	510	612	714	816	918	1020	1122	1224	1326	1428	1530	1.7	102
40.0	0.67	450	540	630	720	810	900	990	1080	1170	1260	1350	1.5	90
45.0	0.75	390	468	546	624	702	780	858	936	1014	1092	1170	1.3	78
50.0	0.83	360	432	504	576	648	720	792	864	936	1008	1080	1.2	72
55.0	0.92	330	396	462	528	594	660	726	792	858	924	990	1.1	66
60.0	1.00	300	360	420	480	540	600	660	720	780	840	900	1.0	60

Cubic Meters/Yards per 60 Minute Hour\*

ESTIMATED CYCLE TIMES		ESTIMATED BUCKET PAYLOAD** — LOOSE CUBIC METERS/YARDS										ESTIMATED CYCLE TIMES	
Cycle Time		16.0	17.0	18.0	19.0	20.0	21.0	22.0	23.0	24.0	25.0	Cycles Per Min.	Cycles Per Hr.
Seconds	Min.												
15.0	0.25	3840	4080	4320	4560	4800	5040	5280	5520	5760	6000	4.0	240
17.1	0.29	3360	3570	3780	3990	4200	4410	4620	4830	5040	5250	3.5	210
20.0	0.33	2880	3060	3240	3420	3600	3780	3960	4140	4320	4500	3.0	180
24.0	0.40	2400	2550	2700	2850	3000	3150	3300	3450	3600	3750	2.5	150
30.0	0.50	1920	2040	2160	2280	2400	2520	2640	2760	2880	3000	2.0	120
35.0	0.58	1632	1734	1836	1938	2040	2142	2244	2346	2448	2550	1.7	102
40.0	0.67	1440	1530	1620	1710	1800	1890	1980	2070	2160	2250	1.5	90
45.0	0.75	1248	1326	1404	1482	1560	1638	1716	1794	1872	1950	1.3	78
50.0	0.83	1152	1224	1296	1368	1440	1512	1584	1656	1728	1800	1.2	72
55.0	0.92	1056	1122	1188	1254	1320	1386	1452	1518	1584	1650	1.1	66
60.0	1.00	960	1020	1080	1140	1200	1260	1320	1380	1440	1500	1.0	60

Job Efficiency Estimator

Work Time/Hour	Efficiency
60 Min	100%
55	91%
50	83%
45	75%
40	67%

\*Actual hourly production = (60 min. hr. production) × (Job Efficiency Factor)

\*\*Estimated Bucket Payload = (Amount of Material in the Bucket)

= (Heaped Bucket Capacity) × (Bucket Fill Factor)

**NOTE:** For estimating truck loading production include approximately 0.7 minutes for truck exchange time.

## EXCAVATOR TRENCHING PRODUCTION

When an excavator is used for trenching applications, a meaningful expression of work produced is the machine's trenching rate expressed in meters or lineal feet per hour or per day. Trenching rate depends on the earthmoving production of the excavator being used and the size of the trench being excavated. Earthmoving production converts to trenching production as follows:

$$\text{Lineal Meters of Trench per Hour} = \frac{\text{Cubic Meters Excavated per Hour}}{\text{Cubic Meters per Lineal Meter of Trench}}$$

$$\text{Lineal Meters of Trench per day} = (\text{Lineal Meters per Hour}) \times (\text{Trenching Hours per Day})$$

$$\text{Lineal Feet of Trench per Hour} = \frac{\text{Yd}^3 \text{ Excavated Per Hour}}{\text{Yd}^3 \text{ Per Lineal Foot of Trench}}$$

$$\text{Lineal Feet of Trench Per Day} = (\text{Lineal Ft Per Hour}) \times (\text{Trenching Hours Per Day})$$

For machines that work in trenching applications where they dig all of the time, the *Trenching Conversion Chart* provides easy conversion from m<sup>3</sup> (yd<sup>3</sup>) per hour to m (lineal feet) per hour, if the excavating rate m<sup>3</sup>/hr (yd<sup>3</sup>/hr) and trench volume m<sup>3</sup>/m (yd<sup>3</sup>/ft) are known. The following examples demonstrate how the Trenching Conversion Chart can be used.

### Example problem (Metric)

Contractor estimates that the 325 Excavator will produce 200 Lm<sup>3</sup>/hour. Trench survey shows that the trench contains 2.5 Lm<sup>3</sup>/meter. What trenching rate will the 325 produce?

*Solution:* Enter the horizontal axis of the Trenching Conversion Chart at 200 m<sup>3</sup>/Hour and move up to the 2.5 m<sup>3</sup>/m diagonal line. Then move left to the vertical axis of chart and read answer of 80 m/hour.



### Example problem 2 (Metric)

Contractor knows he must produce 1000 meters of trench in every 10 hour work day. Survey shows that trench contains 1.5 Bm<sup>3</sup> per lineal meter and soil swell factor is estimated at 30%. How much earthmoving production will the excavator have to provide in order to get the job done on time assuming a 50 min work hour? What Caterpillar excavator will provide needed production at 6 meter maximum depth in sandy loam soil?

*Solution:* Determine trenching requirement 1000 meters in 10 hrs = 100 m/h. Convert Bm<sup>3</sup> to Lm<sup>3</sup> (excavator handles Lm<sup>3</sup>) 1.5 Bm<sup>3</sup>/m × 1.30 = 2.0 Lm<sup>3</sup>/m. Enter vertical axis of trenching conversion chart at m/h and travel horizontally to diagonal line representing 2.0 m<sup>3</sup>/m. Next move down to horizontal axis and read answer to 200 Lm<sup>3</sup>/50 min hr. Convert 200 Lm<sup>3</sup>/50 min hr to Lm<sup>3</sup>/60 min hr = 200 = 241 Lm<sup>3</sup>/60 min hr.

Production estimating tables in this section show that 241 Lm<sup>3</sup>/60 min hr is within the capability of a 325 Excavator. Job should then be checked for reach and lifting requirements to make sure that the 325 could handle these aspects of the work.



### Example problem (English)

Contractor estimates that a 325 Excavator will produce 250 LCY/Hour. Trench survey shows that the trench contains 2.5 LCY/Foot. What trenching rate will the 325 produce?

*Solution:* Enter the horizontal axis of the Trenching Conversion Chart at 250 yd<sup>3</sup>/hr. Then move to the vertical axis of chart and read answer of 100 ft/hr.

The Trenching Conversion Chart can also be used to determine the required excavating rate if the contractor can define his trenching production requirement and the trench volume per lineal foot.



Example problem 2 (English)

Contractor knows he must produce 1000 ft of trench in every 10 hr work day. Survey shows that trench contains 1.6 BCY per lineal ft and soil swell factor is estimated at 25%. How much earthmoving production will excavator have to provide in order to get the job done on time assuming 50 min work hour? What Caterpillar model will provide needed production at 8 ft depth in sandy loam soil?

*Solution:* Determine trenching requirement — 1000 ft in 10 Hrs. = 100 ft/hr  
Convert BCY to LCY —  $1.6 \text{ BCY/ft} \times 1.25 = 2.0 \text{ LCY/ft}$


Enter vertical axis of trenching conversion chart at 100 ft/hr and travel over to diagonal line representing 2.0 yd<sup>3</sup>/ft. Next move down to horizontal axis and read answer of 200 LCY/50 min hr.

Convert 200 LCY/50 min hr to LCY/60 min hr =  $\frac{200}{0.83} = 241 \text{ LCY/60 min hr}$

Production estimating tables in this section show that 241 LCY/60 min. hr. is within capability of a 325 Excavator. Job should then be checked for reach and lifting requirements to make sure that the 325 could handle these aspects of the work.



**TRENCHING CONVERSION CHART — CUBIC METERS (yd<sup>3</sup>) PER HOUR TO METER (ft) PER HOUR**

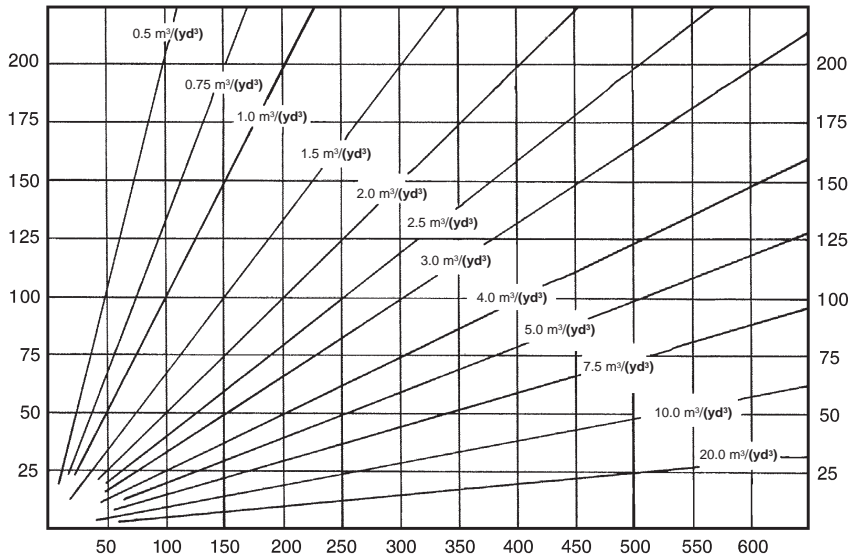

$m \text{ (ft.)} = m^3/(yd^3) \text{ Hr.}$   
 $Hr. = m^3/(yd^3) m \text{ (ft.)}$

Values in m<sup>3</sup>/m or yd<sup>3</sup>/ft

- If excavating rate has been calculated in Bm<sup>3</sup>/h use Bm<sup>3</sup>/m for Trench Volume/m.
- " " " " " " " " Lm<sup>3</sup>/h use Lm<sup>3</sup>/m for Trench Volume/m.
- " " " " " " " " BCY/Hr use BCY/ft for Trench Volume/ft.
- " " " " " " " " LCY/Hr use LCY/ft for Trench Volume/ft.

**Estimating Bucket Size**


In addition to the trenching calculations on the previous pages, an alternative method of figuring trenching production is the nomograph. Shown on the following pages, this particular nomograph can be used for estimating bucket size when given trench dimensions and linear production rate. The nomograph is quicker and easier than the preceding example because it does not require as many calculations, yet the accuracy is about the same within the normal limits of input data.

Be careful when entering and reading data from the nomographs because some scales increase from bottom to top, while others are the reverse. Do not be overly concerned with the precision as affected by pencil line width or reading to the hundredth of a m<sup>3</sup> (yd<sup>3</sup>). Remember that bucket fill factor, material density and cycle time are at best close estimates.

Example problem:

A sewer contractor owns a 325 with 2 piece boom and short stick. He wants to bid a contract for a 3.1 m (10') deep trench which measures 1.8 m (6') at the top and 1.2 m (4') at the bottom. He must dig 9 m/hr (30 ft/hr) to finish on time. The material is sand and gravel with a load factor of 0.90 and 100% bucket fill factor. He works 54 minutes per hour, half the time digging and half setting pipe. Cycle time is estimated at 23 seconds which includes a 90° swing angle.


- 1) Enter trench depth 3.1 m (10') on scale A and average trench width 1.5 m (5') on scale B.
- 2) Connect A and B and extend to scale C for bank volume per m (ft).
- 3) Enter estimated load factor (0.90) on scale D.
- 4) Connect C & D and extend to scale E for loose volume per m (ft).

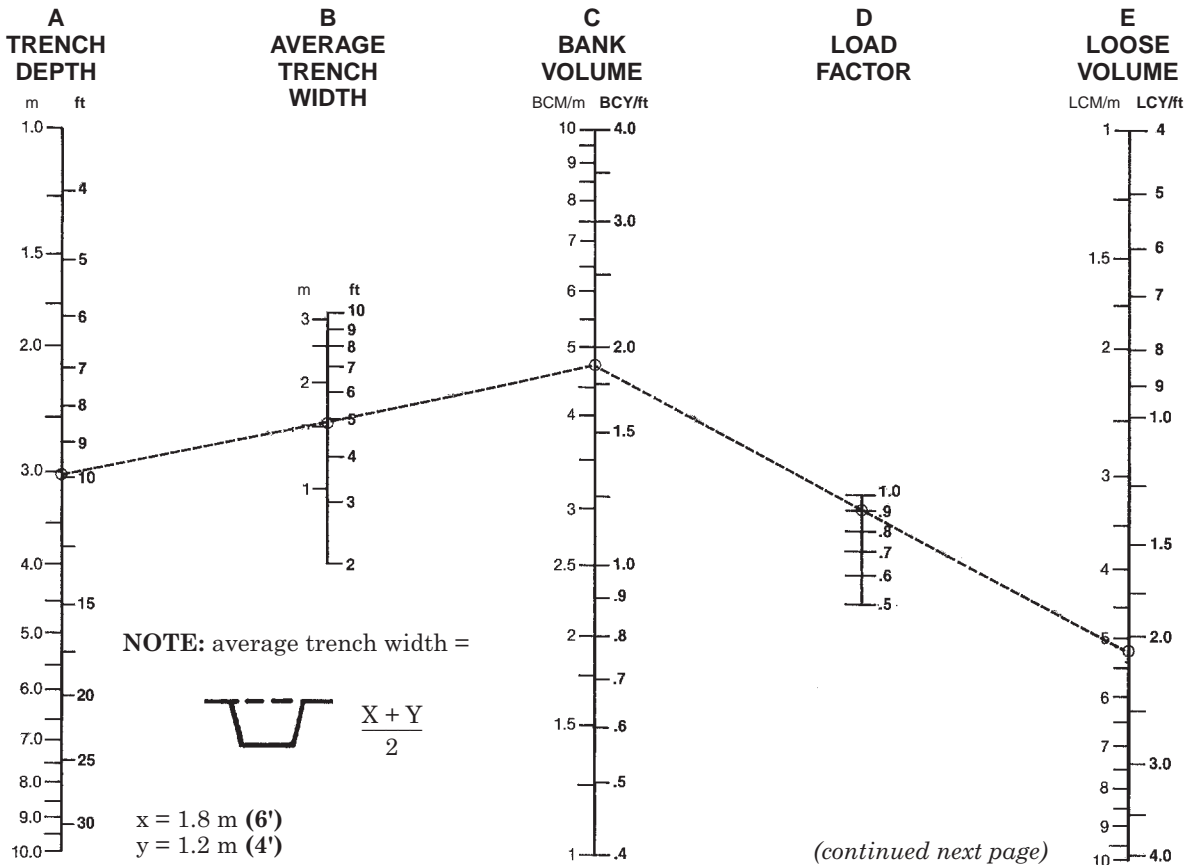

(get loose volume from scale E and enter on this page scale E)

- 5) Enter required linear production rate 9 m/h (30 t/hr) on scale G.
- 6) Connect E and G. Transfer hourly production rate from scale F to scale K (next page).


- 7) Estimate cycle time (23 sec) based on anticipated conditions and enter on scale H.
- 8) Estimate hourly digging time (27 min) and enter on scale I.
- 9) Connect H through I to scale J for cycles per hour.

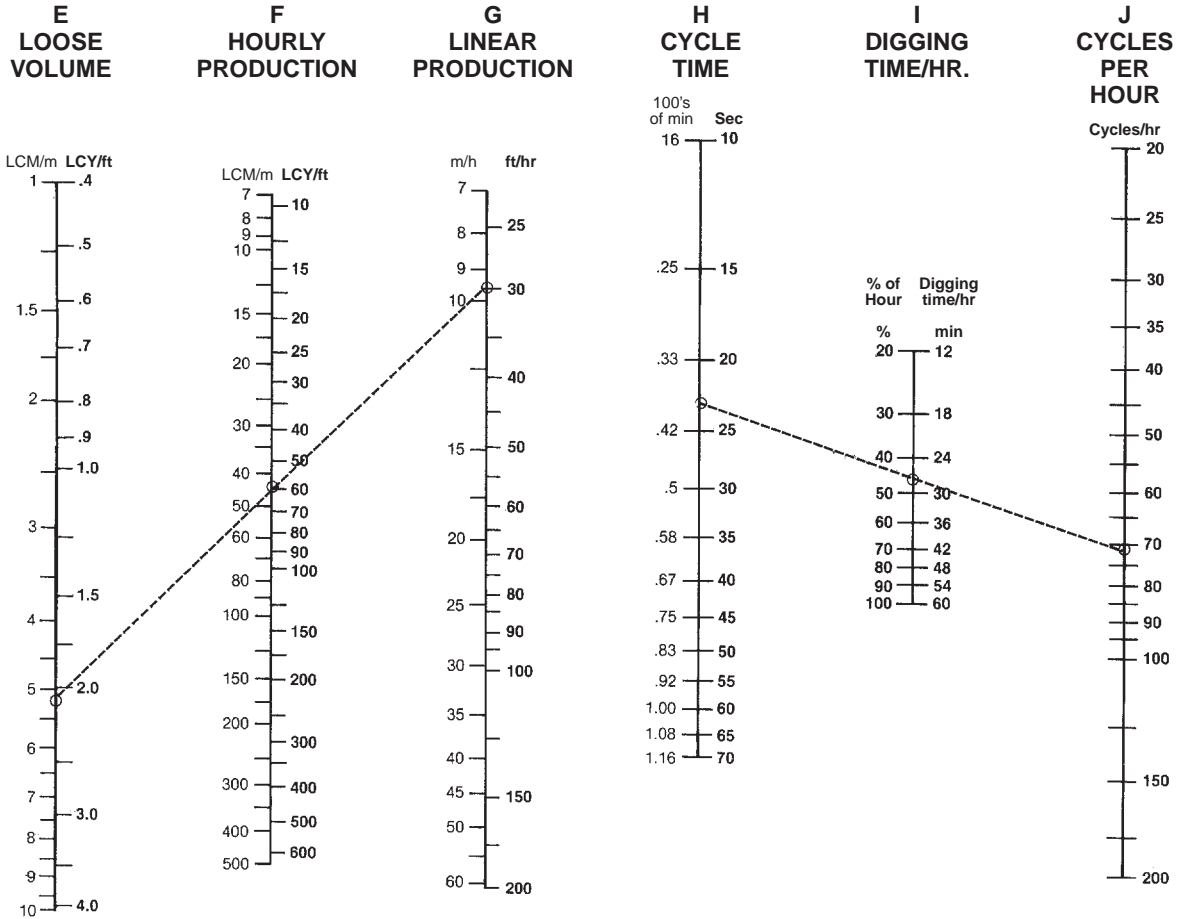


(get cycles per hour from scale J and enter on this page scale J)

- 10) Connect J through K to scale L for required volume per cycle.
- 11) Enter estimated bucket fill factor (100%) on scale M.
- 12) Connect L through M to scale N for required bucket size.

**NOTE:** Ensure bucket width does not exceed minimum trench width and also that weight of bucket and payload does not exceed machine working weight capacity (see lift capacity charts in this section).

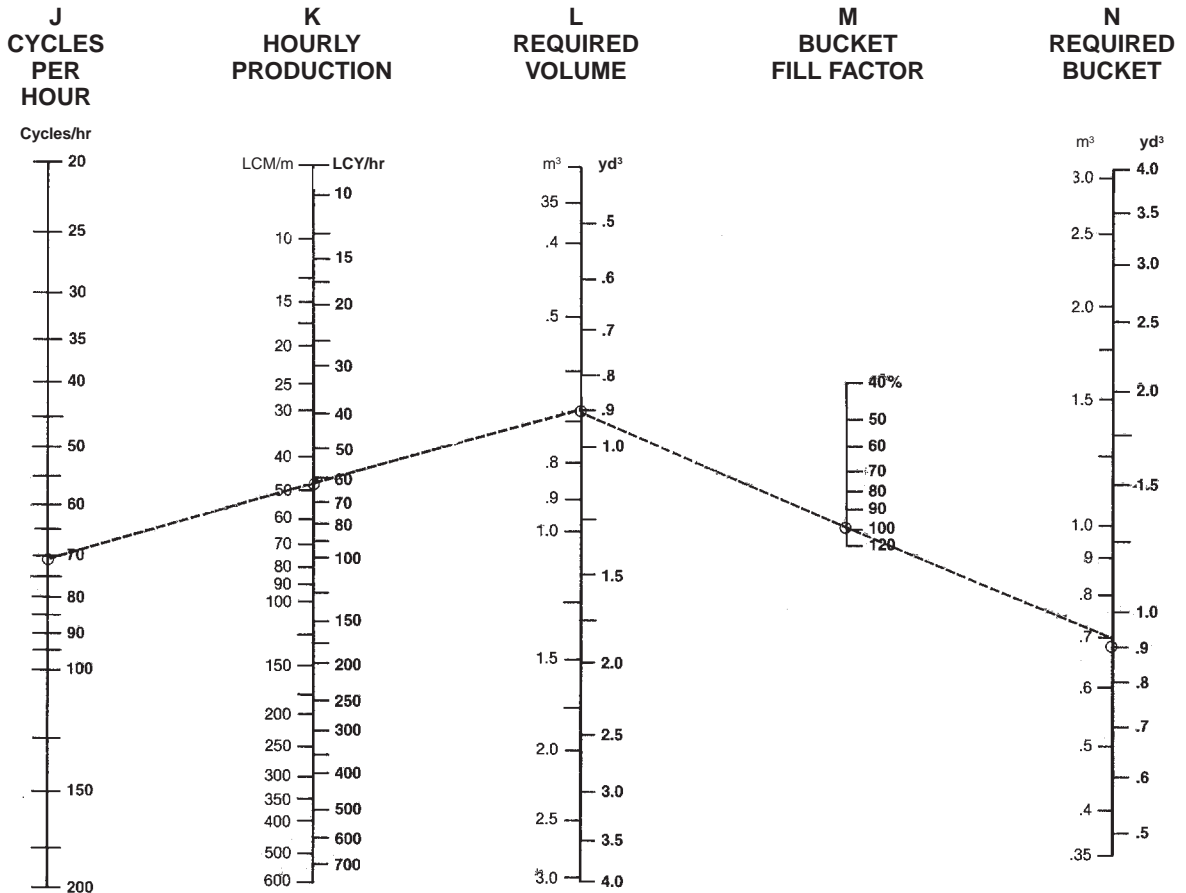

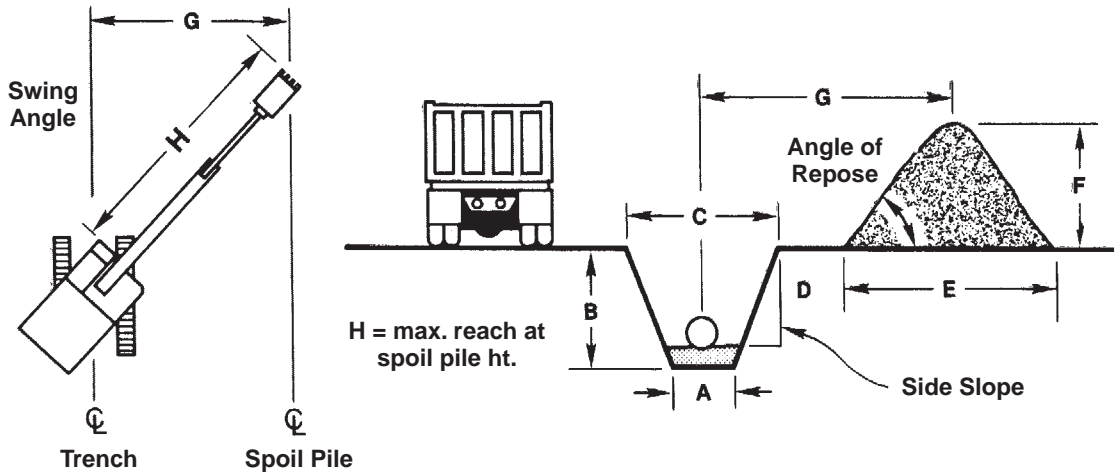

**Excavation Volumes Per Meter or Foot of Trench Length**

Metric version

Bank  $m^3/meter = (\text{Trench end area } m^2) \times (\text{one } m)$   
 Trench volume  $(Bm^3/m) = \frac{1}{2} (A + C) \times B$   
 Spoil pile volume  $(Lm^3/m) = (Bm^3/m) \times (1.00 + \% \text{ Swell})$

English version

Bank  $yd^3/foot = \frac{(\text{Trench end area } ft^2) \times (\text{one } ft)}{27}$

Trench volume  $(BCY/ft) = \frac{\frac{1}{2} (A + C) \times B}{27}$

Spoil pile volume  $(LCY/ft) = (BCY/ft) \times (1.00 + \% \text{ Swell})$

The following table provides a general guide to trench bottom width for various outside diameters of pipe.

Pipe Diameter		Trench Width		Pipe Diameter		Trench Width	
mm	ft/in	m	ft/in	mm	ft/in	m	ft/in
102	4"	0.49	1'7"	1524	5'0"	2.59	8'6"
152	6"	0.55	1'10"	1676	5'6"	2.80	9'2"
203	8"	0.61	2'0"	1829	6'0"	3.05	10'0"
254	10"	0.70	2'4"	1981	6'6"	3.26	10'8"
305	12"	0.76	2'6"	2134	7'0"	3.47	11'5"
381	15"	0.91	3'0"	2286	7'6"	3.69	12'1"
457	18"	1.03	3'5"	2438	8'0"	3.93	12'11"
533	1'9"	1.16	3'10"	2591	8'6"	4.15	13'7"
610	2'0"	1.25	4'1"	2743	9'0"	4.36	14'4"
686	2'3"	1.37	4'6"	2896	9'6"	4.54	14'11"
838	2'9"	1.58	5'2"	3048	10'0"	4.75	15'7"
914	3'0"	1.70	5'7"	3200	10'6"	4.99	16'5"
1067	3'6"	1.92	6'4"	3353	11'0"	5.21	17'1"
1219	4'0"	2.13	7'0"	3505	11'6"	5.43	17'10"
1372	4'6"	2.38	7'10"	3658	16'2"	5.64	18'6"

NOTE: Trench widths based on  $1.25 B_c + 1.0$  where  $B_c$  is the outside diameter of the pipe in feet.  
 Table courtesy of American Concrete Pipe Association

- Trenching Production
- Pipesetting Example Problem

**Trenching Production with Pipesetting**

On many sewer construction jobs the excavator does more than just dig the trench. Other tasks include handling the shoring system, placing bedding material, and lowering the pipe. The normal work procedure is to open a section of trench and then stop and make a pipe installation before going on to dig the next section of trench. At that point the key to trenching production is the total amount of time required to install each section of pipe. Pipe installation time can be broken down as follows: Digging time + other time = Total pipe installation time

Total Pipe Installation Time	Pipe Installed Per Hour
60 min	1 Pipe/hr
30 min	2 Pipe/hr
15 min	4 Pipe/hr
10 min	6 Pipe/hr

Digging Time can be calculated once the trenching rate has been calculated using the methods described earlier in this section. Once Digging Time has been calculated, it can be added to an estimate of “Other Time” to determine Total Pipe Installation Time. “Other Time” can be estimated based on a contractor’s judgment, experience, or actual measurement on a job. The following formula and table relate the trenching rate of the excavator to the time required to open a section of trench for pipe of various lengths.

$$\text{Digging Time (Min.)} = \frac{\text{Pipe Length (ft)}}{\text{Trenching Rate (ft/hr)}} \times 60 \text{ (Min/hr)}$$

Trenching Rate Ft. Per Hour	Time Required to Dig for Pipe of Various Lengths							
	8 ft Pipe		12 ft Pipe		16 ft Pipe		20 ft Pipe	
	Hours	Min.	Hours	Min.	Hours	Min.	Hours	Min.
20 ft/hr	0.400	24.00	0.600	36.00	0.800	48.00	1.000	60.00
40	0.200	12.00	0.300	18.00	0.400	24.00	0.500	30.00
60	0.130	8.00	0.200	12.00	0.260	16.00	0.333	20.00
80	0.100	6.00	0.150	9.00	0.200	12.00	0.250	15.00
100	0.080	4.80	0.120	7.20	0.160	9.60	0.200	12.00
120	0.060	4.00	0.100	6.00	0.120	7.20	0.167	10.00
140	0.057	3.43	0.086	5.14	0.114	6.86	0.143	8.57
160	0.050	3.00	0.075	4.50	0.100	6.00	0.125	7.50
180	0.044	2.66	0.067	4.00	0.089	5.33	0.111	6.67
200	0.040	2.40	0.060	3.60	0.080	4.80	0.100	6.00

This table can be used to show how an excavator that is capable of more trenching production will provide significant advantages even on jobs where the

machine does not dig all of the time. Consider 12,000' job with 12' sections of pipe (1000 pipe to be installed). Excavator “A” can work at 60 ft/hr while Excavator “B” is capable of producing 120 ft/hr. Table shows that Excavator “B” will only take 0.10 hr to do the same work. This means that over the course of installing the 1000 pipe the more productive machine will save 0.10 hr/pipe or 100 hours of working time.

Example problem (English)

The following example shows how trenching production can be calculated on a job where the excavator is also required to set pipe. This example is based on the assumption that the excavator’s earthmoving rate and the pipe installation time have already been estimated by the contractor.

*Problem:* Contractor estimates that the 350 Excavator will be able to produce 500 LCY/60 min. hr. Survey shows that an average cross section trench contains 3.2 BCY/ft and swell factor for sandy clay soil is estimated at 25%. How much trenching production can a contractor expect; assuming it takes 10.0 min. to install each 20 ft length of pipe after trench has been opened. Also assume 83% job efficiency — 50 min. work hour and 8 work hours out of a 9 hour shift. (0.5 hours for lunch and two 15 minute breaks.)

*Solution:*

Convert trench volume to LCY/ft:

$$1.25 (3.2 \text{ BCY/ft}) = 4.0 \text{ LCY/ft}$$

Convert Earthmoving rate to Trenching rate:

$$\frac{500 \text{ LCY/hr}}{4.0 \text{ LCY/ft}} = 125 \text{ ft/hr}$$

Calculate digging time for each pipe:

$$\frac{20 \text{ ft/pipe}}{125 \text{ ft/hr}} = 0.16 \text{ hr/pipe} = 9.6 \text{ min}$$

Calculate pipe installation time:

$$\begin{aligned} \text{Digging time} &= 9.6 \text{ min} \\ \text{Other time} &= 10.0 \text{ min} \\ \text{Pipe Installation time} &= 19.6 \text{ min} \end{aligned}$$

Calculate pipe installations/hour:

$$\frac{60 \text{ min/hr}}{19.6 \text{ min/pipe}} = 3.06 \text{ pipe/hr}$$

Calculate max. pipe installations/day:

$$8 \text{ hrs} (3.06 \text{ pipe/hr}) = 24.48 \text{ pipe/day}$$

Actual pipe/day:

$$0.83 (24.48 \text{ pipe/day}) = 20.3 - 20 \text{ pipe/day}$$

Actual feet/day:

$$(20 \text{ pipe/day}) \times (20 \text{ ft/pipe}) = 400 \text{ ft/day}$$





# 5000 SERIES EXCAVATORS AND SHOVELS

## CONTENTS

Features .....	5-169
Specifications .....	5-170
Adjustments to Standard	
Operating Weight .....	5-172
Digging Envelopes .....	5-173
Shipping Information .....	5-175
General Dimensions .....	5-177
Shoe Selection and Ground Pressure .....	5-178
Curl and Crowd Forces .....	5-179
Working Weights .....	5-180
Bucket Selection .....	5-181
Vital Information Management	
System (VIMS) .....	5-181
Estimating Cycle Time .....	5-182
Production Tables .....	5-184

### Features:

- **Cat Diesel Engines** provide the power, reliability and performance you can depend on.
- **Hydraulic Electronic Unit Injection (HEUI)** on the 5110B, and **Electronic Unit Injection (EUI)** on the 5130B and 5230 electronically maintains fuel settings, provides automatic altitude and air filter restriction compensation, automatic variable timing, improved diagnostics and increased fuel efficiency.
- **Advanced Modular Cooling System (AMOCs)** this patented cooling system used on the 5000 Series promotes more efficient engine cooling, and is easy to service.
- **Proportional Priority Pressure Compensation hydraulic system** delivers excellent controllability with full-powered response under all operating conditions.

- **Dedicated Swing Pumps** on the 5000 series ensures fast cycles, and consistent multi-function implement response.
- **Automatic Lubrication System** eliminates a daily lubrication chore, automatically lubricates the swing bearing, linkage, and undercarriage on regular intervals.
- **Vital Information Management System (VIMS)** on the 5130B and 5230 monitors all vital machine functions, and keeps the operator advised on current machine conditions. VIMS reduces downtime and allows service personnel easy access to data for fast accurate diagnosis.
- **Electronic Monitoring System II (EMS II)** on the 5110B monitors machine functions. The EMS II ensures that the engine and hydraulic system are perfectly matched to the operator's demand for the most efficient power transfer possible, it also keeps the operator advised on current machine conditions.
- **Durable Structures** are a key component in the 5000 Series. Large castings eliminate welds in high stress areas. Boom and sticks are thermally stress relieved to increase life. Boom and stick castings provide improved visibility over competitive designs. Penetrating, deep, beveled welds and rugged box section construction add to the machine's durability.
- **Service Access** is a priority on all 5000 Series machines. Platforms, walkways and hinged doors provide standing access to both sides of engine and pumps.

**NOTE:** Listed features may be standard on some models. Optional on others. Contact your Caterpillar Dealer for specific information.



MODEL	5080		5130B		5230	
Sourcing	U.S.		U.S.		U.S.	
Flywheel Horsepower	319 kW	<b>428 hp</b>	597 kW	<b>800 hp</b>	1095 kW	<b>1470 hp</b>
Operating Weight*	83 800 kg	<b>184,600 lb</b>	181 000 kg	<b>399,000 lb</b>	318 500 kg	<b>702,000 lb</b>
Bucket Capacity Range (heaped)	5.2 m <sup>3</sup>	<b>6.8 yd<sup>3</sup></b>	9-11 m <sup>3</sup>	<b>12.0-14.5 yd<sup>3</sup></b>	12.5-17 m <sup>3</sup>	<b>16.3-22.2 yd<sup>3</sup></b>
Engine Model	<b>3406C ATAAC</b>		<b>3508B EU1</b>		<b>3516 EU1</b>	
Rated Engine RPM	<b>1800</b>		<b>1750</b>		<b>1750</b>	
No. of Cylinders	<b>6</b>		<b>8</b>		<b>16</b>	
Bore	137 mm	<b>5.4"</b>	170 mm	<b>6.7"</b>	170 mm	<b>6.7"</b>
Stroke	165 mm	<b>6.5"</b>	190 mm	<b>7.5"</b>	190 mm	<b>7.5"</b>
Displacement	14.6 L	<b>891 in<sup>3</sup></b>	34.5 L	<b>2105 in<sup>3</sup></b>	69.1 L	<b>4211 in<sup>3</sup></b>
Max. Hydraulic Pump Output at Rated RPM: Implement Swing	2 × 430 L/min 1 × 340 L/min	2 × <b>114 gpm</b> 1 × <b>90 gpm</b>	4 × 372 L/min 1 × 464 L/min	4 × <b>99 gpm</b> 1 × <b>123 gpm</b>	6 × 372 L/min 2 × 464 L/min	6 × <b>99 gpm</b> 2 × <b>123 gpm</b>
Relief Valve Settings:						
Implement Circuits	31 400 kPa	<b>4550 psi</b>	31 000 kPa	<b>4500 psi</b>	31 000 kPa	<b>4500 psi</b>
Travel Circuits	34 300 kPa	<b>4980 psi</b>	35 000 kPa	<b>5080 psi</b>	35 000 kPa	<b>5080 psi</b>
Pilot Circuits	3500 kPa	<b>505 psi</b>	4000 kPa	<b>580 psi</b>	4000 kPa	<b>580 psi</b>
Maximum Drawbar Pull	546 kN	<b>122,850 lb</b>	872 kN	<b>196,000 lb</b>	1545 kN	<b>340,875 lb</b>
Maximum Travel Speed at Rated RPM	Low: 2.7 km/h High: 4.4 km/h	<b>1.7 mph</b> <b>2.7 mph</b>	3.3 km/h	<b>2.1 mph</b>	2.5 km/h	<b>1.6 mph</b>
Overall Track Length**	4.6 m	<b>15'1"</b>	5.55 m	<b>18'3"</b>	6.26 m	<b>20'6"</b>
Track Gauge	3.51 m	<b>11'6"</b>	4.72 m	<b>15'6"</b>	5.12 m	<b>17'</b>
Grouser Height	48 mm	<b>2"</b>	29, 71 mm	<b>1.1", 2.8"</b>	15 mm	<b>0.6"</b>
Track Shoe Widths	610, 750 mm	<b>24", 30"</b>	650, 800, 1000 mm	<b>26", 32", 39"</b>	1100, 1300, 1500 mm	<b>43", 51", 59"</b>
Ground Contact Areas	6.13, 7.55 m <sup>2</sup>	<b>66, 81.3 ft<sup>2</sup></b>	8.0, 9.8, 12.3 m <sup>2</sup>	<b>86.1, 105.4 ft<sup>2</sup></b>	15.2, 18.0, 20.8 m <sup>2</sup>	<b>163.6, 193.7, 223.8 ft<sup>2</sup></b>
Ground Pressures	132, 107 kPa	<b>19.2, 16 psi</b>	217, 178, 144 kPa	<b>31.4, 25.8, 20.9 psi</b>	205, 174, 153 kPa	<b>29.7, 25.3, 22.2 psi</b>
Fuel Tank Refill Capacity	990 L	<b>262 U.S. gal</b>	2600 L	<b>687 U.S. gal</b>	5330 L	<b>1386 U.S. gal</b>

\*Operating weights include coolant, lubricants, full fuel tank, standard shoes, bucket, and operator.

\*\*Track length measured from center of idler to center of sprocket.

# Specifications

# 5000 Series — Mass Excavators



MODEL	5110B ME		5130B ME		5230 ME	
Sourcing	U.S.		U.S.		U.S.	
Flywheel Power	519 kW	<b>696 hp</b>	597 kW	<b>800 hp</b>	1095 kW	<b>1470 hp</b>
Operating Weight*	125 000 kg	<b>275,000 lb</b>	182 000 kg	<b>401,000 lb</b>	316 600 kg	<b>698,000 lb</b>
Bucket Capacity Range (heaped)	6.0-10.4 m <sup>3</sup>	<b>7.8-13.4 yd<sup>3</sup></b>	8.5-18.3 m <sup>3</sup>	<b>11-24 yd<sup>3</sup></b>	13-27.5 m <sup>3</sup>	<b>17-36 yd<sup>3</sup></b>
Engine Model	<b>3412E HEUI</b>		<b>3508B EUI</b>		<b>3516 EUI</b>	
Rated Engine RPM	<b>1800</b>		<b>1750</b>		<b>1750</b>	
No. of Cylinders	<b>12</b>		<b>8</b>		<b>16</b>	
Bore	137 mm	<b>5.4"</b>	170 mm	<b>6.7"</b>	170 mm	<b>6.7"</b>
Stroke	152 mm	<b>6.0"</b>	190 mm	<b>7.5"</b>	190 mm	<b>7.5"</b>
Displacement	271 L	<b>1648 in<sup>3</sup></b>	34.5 L	<b>2105 in<sup>3</sup></b>	69 L	<b>4210 in<sup>3</sup></b>
Max. Hydraulic Pump Output at Rated RPM: Implement Swing	3 × 446 L/min 1 × 463 L/min	<b>3 × 118 gpm 1 × 122 gpm</b>	4 × 372 L/min 1 × 464 L/min	<b>4 × 99 gpm 1 × 123 gpm</b>	6 × 372 L/min 2 × 464 L/min	<b>6 × 99 gpm 2 × 123 gpm</b>
Relief Valve Settings:						
Implement Circuits	32 000 kPa	<b>4640 psi</b>	31 000 kPa	<b>4550 psi</b>	31 000 kPa	<b>4550 psi</b>
Travel Circuits	35 000 kPa	<b>5075 psi</b>	35 000 kPa	<b>5075 psi</b>	35 000 kPa	<b>5075 psi</b>
Swing Circuits: Accelerate	35 000 kPa	<b>5075 psi</b>	35 000 kPa	<b>5075 psi</b>	35 000 kPa	<b>5075 psi</b>
Decelerate	25 000 kPa	<b>3620 psi</b>	25 000 kPa	<b>3620 psi</b>	25 000 kPa	<b>3620 psi</b>
Pilot Circuits	6900 kPa	<b>1000 psi</b>	4000 kPa	<b>580 psi</b>	4000 kPa	<b>580 psi</b>
Maximum Drawbar Pull	846 kN	<b>190,200 lb</b>	872 kN	<b>196,000 lb</b>	1545 kN	<b>340,875 lb</b>
Maximum Travel Speed at Rated RPM	3.3 km/h	<b>2.0 mph</b>	3.3 km/h	<b>2.1 mph</b>	2.5 km/h	<b>1.6 mph</b>
Overall Track Length**	5.5 m	<b>18'</b>	5.55 m	<b>18'3"</b>	6.26 m	<b>20'6"</b>
Width of Standard Track Shoe	700 mm	<b>2'4"</b>	800 mm	<b>2'8"</b>	1300 mm	<b>4'4"</b>
Ground Contact Area with Std. Shoe	8.3 m <sup>2</sup>	<b>12,900 in<sup>2</sup></b>	9.8 m <sup>2</sup>	<b>15,200 in<sup>2</sup></b>	18 m <sup>2</sup>	<b>27,900 in<sup>2</sup></b>
Track Gauge	4.1 m	<b>13'5"</b>	4.72 m	<b>15'6"</b>	5.2 m	<b>17'</b>
Fuel Tank Refill Capacity	1700 L	<b>450 U.S. gal</b>	2600 L	<b>687 U.S. gal</b>	5330 L	<b>1386 U.S. gal</b>

\*Operating weight includes coolant, lubricants, full fuel tank, one-piece boom, medium stick, bucket, standard counterweight and operator 75 kg (165 lb).

\*\*Measured from center of driver to center of idler.

**NOTE:** Certain models may not be available in all Sales areas.

Specifications may also vary by Sales area.

Contact your Caterpillar Dealer for details.

**Adjustments to Standard Operating Weight — FS**




Track	<b>5080</b>	610 mm (24") 750 mm (30")	0 kg (0 lb) +870 kg (+1920 lb)
	<b>5130B</b>	650 mm (26") 800 mm (32") 1000 mm (39")	0 kg (0 lb) +2050 kg (+4520 lb) +4320 kg (+9520 lb)
	<b>5230</b>	1100 mm (43") 1300 mm (51") 1500 mm (59")	0 kg (0 lb) +2320 kg (+5120 lb) +5370 kg (+11,840 lb)
Buckets	<b>5080</b>	G.P. Rock Bucket – 5.2 m <sup>3</sup> (6.8 yd <sup>3</sup> )	0 kg (0 lb)
	<b>5130B</b>	Rock Bucket – 11.0 m <sup>3</sup> (14.4 yd <sup>3</sup> ) High Density – 9.0 m <sup>3</sup> (12.0 yd <sup>3</sup> )	0 kg (0 lb) –225 kg (–500 lb)
	<b>5230</b>	Rock Bucket – 17.0 m <sup>3</sup> (22.2 yd <sup>3</sup> ) High Density – 14.5 m <sup>3</sup> (19.0 yd <sup>3</sup> ) High Density – 12.5 m <sup>3</sup> (16.3 yd <sup>3</sup> )	0 kg (0 lb) –3050 kg (–6700 lb) –3750 kg (–8300 lb)

**Adjustments to Standard Operating Weight — ME**

Track	<b>5110B</b>	700 mm (28") 900 mm (36") 1000 mm (39")	0 kg (0 lb) +1777 kg (+3920 lb) +2664 kg (+5875 lb)
	<b>5130B</b>	650 mm (26") 800 mm (32") 1000 mm (39")	–2050 kg (–4520 lb) 0 kg (0 lb) +2270 kg (+5000 lb)
	<b>5230</b>	1100 mm (43") 1300 mm (51") 1500 mm (59")	–2320 kg (–5120 lb) 0 kg (0 lb) +5370 kg (+6720 lb)
Buckets	<b>5110B</b>	Rock – 7.2 m <sup>3</sup> (9.4 yd <sup>3</sup> ) Rock – 6.0 m <sup>3</sup> (7.8 yd <sup>3</sup> ) Coal – 10.4 m <sup>3</sup> (13.6 yd <sup>3</sup> )	0 kg (0 lb) –1000 kg (–2204 lb) –300 kg (–661 lb)
	<b>5130B</b>	Rock – 10.5 m <sup>3</sup> (13.7 yd <sup>3</sup> ) High Density – 8.5 m <sup>3</sup> (11.0 yd <sup>3</sup> ) Excavation – 10.5 m <sup>3</sup> (13.7 yd <sup>3</sup> ) Coal – 13.6 m <sup>3</sup> (17.8 yd <sup>3</sup> ) Coal – 18.3 m <sup>3</sup> (24.6 yd <sup>3</sup> )	0 kg (0 lb) –1079 kg (–2380 lb) –500 kg (–2080 lb) –800 kg (–2760 lb) –130 kg (–280 lb)
	<b>5230</b>	Rock – 16.0 m <sup>3</sup> (21.0 yd <sup>3</sup> ) High Density – 13.0 m <sup>3</sup> (17.0 yd <sup>3</sup> ) Rock – 18.0 m <sup>3</sup> (24.2 yd <sup>3</sup> ) Coal – 27.5 m <sup>3</sup> (36.0 yd <sup>3</sup> )	0 kg (0 lb) –2000 kg (–4400 lb) +1800 kg (+4000 lb) –1140 kg (–2500 lb)

**Working Weights Bucket & Payload — ME**




Model	Boom		Stick Length		Working Weights Buckets & Payload	
<b>5110B</b>	7.6 m	24'11"	3.4 m	11'1"	20 360 kg	44,900 lb
			4.1 m	13'5"	17 200 kg	37,930 lb
<b>5130B</b>	8.0 m	26'3"	3.8 m	12'6"	28 500 kg	62,800 lb
			5.2 m	17'1"	23 900 kg	52,700 lb
	11.0 m	36'1"	3.8 m	12'6"	18 250 kg	35,800 lb
<b>5230</b>	9.5 m	31'2"	4.5 m	14'9"	44 500 kg	98,100 lb

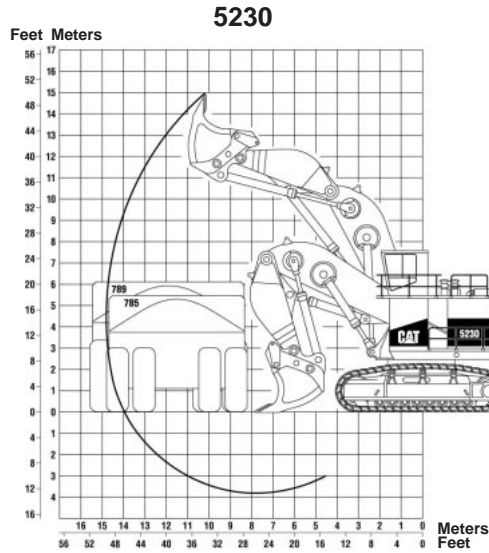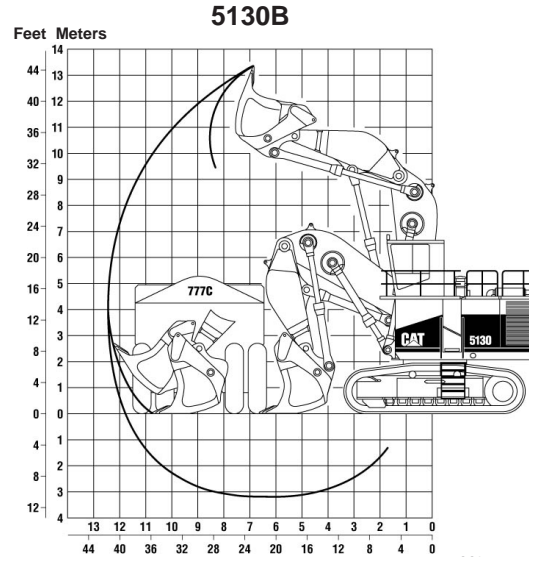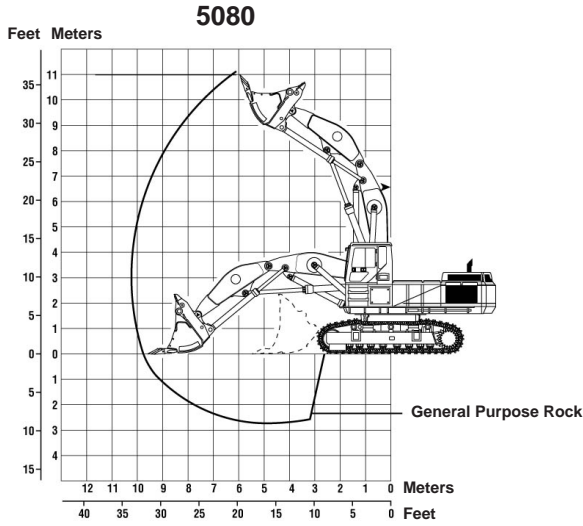

**5000 Series —  
Excavators**

**Digging Envelopes**

- 5110B
- 5130B ME
- 5230 ME

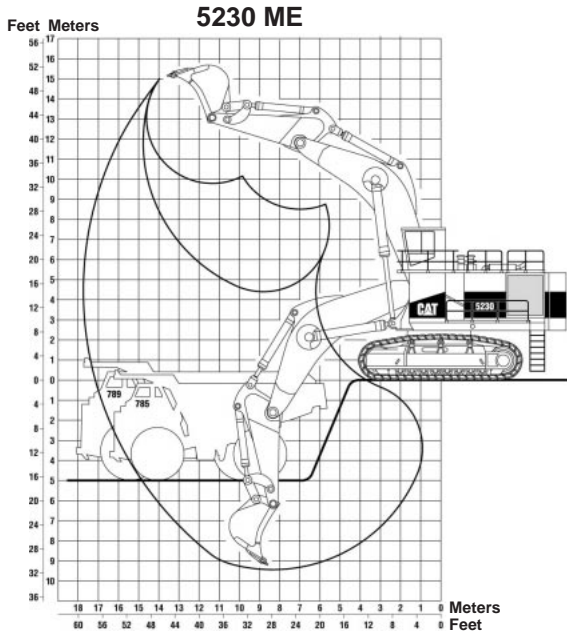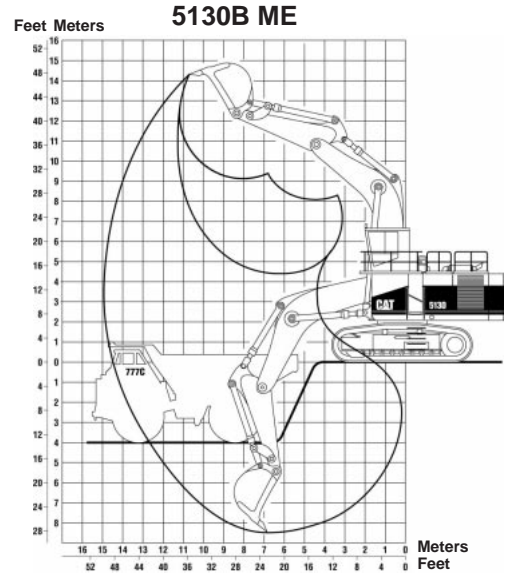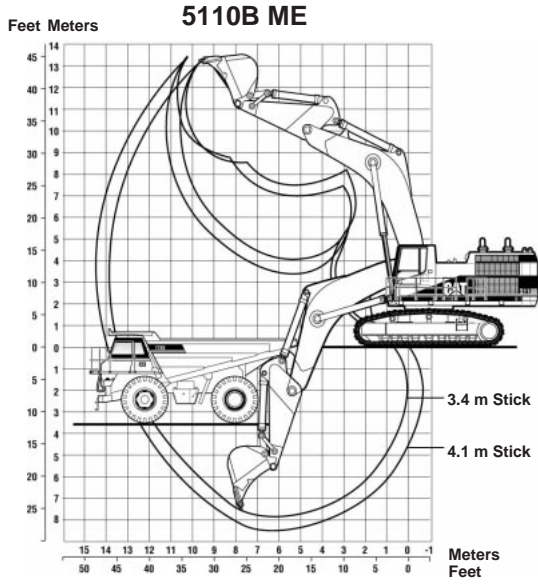

MODEL	5110B			
	m	ft	m	ft
Boom	7.6	25'11"	7.6	25'11"
Stick	3.4	11'1"	4.1	13'5"
Max. Loading Height	8.6	28'0"	8.8	28'11"
Max. Reach	13.9	45'8"	14.6	47'9"
Max. Digging Depth	7.9	25'11"	8.6	28'2"

MODEL	5130B ME		5230 ME			
	m	ft	m	ft		
Boom	8.0	26'3"	8.0	26'3"	9.5	31'2"
Stick	3.8	12'5"	5.2	17'1"	4.5	14'9"
Max. Loading Height	9.1	29'8"	9.7	31'8"	9.8	32'2"
Max. Reach	14.9	48'11"	16.1	52'8"	17.7	58'0"
Max. Digging Depth	8.4	27'7"	9.7	31'8"	9.4	30'11"

● **5110B ME**

	Weight		Length		Width		Height	
	mt	ton	mm	in	mm	in	mm	in
Chassis, Carbody and Cab	42.7	47.1	7067	278	3500	138	3555	140
Counterweight	16.8	18.5	900	35	3773	149	2628	103
Track Roller Frame (each)								
700 mm (2'4") Shoes	16.4	18.0	6706	264	1803	71	1245	49
900 mm (3'0") Shoes	18.2	20.1	6706	264	1803	71	1245	49
1000 mm (3'3") Shoes	19.1	21.1	6706	264	1803	71	1245	49
Front Structures								
7.6 m (24'11") Boom	14.8	16.3	8015	316	1480	58	3080	121
3.4 m (11'1") Stick	7.9	8.7	5060	199	1000	39	2140	84
7.2 m <sup>3</sup> (9.4 yd <sup>3</sup> ) Bucket	7.2	8.0	3000	113	2620	103	2460	97
Stick & Bucket	15.2	16.7	8060	317	2620	103	2460	97
Handrail Skid	1.3	1.5	3990	157	2290	90	1120	44
Parts Box	2.0	2.2	2235	88	990	39	1093	43


● **5130B ME**

	Weight		Length		Width		Height	
	kg	lb	mm	ft	mm	ft	mm	ft
Carbody	15 800	34,820	3560	11'8"	4110	13'6"	1520	5'0"
Swing Frame	22 830	50,340	7060	23'2"	2460	8'1"	2440	8'0"
Track Roller Frame (each)								
650 mm (2'2") Shoes	23 610	52,060	7140	23'5"	1500	4'11"	1910	6'3"
800 mm (2'7") Shoes	24 640	54,320	7140	23'5"	1500	4'11"	1910	6'3"
1000 mm (3'3") Shoes	25 770	56,820	7140	23'5"	1500	4'11"	1910	6'3"
Left Module	8090	17,830	5770	18'11"	2340	7'8"	2620	8'7"
Boom Cylinders	3000	6620	3840	12'7"	910	3'0"	690	2'3"
Stick Cylinders	1100	2430	3840	12'7"	910	3'0"	690	2'3"
Bucket Cylinders	1100	2430	3840	12'7"	910	3'0"	690	2'3"
Ladders	2070	4570	2240	7'4"	1090	3'7"	1190	3'11"
Parts Box	2100	4620	2240	7'4"	1090	3'7"	990	3'3"
Handrails	1150	2540	3990	13'1"	2290	7'6"	1120	3'8"
Right Module	13 810	30,440	5660	18'7"	2440	8'0"	3050	10'0"
Cab	2050	4510	2360	7'9"	2060	6'9"	3100	10'2"
Boom	20 530	45,260	8560	28'1"	1980	6'6"	3400	11'2"
Counterweight	20 970	46,220	6250	20'6"	1170	3'10"	2510	8'3"
Stick	6220	13,710	5260	17'3"	1020	3'4"	2290	7'6"
Brackets	1550	3420	1520	5'0"	1450	4'9"	790	2'7"
Bucket	9700	21,380	2900	9'6"	3200	10'6"	2820	9'3"



● **5230 ME**

	Weight		Length		Width		Height	
	kg	lb	mm	ft	mm	ft	mm	ft
Carbody	24 770	<b>54,610</b>	4470	<b>14'8"</b>	3840	<b>12'7"</b>	1980	<b>6'6"</b>
Swing Frame	40 590	<b>89,490</b>	8890	<b>29'2"</b>	3330	<b>10'11"</b>	3480	<b>11'5"</b>
Track Roller Frame (each)								
1100 mm (3'7") Shoes	45 400	<b>100,080</b>	8030	<b>26'4"</b>	1830	<b>6'0"</b>	2360	<b>7'9"</b>
1300 mm (4'3") Shoes	46 560	<b>102,640</b>	8030	<b>26'4"</b>	1830	<b>6'0"</b>	2360	<b>7'9"</b>
1500 mm (4'11") Shoes	48 080	<b>106,000</b>	8030	<b>26'4"</b>	1830	<b>6'0"</b>	2360	<b>7'9"</b>
Left Module	12 310	<b>27,140</b>	7190	<b>23'7"</b>	2510	<b>8'3"</b>	3230	<b>10'7"</b>
Cylinder Skid	3130	<b>6900</b>	4170	<b>13'8"</b>	610	<b>2'0"</b>	810	<b>2'8"</b>
Cylinder Skid	3130	<b>6900</b>	4170	<b>13'8"</b>	610	<b>2'0"</b>	810	<b>2'8"</b>
Cylinder Skid	4350	<b>9580</b>	4880	<b>16'0"</b>	910	<b>3'0"</b>	740	<b>2'5"</b>
Cylinder Skid	3290	<b>7260</b>	4170	<b>13'8"</b>	910	<b>3'0"</b>	740	<b>2'5"</b>
Parts Box	2220	<b>4890</b>	2240	<b>7'4"</b>	1090	<b>3'7"</b>	990	<b>3'3"</b>
Parts Box	2170	<b>4780</b>	2240	<b>7'4"</b>	1090	<b>3'7"</b>	990	<b>3'3"</b>
Parts Box	2220	<b>4900</b>	2240	<b>7'4"</b>	1090	<b>3'7"</b>	990	<b>3'3"</b>
Handrails	1350	<b>2980</b>	3990	<b>13'1"</b>	2290	<b>7'6"</b>	1120	<b>3'8"</b>
Right Module	20 880	<b>46,040</b>	7570	<b>24'10"</b>	2510	<b>8'3"</b>	3580	<b>11'9"</b>
Cab	2380	<b>5240</b>	2360	<b>7'9"</b>	2060	<b>6'9"</b>	3050	<b>10'0"</b>
Boom	28 340	<b>62,480</b>	10 030	<b>32'11"</b>	3960	<b>13'0"</b>	2490	<b>8'2"</b>
Counterweight	41 390	<b>91,240</b>	7320	<b>24'0"</b>	1220	<b>4'0"</b>	3050	<b>10'0"</b>
Stick	11 030	<b>24,320</b>	6250	<b>20'6"</b>	1350	<b>4'5"</b>	2570	<b>8'5"</b>
Brackets	2590	<b>5720</b>	1780	<b>5'10"</b>	1680	<b>5'6"</b>	890	<b>2'11"</b>
Guards	940	<b>2080</b>	2080	<b>6'10"</b>	1700	<b>5'7"</b>	840	<b>2'9"</b>
Bucket	16 380	<b>36,110</b>	4010	<b>13'2"</b>	3250	<b>10'8"</b>	3100	<b>10'2"</b>

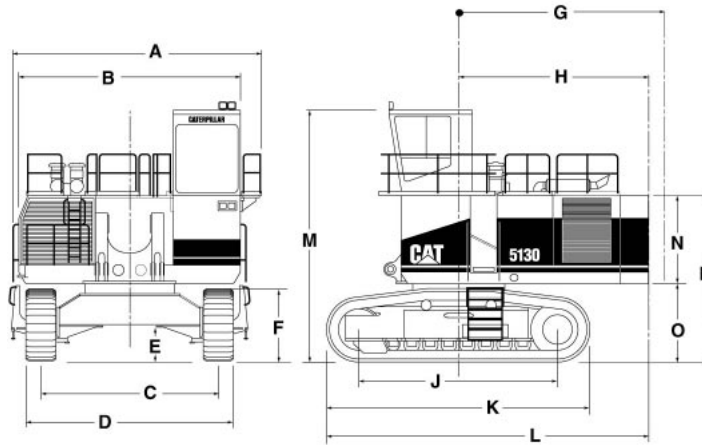

	5080		5110B ME		5130B ME		5230 ME	
<b>A</b>	4400 mm	14'5"	5460 mm	17'11"	6620 mm	21'9"	7510 mm	24'7"
<b>B</b>	3470 mm	11'5"	3500 mm	11'6"	5900 mm	19'4"	6960 mm	22'11"
<b>C</b>	3510 mm	11'6"	4100 mm	13'5"	4720 mm	15'6"	5196 mm	17'0"
<b>D</b>	4120 mm	13'6"	4800 mm	15'9"	5370 mm	17'7"	6296 mm	20'8"
<b>E</b>	890 mm	2'11"	1052 mm	3'5"	960 mm	3'2"	1108 mm	3'8"
<b>F</b>	—	—	—	—	1890 mm	6'3"	2260 mm	7'5"
<b>G Swing radius</b>	4200 mm	13'9"	5180 mm	17'0"	5250 mm	17'3"	6450 mm	21'2"
<b>H</b>	4200 mm	13'9"	5180 mm	17'0"	5140 mm	16'11"	6280 mm	20'7"
<b>J</b>	4600 mm	15'1"	5452 mm	17'11"	5552 mm	18'3"	6260 mm	20'6"
<b>K</b>	5840 mm	19'2"	6869 mm	22'6"	7270 mm	23'10"	8174 mm	26'10"
<b>L</b>	7120 mm	23'4"	8353 mm	27'5"	8775 mm	28'9"	10 325 mm	33'10"
<b>M</b>	4820 mm*	15'10"	4580 mm	15'1"	6550 mm	21'5"	7455 mm	24'5"
<b>N</b>	—	—	2410 mm	7'10"	2350 mm	7'9"	2850 mm	9'4"
<b>O</b>	1620 mm	5'4"	1890 mm	6'3"	2045 mm	6'9"	2450 mm	8'0"
<b>P</b>	—	—	4300 mm	14'1"	4395 mm	14'5"	5300 mm	17'5"

\*Euro cab with FOPS.

**CHOOSING A TRACK SHOE**

In severe underfoot conditions, narrow shoes impose lower forces on other undercarriage components, and normally result in improved overall track life. Machines working in rock should be equipped with the narrowest available shoe. Wider shoes will improve flotation, but shoes wider than those shown here should not be used. Track shoe width has little effect on stability.



Double grouser shoes will provide adequate traction in most underfoot conditions, and are less damaging to floor and road surfaces. For additional traction in deep mud, or in rock applications which allow some grouser penetration, single grouser shoes are recommended. Hard, smooth quarry floors that allow little or no grouser penetration are best handled by the narrowest double grouser shoes.

**Track Shoe Widths and Ground Pressures**

Model	Shoe Type	Shoe Width		Ground Pressure	
		mm	in	kPa	psi
<b>5110B ME</b>	Double	700	<b>28</b>	148	<b>21.5</b>
	Double	900	<b>36</b>	117	<b>17.0</b>
	Double	1000	<b>39</b>	106	<b>15.4</b>
<b>5130B ME</b>	Double	650	<b>26</b>	179	<b>26.0</b>
	Double	800	<b>32</b>	218	<b>31.6</b>
	Double	1000	<b>39</b>	145	<b>21.0</b>
<b>5230 ME</b>	Double	1100	<b>43</b>	151	<b>21.9</b>
	Double	1300	<b>51</b>	172	<b>25.0</b>
	Double	1500	<b>59</b>	202	<b>29.4</b>
<b>5080 FS Bottom Dump</b>	Double	610	<b>24</b>	132	<b>19.2</b>
	Double	750	<b>30</b>	107	<b>16.0</b>
<b>5130B FS Bottom Dump</b>		650	<b>26</b>	215	<b>31.2</b>
		800	<b>32</b>	174	<b>25.3</b>
		1000	<b>39</b>	144	<b>20.9</b>
<b>5230 FS Bottom Dump</b>		1100	<b>43</b>	202	<b>29.3</b>
		1300	<b>51</b>	171	<b>24.8</b>
		1500	<b>59</b>	148	<b>21.5</b>

## CURL AND CROWD FORCES

Rated digging forces are the forces that can be exerted at the outermost cutting point. They are calculated by applying working relief hydraulic pressure to the cylinder(s) providing the digging force. Weight of components and friction are excluded from the calculations.

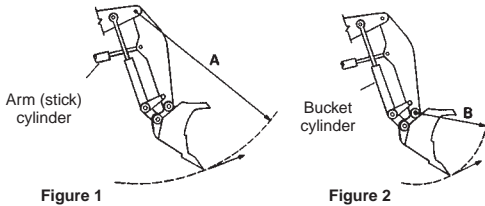

**Rated Arm (Stick) Force** — is generated by the arm (stick) cylinder and is tangent to the arc of radius “A”. The arm is positioned to obtain the maximum output moment from the arm cylinder with the bucket positioned as in figure 1.

**Rated Bucket Tangential Force** — is generated by the bucket cylinders and is tangent to the arc of radius “B”. The bucket is positioned to obtain the maximum output moment from the bucket cylinders and connecting linkage as in figure 2.

5

Model	Bucket	Bucket Capacity		A — Crowd Force		B — Bucket Tangential Force	
		m <sup>3</sup>	yd <sup>3</sup>	kN	lb	kN	lb
<b>5080 FS</b>	Bottom Dump	5.2	6.8	434	97,600	451	101,500
<b>5130B FS</b>	Bottom Dump	11.0	14.5	770	173,000	715	161,000
<b>5230 FS</b>	Bottom Dump	17.0	22.2	1250	281,000	1125	253,000

## U.S. Sourced

		5110B ME		5130B ME		5230 ME	
		m	ft	m	ft	m	ft
Boom		7.6 25'11"		8.0 26'3"		11.0 36'1"	9.5 31'2"
Stick		3.4 11'1"	4.1 13'5"	3.8 12'6"	5.2 17'1"	3.8 12'6"	4.5 14'9"
Bucket Tip Radius		2851 9'4"	2774 9'1"	3038 10'0"	3038 10'0"	3038 10'0"	3254 10'8"
Bucket Curling Force		501 112,725	501 112,725	672 151,000	666 150,000	672 151,000	873 196,200
Rated Arm Force		439 98,775	395 88,875	624 140,000	542 122,000	624 140,000	874 196,400

**Working Weights**

Model	Boom	Stick Length		Working Weights† Buckets & Payload	
		m	ft	kg	lb
<b>5110B ME</b>	Mass	3.40	<b>11'1"</b>	20 360	<b>44,900</b>
	Mass	4.10	<b>13'5"</b>	17 200	<b>37,930</b>
<b>5130B ME</b>	Mass	3.80	<b>12'6"</b>	28 500	<b>62,800</b>
	Mass	5.20	<b>17'1"</b>	28 100	<b>61,960</b>
<b>5230 ME</b>	Mass	4.50	<b>14'9"</b>	44 500	<b>98,100</b>

†Working weights may vary depending on machine configuration and geographic location.

**Bucket Selection — ME**

Model	Bucket Type	Bucket Bite Width		Bucket Tip Radius		Heaped Capacity		Bucket Weight With Teeth	
		mm	in	mm	in	m <sup>3</sup>	yd <sup>3</sup>	kg	lb
<b>5110B ME</b>	Rock	2250	<b>88.0"</b>	2774	<b>109.0"</b>	6.0	<b>7.8</b>	6400	<b>14,100</b>
	Rock	2600	<b>102.0"</b>	2851	<b>112.0"</b>	7.2	<b>9.4</b>	7400	<b>16,300</b>
	Coal	3070	<b>121.0"</b>	2783	<b>110.0"</b>	10.4	<b>13.6</b>	7100	<b>15,600</b>
<b>5130B ME</b>	High Density	2810	<b>111.0"</b>	3038	<b>120.0"</b>	8.5	<b>11.0</b>	8340	<b>18,380</b>
	Rock	2810	<b>111.0"</b>	3038	<b>120.0"</b>	10.5	<b>13.7</b>	10 250	<b>22,600</b>
	Excavation	2810	<b>111.0"</b>	3038	<b>120.0"</b>	10.5	<b>13.7</b>	8940	<b>19,700</b>
	Coal	3500	<b>138.0"</b>	3225	<b>127.0"</b>	13.6	<b>17.8</b>	8760	<b>19,320</b>
	Coal	3680	<b>145.0"</b>	3225	<b>127.0"</b>	18.3	<b>24.0</b>	9430	<b>20,800</b>
<b>5230 ME</b>	Rock	3940	<b>156.0"</b>	3250	<b>128.0"</b>	16.0	<b>21.0</b>	17 140	<b>37,785</b>
	Light Material	3940	<b>156.0"</b>	3250	<b>128.0"</b>	18.0	<b>23.5</b>	19 040	<b>41,975</b>
	Coal	4350	<b>171.0"</b>	3400	<b>134.0"</b>	27.5	<b>36.0</b>	15 420	<b>34,000</b>

**MAJOR BOTTOM DUMP BUCKET APPLICATION FEATURES:**

- Controlled dumping action permits more accurate loading of narrow trucks with less chance of spillage. Closer bucket positioning over the truck, and metering the material flow on the first pass, lessens impact on truck bodies increasing their life.

- The bottom-dump clamping action is ideal for sorting in rock applications. Oversized material can be segregated for secondary breakage. In some cases, the operator can screen material as he dumps by limiting the bucket opening.
- Sticky material is easier to dislodge, thus avoiding material build-up which robs production. The bottom-dump bucket bulldozer assembly is nearly vertical when the bucket is fully open.

**Bucket Selection**

Model	Heaped Capacity		Struck Capacity		Weight		Width	
	m <sup>3</sup>	yd <sup>3</sup>	m <sup>3</sup>	yd <sup>3</sup>	kg	lb	m	ft
<b>5080 FS</b> General Purpose	5.2	6.8	4.1	5.4	8893	19,610	2.59	8'6"
<b>5130B FS</b> General Purpose	11.0	14.5	NA	NA	15 790	34,820	3.64	11'11"
Rock	11.0	14.5	NA	NA	17 960	39,500	3.64	11'11"
Hi-density Rock	9.0	12.0	NA	NA	17 700	39,000	3.06	10'0"
<b>5230 FS</b> Rock	17.0	22.2	NA	NA	29 820	65,740	4.36	14'4"
Hi-density Rock	15.5	20.2	NA	NA	28 580	63,000	3.67	12'0"

**VITAL INFORMATION MANAGEMENT SYSTEM (VIMS): (5130 & 5230)**

VIMS is a Caterpillar exclusive advanced diagnostic and equipment management tool designed to lower operating costs. Equipment utilization can be improved through higher mechanical availability, optimized component life, reduced risk of catastrophic failures, faster diagnostics and improved serviceability. VIMS includes both on-board hardware and an off-board software package — VIMS-PC.

The VIMS system “coaches” the operator to improve vehicle performance and productivity. On-board, VIMS is designed to work with the operator and not interfere with equipment operation. In-cab modules provide meaningful messages, indicators, gauges and warnings from sensors located throughout the machine. VIMS provides the operator immediate access to current machine information. VIMS data can also be transmitted for in-office/remote machine monitoring and analysis.

The CAT DATA LINK is the on-board network allowing communication between VIMS and the many machine mounted electronic control modules.

VIMS is like having a first rate mechanic riding in the cab with all of his diagnostic tools connected to the machine. Listening, watching, monitoring the entire vehicle by converting data signals from various sensors into meaningful information. VIMS displays information in “real-time” and records and stores information similar to a Flight Data Recorder on an airplane.

VIMS works with four types of information: 1. Internal (e.g.: service meter hours); 2. Sensed (e.g.: Exhaust Temperature); 3. Communicated (e.g.: Tach from ECM); 4. Calculated (e.g.: fuel consumption).

VIMS organizes and stores information into six categories: 1. Event List; 2. Event Recorder; 3. Data Logger; 4. Trends; 5. Cumulatives; 6. Histograms.

VIMS provides value to more than the operator. Whether you’re in operations, maintenance, engineering, planning or management — Caterpillar’s VIMS is your best choice for maximizing availability, productivity and reducing the risk of catastrophic failure while lowering overall cost.

**ESTIMATING FRONT SHOVEL CYCLE TIME**

The loading cycle of the front shovel is composed of four segments:

- 1. Load bucket
- 2. Swing loaded
- 3. Dump bucket
- 4. Swing empty

Total shovel cycle time is dependent on machine size and job conditions. As conditions become more severe (tougher loading, more obstacles, etc.), the shovel slows down accordingly.

The following table breaks down what experience has shown to be typical Caterpillar Front Shovel cycle times with above average job conditions and an operator of average ability.

These times would decrease as job conditions or operator ability improved and would become slower as conditions become less favorable. For example:

Tough material . . . . . Longer bucket fill and dump time.

Greater swing angle . . . . . Longer swing times.

Operator ability . . . . . Affects total cycle time.

Loading from the top down . . . . . May improve swing time.


**Cycle Time Estimating**

MODEL		5110B ME	5130 ME	5230 ME
Bucket Size	(m <sup>3</sup> ) (yd <sup>3</sup> )	7.2 9.4	10 13	15.5 20.3
Soil Type		← Hard Clay →		
Digging Depth	(m) (ft)	—	4.0 13	5.0 16
Load Bucket	(min)	—	0.12	0.12
Swing Loaded	(min)	—	0.13	0.14
Dump Bucket	(min)	—	0.04	0.04
Swing Empty	(min)	—	0.13	0.14
Total Cycle Time	(min)	—	0.42	0.44

MODEL		5080	5130B FS	5230 FS
Bucket Size	(m <sup>3</sup> ) (yd <sup>3</sup> )	5.2 6.8	11.1 14.5	17.0 22.2
Soil Type		← Shot Rock →		
Swing Angle		← 90° →		
Load Area		← No Obstructions →		
Operator Ability		← Average →		
Load Bucket	(min)	0.16	0.18	0.20
Swing Loaded	(min)	0.09	0.13	0.14
Dump Bucket	(min)	0.03	0.04	0.05
Swing Empty	(min)	0.09	0.10	0.10
Total Cycle Time	(min)	0.37	0.45	0.49

CYCLE TIME ESTIMATING CHART				
CYCLE TIME (Min)	MACHINE AND BUCKET			CYCLE TIME (Sec)
	5080 FS	5130B FS	5230 FS	
				10
0.25				15
0.30				20
0.35				25
0.40				30
0.45				35
0.50				40
0.60				45
				50
0.75				55
				60

**CYCLE TIME vs  
JOB CONDITION DESCRIPTION**

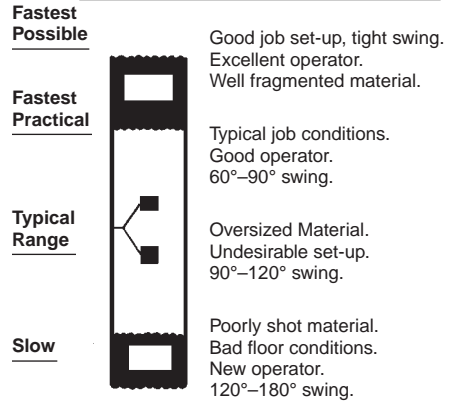

**BOTTOM DUMP BUCKET  
FILL FACTORS**

Material	Fill Factor*
Bank Clay; Earth	100%-105%
Rock-Earth Mixture	100%-105%
Rock — Poorly Blasted	85%-95%
Rock — Well Blasted	95%-105%
Shale, Sandstone — Standing Bank	85%-100%

\*Percent of heaped bucket capacity.

CYCLE TIME ESTIMATING CHART				
CYCLE TIME (Min)	MACHINE SIZE CLASS			CYCLE TIME (Sec)
	5110B ME	5130B ME	5230 ME	
0.17				10
0.25				15
0.33				20
0.42				25
0.50				30
0.58				35
0.67				40
0.75				45
0.83				50
0.92				55
1.00				60



**ROCK LOADING PRODUCTION TABLES**

- Shot Rock
- Estimated Density — 1600 kg/Lm<sup>3</sup> or 2700 lb/LCY (1.35 ton/LCY)

**METRIC TONS PER 60 MIN. HOUR\***

ESTIMATED CYCLE TIME		ESTIMATED BUCKET PAYLOAD** — LOOSE CUBIC METER					ESTIMATED CYCLES	
Cycle Time (Sec)	Cycle Time (Min)	2.6 m <sup>3</sup>	3.8 m <sup>3</sup>	7.5 m <sup>3</sup>	8.8 m <sup>3</sup>	12 m <sup>3</sup>	Cycles/Minute	Cycles/Hour
15	0.25	998	1459	2880	3379	4608	4.0	240
18	0.30	832	1216	2400	2816	3840	3.0	200
21	0.35	711	1040	2052	2408	3283	2.9	171
25	0.42	599	876	1728	2028	2765	2.5	144
32	0.53	470	687	1356	1591	2170	1.9	113
40	0.67	374	547	1080	1267	1728	1.5	90
45	0.75	333	486	960	1126	1536	1.3	80
50	0.83	300	438	864	1014	1382	1.2	72

**U.S. TONS PER 60 MIN. HOUR\***

ESTIMATED CYCLE TIME		ESTIMATED BUCKET PAYLOAD** — LOOSE CUBIC YARD					ESTIMATED CYCLES	
Cycle Time (Sec)	Cycle Time (Min)	3.4 yd <sup>3</sup>	5 yd <sup>3</sup>	9.75 yd <sup>3</sup>	11.5 yd <sup>3</sup>	15.75 yd <sup>3</sup>	Cycles/Minute	Cycles/Hour
15	0.25	1102	1620	3159	3726	5103	4.0	240
18	0.30	918	1350	2633	3105	4253	3.0	200
21	0.35	785	1154	2251	2655	3636	2.9	171
25	0.42	661	972	1895	2236	3062	2.5	144
32	0.53	519	763	1487	1754	2403	1.9	113
40	0.67	413	608	1185	1397	1914	1.5	90
45	0.75	367	540	1053	1242	1701	1.3	80
50	0.83	330	486	948	1118	1531	1.2	72

\*Actual Hourly Production = (60 Min. Hr. Production) × (Job Efficiency Factor)

\*\*Estimated Bucket Payload = (Heaped Bucket Capacity) × (Bucket Fill Factor)

These tables are calculated using a 100% bucket fill factor.

See bucket fill factors prior to the rock loading production charts.

## EARTH LOADING PRODUCTION TABLES

METRIC Lm<sup>3</sup> PER 60 MIN. HOUR\*

ESTIMATED CYCLE TIME		ESTIMATED BUCKET PAYLOAD** — LOOSE CUBIC METER					ESTIMATED CYCLES	
Cycle Time (Sec)	Cycle Time (Min)	2.6 m <sup>3</sup>	3.8 m <sup>3</sup>	7.5 m <sup>3</sup>	8.8 m <sup>3</sup>	12 m <sup>3</sup>	Cycles/Minute	Cycles/Hour
15	0.25	624	912	1800	2112	3880	4.0	240
18	0.30	520	760	1500	1760	2400	3.0	200
21	0.35	445	650	1283	1505	2052	2.9	171
24	0.40	390	570	1125	1320	1800	2.5	150
27	0.45	346	505	998	1170	1596	2.2	133
30	0.50	312	456	900	1056	1440	2.0	120
33	0.55	283	414	818	959	1308	1.8	109
36	0.60	260	380	750	880	1200	1.7	100

5

## U.S. LCY PER 60 MIN. HOUR\*

ESTIMATED CYCLE TIME		ESTIMATED BUCKET PAYLOAD** — LOOSE CUBIC YARD					ESTIMATED CYCLES	
Cycle Time (Sec)	Cycle Time (Min)	3.4 yd <sup>3</sup>	5 yd <sup>3</sup>	9.75 yd <sup>3</sup>	11.5 yd <sup>3</sup>	15.75 yd <sup>3</sup>	Cycles/Minute	Cycles/Hour
15	0.25	816	1200	2340	2760	3780	4.0	240
18	0.30	680	1000	1950	2300	3150	3.0	200
21	0.35	581	855	1667	1967	2693	2.9	171
24	0.40	510	750	1463	1725	2363	2.5	150
27	0.45	452	665	1297	1530	2095	2.2	133
30	0.50	408	600	1170	1380	1890	2.0	120
33	0.55	370	545	1063	1254	1717	1.8	109
36	0.60	340	500	975	1150	1575	1.7	100

\*Actual Hourly Production = (60 Min. Hr. Production) × (Job Efficiency Factor)

\*\*Estimated Bucket Payload = (Heaped Bucket Capacity) × (Bucket Fill Factor)

These tables are calculated using a 100% bucket fill factor.

See bucket fill factors prior to the rock loading production charts.



# MATERIAL HANDLING ARRANGEMENTS

## CONTENTS

M325B MH-Range .....	5-188
Lifting Capacities .....	5-188
320B MH, 325B MH, 330B MH	
Belgium Sourced-Range .....	5-191
Lifting Capacities .....	5-192
325B MH-375 MH	
Japan/U.S. Sourced, Track UC-Range . . .	5-198
Lifting Capacities .....	5-200
325B MH-330B MH	
U.S. Sourced, Wheeled Carrier-Range . . .	5-207
Lifting Capacities .....	5-208


(Scrap specifications and classifications can be found in the Institute of Scrap Iron and Steel Inc.'s "Handbook". The common unit measure for the scrap industry is the gross ton which is 2240 pounds. However, short tons, net tons and metric tons may also be used.)

The versatility of Caterpillar Excavators, plus their ability to be equipped in any number of ways, make them an effective, low cost way to handle scrap and other materials.

**NOTE:** Contact your Caterpillar Dealer for additional information on equipping Caterpillar Excavators for material handling.

**M325B MH Range Diagram**

- Caterpillar Material Handling Boom and Stick

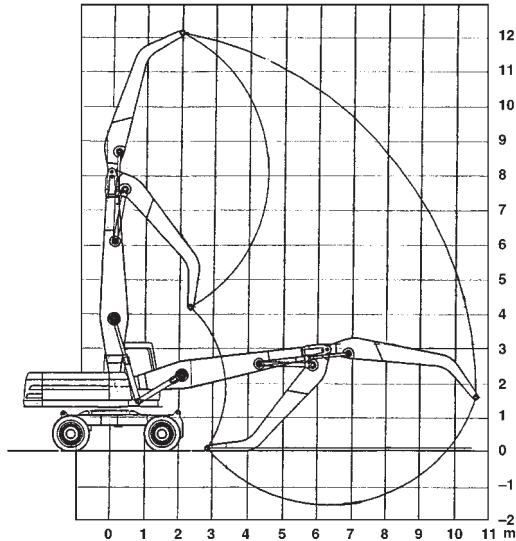

Model	M325B MH	
	m	ft
Maximum Horizontal Reach	13.4	43'11"
Maximum Vertical Pin Height	15.3	50'4"

**Lifting Capacities**

Equipped with Caterpillar material handling arrangement.

Includes purpose built material handling boom and stick.

Capacities are measured at the bare stick tip.




















**Capacities are based on level machine equipped as follows:**

- Total machine weight including base machine, material handling front, 1.9 m manual tilt cab-riser, wide axles, 2 sets of outriggers, 20.5-25 tires, 6985 kg (15,400 lb) counterweight, lubricants and operator.

M325B MH — 34 960 kg (77,000 lb)




















**M325B MH with Cat two-piece, 13.4 m (43'11") front**

**Metric**

Height**	Undercarriage configuration	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		9.0 m		10.5 m		12.0 m				m	
																					
12 m	All stabilizers up All stabilizers down									6.6*	6.6*	6.4*	5.7					6.4	5.3	9.3	
10.5 m	All stabilizers up All stabilizers down									6.3*	6.3*	6.0*	5.8	5.3	4.5			5.2	4.3	10.7	
9 m	All stabilizers up All stabilizers down									6.3*	6.3*	6.0*	5.8	5.4	4.5			4.5	2.8	11.7	
7.5 m	All stabilizers up All stabilizers down									6.5*	6.5*	6.1*	5.8	5.4	4.5	4.3	3.6	4.1	3.4	12.4	
6 m	All stabilizers up All stabilizers down									6.9*	6.9*	6.3*	5.7	5.3	4.4	4.3	3.6	3.8	3.1	12.9	
4.5 m	All stabilizers up All stabilizers down							8.7*	8.7*	7.6*	7.2	6.6	5.5	5.2	4.3	4.3	3.5	3.6	3.0	13.2	
3 m	All stabilizers up All stabilizers down							10.0*	9.4	8.2*	6.9	6.4	5.3	5.1	4.2	4.2	3.5	3.5	2.9	13.4	
1.5 m	All stabilizers up All stabilizers down					15.1*	13.3	10.9	8.9	8.0	6.6	6.2	5.1	5.0	4.1	4.1	3.4	3.5	2.9	13.4	
0 m	All stabilizers up All stabilizers down					11.5*	11.5*	10.4	8.4	7.7	6.3	6.0	4.9	4.9	4.0	4.1	3.3	3.6	2.9	13.2	
-1.5 m	All stabilizers up All stabilizers down			4.5*	4.5*	10.3*	10.3*	10.2	8.2	7.5	6.1	5.9	4.8	4.8	3.9	4.0	3.3	3.7	3.1	12.8	
-3 m	All stabilizers up All stabilizers down	4.4*	4.4*	6.4*	6.4*	11.4*	11.4*	10.0	8.0	7.4	6.0	5.8	4.7	4.8	3.9	3.9*	3.3	3.6*	3.3	12.2	
-4.5 m	All stabilizers up All stabilizers down			8.4*	8.4*	11.7*	11.7*	9.2*	8.1	7.3*	6.0	5.8*	4.8	4.3*	3.9			3.0*	3.0*	11.4	
-6 m	All stabilizers up All stabilizers down							6.9*	6.9*	5.4*	5.4*	4.0*	4.0*								

M325B MH with Cat two-piece, 13.4 m (43'11") front

English

Height**	Undercarriage configuration	5 ft		10 ft		15 ft		20 ft		25 ft		30 ft		35 ft		40 ft				ft
																				
45 ft	All stabilizers up All stabilizers down							17.8*	17.8*									17.2*	17.2*	23.35
40 ft	All stabilizers up All stabilizers down									14.8*	14.8*							14.5*	12.1	29.94
35 ft	All stabilizers up All stabilizers down									14.0*	14.0*	13.5*	12.5					11.7	9.7	34.58
30 ft	All stabilizers up All stabilizers down									13.9*	13.9*	13.4*	12.5	11.6	9.7			10.1	8.4	38.00
25 ft	All stabilizers up All stabilizers down									14.5*	14.5*	13.5*	12.4	11.6	9.7	9.3	7.7	9.1	7.5	40.51
20 ft	All stabilizers up All stabilizers down									15.2*	15.2*	13.9*	12.2	11.5	9.6	9.3	7.7	8.4	7.0	42.27
15 ft	All stabilizers up All stabilizers down							19.0*	19.0*	16.5*	15.5	14.2	11.8	11.2	9.3	9.2	7.6	8.0	6.6	43.39
10 ft	All stabilizers up All stabilizers down					28.0*	28.0*	21.7*	20.4	17.9	14.8	13.7	11.4	11.0	9.1	9.0	7.4	7.8	6.4	43.90
5 ft	All stabilizers up All stabilizers down					32.5*	28.6	23.5	19.2	17.2	14.1	13.3	11.0	10.7	8.8	8.9	7.3	7.8	6.4	43.84
0 ft	All stabilizers up All stabilizers down					27.5*	26.9	22.5	18.2	16.6	13.5	12.9	10.6	10.5	8.6	8.7	7.2	7.9	6.5	43.19
-5 ft	All stabilizers up All stabilizers down			10.5*	10.5*	24.0*	24.0*	21.9	17.6	16.1	13.1	12.7	10.4	10.3	8.5	8.7	7.1	8.2	6.7	41.93
-10 ft	All stabilizers up All stabilizers down	10.1*	10.1*	14.7*	14.7*	26.2*	25.8	21.6	17.3	15.9	12.9	12.5	10.2	10.3	8.4	8.0*	7.2	8.0*	7.2	40.01
-15 ft	All stabilizers up All stabilizers down			19.0*	19.0*	25.5*	25.5*	20.0*	17.4	15.9	12.9	12.5*	10.3	9.1*	8.5		6.8*	6.8*	37.31	
-20 ft	All stabilizers up All stabilizers down							14.9*	14.9*	11.7*	11.7*									

5

\*\*Limited by hydraulic rather than tipping load.  
\*\*Height of stick pin.



Load Radius Over Front



Load Radius Over Side



Load at Maximum Reach

The above loads are in compliance with hydraulic excavator lift capacity ratings standard ISO 21057/SAE 1097. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity.  
Weight of all lifting accessories must be deducted from the above lifting capacities.

### M320 MH

#### ● Stabilizers Raised

Height		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach		Max. Reach Radius	
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	m	ft
7.5 m 24'7"	kg lb	—	—	6300 13,890	4500 9920	4400 9700	3100 6830	3200 7050	2200 4850	2600 5730	1800 3960	10.10	33'2"
6.0 m 19'6"	kg lb	—	—	6200 13,670	4300 9480	4300 9480	3000 6610	3200 7050	2200 4850	2300 5070	1500 3300	10.81	35'6"
4.5 m 14'9"	kg lb	9400 20,720	6300 13,890	5900 13,000	4100 9040	4100 9040	2900 6390	3100 6830	2100 4630	2100 4630	1400 3080	11.28	37'0"
3.0 m 9'10"	kg lb	8600 18,960	5600 12,340	5500 12,120	3700 8150	3900 8590	2700 5950	3000 6610	2000 4410	2000 4410	1300 2860	11.53	38'4"
1.5 m 4'11"	kg lb	7900 17,410	5000 11,020	5100 11,240	3400 7490	3700 8150	2500 5510	2800 6170	1900 4180	—	—	—	—
Ground Line	kg lb	7400 16,310	4600 10,140	4900 10,800	3200 7050	3600 7930	2300 5070	2800 6170	1800 3960	—	—	—	—
-1.5 m -4'11"	kg lb	—	—	4700 10,360	3000 6610	3500 7710	2200 4850	—	—	—	—	—	—

### M320 MH

#### ● Stabilizers Lowered


Height		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		At Max. Reach		Max. Reach Radius	
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	m	ft
7.5 m 24'7"	kg lb	—	—	7100* 15,650*	7100* 15,650*	6200* 13,670*	6000 13,230	5400* 11,900*	4500 9920	2800* 6170*	2800* 6170*	10.10	33'2"
6.0 m 19'6"	kg lb	—	—	7400* 16,310*	7400* 16,310*	6300* 13,890*	5900 13,000	5500* 12,120*	4400 9700	2800* 6170*	2800* 6170*	10.81	35'6"
4.5 m 14'9"	kg lb	10 100* 22,270*	10 100* 22,270*	7900* 17,410*	7900* 17,410*	6500* 14,330*	5800 12,780	5500* 12,120*	4300 9480	2700* 5950*	2700* 5950*	11.28	37'0"
3.0 m 9'10"	kg lb	11 200* 24,690*	11 200* 24,690*	8400* 18,520*	7900 17,410	6700* 14,770*	5600 12,340	5600* 12,340*	4200 9260	2800* 6170*	2800* 6170*	11.53	38'4"
1.5 m 4'11"	kg lb	11 800* 26,010*	11 800* 26,010*	8600* 18,960*	7500 16,530	6800* 14,990*	5300 11,680	5500* 12,120*	4100 9040	—	—	—	—
Ground Line	kg lb	10 800* 23,810*	10 800* 23,810*	8400* 18,520*	7200 15,870	6600* 14,550*	5200 11,460	5200* 11,460*	4000 8820	—	—	—	—
-1.5 m -4'11"	kg lb	—	—	7500* 16,530*	7000 15,430	5900* 13,000*	5100 11,240	—	—	—	—	—	—

\*Load limited by hydraulic capacity rather than tipping.

- 320B MH
- 325B MH
- 330B MH
- Belgium Sourced


**320B MH Range Diagram**

- Caterpillar Material Handling Boom and Stick

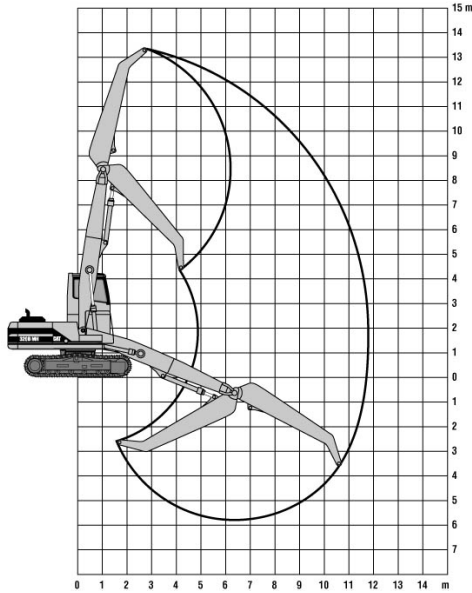


**330B MH Range Diagram**

- Caterpillar Material Handling Boom and Stick

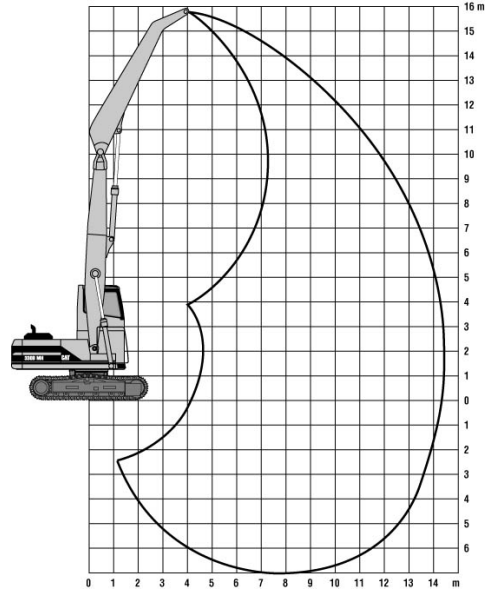

**325B MH Range Diagram**

- Caterpillar Material Handling Boom and Stick

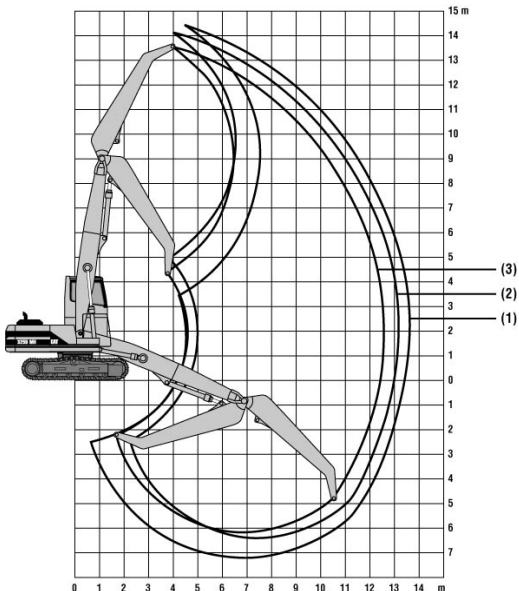

Model	320B MH		330B MH	
	m	ft	m	ft
Boom	6.65	21'10"	7.77	25'6"
Stick	5.40	17'9"	6.83	22'5"
Maximum Horizontal Reach	12.40	40'3"	14.37	47'1"
Maximum Vertical Pin Height	13.60	44'6"	15.78	51'9"

Model	325B MH					
	1		2		3	
	m	ft	m	ft	m	ft
Boom	7.20	23'7"	7.80	25'7"	7.20	23'7"
Stick	6.35	20'10"	5.35	17'7"	5.35	17'7"
Maximum Horizontal Reach	13.40	44'0"	12.90	42'4"	12.40	40'8"
Maximum Vertical Pin Height	14.60	47'11"	14.00	45'11"	13.50	44'3"

**NOTE:** All Material Handling Arrangements require extra wide gage, reinforced upper frame and additional counter weight.



**Lifting Capacities**

Equipped with Caterpillar material handling arrangement.

Includes purpose built material handling boom and stick, wiring and connecting hydraulics, hydraulic cylinders and heavier counterweight. Boom cylinder — 140 mm (5.5") diameter stick cylinder — 150 mm (5.9") diameter.

Capacities are measured at the bare stick tip, and are expressed in kg.

**Capacities are based on level machine equipped as follows:**

- Total machine weight including base machine, material handling front, 1.2 m fixed cabriser, wide gage undercarriage, counterweight, lubricants, full fuel tank and operator.
- 600 mm (2'0") triple grouser shoes.

**320B MH — Heavy Duty Square Undercarriage configuration**

Maximum reach, height and lift capacity (6.65 m boom and 5.4 m stick)

Height	3 m		4.5 m		6 m		7.5 m		Max. Reach Radius	
	Front	Side	Front	Side	Front	Side	Front	Side		
12.0 m	kg	—	—	—	6233*	6233*	—	—	6.46 m	
10.5 m	kg	—	—	—	7627*	7627*	6161*	6161*	8.37 m	
9.0 m	kg	—	—	—	—	—	6979*	6531	9.69 m	
7.5 m	kg	—	—	—	—	—	6972*	6511	10.63 m	
6.0 m	kg	—	—	—	8164*	8164*	7173*	6390	11.29 m	
4.5 m	kg	—	—	9215*	9215*	8848*	8848*	7070	6186	11.73 m
3.0 m	kg	—	—	12 551*	12 551*	9652*	8390	6803	5927	11.96 m
1.5 m	kg	—	—	13 903*	12 366	9166	7894	6524	5657	12.00 m
Ground	kg	—	—	11 336*	11 336*	8746	7491	6285	5425	11.84 m
-1.5 m	kg	3656*	3656*	8933*	8933*	8484	7239	6122	5266	11.49 m
-3.0 m	kg	4990*	4990*	9408*	9408*	8375	7135	6047	5194	10.52 m
-4.5 m	kg	—	—	—	—	6295*	6295*	4887*	4887*	7.68 m

Height	9 m		10.5 m		At Max. Reach		Max. Reach Radius
	Front	Side	Front	Side	Front	Side	
12.0 m	kg	—	—	—	5124*	5124*	6.46 m
10.5 m	kg	—	—	—	4190*	4190*	8.37 m
9.0 m	kg	5418	4755	—	—	—	9.69 m
7.5 m	kg	5451	4786	4043*	3612	3494*	10.63 m
6.0 m	kg	5392	4728	4153	3626	3362*	11.29 m
4.5 m	kg	5274	4614	4101	3576	3308*	11.73 m
3.0 m	kg	5123	4466	4021	3497	3255	11.96 m
1.5 m	kg	4964	4311	3933	3411	3212	12.00 m
Ground	kg	4824	4175	3859	3338	3255	11.84 m
-1.5 m	kg	4728	4080	3816	3296	3195*	11.49 m
-3.0 m	kg	4692	4045	3326*	3308	3297*	10.52 m
-4.5 m	kg	—	—	—	—	4716*	7.68 m

\*Load limited by hydraulic capacity rather than tipping.

The above loads are in compliance with hydraulic excavator lift capacity ratings standard ISO 10567, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity. Weight of all lifting accessories must be deducted from the above lifting capacities.

### 320B MH — Heavy Duty High Undercarriage configuration

Maximum reach and height but less lift capacity (6.65 m boom and 5.4 m stick). To be used when shipping width is limited.

Height		3 m		4.5 m		6 m		7.5 m		Max. Reach Radius
		Front	Side	Front	Side	Front	Side	Front	Side	
12.0 m	kg	—	—	—	—	6233*	6233*	—	—	6.46 m
10.5 m	kg	—	—	—	—	7627*	7627*	6161*	5248	8.37 m
9.0 m	kg	—	—	—	—	—	—	6979*	5363	9.69 m
7.5 m	kg	—	—	—	—	—	—	6972*	5344	10.63 m
6.0 m	kg	—	—	—	—	8164*	7520	7173*	5229	11.29 m
4.5 m	kg	—	—	9215*	9215*	8848*	7182	7035	5034	11.73 m
3.0 m	kg	—	—	12 551*	10 542*	9636	6735	6768	4786	11.96 m
1.5 m	kg	—	—	13 903*	9570	9120	6268	6490	4528	12.00 m
Ground	kg	—	—	11 336*	8875	8700	5889	6251	4307	11.84 m
-1.5 m	kg	3656*	3656*	8933*	8528	8437	5651	6087	4155	11.49 m
-3.0 m	kg	4990*	4990*	9408*	8433	8328	5553	6012	4086	10.52 m
-4.5 m	kg	—	—	—	—	6295*	5577	4887*	4104	7.68 m

Height		9 m		10.5 m		At Max. Reach		Max. Reach Radius
		Front	Side	Front	Side	Front	Side	
12.0 m	kg	—	—	—	—	5124*	5124*	6.46 m
10.5 m	kg	—	—	—	—	4190*	4190*	8.37 m
9.0 m	kg	5391	3880	—	—	3741*	3339	9.69 m
7.5 m	kg	5424	3910	4043*	2915	3494*	2835	10.63 m
6.0 m	kg	5365	3855	4131	2929	3362*	2530	11.29 m
4.5 m	kg	5247	3744	4079	2880	3308*	2343	11.73 m
3.0 m	kg	5096	3601	3999	2804	3236	2238	11.96 m
1.5 m	kg	4936	3451	3912	2721	3193	2200	12.00 m
Ground	kg	4797	3321	3837	2649	3236	2226	11.84 m
-1.5 m	kg	4701	3230	3793	2608	3195*	2324	11.49 m
-3.0 m	kg	4665	3195	3326*	2620	3297*	2615	10.52 m
-4.5 m	kg	—	—	—	—	4716*	3976	7.68 m

\*Load limited by hydraulic capacity rather than tipping.

The above loads are in compliance with hydraulic excavator lift capacity ratings standard ISO 10567, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity. Weight of all lifting accessories must be deducted from the above lifting capacities.

**Lifting Capacities**

Equipped with Caterpillar material handling arrangement.

Includes purpose built material handling boom and stick, wiring and connecting hydraulics, hydraulic cylinders (boom cylinder — 140 mm (5.5") diameter, stick cylinder — 170 mm (7") diameter).

Capacities are measured at the bare stick tip, and are expressed in kg.

**Capacities are based on level machine equipped as follows:**

- Total machine weight including base machine, material handling front, 1.2 m fixed cabriser, wide gage undercarriage, counterweight, lubricants, full fuel tank and operator.
- 800 mm (2'8") triple grouser shoes.

**325B MH — Standard configuration (1)**

Maximum reach, height and lift capacity (7.2 m boom and 6.35 m stick)

Height	3 m		4.5 m		6 m		7.5 m		Max. Reach Radius	
	Front	Side	Front	Side	Front	Side	Front	Side		
13.5 m	kg	—	—	—	—	—	—	—	6.94 m	
12.0 m	kg	—	—	—	—	—	6751*	6751*	8.98 m	
10.5 m	kg	—	—	—	—	—	—	—	10.42 m	
9.0 m	kg	—	—	—	—	—	—	—	11.47 m	
7.5 m	kg	—	—	—	—	—	—	—	12.26 m	
6.0 m	kg	—	—	—	—	—	6771*	6771*	12.82 m	
4.5 m	kg	—	—	—	—	8413*	8413*	7347*	7347*	13.18 m
3.0 m	kg	—	—	12 309*	12 309*	9629*	9629*	8014*	7543	13.36 m
1.5 m	kg	—	—	14 524*	14 524*	10 744*	9945	8617*	7196	13.37 m
Ground	kg	—	—	12 855*	12 855*	11 420*	9434	8889	6894	13.21 m
-1.5 m	kg	4204*	4204*	10 392*	10 392*	11 470*	9099	8658	6676	12.88 m
-3.0 m	kg	6043*	6043*	11 133*	11 133*	10 847*	8934	8529	6554	12.35 m
-4.5 m	kg	7956*	7956*	12 210*	12 210*	9533*	8908	7586*	6527	11.60 m
-6.0 m	kg	—	—	9210*	9210*	7447*	7447*	5924*	5924*	10.23 m

Height	9 m		10.5 m		12 m		At Max. Reach		Max. Reach Radius	
	Front	Side	Front	Side	Front	Side	Front	Side		
13.5 m	kg	—	—	—	—	—	7823*	7823*	6.94 m	
12.0 m	kg	—	—	—	—	—	6536*	6078	8.98 m	
10.5 m	kg	6078*	6078*	—	—	—	5894*	4820	10.42 m	
9.0 m	kg	5937*	5937*	5676*	4846	—	5182	4115	11.47 m	
7.5 m	kg	5999*	5999*	5648*	4839	4830	3828	4647	3674	12.26 m
6.0 m	kg	6217*	6117	5741*	4773	4817	3815	4302	3388	12.82 m
4.5 m	kg	6544*	5946	5880	4670	4763	3762	4085	3207	13.18 m
3.0 m	kg	6913*	5741	5750	4544	4689	3691	3966	3105	13.36 m
1.5 m	kg	7038	5531	5615	4414	4611	3617	3930	3070	13.37 m
Ground	kg	6843	5344	5495	4299	4545	3552	3975	3102	13.21 m
-1.5 m	kg	6696	5204	5406	4214	4503	3512	4028*	3207	12.88 m
-3.0 m	kg	6612	5124	5364	4173	4159*	3516	3672*	3403	12.35 m
-4.5 m	kg	6037*	5113	4593*	4191	—	—	3164*	3164*	11.60 m
-6.0 m	kg	4466*	4466*	—	—	—	—	3017*	3017*	10.23 m

\*Load limited by hydraulic capacity rather than tipping.

The above loads are in compliance with hydraulic excavator lift capacity ratings standard ISO 10567, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity. Weight of all lifting accessories must be deducted from the above lifting capacities.

### 325B MH — Optional configuration (2)

More dump height close at machine with the same reach (7.8 m boom and 5.35 m stick)

Height		3 m		4.5 m		6 m		7.5 m		Max. Reach Radius
		Front	Side	Front	Side	Front	Side	Front	Side	
13.5 m	kg	—	—	—	—	8952*	8952*	—	—	6.17 m
12.0 m	kg	—	—	—	—	—	—	7291*	7291*	8.40 m
10.5 m	kg	—	—	—	—	—	—	6934*	6934*	9.92 m
9.0 m	kg	—	—	—	—	—	—	6902*	6902*	11.03 m
7.5 m	kg	—	—	—	—	—	—	7110*	7110*	11.84 m
6.0 m	kg	—	—	—	—	8713*	8713*	7513*	7513*	12.42 m
4.5 m	kg	—	—	12 440*	12 440*	9683*	9683*	8037*	7566	12.79 m
3.0 m	kg	—	—	—	—	10 667*	9961	8559*	7224	12.98 m
1.5 m	kg	—	—	—	—	11 324*	9408	8903	6906	12.99 m
Ground	kg	—	—	5604*	5604*	11 404*	9030	8643	6661	12.83 m
-1.5 m	kg	—	—	7022*	7022*	10 861*	8836	8485	6512	12.48 m
-3.0 m	kg	5454*	5454*	9104*	9104*	9732*	8788	7885*	6456	11.93 m
-4.5 m	kg	—	—	9516*	9516*	8024*	8024*	6606*	6488	11.16 m
-6.0 m	kg	—	—	—	—	5654*	5654*	4676*	4676*	8.94 m

Height		9 m		10.5 m		12 m		At Max. Reach		Max. Reach Radius
		Front	Side	Front	Side	Front	Side	Front	Side	
13.5 m	kg	—	—	—	—	—	—	8870*	8870*	6.17 m
12.0 m	kg	—	—	—	—	—	—	7067*	6663	8.40 m
10.5 m	kg	6464*	6113	—	—	—	—	6276*	5141	9.92 m
9.0 m	kg	6352*	6145	5925*	4740	—	—	5458	4329	11.03 m
7.5 m	kg	6435*	6079	5896*	4734	—	—	4856	3836	11.84 m
6.0 m	kg	6645*	5944	5877	4665	4743	3743	4475	3522	12.42 m
4.5 m	kg	6926*	5762	5766	4560	4695	3696	4239	3324	12.79 m
3.0 m	kg	7068	5558	5640	4437	4628	3631	4110	3215	12.98 m
1.5 m	kg	6866	5364	5517	4320	4560	3567	4073	3180	12.99 m
Ground	kg	6702	5208	5417	4223	4509	3517	4126	3218	12.83 m
-1.5 m	kg	6595	5106	5355	4163	4491	3499	4015*	3337	12.48 m
-3.0 m	kg	6415*	5067	5122*	4151	—	—	3586*	3560	11.93 m
-4.5 m	kg	5294*	5098	3881*	3881*	—	—	2970*	2970*	11.16 m
-6.0 m	kg	—	—	—	—	—	—	3506*	3506*	8.94 m

\*Load limited by hydraulic capacity rather than tipping.

The above loads are in compliance with hydraulic excavator lift capacity ratings standard ISO 10567, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity. Weight of all lifting accessories must be deducted from the above lifting capacities.

**325B MH — Optional configuration (3)**

Allows more lift capacity but less maximum reach (7.2 m boom and 5.35 m stick)

Height	3 m		4.5 m		6 m		7.5 m		Max. Reach Radius	
	Front	Side	Front	Side	Front	Side	Front	Side		
13.5 m	kg	—	—	—	—	—	—	—	4.77 m	
12.0 m	kg	—	—	—	—	—	—	—	7.45 m	
10.5 m	kg	—	—	—	—	—	7222*	7222*	9.13 m	
9.0 m	kg	—	—	—	—	—	7054*	7054*	10.32 m	
7.5 m	kg	—	—	—	—	—	7184*	7184*	11.19 m	
6.0 m	kg	—	—	—	—	8548*	8548*	7551*	7551*	11.80 m
4.5 m	kg	—	—	11 837*	11 837*	9532*	9532*	8082*	7722	12.19 m
3.0 m	kg	—	—	14 086*	14 086*	10 621*	10 279	8652*	7424	12.39 m
1.5 m	kg	—	—	14 966*	14 904	11 646*	9765	9094*	7136	12.40 m
Ground	kg	—	—	9229*	9229*	11 749*	9390	8892	6906	12.23 m
-1.5 m	kg	4309*	4309*	9810*	9810*	11 351*	9181	8738	6761	11.86 m
-3.0 m	kg	6770*	6770*	11 753*	11 753*	10 258*	9117	8184*	6705	11.29 m
-4.5 m	kg	—	—	10 348*	10 348*	8436*	8436*	6768*	6738	10.46 m
-6.0 m	kg	—	—	—	—	—	—	—	—	7.08 m

Height	9 m		10.5 m		12 m		At Max. Reach		Max. Reach Radius	
	Front	Side	Front	Side	Front	Side	Front	Side		
13.5 m	kg	—	—	—	—	—	10 985*	10 985*	4.77 m	
12.0 m	kg	—	—	—	—	—	7922*	7922*	7.45 m	
10.5 m	kg	6898*	6050	—	—	—	6887*	5896	9.13 m	
9.0 m	kg	6611*	6150	—	—	—	6102	4865	10.32 m	
7.5 m	kg	6618*	6124	5976	4769	—	5368	4269	11.19 m	
6.0 m	kg	6794*	6025	5937	4731	—	4918	3899	11.80 m	
4.5 m	kg	7068*	5877	5854	4651	4764	3769	4644	3672	12.19 m
3.0 m	kg	7211	5703	5751	4551	4719	3726	4499	3549	12.39 m
1.5 m	kg	7032	5532	5647	4452	4672	3681	4461	3515	12.40 m
Ground	kg	6884	5391	5562	4371	4641	3650	4527	3562	12.23 m
-1.5 m	kg	6788	5299	5514	4323	—	—	4400*	3707	11.86 m
-3.0 m	kg	6551*	5268	5022*	4327	—	—	3924*	3924*	11.29 m
-4.5 m	kg	5213*	5213*	—	—	—	—	3218*	3218*	10.46 m
-6.0 m	kg	—	—	—	—	—	—	4858*	4858*	7.08 m

\*Load limited by hydraulic capacity rather than tipping.

The above loads are in compliance with hydraulic excavator lift capacity ratings standard ISO 10567, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity. Weight of all lifting accessories must be deducted from the above lifting capacities.

### Lifting Capacities

Equipped with Caterpillar material handling arrangement.

Includes purpose built material handling boom and stick, wiring and connecting hydraulics, hydraulic cylinders (boom cylinder — 150 mm (5.9") diameter, stick cylinder — 170 mm (6.7") diameter).

Capacities are measured at the bare stick tip, and are expressed in kg.

### Capacities are based on level machine equipped as follows:

- Total machine weight including base machine, material handling front, 1.2 m fixed cabriser, wide gage undercarriage, counterweight, lubricants, full fuel tank and operator.
- 750 mm (2'6") triple grouser shoes.

### 330B MH

Maximum reach, height and lift capacity (7.8 m boom and 6.8 m stick)

Height	3 m		4.5 m		6 m		7.5 m		9 m		Max. Reach Radius			
	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side				
15.0 m	kg	—	—	—	—	—	9198*	9198*	—	—	6.64 m			
13.5 m	kg	—	—	—	—	—	—	—	7676*	7676*	8.97 m			
12.0 m	kg	—	—	—	—	—	—	—	—	—	10.59 m			
10.5 m	kg	—	—	—	—	—	—	—	—	—	11.80 m			
9.0 m	kg	—	—	—	—	—	—	—	—	—	12.72 m			
7.5 m	kg	—	—	—	—	—	—	—	—	—	13.40 m			
6.0 m	kg	—	—	—	—	—	—	—	—	—	13.89 m			
4.5 m	kg	—	—	—	—	—	—	—	—	—	13.89 m			
3.0 m	kg	—	—	—	—	—	—	—	—	—	14.21 m			
1.5 m	kg	—	—	—	—	—	—	—	—	—	14.36 m			
Ground	kg	—	—	—	—	—	—	—	—	—	14.35 m			
-1.5 m	kg	2864*	2864*	7670*	7670*	12 943*	12 355	12 901*	11 910	10 178*	9042	8372*	7026	14.18 m
-3.0 m	kg	4569*	4569*	7237*	7237*	12 901*	11 910	12 901*	11 910	10 158*	8742	8298*	6826	13.85 m
-4.5 m	kg	4569*	4569*	8312*	8312*	12 177*	11 684	12 177*	11 684	9677*	8568	7884*	6703	13.34 m
-4.5 m	kg	6320*	6320*	9933*	9933*	10 787*	10 787*	10 787*	10 787*	8679*	8511	7043*	6664	12.63 m
-6.0 m	kg	—	—	10 626*	10 626*	8691*	8691*	8691*	8691*	7071*	7071*	5637*	5637*	11.43 m

Height	10.5 m		12 m		13.5 m		At Max. Reach		Max. Reach Radius	
	Front	Side	Front	Side	Front	Side	Front	Side		
15.0 m	kg	—	—	—	—	—	8224*	8224*	6.64 m	
13.5 m	kg	—	—	—	—	—	6690*	6690*	8.97 m	
12.0 m	kg	6171*	6171*	—	—	—	5951*	5951*	10.59 m	
10.5 m	kg	6233*	6233*	—	—	—	5527*	5298	11.80 m	
9.0 m	kg	6164*	6164*	5832*	5216	—	5273*	4672	12.72 m	
7.5 m	kg	6234*	6234*	5816*	5204	—	5130*	4258	13.40 m	
6.0 m	kg	6401*	6384	5879*	5138	5370*	4197	5068*	13.89 m	
4.5 m	kg	6625*	6219	5978*	5037	5370	4152	4936	3801	14.21 m
3.0 m	kg	6855*	6029	6070*	4919	5304	4088	4818	3699	14.36 m
1.5 m	kg	7027*	5838	6109*	4798	5235	4021	4637*	3668	14.35 m
Ground	kg	7073*	5667	6034*	4692	5030*	3967	4412*	3705	14.18 m
-1.5 m	kg	6919*	5538	5773*	4615	4550*	3941	4137*	3817	13.85 m
-3.0 m	kg	6482*	5460	5221*	4581	—	—	3780*	3780*	13.34 m
-4.5 m	kg	5644*	5448	4176*	4176*	—	—	3288*	3288*	12.63 m
-6.0 m	kg	4186*	4186*	—	—	—	—	3031*	3031*	11.43 m


\*Load limited by hydraulic capacity rather than tipping.

The above loads are in compliance with hydraulic excavator lift capacity ratings standard ISO 10567, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity. Weight of all lifting accessories must be deducted from the above lifting capacities.


Model	320B MH		325B MH		330B MH		345B MH		375 MH			
	m	ft	m	ft	m	ft	m	ft	m	ft		
MH Two-Piece Front	12.40	40'8"	13.40	43'11"	14.40	47'3"	16.50	54'0"	16.76	55'0"	20.73	68'0"
Max. Reach @ 1.5 m (5'0")	12.40	40'8"	13.40	43'11"	14.40	47'3"	16.50	54'0"	16.76	55'0"	20.73	68'0"
Max. Height	13.70	44'11"	14.80	48'7"	15.65	51'4"	16.20	53'2"	*		*	
Reach @ Max. Height	3.50	11'6"	1.50	5'0"	1.50	5'0"	8.40	27'6"	*		*	
Track Shoe	600 mm	24"	800 mm	32"	850 mm	34"	900 mm	36"	700 mm	30"	700 mm	30"

\*Information unavailable at time of printing.


**320B MH Range Diagram**

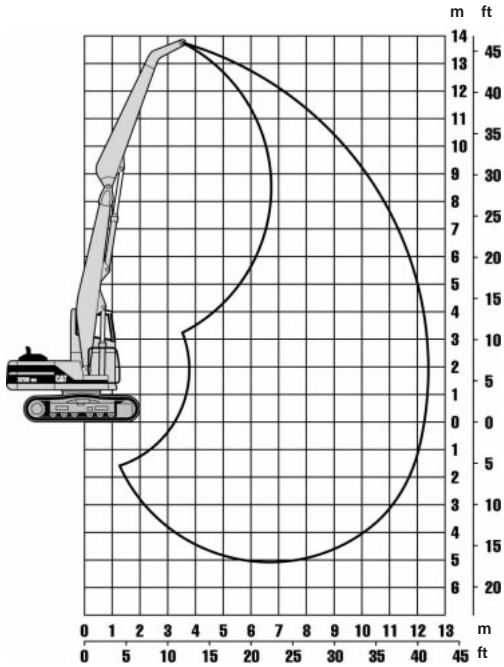


**325B MH Range Diagram**

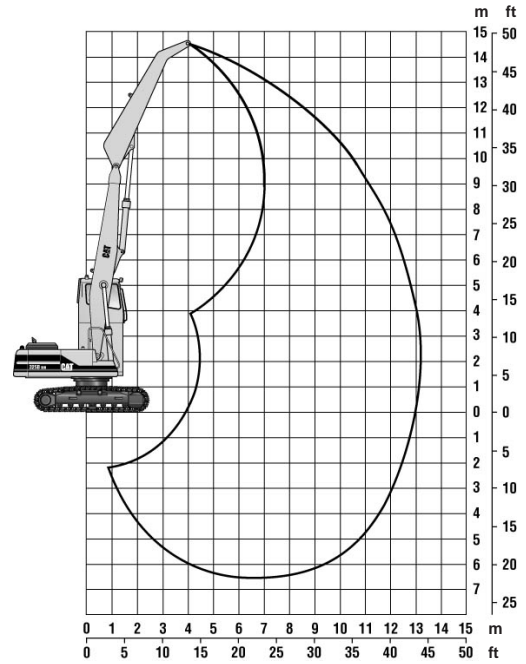

330B MH Range Diagram

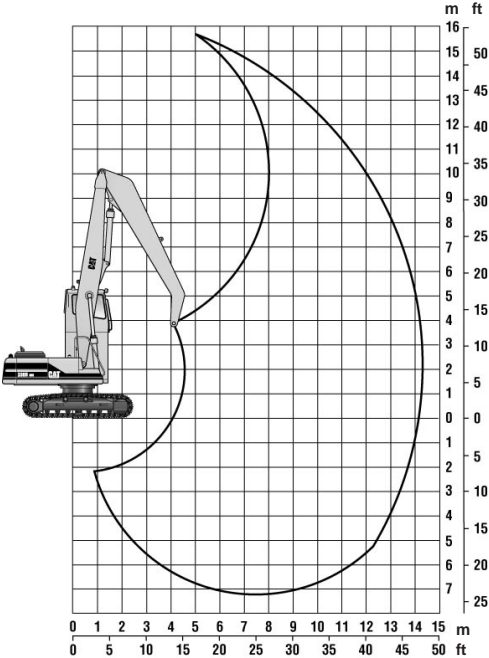




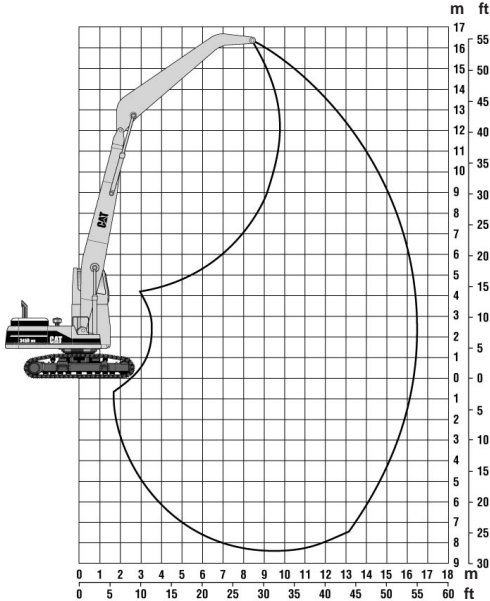


















345B MH Range Diagram





M320B MH

		1.5 m/5.0 ft		3.0 m/10.0 ft		4.5 m/15.0 ft		6.0 m/20.0 ft		7.5 m/25.0 ft		9.0 m/30.0 ft		10.5 m/35.0 ft		12.0 m/40.0 ft											
																						m ft					
10.5 m 35.0 ft	kg lb									*6000 *13,250	5300 11,300											*3900 *8650	3850 *8650	8.96 28.84			
9.0 m 30.0 ft	kg lb									*5800 *12,700	5350 11,500	*5400 11,650	3950 8450										*3500 *7800	3150 7000	10.20 33.14		
7.5 m 25.0 ft	kg lb									*5800 *12,650	5350 11,450	*5350 11,650	4000 8500	4200 9000	3050 6500								*3300 *7300	2750 6050	11.11 36.23		
6.0 m 20.0 ft	kg lb							*6700 *14,550	*6700 *14,550	*6000 *13,850	5250 11,250	5400 11,600	3900 8400	4200 9050	3050 6500								*3200 *7000	2500 5450	11.75 38.43		
4.5 m 15.0 ft	kg lb							*7300 *15,850	7200 15,450	*6300 *13,700	5100 10,950	5300 11,400	3850 8200	4150 8950	3000 6400	3350 7350	2400 5200						*3150 *6900	2300 5100	12.17 39.88		
3.0 m 10.0 ft	kg lb					*10,300 *22,200	*10,300 *22,200	*17,500 *17,500	*8100 14,650	6800 14,550	*6700 10,450	4850 10,450	5150 11,100	3700 7950	4100 8750	2900 6250	3350 7150	2350 5050						*3150 *6900	2250 4900	12.40 40.66	
1.5 m 5.0 ft	kg lb					*11,750 *25,350	9750 21,000	*8750 *18,950	6400 13,750	6550 14,100	4650 10,000	5000 10,800	3550 7650	4000 8600	2850 6100	3300 7050	2300 4950	3100 6850	2200 4800						*3100 *6850	2200 4800	12.44 40.81
Ground Line	kg lb					*12,300 *26,650	9100 19,500	8800 18,900	6050 13,000	6350 13,650	4450 9550	4900 10,500	3450 7400	3950 8450	2750 5950	3250 7000	2300 4900	3150 6950	2200 4850						*3150 *6950	2200 4850	12.30 40.34
-1.5 m -5.0 ft	kg lb	*1850 *4100	*1850 *4100	*3750 *8550	*3750 *8550	*9600 *22,300	8700 18,700	8550 18,350	8500 12,500	6200 13,300	4300 9200	4800 10,300	3350 7200	3900 8350	2700 5850								*2800 *6150	2300 5050	11.96 39.22		
-3.0 m -10.0 ft	kg lb			*4900 *11,000	*4900 *11,000	*9400 *21,600	8550 18,400	*7850 *16,950	5700 12,250	6100 13,100	4200 9050	4750 10,200	3300 7100	*3500 *7250	2700 5850								*2900 *6450	2550 5650	11.03 36.05		
-4.5 m -15.0 ft	kg lb							*6250 *13,350	5700 12,200	*4900 *10,350	4200 9050												*3750 *8450	3400 7700	8.84 28.37		

\*Indicates that the load is limited by hydraulic capacity rather than tipping capacity. Lift capacity ratings are based on SAE standard J1097. Rated loads do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity.



Load Point  
Height



Load Radius  
Over Front



Load Radius  
Over Side



Load at  
Maximum Reach

**325B MH**

Equipped with Cat two-piece, 13.4 m (43'11") Front, 800 mm (2'7.5") triple grouser shoes

Height		1.5 m 5'0"		3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		Max. Reach Radius	
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	m	ft
15.0 m 45'0"	kg lb	—	—	—	—	—	—	18,600*	18,600*	—	—	—	21.43
12.0 m 40'0"	kg lb	—	—	—	—	—	—	—	—	6700*	6700*	8.96	28.68
10.5 m 35'0"	kg lb	—	—	—	—	—	—	—	—	6300*	6300*	10.40	33.67
9.0 m 30'0"	kg lb	—	—	—	—	—	—	—	—	13,800*	13,800*	11.46	37.32
7.5 m 25'0"	kg lb	—	—	—	—	—	—	—	—	6400*	6400*	12.25	40.02
6.0 m 20'0"	kg lb	—	—	—	—	—	—	—	—	14,300*	14,300*	12.81	41.94
4.5 m 15'0"	kg lb	—	—	—	—	—	—	8500*	8500*	15,000*	15,000*	13.18	43.19
3.0 m 10'0"	kg lb	—	—	—	—	12 300*	12 300*	9700*	9700*	7400*	7400*	13.37	43.84
1.5 m 5'0"	kg lb	—	—	—	—	26,800*	26,800*	21,000*	21,000*	17,600*	16,700*	13.38	43.90
0.0 m 0"	kg lb	—	—	—	—	—	—	10 800*	10 200*	8700*	7400*	13.22	43.39
-1.5 m -5'0"	kg lb	—	—	4100*	4100*	10 300*	10 300*	11 500*	9400	9100*	7100	12.89	42.27
-3.0 m -10'0"	kg lb	—	—	9600*	9600*	24,000*	24,000*	25,000*	20,100	19,500	14,800	12.36	40.50
-4.5 m -15'0"	kg lb	9100*	9100*	6000*	6000*	11 000*	11 000*	10 900*	9200	8600*	6800	11.62	37.98
-6.0 m -20'0"	kg lb	—	—	13,700*	13,700*	25,400*	25,400*	23,800*	19,800	18,800*	14,600	—	—
				7900*	7900*	12 300*	12 300*	9600*	9200	7600*	6700		
				18,000*	18,000*	26,900*	26,900*	20,900*	19,700*	16,600*	14,500		
				—	20,100*	20,100*	16,200*	16,200*	12,800*	12,800*	9500*		

5

Height		9 m 30'0"		10.5 m 35'0"		12 m 40'0"		At Max. Reach		Max. Reach Radius	
		Front	Side	Front	Side	Front	Side	Front	Side	m	ft
15.0 m 45'0"	kg lb	—	—	—	—	—	—	18,300*	18,300*	—	21.43
12.0 m 40'0"	kg lb	—	—	—	—	—	—	6600*	6200	8.96	28.68
10.5 m 35'0"	kg lb	6100*	6100*	—	—	—	—	14,900*	14,300	10.40	33.67
9.0 m 30'0"	kg lb	13,600*	13,600*	—	—	—	—	5900*	5000	11.46	37.32
7.5 m 25'0"	kg lb	13,500*	13,500*	5700*	5000	—	—	13,400*	11,200	12.25	40.02
6.0 m 20'0"	kg lb	6000*	6000*	5700*	5000	10,800	8500	5400	4300	12.81	41.94
4.5 m 15'0"	kg lb	13,400*	13,400*	12,600*	10,700	5000	4000	12,100	9500	13.18	43.19
3.0 m 10'0"	kg lb	6300*	6300*	5800*	4900	5000	3900	10,800	7800	13.37	43.84
1.5 m 5'0"	kg lb	13,800*	13,500	12,800*	10,600	10,800	8500	4300	3300	13.38	43.90
0.0 m 0"	kg lb	6600*	6100	6000*	4800	5000	3900	4100	3200	13.22	43.39
-1.5 m -5'0"	kg lb	14,400*	13,200	13,100*	10,400	10,700	8400	9200	7100	12.89	42.27
-3.0 m -10'0"	kg lb	7000*	5900	6000	4700	4900	3800	4100*	3300	12.36	40.50
-4.5 m -15'0"	kg lb	15,200*	12,700	12,900	10,100	10,600	8200	8200*	7800	11.62	37.98
-6.0 m -20'0"	kg lb	7300*	5700	5900	4600	4800	3800	3200*	3200*	—	—
		15,800	12,300	12,700	9800	10,400	8100	7100*	7100*		
		7200	5500	5800	4500	4800	3700	—	—		
		15,400	11,900	12,400	9600	10,300	8000	—	—		
		7000	5400	5700	4400	4700	3700	—	—		
		15,100	11,600	12,200	9400	10,200	7900	—	—		
		6900	5300	5600	4300	4200*	3700	—	—		
		14,900	11,400	12,100	9400	8800*	7900	—	—		
		6100*	5300	4600*	4400	—	—	—	—		
		13,200*	11,400	9900*	9400	—	—	—	—		
		—	—	—	—	—	—	—	—		
		9500*	—	—	—	—	—	—	—		

\*Indicates that the load is limited by hydraulic capacity rather than tipping capacity. Lift capacity ratings are based on SAE standard J1097. Rated loads do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity.

**330B MH**























Equipped with Cat two-piece, 14.4 m (47'3") Front, 850 mm (2'10") triple grouser shoes

Height		3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		Max. Reach Radius	
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	m	ft
13.5 m 46'0"	kg lb	—	—	—	—	—	—	7600* 17,200*	7600* 17,200*	—	—	8.93	26.37
12.0 m 40'0"	kg lb	—	—	—	—	—	—	—	—	6700* 15,000*	6700* 15,000*	10.56	34.05
10.5 m 35'0"	kg lb	—	—	—	—	—	—	—	—	6500* 14,800*	6500* 14,800*	11.78	38.25
9.0 m 30'0"	kg lb	—	—	—	—	—	—	—	—	6500* 14,600*	6500* 14,600*	12.70	41.41
7.5 m 25'0"	kg lb	—	—	—	—	—	—	—	—	6700* 14,800*	6700* 14,800*	13.39	43.76
6.0 m 20'0"	kg lb	—	—	—	—	—	—	7700* 17,000*	7700* 17,000*	7000* 15,400*	7000* 15,400*	13.89	45.47
4.5 m 15'0"	kg lb	—	—	—	—	9800* 21,300*	9800* 21,300*	8400* 18,400*	8400* 18,400*	7400* 16,200*	7400* 16,200*	14.21	46.57
3.0 m 10'0"	kg lb	—	—	—	—	11 200* 24,300*	11 200* 24,300*	9200* 20,000*	9200* 20,000*	7900* 17,100*	7700* 16,600*	14.36	47.10
1.5 m 5'0"	kg lb	—	—	—	—	12 300* 26,800*	12 300* 26,800*	9800* 21,400*	9600* 20,600*	8200* 17,900*	7400* 16,000*	14.35	47.10
0.0 m 0"	kg lb	—	—	7600* 18,800*	7600* 18,800*	13 000* 26,200*	12 500* 26,800*	10 200* 22,200*	9200* 19,700*	8400* 18,300*	7100* 15,400*	14.19	46.55
-1.5 m -5'0"	kg lb	2900* 6800*	2900* 6800*	7200* 17,000*	7200* 17,000*	12 900* 28,000*	12 000* 25,900*	10 200* 22,100*	8900* 19,100*	8300* 18,100*	6900* 15,000*	13.86	45.45
-3.0 m -10'0"	kg lb	4600* 10,600*	4600* 10,600*	8300* 19,200*	8300* 19,200*	12 200* 26,300*	11 800* 25,400*	9700* 21,100*	8700* 18,700*	7900* 17,200*	6800* 14,700*	13.35	43.75
-4.5 m -15'0"	kg lb	6300* 14,400*	6300* 14,400*	9900* 22,700*	9900* 22,700*	10 800* 23,600*	10 800* 23,600*	8700* 18,900*	8600* 18,600*	7100* 15,300*	6800* 14,600*	12.65	41.37
-6.0 m -20'0"	kg lb	—	—	10 600* 23,200*	10 600* 23,200*	8700* 18,900*	8700* 18,900*	7100* 15,300*	7100* 15,300*	5600* 12,100*	5600* 12,100*	—	—

Height		10.5 m 35'0"		12 m 40'0"		13.5 m 46'0"		At Max. Reach		Max. Reach Radius	
		Front	Side	Front	Side	Front	Side	Front	Side	m	ft
13.5 m 46'0"	kg lb	—	—	—	—	—	—	6600* 15,200*	6600* 15,200*	8.93	26.37
12.0 m 40'0"	kg lb	6000* —	6000* —	—	—	—	—	5900* 13,300*	5900* 13,300*	10.56	34.05
10.5 m 35'0"	kg lb	6200* 14,100*	6200* 14,100*	—	—	—	—	5500* 12,200*	5400* 12,100*	11.78	38.25
9.0 m 30'0"	kg lb	6200* 13,700*	6200* 13,700*	5800* 13,000*	5300* 11,300*	—	—	5200* 11,600*	4800* 10,600*	12.70	41.41
7.5 m 25'0"	kg lb	6200* 13,800*	6200* 13,800*	5800* 12,900*	5300* 11,400*	—	—	5100* 11,300*	4400* 9600*	13.39	43.76
6.0 m 20'0"	kg lb	6400* 14,100*	6400* 13,900*	5900* 12,900*	5200* 11,200*	5400* 11,800*	4300* 9200*	5000* 11,100*	4100* 9000*	13.89	45.47
4.5 m 15'0"	kg lb	6600* 14,500*	6300* 13,600*	6000* 13,100*	5100* 11,000*	5400* 11,700*	4200* 9100*	5000* 11,100*	3900* 8600*	14.21	46.57
3.0 m 10'0"	kg lb	6900* 15,000*	6100* 13,200*	6100* 13,300*	5000* 10,800*	5400* 11,700*	4200* 9000*	4900* 10,800*	3800* 8300*	14.36	47.10
1.5 m 5'0"	kg lb	7100* 15,400*	5900* 12,800*	6100* 13,400*	4900* 10,500*	5300* 11,400*	4100* 8800*	4700* 10,400*	3800* 8300*	14.35	47.10
0.0 m 0"	kg lb	7100* 15,400*	5800* 12,400*	6100* 13,200*	4800* 10,300*	5100* 10,900*	4100* 8700*	4400* 9900*	3800* 8400*	14.19	46.55
-1.5 m -5'0"	kg lb	6900* 15,100*	5600* 12,200*	5800* 12,500*	4700* 10,200*	4600* 9600*	4000* 8700*	4200* 9200*	3900* 8600*	13.86	45.45
-3.0 m -10'0"	kg lb	6500* 14,100*	5600* 12,000*	5200* 11,200*	4700* 10,100*	—	—	3800* 8400*	3800* 8400*	13.35	43.75
-4.5 m -15'0"	kg lb	5700* 12,200*	5600* 12,000*	4200* 8700*	4200* 8700*	—	—	3300* 7300*	3300* 7300*	12.65	41.37
-6.0 m -20'0"	kg lb	4200* 8800*	4200* 8800*	—	—	—	—	—	—	—	—

\*Indicates that the load is limited by hydraulic capacity rather than tipping capacity. Lift capacity ratings are based on SAE standard J1097. Rated loads do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity.

M345B Series II MH equipped with Cat two-piece, 16.5 m (54'0") front, 900 mm triple grouser shoes

	3.0 m (10.0 ft)		4.5 m (15.0 ft)		6.0 m (20.0 ft)		7.5 m (25.0 ft)		9.0 m (30.0 ft)		10.5 m (35.0 ft)		12.0 m (40.0 ft)		13.5 m (45.0 ft)		15.0 m (50.0 ft)				m ft		
																							
15.0 m 50.0 ft	kg lb									*15,100	*15,100									*5700	*5700	10.6 32.30	
13.5 m 45.0 ft	kg lb											*7400	*7400								*5300	*5300	11.84 38.15
12.0 m 40.0 ft	kg lb											*8300	*8300	*7100	*7100						*5000	*5000	13.13 42.60
10.5 m 35.0 ft	kg lb											*8300	*8300	*7700	*7700	*6300	*6300				*4900	*4900	14.15 46.08
9.0 m 30.0 ft	kg lb											*8400	*8400	*7700	*7700	*7200	*7200				*4900	*4900	14.94 48.80
7.5 m 25.0 ft	kg lb									*9600	*9600	*8600	*8600	*7900	*7900	*7200	7200	*6300	6000		*4900	*4900	15.55 50.88
6.0 m 20.0 ft	kg lb							*11 500	*11 500	*10 100	*10 100	*9000	*9000	*8100	*8100	*7300	7000	*6700	5900		*4900	*4900	15.99 52.39
4.5 m 15.0 ft	kg lb					*15 200	*15 200	*12 500	*12 500	*10 700	*10 700	*9300	*9300	*8300	8300	*7500	6900	6700	5800		*5100	*5100	16.28 53.39
3.0 m 10.0 ft	kg lb			*22 900	*22 900	*16 800	*16 800	*13 400	*13 400	*11 200	*11 200	*9700	*9700	*8500	8000	*7500	6700	6600	5700		*5300	4900	16.43 53.90
1.5 m 5.0 ft	kg lb			*14 100	*14 100	*18 000	*18 000	*14 100	*14 100	*11 600	*11 600	*9900	9400	*8600	7800	7500	6500	6500	5600		*5500	4800	16.44 53.94
0.0 m 0.0 ft	kg lb			*9300	*9300	*18 400	*18 400	*14 400	*14 400	*11 800	11 300	*10 000	9100	*8600	7500	7400	6400	6300	5500		5600	4800	16.31 53.51
-1.5 m -5.0 ft	kg lb	*5500	*5500	*8500	*8500	*14 900	*14 900	*14 300	14 000	*11 700	10 900	*9900	8800	*8400	7300	7200	6200	*6200	5400		*5400	4900	16.04 52.60
-3.0 m -10.0 ft	kg lb	*14,300	*14,300	*8700	*8700	*13 300	*13 300	*13 600	*13 600	*11 200	10 600	*9500	8600	*8100	7200	*6800	6200	*5700	5300		*5200	5100	15.61 51.18
-4.5 m -15.0 ft	kg lb	*7100	*7100	*9200	*9200	*13 000	*13 000	*12 400	*12 400	*10 400	*10 400	*8800	8500	*7400	7100	*6200	6100	*4900	*4900				
-6.0 m -20.0 ft	kg lb			*9700	*9700	*12 600	*12 600	*10 700	*10 700	*9100	*9100	*7700	*7700	*6400	*6400	*5100	*5100						
-7.5 m -25.0 ft	kg lb					*9700	*9700	*8500	*8500	*7300	*7300	*6100	*6100	*4900	*4900								

\*Indicates that the load is limited by hydraulic capacity rather than tipping capacity. Lift capacity ratings are based on SAE standard J1097.

Rated loads do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity.



Load Point Height



Load Radius Over Front



Load Radius Over Side



Load at Maximum Reach

**345B Series II MH**

Equipped with Cat two-piece, 16.5 m (54'0") Front, 900 mm (3'0") triple grouser shoes

Height		3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		Max. Reach Radius	
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	m	ft
15.0 m 50'0"	kg lb	—	—	—	—	—	—	—	—	14,900*	14,900*	10.16	32.30
13.5 m 45'0"	kg lb	—	—	—	—	—	—	—	—	—	—	11.84	38.15
12.0 m 40'0"	kg lb	—	—	—	—	—	—	—	—	—	—	13.13	42.60
10.5 m 35'0"	kg lb	—	—	—	—	—	—	—	—	—	—	14.15	46.08
9.0 m 30'0"	kg lb	—	—	—	—	—	—	—	—	—	—	14.94	48.80
7.5 m 25'0"	kg lb	—	—	—	—	—	—	—	—	9000*	9000*	15.55	50.88
6.0 m 20'0"	kg lb	—	—	—	—	—	—	10 900*	10 900*	20,500*	20,500*	15.99	52.39
4.5 m 15'0"	kg lb	—	—	—	—	14 300*	14 300*	11 800*	11 800*	10 000*	10 000*	16.28	53.39
3.0 m 10'0"	kg lb	—	—	21 500*	21 500*	15 800*	15 800*	12 600*	12 600*	10 500*	10 500*	16.43	53.90
1.5 m 5'0"	kg lb	—	—	13 400*	13 400*	16 900*	16 900*	13 300*	13 300*	10 900*	10 900*	16.44	53.94
0.0 m 0'	kg lb	—	—	8800*	8800*	17 200*	17 200*	13 500*	13 500*	11 100*	11 100*	16.31	53.51
-1.5 m -5'0"	kg lb	5200*	5200*	8100*	8100*	14 100*	14 100*	13 300*	13 300*	10 900*	10 900*	16.04	52.60
-3.0 m -10'0"	kg lb	14,100*	14,100*	8300*	8300*	13 700*	13 700*	12 700*	12 700*	10 500*	10 500*	15.61	51.18
-4.5 m -15'0"	kg lb	6800*	6800*	19,400*	19,400*	29,900*	29,900*	29,000*	29,000*	24,000*	22,900*	—	—
-6.0 m -20'0"	kg lb	15,700*	15,700*	20,300*	20,300*	29,100*	29,100*	26,400*	26,400*	22,100*	22,100*	—	—
-7.5 m -25'0"	kg lb	—	—	21,500*	21,500*	26,800*	26,800*	22,700*	22,700*	19,200*	19,200*	—	—

Height		10.5 m 35'0"		12 m 40'0"		13.5 m 45'0"		15 m 50'0"		At Max. Reach		Max. Reach Radius	
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	m	ft
15.0 m 50'0"	kg lb	—	—	—	—	—	—	—	—	5300*	5300*	10.16	32.30
13.5 m 45'0"	kg lb	7000*	7000*	—	—	—	—	—	—	12,500*	12,500*	11.84	38.15
12.0 m 40'0"	kg lb	15,100*	15,100*	—	—	—	—	—	—	5000*	5000*	13.13	42.60
10.5 m 35'0"	kg lb	7800*	7800*	6700*	6700*	—	—	—	—	11,000*	11,000*	14.15	46.08
9.0 m 30'0"	kg lb	17,900*	17,900*	16,600*	16,600*	6000*	6000*	—	—	4600*	4600*	14.94	48.80
7.5 m 25'0"	kg lb	7800*	7800*	7200*	7200*	12,300*	12,300*	—	—	10,700*	10,700*	15.55	50.88
6.0 m 20'0"	kg lb	17,800*	17,800*	16,600*	16,600*	12,300*	12,300*	—	—	10,700*	10,700*	15.99	52.39
4.5 m 15'0"	kg lb	7900*	7900*	7300*	7300*	6700*	6700*	—	—	4600*	4600*	16.28	53.39
3.0 m 10'0"	kg lb	18,100*	18,100*	16,700*	16,700*	15,500*	15,500*	—	—	10,600*	10,600*	16.43	53.90
1.5 m 5'0"	kg lb	8100*	8100*	7400*	7400*	6800*	6800*	5900*	5900*	4600*	4600*	16.44	53.94
0.0 m 0'	kg lb	18,600*	18,600*	17,000*	17,000*	15,600*	15,400*	12,200*	12,200*	10,600*	10,600*	16.31	53.51
-1.5 m -5'0"	kg lb	8400*	8400*	7600*	7600*	6900*	6900*	6200*	5900*	4700*	4700*	16.04	52.60
-3.0 m -10'0"	kg lb	19,200*	19,200*	17,300*	17,300*	15,800*	15,100*	14,300*	12,700*	10,800*	10,800*	15.61	51.18
-4.5 m -15'0"	kg lb	8400*	8400*	7600*	7600*	6800*	6800*	6200*	5900*	4700*	4700*	—	—
-6.0 m -20'0"	kg lb	18,600*	18,400*	15,600*	15,400*	12,900*	12,900*	—	—	—	—	—	—
-7.5 m -25'0"	kg lb	7100*	7100*	6900*	6900*	5700*	5700*	4500*	4500*	—	—	—	—

\*Indicates that the load is limited by hydraulic capacity rather than tipping capacity. Lift capacity ratings are based on SAE standard J1097. Rated loads do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity.

### 375 MH

Equipped with 16.76 m (55'0") Pierce Pacific two-piece Front

Height		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		10.5 m 35'0"		12 m 40'0"	
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side
15.0 m 50'0"	kg lb	—	—	—	—	—	—	43,270*	43,270*	37,150*	37,150*	—	—
13.5 m 45'0"	kg lb	—	—	—	—	—	—	42,280*	42,280*	36,500*	36,500*	32,100*	32,100
12.0 m 40'0"	kg lb	—	—	—	—	—	—	41,360*	41,360*	35,760*	35,760	31,640*	31,640*
10.5 m 35'0"	kg lb	—	—	—	—	—	—	40,580*	40,580*	35,100*	35,100*	31,110*	31,110*
9.0 m 30'0"	kg lb	—	—	—	—	—	—	39,960*	39,960*	34,550*	34,550*	30,650*	30,650*
7.5 m 25'0"	kg lb	—	—	—	—	47,460*	47,460*	39,510*	39,510*	34,140*	34,140*	30,280*	30,280*
6.0 m 20'0"	kg lb	—	—	—	—	47,300*	47,300*	39,230*	39,230*	33,850*	33,850*	30,020*	30,020*
4.5 m 15'0"	kg lb	—	—	—	—	47,270*	47,270*	39,090*	39,090*	33,690*	33,690*	29,870*	29,870
3.0 m 10'0"	kg lb	—	—	—	—	—	—	39,090*	39,090*	33,640*	33,640*	29,830*	29,830*
1.5 m 5'0"	kg lb	—	—	—	—	47,270*	47,270*	39,110*	39,110*	33,710*	33,710*	29,890*	29,890*
0.0 m 0'	kg lb	—	—	—	—	47,310*	47,310*	39,280*	39,280*	33,890*	33,890*	30,070*	30,070*
-1.5 m -5'0"	kg lb	—	—	29,400*	29,400*	47,520*	47,520*	39,590*	39,590*	34,210*	34,210*	30,350*	30,350*
-3.0 m -10'0"	kg lb	14,880*	14,880*	40,370*	40,370*	48,970*	48,970*	40,060*	40,060*	34,630*	34,630*	30,740*	30,740*
-4.5 m -15'0"	kg lb	—	—	46,130*	46,130*	48,680*	48,680*	40,720*	40,720*	34,220*	34,220*	31,220*	31,220*
-6.0 m -20'0"	kg lb	—	—	—	—	—	—	41,530*	41,530*	35,910*	35,910*	—	—

Height		13.5 m 45'0"		15 m 50'0"		16.5 m 55'0"	
		Front	Side	Front	Side	Front	Side
10.5 m 35'0"	kg lb	28,030*	28,030*	—	—	—	—
9.0 m 30'0"	kg lb	27,680*	27,680*	25,140*	25,140*	—	—
7.5 m 25'0"	kg lb	27,380*	27,380*	25,030*	25,030*	—	—
6.0 m 20'0"	kg lb	27,160*	27,160*	24,890*	24,890*	—	—
4.5 m 15'0"	kg lb	27,030*	27,030*	24,790*	24,790*	—	—
3.0 m 10'0"	kg lb	26,990*	26,990*	24,760*	24,760*	23,500*	23,500*
1.5 m 5'0"	kg lb	27,050*	27,050*	24,810*	24,810*	—	—
0.0 m 0'	kg lb	27,200*	27,200*	24,920*	24,920*	—	—
-1.5 m -5'0"	kg lb	27,440*	27,440*	25,060*	25,060*	—	—
-3.0 m -10'0"	kg lb	27,750*	27,750*	—	—	—	—
-4.5 m -15'0"	kg lb	28,090*	28,090*	—	—	—	—

\*Indicates that the load is limited by hydraulic capacity rather than tipping capacity. Lift capacity ratings are based on SAE standard J1097. Rated loads do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity.

# Excavators — Material Handling

- ## Lifting Capacities
- 375 MH Two-Piece Front
  - U.S. Sourced

### 375 MH

Equipped with 20.73 m (68'0") Cat two-piece Front

Height		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		10.5 m 35'0"		12 m 40'0"	
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side
6.0 m 20'0"	kg lb	—	—	—	—	—	—	—	—	26,400*	26,400*	23,300*	23,300*
4.5 m 15'0"	kg lb	59,700*	59,700*	50,200*	50,200*	39,300*	39,300*	32,400*	32,400*	27,600*	27,600	24,100*	24,100*
3.0 m 10'0"	kg lb	—	—	53,800*	53,800*	41,700*	41,700*	34,000*	34,000*	28,700*	28,700*	24,800*	24,800*
1.5 m 5'0"	kg lb	—	—	32,100*	32,100*	43,100*	43,100*	35,000*	35,000*	29,400*	29,400*	25,300*	25,300*
0.0 m 0'	kg lb	—	—	26,900*	26,900*	43,400*	43,400*	35,400*	35,400*	29,800*	29,800*	25,600*	25,600*
-1.5 m -5'0"	kg lb	—	—	26,000*	26,000*	39,600*	39,600*	35,200*	35,200*	29,400*	29,400*	25,500*	25,500*
-3.0 m -10'0"	kg lb	20,200*	20,200*	26,500*	26,500*	37,200*	37,200*	34,200*	34,200*	29,000*	29,000*	25,000*	25,000*
-4.5 m -15'0"	kg lb	22,200*	22,200*	27,600*	27,600*	36,700*	36,700*	32,500*	32,500*	27,800*	27,800*	24,100*	24,100*
-6.0 m -20'0"	kg lb	24,000*	24,000*	28,900*	28,900*	35,000*	35,000*	30,100*	30,100*	26,000*	26,000*	22,600*	22,600*
-7.5 m -25'0"	kg lb	—	—	30,300*	30,300*	30,800*	30,800*	27,000*	27,000*	23,600*	23,600*	20,600*	20,600*
-9.0 m -30'0"	kg lb	—	—	—	—	25,900*	25,900*	23,100*	23,100*	20,400*	20,400*	17,900*	17,900*
-10.5 m -35'0"	kg lb	—	—	—	—	—	—	—	—	—	—	14,400*	14,400*


  

Height		13.5 m 45'0"		15 m 50'0"		16.5 m 55'0"		18 m 60'0"		19.5 m 65'0"		21 m 70'0"	
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side
15.0 m 50'0"	kg lb	—	—	17,500*	17,500*	16,200*	16,200*	—	—	—	—	—	—
13.5 m 45'0"	kg lb	—	—	17,500*	17,500*	16,400*	16,400*	—	—	—	—	—	—
12.0 m 40'0"	kg lb	—	—	17,500*	17,500*	16,400*	16,400*	15,400*	15,400*	—	—	—	—
10.5 m 35'0"	kg lb	—	—	17,800*	17,800*	16,500*	16,500*	15,400*	15,400*	—	—	—	—
9.0 m 30'0"	kg lb	19,700*	19,700*	18,100*	18,100*	16,900*	16,900*	15,500*	15,500*	14,400*	14,400*	—	—
7.5 m 25'0"	kg lb	20,200*	20,200*	18,400*	18,400*	17,200*	17,200*	15,600*	15,600*	14,400*	14,400*	—	—
6.0 m 20'0"	kg lb	20,800*	20,800*	18,800*	18,800*	17,400*	17,400*	15,700*	15,700*	14,500*	14,500*	13,600*	13,600*
4.5 m 15'0"	kg lb	21,400*	21,400*	19,200*	19,200*	17,600*	17,600*	15,900*	15,900*	14,500*	14,500*	13,400*	13,400*
3.0 m 10'0"	kg lb	21,800*	21,800*	19,500*	19,500*	17,700*	17,700*	15,900*	15,900*	14,400*	14,400*	13,000*	13,000*
1.5 m 5'0"	kg lb	22,200*	22,200*	19,700*	19,700*	17,600*	17,600*	15,900*	15,900*	14,300*	14,300*	12,900*	12,900*
0.0 m 0'	kg lb	22,300*	22,300*	19,700*	19,700*	17,400*	17,400*	15,700*	15,700*	14,000*	14,000*	12,700*	12,700*
-1.5 m -5'0"	kg lb	22,200*	22,200*	19,600*	19,600*	16,900*	16,900*	15,400*	15,400*	13,600*	13,600*	12,500*	12,500*
-3.0 m -10'0"	kg lb	21,800*	21,800*	19,100*	19,100*	16,100*	16,100*	25,400*	25,400*	12,800*	12,800*	—	—
-4.5 m -15'0"	kg lb	21,000*	21,000*	18,400*	18,400*	14,900*	14,900*	14,900*	14,900*	—	—	—	—
-6.0 m -20'0"	kg lb	19,700*	19,700*	17,200*	17,200*	13,200*	13,200*	14,000*	14,000*	—	—	—	—
-7.5 m -25'0"	kg lb	17,900*	17,900*	15,500*	15,500*	10,700*	10,700*	12,600*	12,600*	—	—	—	—
-9.0 m -30'0"	kg lb	15,500*	15,500*	13,200*	13,200*	—	—	10,700*	10,700*	—	—	—	—
-10.5 m -35'0"	kg lb	12,200*	12,200*	—	—	—	—	—	—	—	—	—	—


\*Indicates that the load is limited by hydraulic capacity rather than tipping capacity. Lift capacity ratings are based on SAE standard J1097. Rated loads do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity.

Model	325B MH		330B MH	
	m	ft	m	ft
MH Two-Piece Front	13.40	43'11"	14.40	47'3"
Max. Horizontal Reach	13.40	43'11"	14.40	47'3"
Max. Height	15.30	50'4"	16.00	52'5"
Reach @ Max. Height	9.75	32'0"	5.09	16'8"

**325B MH Range Diagram**

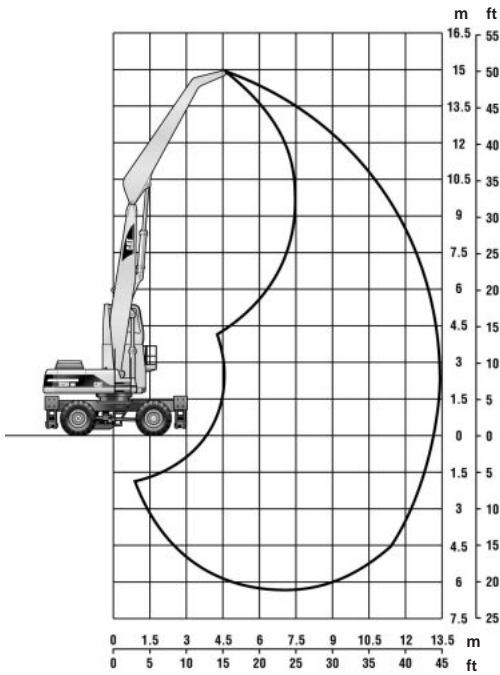

**330B MH Range Diagram**

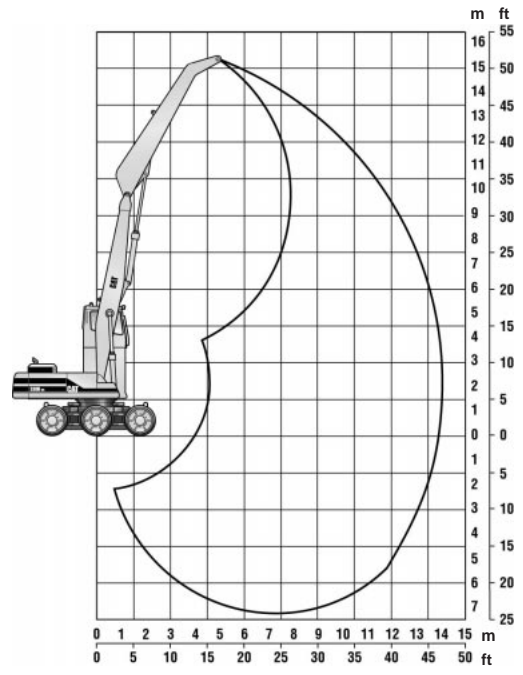



# Excavators — Material Handling

## Lifting Capacities

- 325B MH Two-Piece Front
- U.S. Sourced ● Wheeled Carrier

### 325B MH (Metric)

Equipped with Pierce Wheeled Carrier and Cat two-piece 13.4 m (43'11") Front

Height**	Undercarriage configuration	1.5 m		3 m		4.5 m		6 m		7.5 m		9 m		10.5 m		12 m		At Maximum Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	m
12 m	All stabilizers up									6.6*	6.6*	6.4*	5.7					6.4	5.3	9.3
	All stabilizers down									6.6*	6.6*	6.4*	6.4*					6.4*	6.4*	
10.5 m	All stabilizers up									6.3*	6.3*	6.0*	5.8	5.3	4.5			5.2	4.3	10.7
	All stabilizers down									6.3*	6.3*	6.0*	6.0*	5.9*	5.9*			5.8*	5.8*	
9 m	All stabilizers up									6.3*	6.3*	6.0*	5.8	5.4	4.5			4.5	2.8	11.7
	All stabilizers down									6.3*	6.3*	6.0*	6.0*	5.7*	5.7*			5.5*	5.5*	
7.5 m	All stabilizers up									6.5*	6.5*	6.1*	5.8	5.4	4.5	4.3	3.6	4.1	3.4	12.4
	All stabilizers down									6.5*	6.5*	6.1*	6.1*	5.7*	5.7*	5.4*	5.4*	5.3*	5.3*	
6 m	All stabilizers up									6.9*	6.9*	6.3*	5.7	5.3	4.4	4.3	3.6	3.8	3.1	12.9
	All stabilizers down									6.9*	6.9*	6.3*	6.3*	5.8*	5.8*	5.4*	5.4*	5.1*	5.1*	
4.5 m	All stabilizers up							8.7*	8.7*	7.6*	7.2	6.6	5.5	5.2	4.3	4.3	3.5	3.6	3.0	13.2
	All stabilizers down							8.7*	8.7*	7.6*	7.6*	6.7*	6.7*	6.0*	6.0*	5.4*	5.4*	4.9*	4.9*	
3 m	All stabilizers up							10.0*	9.4	8.2*	6.9	6.4	5.3	5.1	4.2	4.2	3.5	3.5	2.9	13.4
	All stabilizers down							10.0*	10.0*	8.2*	8.2*	7.1*	7.1*	6.2*	6.2*	5.5*	5.5*	4.7*	4.7*	
1.5 m	All stabilizers up					15.1*	13.3	10.9	8.9	8.0	6.6	6.2	5.1	5.0	4.1	4.1	3.4	3.5	2.9	13.4
	All stabilizers down					15.1*	15.1*	11.0*	11.0*	8.8*	8.8*	7.4*	7.4*	6.3*	6.3*	5.4*	5.4*	4.5*	4.5*	
0 m	All stabilizers up					11.5*	11.5*	10.4	8.4	7.7	6.3	6.0	4.9	4.9	4.0	4.1	3.3	3.6	2.9	13.2
	All stabilizers down					11.5*	11.5*	11.6*	11.6*	9.1*	9.1*	7.5*	7.5*	6.3*	6.3*	5.3*	5.3*	4.3*	4.3*	
-1.5 m	All stabilizers up			4.5*	4.5*	10.3*	10.3*	10.2	8.2	7.5	6.1	5.9	4.8	4.8	3.9	4.0	3.3	3.7	3.1	12.8
	All stabilizers down			4.5*	4.5*	10.3*	10.3*	11.5*	11.5*	9.0*	9.0*	7.3*	7.3*	6.1*	6.1*	4.9*	4.9*	4.0*	4.0*	
-3 m	All stabilizers up	4.4*	4.4*	6.4*	6.4*	11.4*	11.4*	10.0	8.0	7.4	6.0	5.8	4.7	4.8	3.9	3.9*	3.3	3.6*	3.3	12.2
	All stabilizers down	4.4*	4.4*	6.4*	6.4*	11.4*	11.4*	10.7*	10.7*	8.5*	8.5*	6.8*	6.8*	5.5*	5.5*	3.9*	3.9*	3.6*	3.6*	
-4.5 m	All stabilizers up			8.4*	8.4*	11.7*	11.7*	9.2*	8.1	7.3*	6.0	5.8*	4.8	4.3*	3.9			3.0*	3.0*	11.4
	All stabilizers down			8.4*	8.4*	11.7*	11.7*	9.2*	9.2*	7.3*	7.3*	5.8*	5.8*	4.3*	4.3*			3.0*	3.0*	
-6 m	All stabilizers up							6.9*	6.9*	5.4*	5.4*	4.0*	4.0*							
	All stabilizers down							6.9*	6.9*	5.4*	5.4*	4.0*	4.0*							

### 325B MH (English)

Equipped with Pierce Wheeled Carrier and Cat two-piece 13.4 m (43'11") Front

Height**	Undercarriage configuration	5 ft		10 ft		15 ft		20 ft		25 ft		30 ft		35 ft		40 ft		At Maximum Reach		
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	ft
45 ft	All stabilizers up							17.8*	17.8*									17.2*	17.2*	23.35
	All stabilizers down							17.8*	17.8*										17.2*	17.2*
40 ft	All stabilizers up									14.8*	14.8*							14.5*	12.1	29.94
	All stabilizers down									14.8*	14.8*							14.5*	14.5*	
35 ft	All stabilizers up									14.0*	14.0*	13.5*	12.5					11.7	9.7	34.58
	All stabilizers down									14.0*	14.0*	13.5*	13.5*					13.1*	13.1*	
30 ft	All stabilizers up									13.9*	13.9*	13.4*	12.5	11.6	9.7			10.1	8.4	38.00
	All stabilizers down									13.9*	13.9*	13.4*	13.4*	12.8*	12.8*			12.3*	12.3*	
25 ft	All stabilizers up									14.5*	14.5*	13.5*	12.4	11.6	9.7	9.3	7.7	9.1	7.5	40.51
	All stabilizers down									14.5*	14.5*	13.5*	13.5*	12.6*	12.6*	11.8*	11.8*	11.8*	11.8*	
20 ft	All stabilizers up									15.2*	15.2*	13.9*	12.2	11.5	9.6	9.3	7.7	8.4	7.0	42.27
	All stabilizers down									15.2*	15.2*	13.9*	13.9*	12.8*	12.8*	11.8*	11.8*	11.3*	11.3*	
15 ft	All stabilizers up							19.0*	19.0*	16.5*	15.5	14.2	11.8	11.2	9.3	9.2	7.6	8.0	6.6	43.39
	All stabilizers down							19.0*	19.0*	16.5*	16.5*	14.6*	14.6*	13.1*	13.1*	11.8*	11.8*	10.8*	10.8*	
10 ft	All stabilizers up					28.0*	28.0*	21.7*	20.4	17.9	14.8	13.7	11.4	11.0	9.1	9.0	7.4	7.8	6.4	43.90
	All stabilizers down					28.0*	28.0*	21.7*	21.7*	17.9*	17.9*	15.4*	15.4*	13.5*	13.5*	11.9*	11.9*	10.4*	10.4*	
5 ft	All stabilizers up					32.5*	28.6	23.5	19.2	17.2	14.1	13.3	11.0	10.7	8.8	8.9	7.3	7.8	6.4	43.84
	All stabilizers down					32.5*	32.5*	23.9*	23.9*	19.2*	19.2*	16.1*	16.1*	13.8*	13.8*	11.8*	11.8*	10.0*	10.0*	
0 ft	All stabilizers up					27.5*	26.9	22.5	18.2	16.6	13.5	12.9	10.6	10.5	8.6	8.7	7.2	7.9	6.5	43.19
	All stabilizers down					27.5*	27.5*	25.1*	25.1*	19.8*	19.8*	16.3*	16.3*	13.7*	13.7*	11.5*	11.5*	9.6*	9.6*	
-5 ft	All stabilizers up			10.5*	10.5*	24.0*	24.0*	21.9	17.6	16.1	13.1	12.7	10.4	10.3	8.5	8.7	7.1	8.2	6.7	41.93
	All stabilizers down			10.5*	10.5*	24.0*	24.0*	24.8*	24.8*	19.5*	19.5*	15.9*	15.9*	13.1*	13.1*	10.3*	10.3*	8.9*	8.9*	
-10 ft	All stabilizers up	10.1*	10.1*	14.7*	14.7*	26.2*	25.8	21.6	17.3	15.9	12.9	12.5	10.2	10.3	8.4	8.0*	7.2	8.0*	7.2	40.01
	All stabilizers down	10.1*	10.1*	14.7*	14.7*	26.2*	26.2*	23.3*	23.3*	18.4*	18.4*	14.8*	14.8*	11.8*	11.8*	8.0*	8.0*	8.0*	8.0*	
-15 ft	All stabilizers up			19.0*	19.0*	25.5*	25.5*	20.0*	17.4	15.9	12.9	12.5*	10.3	9.1*	8.5			6.8*	6.8*	37.31
	All stabilizers down			19.0*	19.0*	25.5*	25.5*	20.0*	20.0*	15.9*	15.9*	12.5*	12.5*	9.1*	9.1*			6.8*	6.8*	
-20 ft	All stabilizers up							14.9*	14.9*	11.7*	11.7*									
	All stabilizers down							14.9*	14.9*	11.7*	11.7*									

\*Load limited by hydraulic capacity rather than tipping.

\*\*Height of stick pin.

The above loads are in compliance with hydraulic excavator lift capacity ratings standard ISO 21057/SAE 1097. They do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity. Weight of all lifting accessories must be deducted from the above lifting capacities.

**330B MH**

Wheeled Carrier with Cat two-piece 14.4 m (47'3") Front

Height		3 m 10'0"		4.5 m 15'0"		6 m 20'0"		7.5 m 25'0"		9 m 30'0"		Max. Reach Radius	
		Front	Side	Front	Side	Front	Side	Front	Side	Front	Side	m	ft
15.0 m 50'0"	kg lb	—	—	—	—	7600*	7600*	—	—	—	—	6.58	19.95
13.5 m 45'0"	kg lb	—	—	—	—	—	—	7600*	7600*	—	—	8.93	28.37
12.0 m 40'0"	kg lb	—	—	—	—	—	—	—	—	6700*	6700*	10.56	34.05
10.5 m 35'0"	kg lb	—	—	—	—	—	—	—	—	14,900*	14,900*	11.78	38.25
9.0 m 30'0"	kg lb	—	—	—	—	—	—	—	—	6500*	6500*	12.70	41.42
7.5 m 25'0"	kg lb	—	—	—	—	—	—	—	—	14,500*	14,500*	13.39	43.78
6.0 m 20'0"	kg lb	—	—	—	—	—	—	7700*	7700*	6700*	6700*	13.89	45.48
4.5 m 15'0"	kg lb	—	—	—	—	9800*	9800*	16,900*	16,900*	15,300*	15,300*	14.21	46.57
3.0 m 10'0"	kg lb	—	—	—	—	21,300*	21,300*	18,300*	18,300*	16,100*	16,100*	14.36	47.10
1.5 m 5'0"	kg lb	—	—	—	—	11 100*	11 100*	19,900*	19,900*	17,000*	17,000*	14.35	47.10
0.0 m 0'	kg lb	—	—	7600*	7600*	12 200*	12 200*	24,100*	24,100*	9800*	9800*	14.19	46.55
-1.5 m -5'0"	kg lb	2800*	2800*	18,600*	18,600*	12 900*	12 900*	26,600*	26,600*	10 100*	10 100*	8300*	8300*
-3.0 m -10'0"	kg lb	6700*	6700*	16,900*	16,900*	12 800*	12 800*	27,800*	27,800*	21,900*	21,900*	17,900*	17,900*
-4.5 m -15'0"	kg lb	4600*	4600*	19,100*	19,100*	12 100*	12 100*	26,400*	26,400*	21,000*	21,000*	16,900*	16,900*
-6.0 m -20'0"	kg lb	10,500*	10,500*	19,100*	19,100*	10 700*	10 700*	23,400*	23,400*	18,800*	18,800*	15,200*	15,200*

5

Height		10.5 m 35'0"		12 m 40'0"		13.5 m 45'0"		At Max. Reach		Max. Reach Radius	
		Front	Side	Front	Side	Front	Side	Front	Side	m	ft
15.0 m 50'0"	kg lb	—	—	—	—	—	—	8100*	8100*	6.58	19.95
13.5 m 45'0"	kg lb	—	—	—	—	—	—	18,900*	18,900*	8.93	28.37
12.0 m 40'0"	kg lb	6000*	6000*	—	—	—	—	6600*	6600*	10.56	34.05
10.5 m 35'0"	kg lb	—	—	—	—	—	—	15,200*	15,200*	11.78	38.25
9.0 m 30'0"	kg lb	6200*	6200*	5900*	5900*	—	—	13,300*	13,300*	12.70	41.42
7.5 m 25'0"	kg lb	6300*	6300*	5800*	5800*	—	—	5500*	5500*	13.39	43.78
6.0 m 20'0"	kg lb	13,900*	13,900*	5800*	5800*	5300*	5300*	13,700*	13,700*	13.89	45.48
4.5 m 15'0"	kg lb	6400*	6400*	12,800*	12,800*	5000*	5000*	14,000*	14,000*	14.21	46.57
3.0 m 10'0"	kg lb	6600*	6600*	13,000*	13,000*	5300*	5300*	14,400*	14,400*	14.36	47.10
1.5 m 5'0"	kg lb	6800*	6800*	13,200*	13,200*	5300*	5300*	6800*	6800*	14.35	47.10
0.0 m 0'	kg lb	14,900*	14,900*	6000*	6000*	5200*	5200*	15,300*	15,300*	14.19	46.55
-1.5 m -5'0"	kg lb	7000*	7000*	6000*	6000*	5000*	5000*	15,300*	15,300*	13.86	45.45
-3.0 m -10'0"	kg lb	15,300*	15,300*	13,000*	13,000*	4800*	4800*	14,900*	14,900*	13.35	43.75
-4.5 m -15'0"	kg lb	6900*	6900*	5700*	5700*	5300*	5300*	6400*	6400*	12.65	41.37
-6.0 m -20'0"	kg lb	14,900*	14,900*	12,400*	12,400*	—	—	12,100*	12,100*	—	—

\*Indicates that the load is limited by hydraulic capacity rather than tipping capacity. Lift capacity ratings are based on SAE standard J1097. Rated loads do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity.

Notes —

# BACKHOE LOADERS

## CONTENTS

Features	6-1
Specifications	6-2
Optional Tires	6-4
Backhoe Performance Data	6-6
Loader Performance Data	6-12
Backhoe Bucket Capacities	6-21
Lifting Capacities	6-22
Machine Dimensions	6-28
Work Tools	6-29

### Features:

- **416C/426C/436C/446B** — center pivot backhoe.
- **428C/438C** — side shift backhoe design.
- **Single-tilt loader** ... features divergent loader arms, a narrow loader tower and single bucket tilt cylinder for improved visibility.
- **Integrated toolcarrier (parallel lift) loader** ... offers maximum lift and breakout forces, divergent loader arms, and parallel lift for efficient loading and material handling.
  - **Hydraulic Quick Coupler** ... allows a wide range of selected attachments, including those available for Cat integrated toolcarriers.
- **Excavator-style backhoe** ... provides enhanced visibility even with narrow buckets, ability to reach over obstacles, and faster, easier truck loading.
  - **Backhoe Quick Coupler** ... has high-rotation design for excellent vertical wall digging.
- **Load-sensing hydraulic system** ... provides full hydraulic power to implements at all engine speeds, low fuel consumption, smooth control and low lever efforts. A dual-setting torque limiter automatically optimizes hydraulics.
- **All wheel steer** ... is available on the 426C, 436C, and 438C. Full hydrostatic steering with three operator selected modes. Two wheel steer, circle steer, and independent rear maneuvering for the tightest turning circle in the industry.
- **Ride Control** ... available as an option on all C-Series machines. The Ride-Control system smooths the ride under all job-site conditions.

- **4F/4R fully synchronized gear box** ... provides on-the-go shifting in all gears and on-the-go engagement of optional all wheel drive.
- **Power-Shift transmission is available as an option on C-Series and is standard on 446B** ... for operator comfort and efficiency.
- **Brakes** ... are oil immersed, multi-disc and self adjusting for long service life. Hydraulic assist allows low pedal effort.
- **E-Stick wear pads** ... are field replaceable and can be shimmed independently for reduced maintenance cost.
- **XT-3 hose with O-ring face seals** ... provides a dry, reliable machine.
- **Cat 3054 engine** ... proven reliability, durable gear-driven water pump, thermal starting aid, parts commonality, and low cost per hour. Large fuel tank for extended operation.
- **Sloping, flip-open hood** ... allows excellent visibility to the loader working area and tilts up for single location access to all daily service points.
- **Stackable counterweights** ... allow easy adjustment of machine weight distribution. Lockable tool and battery boxes.
- **Cat radial-seal air filter** ... is an air cleaner and precleaner in a single unit, eliminates hood-mounted precleaner.
- **Operator compartment features:** Air-suspension seat is standard, adjustable tilt steering is optional. Heating/air conditioning system with vents in the front console. Rear, door and side windows can be fully opened for enhanced visibility and cab roof is extended to help keep operator dry. Four-post Rollover Protective Structure (ROPS) for increased protection. Lunch box storage, rear mounted hand throttle, transmission disconnect switch on loader lift lever and low effort levers all add up to more precise control with a less fatigued operator.
- **Stabilizer legs** ... on the 428C and 438C use internal, self-lubricated, adjustable wear pads.



MODEL	416C		426C		436C	
Flywheel Power (Gross)	59 kW	<b>78 hp</b>	66 kW	<b>88 hp</b>	73 kW	<b>97 hp</b>
Flywheel Power (Net)	56 kW	<b>75 hp*</b>	63 kW	<b>85 hp</b>	70 kW	<b>93 hp</b>
Operating Weight	6330 kg	<b>13,960 lb</b>	7051 kg	<b>15,550 lb</b>	7120 kg	<b>15,700 lb</b>
Engine Model	<b>3054 DIT</b>		<b>3054 DIT</b>		<b>3054 DIT</b>	
Rated Engine RPM	<b>2200</b>		<b>2200</b>		<b>2200</b>	
No. of Cylinders	<b>4</b>		<b>4</b>		<b>4</b>	
Bore	100 mm	<b>3.94 in</b>	100 mm	<b>3.94 in</b>	100 mm	<b>3.94 in</b>
Stroke	127 mm	<b>5 in</b>	127 mm	<b>5 in</b>	127 mm	<b>5 in</b>
Displacement	4 L	<b>243 in<sup>3</sup></b>	4 L	<b>243 in<sup>3</sup></b>	4 L	<b>243 in<sup>3</sup></b>
Speeds Forward (Power Shuttle)	km/h	<b>mph</b>	km/h	<b>mph</b>	km/h	<b>mph</b>
1st	5.8	<b>3.6</b>	5.8	<b>3.6</b>	6.0	<b>3.7</b>
2nd	9.3	<b>5.8</b>	9.3	<b>5.8</b>	9.6	<b>6.0</b>
3rd	19.2	<b>12.0</b>	19.2	<b>12.0</b>	19.9	<b>12.4</b>
4th	32.8	<b>20.4</b>	32.8	<b>20.4</b>	33.7	<b>20.9</b>
Speeds Reverse (Power Shuttle)						
1st	5.8	<b>3.6</b>	5.8	<b>3.6</b>	6.0	<b>3.7</b>
2nd	9.3	<b>5.8</b>	9.3	<b>5.8</b>	9.6	<b>6.0</b>
3rd	19.2	<b>12.0</b>	19.2	<b>12.0</b>	19.9	<b>12.4</b>
4th	32.8	<b>20.4</b>	32.8	<b>20.4</b>	33.7	<b>20.9</b>
Speeds Forward (Power Shift)						
1st	5.7	<b>3.5</b>	5.7	<b>3.5</b>	5.8	<b>3.6</b>
2nd	9.2	<b>5.7</b>	9.2	<b>5.7</b>	9.3	<b>5.8</b>
3rd	12.3	<b>7.6</b>	12.3	<b>7.6</b>	12.3	<b>7.6</b>
4th	19.0	<b>11.9</b>	19.0	<b>11.9</b>	19.0	<b>11.9</b>
5th	32.0	<b>20.0</b>	32.0	<b>20.0</b>	32.0	<b>20.0</b>
Speeds Reverse (Power Shift)						
1st	5.7	<b>3.5</b>	5.7	<b>3.5</b>	3.6	<b>5.8</b>
2nd	12.3	<b>7.6</b>	12.3	<b>7.6</b>	12.3	<b>7.6</b>
3rd	23.0	<b>14.5</b>	23.0	<b>14.5</b>	23.0	<b>14.5</b>
Turning Circle Wall to Wall	10 670 mm	<b>35'0"</b>	10 800 mm	<b>35'5"</b>	10 859 mm	<b>35'7"</b>
All Wheel Steer Wall to Wall						
Two Wheel Steer	—		10 800 mm	<b>35'5"</b>	10 800 mm	<b>35'5"</b>
Circle Steer	—		10 400 mm	<b>34'1"</b>	10 400 mm	<b>34'1"</b>
Independent Rear	—		9500 mm	<b>31'2"</b>	9500 mm	<b>31'2"</b>
Tires, Single-Tilt, Front						
Standard, 2WD	<b>11LX16, 10 PR, F3</b>		<b>11LX16, 10 PR, F3</b>		<b>11L-16, 12 PR, F3</b>	
Standard, AWD	<b>12.5/80-18, 10 PR, SGL</b>		<b>12.5/80-18, 10 PR, SGL</b>		<b>12.5/80-18, 10 PR, SGL</b>	
Tires, Single-Tilt, Rear						
Standard, 2WD	<b>16.9X24, 8 PR, ISG</b>		<b>16.9X24, 8 PR, ISG</b>		<b>19.5L-24, 10 PR, IT525</b>	
Standard, AWD	<b>19.5LX24, 8 PR, IT525</b>		<b>19.5L-24, 8 PR, IT525</b>		<b>19.5L-24, 10 PR, IT525</b>	
Standard, AWS	—		<b>19.5L-24, 10 PR, IT525</b>		<b>19.5L-24, 10 PR, IT525</b>	
Tire, IT Parallel Lift, Front						
Standard, 2WD	<b>11LX16, 12 PR, F3</b>		<b>11LX16, 12 PR, F3</b>		<b>11L-16, 12 PR, F3</b>	
Standard, AWD	<b>12.5/80-18, 10 PR, SGL</b>		<b>12.5/80-18, 10 PR, SGL</b>		<b>12.5/80-18, 10 PR, SGL</b>	
Tires, IT Parallel Lift, Rear						
Standard, 2WD	<b>16.9X24, 8 PR, ISG</b>		<b>16.9X24, 8 PR, ISG</b>		<b>19.5L-24, 10 PR, IT525</b>	
Standard, AWD	<b>19.5L-24, 8 PR, IT525</b>		<b>19.5L-24, 8 PR, IT525</b>		<b>19.5L-24, 10 PR, IT525</b>	
Standard, AWS	—		<b>19.5L-24, 10 PR, IT525</b>		<b>19.5L-24, 10 PR, IT525</b>	
Hydraulic System, closed center	<b>LSPC</b>		<b>LSPC</b>		<b>LSPC</b>	
Pump capacity:	163 L/min @ 2200 rpm @ 20 700 kPa <b>(43 gpm @</b> <b>2200 rpm @ 3000 psi)</b>		163 L/min @ 2200 rpm @ 20 700 kPa <b>(43 gpm @</b> <b>2200 rpm @ 3000 psi)</b>		163 L/min @ 2200 rpm @ 20 700 kPa <b>(43 gpm @</b> <b>2200 rpm @ 3000 psi)</b>	
Fuel Tank Capacity	128 L	<b>34 U.S. gal</b>	128 L	<b>34 U.S. gal</b>	128 L	<b>34 U.S. gal</b>

\*With turbocharger 60 kW (80 hp).

# Specifications

# Backhoe Loaders



## MODEL

**446B**

**428C**

**438C**

Flywheel Power (Gross)	82 kW	<b>110 hp</b>	59 kW	<b>78 hp</b>	66 kW	<b>89 hp</b>
Flywheel Power (Net)	76 kW	<b>102 hp</b>	56 kW	<b>75 hp*</b>	63 kW	<b>85 hp</b>
Operating Weight	8890 kg	<b>19,600 lb</b>	7416 kg	<b>16,350 lb</b>	7560 kg	<b>16,670 lb</b>
Engine Model	<b>3114 DIT</b>		<b>3054 DINA</b>		<b>3054 DIT</b>	
Rated Engine RPM	<b>2200</b>		<b>2200</b>		<b>2200</b>	
No. of Cylinders	<b>4</b>		<b>4</b>		<b>4</b>	
Bore	105 mm	<b>4.13 in</b>	100 mm	<b>3.94 in</b>	100 mm	<b>3.94 in</b>
Stroke	127 mm	<b>5 in</b>	127 mm	<b>5 in</b>	127 mm	<b>5 in</b>
Displacement	4.4 L	<b>268 in<sup>3</sup></b>	4 L	<b>243 in<sup>3</sup></b>	4 L	<b>243 in<sup>3</sup></b>
Speeds Forward (Power Shuttle)	km/h	<b>MPH</b>	km/h	<b>MPH</b>	km/h	<b>MPH</b>
1st	—	—	5.7	<b>3.5</b>	5.4	<b>3.4</b>
2nd	—	—	9.1	<b>5.7</b>	8.6	<b>5.3</b>
3rd	—	—	18.7	<b>11.6</b>	18.0	<b>11.2</b>
4th	—	—	31.8	<b>19.8</b>	30.3	<b>18.8</b>
Speeds Reverse (Power Shuttle)	—	—	—	—	—	—
1st	—	—	5.7	<b>3.5</b>	5.4	<b>3.4</b>
2nd	—	—	9.1	<b>5.7</b>	8.6	<b>5.3</b>
3rd	—	—	18.7	<b>11.6</b>	18.0	<b>11.2</b>
4th	—	—	31.8	<b>19.8</b>	30.3	<b>18.8</b>
Speeds Forward (Power Shift)	—	—	—	—	—	—
1st	6.6	<b>4.1</b>	5.3	<b>3.3</b>	5.4	<b>3.4</b>
2nd	12.1	<b>7.5</b>	8.4	<b>5.2</b>	8.6	<b>5.3</b>
3rd	21.7	<b>13.5</b>	11.0	<b>6.8</b>	11.2	<b>7.0</b>
4th	33.0	<b>20.5</b>	17.5	<b>10.9</b>	18.0	<b>11.2</b>
5th	—	—	29.4	<b>18.3</b>	30.0	<b>18.6</b>
Speeds Reverse (Power Shift)	—	—	—	—	—	—
1st	7.3	<b>4.5</b>	5.3	<b>3.3</b>	5.4	<b>3.4</b>
2nd	13.4	<b>8.3</b>	11.0	<b>6.8</b>	11.2	<b>7.0</b>
3rd	24.1	<b>15.0</b>	21.4	<b>13.3</b>	18.0	<b>11.2</b>
4th	36.5	<b>22.7</b>	—	—	—	—
Turning Circle Wall to Wall	11 357 mm	<b>37'3"</b>	10 800 mm	<b>35'5"</b>	10 700 mm	<b>35'1"</b>
All Wheel Steer Wall to Wall	—	—	—	—	—	—
Two Wheel Steer	—	—	—	—	10 800 mm	<b>35'5"</b>
Circle Steer	—	—	—	—	10 400 mm	<b>34'1"</b>
Independent Rear	—	—	—	—	9500 mm	<b>31'2"</b>
Tires, Single-Tilt, Front	—	—	—	—	—	—
Standard, 2WD	<b>14.5/75-16, 10 PR, F3</b>		<b>11L-16, 10 PR, F3</b>		—	
Standard, AWD	<b>12.5-20, 10 PR, R4</b>		<b>10.5-20, 10 PR, ISG</b>		<b>12.5/80-18, 10 PR, ISG</b>	
Standard, AWS	—		—		<b>12.5/80-18, 10 PR, ISG</b>	
Tires, Single-Tilt, Rear	—	—	—	—	—	—
Standard, 2WD/AWD	<b>21L-24, 12 PR, R4, IT525</b>		<b>16.9-28, 10 PR, R4, ISG</b>		—	
Standard, AWD/AWS	—		—		<sup>(1)</sup> <b>16.9-28, 10 PR, R4, ISG</b>	
Tire, Parallel Lift, Front	—	—	—	—	—	—
Standard, 2WD	—		<b>11L-16, 12 PR, F3</b>		—	
Standard, AWD	—		<b>12.5/80-18, 10 PR, SGL</b>		<b>12.5/80-18, 10 PR, SG</b>	
Standard, AWD	—		<b>12.5/80-18, 10 PR, SGI</b>		<b>12.5/80-18, 10 PR, SGI</b>	
Tires, Parallel Lift, Rear	—	—	—	—	—	—
Standard, 2WD/AWD	—		<b>16.9-28, 10 PR, R4, ISG</b>		—	
Standard, 2WD/AWD	—		<b>**16.9-28, 12 PR, R4, ISG</b>		—	
Standard, AWD/AWS	—		—		<sup>(1)</sup> <b>16.9-28, 10 PR, R4, ISG</b>	
Hydraulic System, closed center	<b>LSPC</b>		<b>LSPC</b>		<b>LSPC</b>	
Pump capacity:	178 L/min @ 2200 rpm @ 22 400 kPa		163 L/min @ 2200 rpm @ 20 700 kPa		163 L/min @ 2200 rpm @ 20 700 kPa	
	<b>(47 gpm @ 2200 rpm @ 3250 psi)</b>		<b>(43 gpm @ 2200 rpm @ 3000 psi)</b>		<b>(43 gpm @ 2200 rpm @ 3000 psi)</b>	
Fuel Tank Capacity	125 L	<b>33 U.S. gal</b>	128 L	<b>34 U.S. gal</b>	128 L	<b>34 U.S. gal</b>

\*With turbocharger 60 kW (80 hp).

\*\*For use with E-Stick.

<sup>(1)</sup>Not for use with E-Stick.

MODEL	416C	426C	436C
Tires, Single-Tilt, Front			
Optional, 2WD	11L-16, 12 PR, F3	11L-16, 12 PR, F3	—
Optional, 2WD	—	14.5/75-16, 10 PR, F3	14.5/75-16, 10 PR, F3
Optional, AWD	340/80-R18, IT510	340/80-R18, IT510	340/80-R18, IT510
Tires, Single-Tilt, Rear			
Optional, 2WD	**16.9-24, 10 PR, R4	**16.9-24, 10 PR, R4	19.5LR-24, IT510
Optional, 2WD	19.5L-24, 8 PR, IT525	19.5L-24, 8 PR, IT525	21L-24, 12 PR, IT525
Optional, 2WD	19.5L-24, 10 PR, IT525	19.5L-24, 10 PR, IT525	—
Optional, 2WD	19.5LR-24, IT510	19.5LR-24, IT510	—
Optional, 2WD	—	21L-24, 12 PR, IT525	—
Optional, AWD	19.5L-24, 10 PR, IT525	19.5L-24, 10 PR, IT525	—
Optional, AWD	19.5LR-24, IT510	19.5LR-24, IT510	19.5LR-24, IT510
Optional, AWD	—	21L-24, 12 PR, IT525	21L-24, 12 PR, IT525
Optional, AWS	—	19.5LR-24, IT510	19.5LR-24, IT510
Tires, Parallel Lift, Front			
Optional, 2WD	—	14.5/75-16, 10 PR, F3	14.5/75-16, 10 PR, F3
Optional, AWD	340/80-R18, IT510	340/80-R18, IT510	340/80-R18, IT510
Tires, Parallel Lift, Rear			
Optional, 2WD	**16.9-24, 10 PR, R4	**16.9-24, 10 PR, R4	—
Optional, 2WD	19.5L-24, 8 PR, IT525	19.5L-24, 8 PR, IT525	—
Optional, 2WD	19.5L-24, 10 PR, IT525	19.5L-24, 10 PR, IT525	19.5L-24, 10 PR, IT525
Optional, 2WD	19.5LR-24, IT510	19.5LR-24, IT510	19.5LR-24, IT510
Optional, 2WD	—	21L-24, 12 PR, IT525	21L-24, 12 PR, IT525
Optional, AWD	19.5L-24, 10 PR, IT525	19.5L-24, 10 PR, IT525	19.5LR-24, IT510
Optional, AWD	19.5LR-24, IT510	19.5LR-24, IT510	21L-24, 12 PR, IT525
Optional, AWD	—	21L-24, 12 PR, IT525	—
Optional, AWD	—	—	—
Optional, AWS	—	19.5LR-24, IT510	19.5LR-24, IT510

\*Not for use with E-Stick.


\*\*For use with E-Stick.

MODEL	446B	428C	438C
Tires, Single-Tilt, Front			
Optional, 2WD	—	11L-16, 12 PR, F3	—
Optional, 2WD	—	14.5/75-16, 10 PR, F3	—
Optional, AWD	15-19.5-12 PR, SSG	12.5/80-18, 10 PR, SGL	335/80R-18, XM27
Optional, AWD	—	12.5/80-18, 10 PR, SGI	335/80R-18, IT510
Optional, AWD	—	335/80R-18, XM27	—
Optional, AWD	—	340/80R-18, IT510	—
Optional, AWS	—	—	335/80R-18, XM27
Optional, AWS	—	—	335/80R-18, IT510
Tires, Single-Tilt, Rear			
Optional, 2WD/AWD	—	**16.9-28, 12 PR, R4, ISG	—
Optional, 2WD/AWD	—	16.9/14-28, 12 PR, TSG R1	—
Optional, 2WD/AWD	—	18.4/15-26, 12 PR, ISG	—
Optional, 2WD/AWD	—	16.9R-28, XM27	—
Optional, 2WD/AWD	—	16.9R-28, IT510	—
Optional, 2WD/AWD	—	18.4/15R-26, XM27	—
Optional, AWD/AWS	—	—	16.9-28, 12 PR, SGL R4
Optional, AWD/AWS	—	—	16.9R-28, XM27
Optional, AWD/AWS	—	—	16.9R-28, IT510
Optional, AWD/AWS	—	—	18.4/15-26, 12 PR, IND
Optional, AWD/AWS	—	—	18.4/15R-26, XM27
Tires, Parallel Lift, Front			
Optional, 2WD	—	14.5/75-16, 10 PR, F3	—
Optional, AWD	—	335/80R-18, XM27	335/80R-18, XM27
Optional, AWD	—	335/80R-18, IT510	335/80R-18, IT510
Optional, AWS	—	—	335/80R-18, XM27
Optional, AWS	—	—	335/80R-18, IT510
Tires, Parallel Life, Rear			
Optional, 2WD/AWD	—	*16.9-28, 12 PR, R4, ISG	—
Optional, 2WD/AWD	—	16.9/14-28, 12 PR, TSG R1	—
Optional, 2WD/AWD	—	18.4/15-26, 12 PR, ISG	—
Optional, 2WD/AWD	—	16.9R-28, XM27	—
Optional, 2WD/AWD	—	16.9R-28, IT510	—
Optional, 2WD/AWD	—	18.4/15R-26, XM27	—
Optional, AWD/AWS	—	—	16.9-28, 12 PR, SGL R4
Optional, AWD/AWS	—	—	16.9R-28, XM27
Optional, AWD/AWS	—	—	16.9R-28, IT510
Optional, AWD/AWS	—	—	18.4/15-26, 12 PR, IND
Optional, AWD/AWS	—	—	18.4/15R-26, XM27

\*Not for use with E-Stick.


\*\*For use with E-Stick.



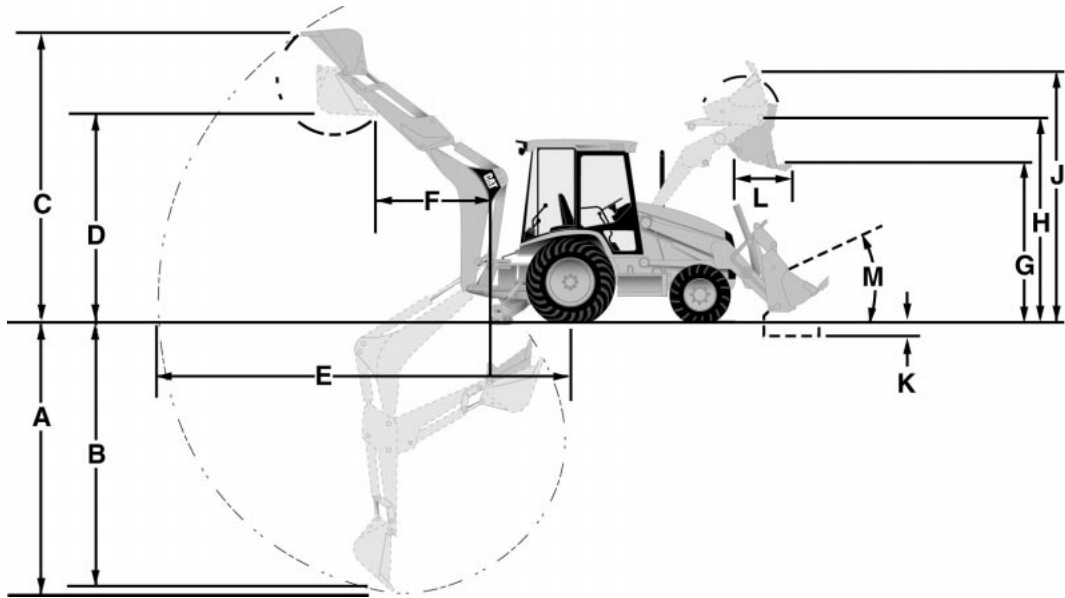


MODEL	416C*					
	Standard Stick		Extendible Stick Retracted		Extendible Stick Extended	
<b>Backhoe</b>						
A) Digging depth (SAE max.)	4420 mm	14'6"	4498 mm	14'9"	5545 mm	18'2"
B) 610 mm (2'0") flat bottom (SAE)	4379 mm	14'4"	4446 mm	14'7"	5498 mm	18'1"
C) Overall operating height — fully raised	5269 mm	17'3"	5240 mm	17'2"	5919 mm	19'5"
D) Loading height	3483 mm	11'5"	3654 mm	12'0"	4223 mm	13'10"
E) Overall reach from rear axle centerline	6729 mm	22'1"	6772 mm	22'3"	7770 mm	25'6"
Overall reach from swing pivot @ groundline	5639 mm	18'6"	5682 mm	18'8"	6680 mm	21'11"
F) Loading reach	1764 mm	5'10"	1804 mm	5'11"	2706 mm	8'11"
Swing arc		180°		180°		180°
Bucket rotation — Vertical wall position		170°		165°		165°
Truck loading position		170°		165°		165°
Stabilizer spread —						
Operating position: (center of pad)	3219 mm	10'7"	3219 mm	10'7"	3219 mm	10'7"
(outside edge of pad)	3689 mm	12'1"	3689 mm	12'1"	3689 mm	12'1"
Transport position	2352 mm	7'9"	2352 mm	7'9"	2352 mm	7'9"
Digging force, bucket cylinder, SAE	52 kN	11,700 lb	53.7 kN	12,065 lb	53.7 kN	12,065 lb
Digging force, stick cylinder, SAE	34.3 kN	7704 lb	34.9 kN	7836 lb	25.1 kN	5635 lb
Leveling angle (maximum slope on which backhoe will make vertical cut)		14°		14°		14°

\*Equipped with 610 mm (24") standard duty bucket.

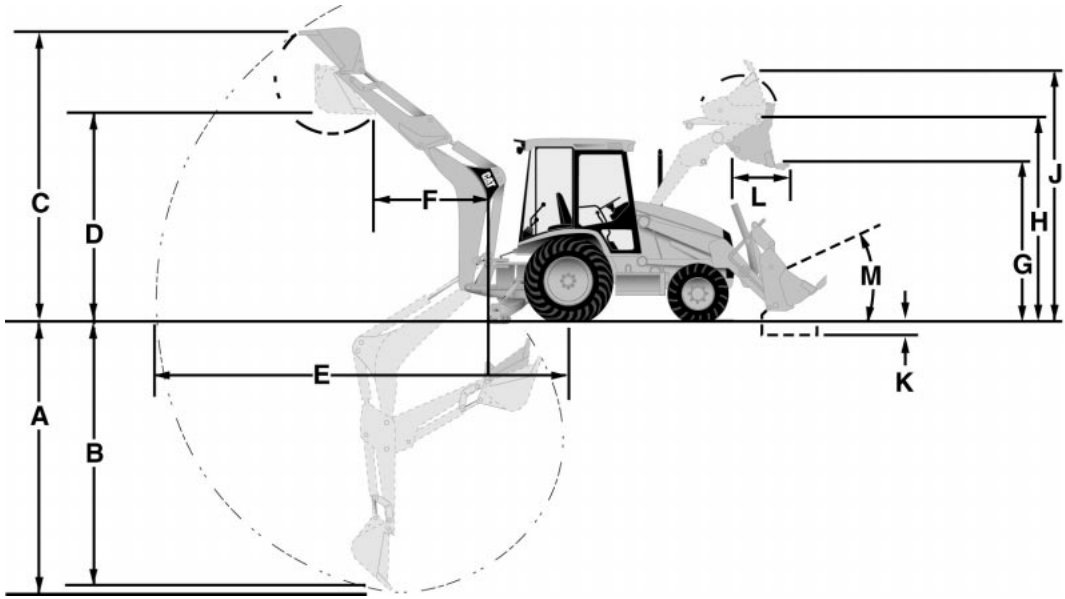


MODEL	426C*					
	Standard Stick		Extendible Stick Retracted		Extendible Stick Extended	
<b>Backhoe</b>						
A) Digging depth (SAE max.)	4721 mm	15'6"	4956 mm	16'3"	6169 mm	20'3"
B) 610 mm (2'0") flat bottom (SAE)	4696 mm	15'4"	4909 mm	16'1"	6129 mm	20'1"
C) Overall operating height — fully raised	5752 mm	18'11"	5832 mm	19'2"	6667 mm	21'11"
D) Loading height	3815 mm	12'6"	4096 mm	13'5"	4925 mm	16'2"
E) Overall reach from rear axle centerline	7146 mm	23'5"	7332 mm	24'1"	8485 mm	27'10"
Overall reach from swing pivot	6056 mm	19'10"	6242 mm	20'6"	7395 mm	24'3"
F) Loading reach	1711 mm	5'7"	1823 mm	6'0"	2717 mm	8'11"
Swing arc	180°		180°		180°	
Bucket rotation — Vertical wall position	170°		165°		165°	
Truck loading position	170°		165°		165°	
Stabilizer spread —						
Operating position: (center of pad)	3219 mm	10'7"	3219 mm	10'7"	3219 mm	10'7"
(outside edge of pad)	3689 mm	12'1"	3689 mm	12'1"	3689 mm	12'1"
Transport position	2352 mm	7'9"	2352 mm	7'9"	2352 mm	7'9"
Digging force, bucket cylinder, SAE	64.3 kN	14,440 lb	64.3 kN	14,440 lb	64.3 kN	14,440 lb
Digging force, stick cylinder, SAE	37.9 kN	8510 lb	39.1 kN	8790 lb	28.1 kN	6310 lb
Leveling angle (maximum slope on which backhoe will make vertical cut)	14°		14°		14°	

\*Equipped with 610 mm (24") heavy duty bucket.

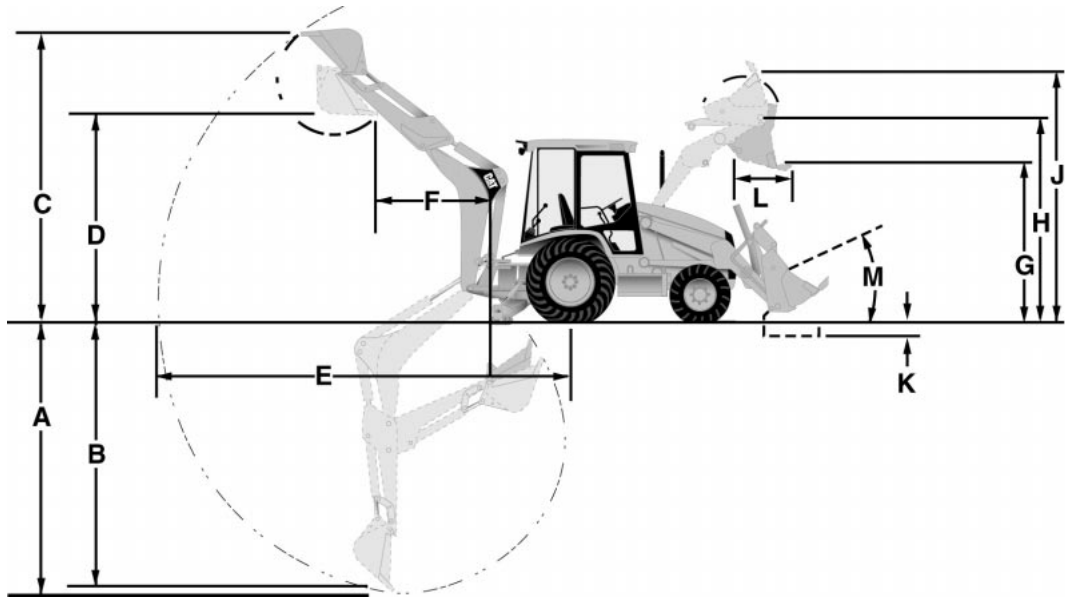


MODEL	436C*					
	Standard Stick		Extendible Stick Retracted		Extendible Stick Extended	
<b>Backhoe</b>						
A) Digging depth (SAE max.)	4953 mm	16'3"	4995 mm	16'5"	6202 mm	20'4"
B) 610 mm (2'0") flat bottom (SAE)	4926 mm	16'2"	4938 mm	16'2"	6160 mm	20'3"
C) Overall operating height — fully raised	5862 mm	19'3"	5664 mm	18'7"	6444 mm	21'2"
D) Loading height	3935 mm	12'11"	4003 mm	13'2"	4783 mm	15'8"
E) Overall reach from rear axle centerline	7358 mm	24'2"	7344 mm	24'1"	8496 mm	27'11"
Overall reach from swing pivot	6268 mm	20'7"	6254 mm	20'6"	7406 mm	24'4"
F) Loading reach	1917 mm	6'4"	2038 mm	6'8"	2717 mm	8'11"
Swing arc		180°		180°		180°
Bucket rotation — Vertical wall position		170°		165°		165°
Truck loading position		170°		165°		165°
Stabilizer spread —						
Operating position: (center of pad)	3219 mm	10'7"	3219 mm	10'7"	3219 mm	10'7"
(outside edge of pad)	3689 mm	12'1"	3689 mm	12'1"	3689 mm	12'1"
Transport position	2352 mm	7'9"	2352 mm	7'9"	2352 mm	7'9"
Digging force, bucket cylinder, SAE	64.2 kN	14,440 lb	64.2 kN	14,440 lb	64.2 kN	14,440 lb
Digging force, stick cylinder, SAE	38.7 kN	8685 lb	40.3 kN	9060 lb	29 kN	6529 lb
Leveling angle (maximum slope on which backhoe will make vertical cut)		14°		14°		14°

\*Equipped with 610 mm (24") heavy duty bucket.

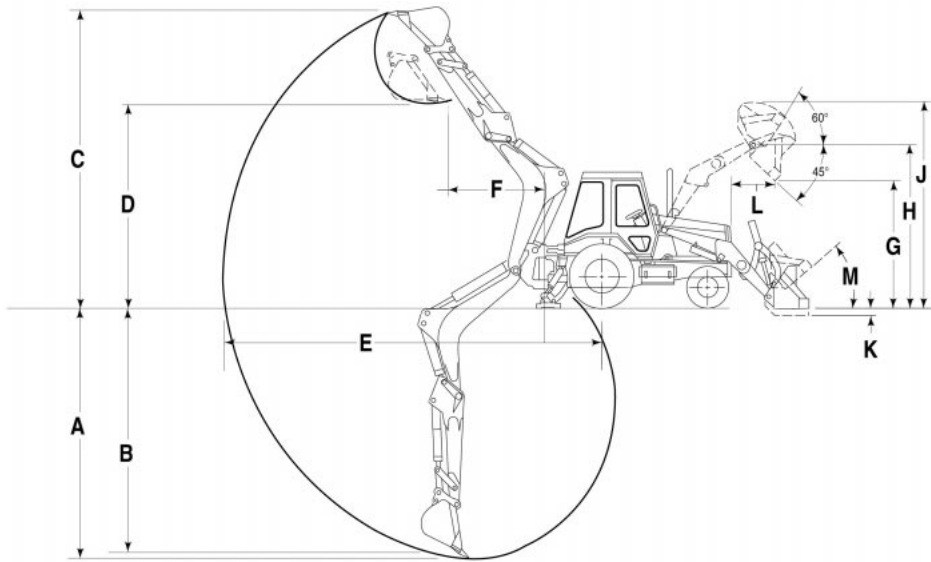


MODEL	446B*					
	Standard Stick		Extendible Stick Retracted		Extendible Stick Extended	
<b>Backhoe</b>						
A) Digging depth (SAE max.)	5219 mm	17'2"	5182 mm	17'0"	6528 mm	21'5"
B) 610 mm (2'0") flat bottom (SAE)	5173 mm	17'0"	5134 mm	16'10"	6479 mm	21'3"
C) Overall operating height — fully raised	6335 mm	20'9"	6298 mm	20'8"	7240 mm	23'9"
D) Loading height	4310 mm	14'2"	4205 mm	13'10"	4894 mm	16'1"
E) Overall reach from rear axle centerline	7866 mm	25'10"	7825 mm	25'8"	9130 mm	29'11"
Overall reach from swing pivot	6604 mm	21'8"	6563 mm	21'6"	7868 mm	25'9"
F) Loading reach	2027 mm	6'8"	2070 mm	6'9"	3261 mm	10'8"
Swing arc	180°		180°		180°	
Bucket rotation — Vertical wall position	169°		163°		163°	
Truck loading position	169°		163°		163°	
Stabilizer spread —						
Operating position: (center of pad)	3614 mm	11'10"	3614 mm	11'10"	3614 mm	11'10"
(outside edge of pad)	4084 mm	13'5"	4084 mm	13'5"	4084 mm	13'5"
Transport position	2405 mm	7'11"	2405 mm	7'11"	2405 mm	7'11"
Digging force, bucket cylinder, SAE	67.6 kN	15,200 lb	67.4 kN	15,150 lb	67.4 kN	15,150 lb
Digging force, stick cylinder, SAE	48 kN	10,800 lb	49.8 kN	11,200 lb	34.8 kN	7830 lb
Leveling angle (maximum slope on which backhoe will make vertical cut)	13°		13°		13°	

\*Equipped with 610 mm (24") standard duty bucket.

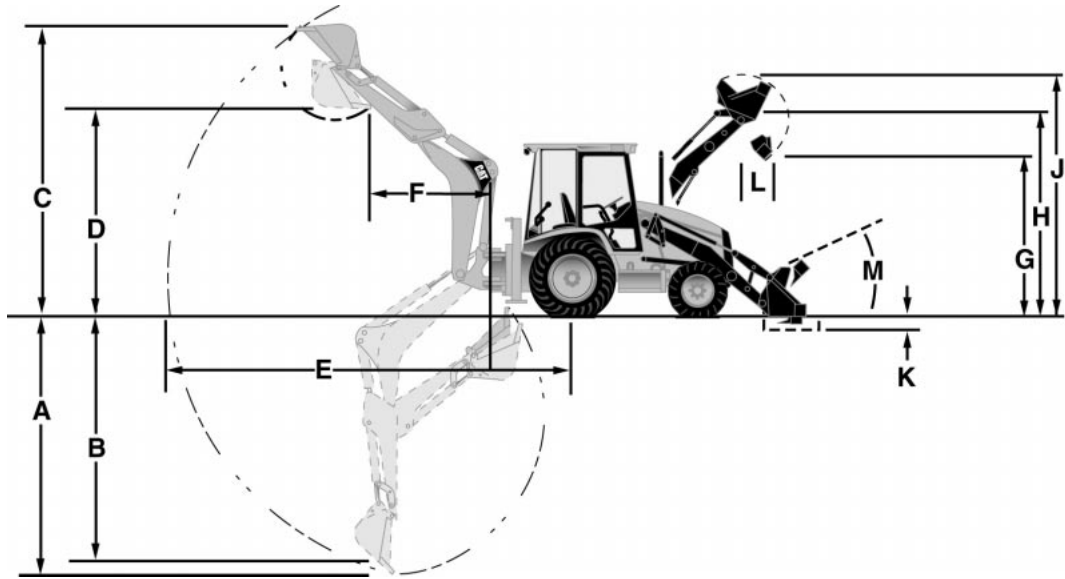

MODEL	428C*					
Backhoe	Standard Stick		Extendible Stick Retracted		Extendible Stick Extended	
A) Digging depth (SAE max.)	4811 mm	15'9"	4859 mm	15'11"	5858 mm	19'3"
B) 610 mm (2'0") flat bottom (SAE)	4766 mm	15'8"	4816 mm	15'10"	5842 mm	19'2"
C) Overall operating height — fully raised	5564 mm	18'3"	5541 mm	18'2"	6250 mm	20'6"
D) Loading height	3803 mm	12'6"	3845 mm	12'7"	4454 mm	14'7"
E) Overall reach from rear axle centerline	7069 mm	23'2"	7112 mm	23'4"	8107 mm	26'7"
Overall reach from swing pivot @ groundline	5727 mm	18'10"	5770 mm	18'11"	6765 mm	22'2"
F) Loading reach	1638 mm	5'5"	1677 mm	5'6"	2579 mm	8'6"
Swing arc	180°		180°		180°	
Sideshift from machine centerline	630 mm	25"	630 mm	25"	630 mm	25"
Bucket rotation — Vertical wall position	170°		165°		165°	
Truck loading position	170°		165°		165°	
Stabilizer spread —						
Operating position	2360 mm	7'9"	2360 mm	7'9"	2360 mm	7'9"
Transport position	2360 mm	7'9"	2360 mm	7'9"	2360 mm	7'9"
Digging force, bucket cylinder	59.6 kN	13,410 lb	59.1 kN	13,290 lb	59.1 kN	13,290 lb
Digging force, stick cylinder	34.8 kN	7830 lb	34.2 kN	7690 lb	25.2 kN	5670 lb
Leveling angle (maximum slope on which backhoe will make vertical cut)	11°		11°		11°	

\*Equipped with 610 mm (24") heavy duty bucket.

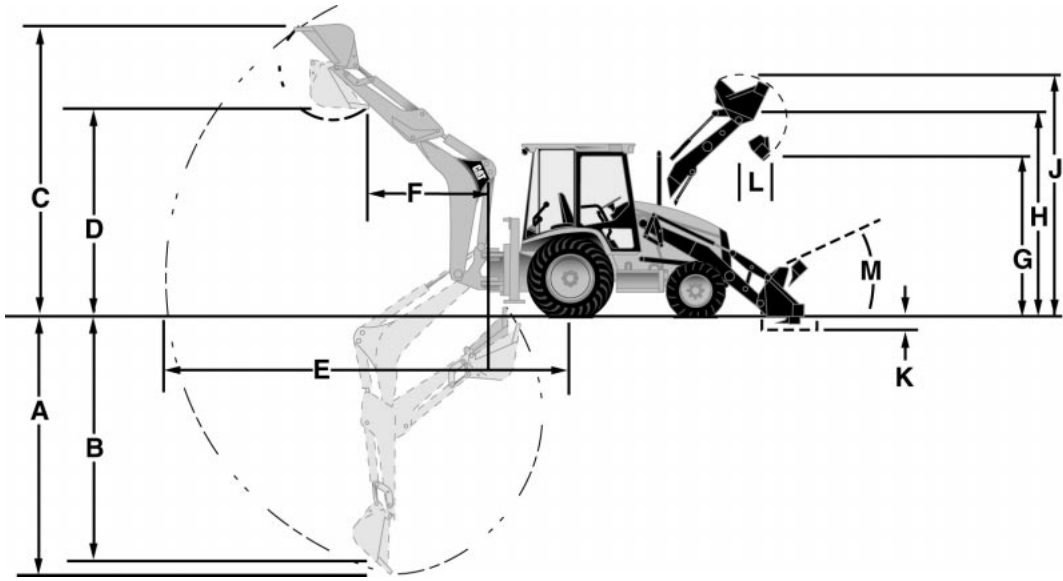


MODEL	438C*					
Backhoe	Standard Stick		Extendible Stick Retracted		Extendible Stick Extended	
A) Digging depth (SAE max.)	4873 mm	16'0"	4924 mm	16'2"	5924 mm	19'5"
B) 610 mm (2'0") flat bottom (SAE)	4827 mm	15'10"	4883 mm	16'0"	5910 mm	19'5"
C) Overall operating height — fully raised	5568 mm	18'3"	5532 mm	18'2"	6220 mm	20'5"
D) Loading height	3684 mm	12'1"	3766 mm	12'4"	4344 mm	14'3"
E) Overall reach from rear axle centerline	7181 mm	23'7"	7221 mm	23'8"	8218 mm	27'0"
Overall reach from swing pivot @ groundline	5839 mm	19'2"	5879 mm	19'4"	6876 mm	22'7"
F) Loading reach	1660 mm	5'5"	1699 mm	5'7"	2596 mm	8'6"
Swing arc	180°		180°		180°	
Sideshift from machine centerline	630 mm	25"	630 mm	25"	630 mm	25"
Bucket rotation — Vertical wall position	170°		165°		165°	
Truck loading position	170°		165°		165°	
Stabilizer spread —						
Operating position	2360 mm	7'9"	2360 mm	7'9"	2360 mm	7'9"
Transport position	2360 mm	7'9"	2360 mm	7'9"	2360 mm	7'9"
Digging force, bucket cylinder	67.7 kN	15,230 lb	67.1 kN	15,090 lb	67.1 kN	15,090 lb
Digging force, stick cylinder	34.8 kN	7830 lb	34.2 kN	7690 lb	25.2 kN	5670 lb
Leveling angle (maximum slope on which backhoe will make vertical cut)	11°		11°		11°	

\*Equipped with 610 mm (24") heavy duty backhoe bucket.


# Backhoe Loaders

## Loader Performance Data

- General/Multi-Purpose Buckets

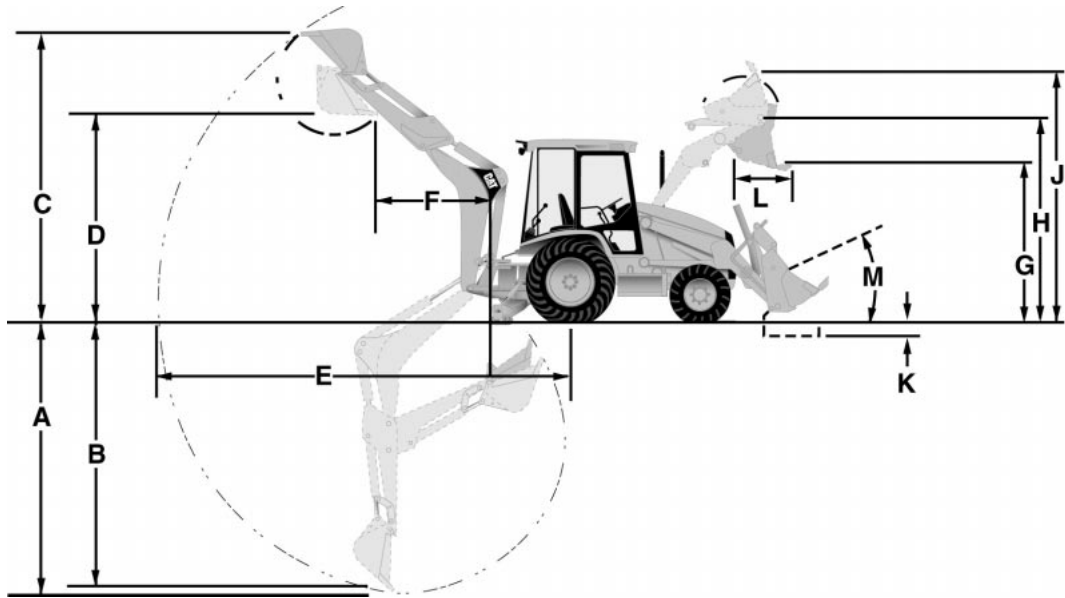


MODEL	416C									
Loader	Single Tilt					IT Loader with QC				
Bucket	General Purpose		General Purpose		Multi-Purpose		General Purpose		Multi-Purpose	
Bucket capacity	0.76 m <sup>3</sup>	1 yd <sup>3</sup>	0.96 m <sup>3</sup>	1.25 yd <sup>3</sup>	0.96 m <sup>3</sup>	1.25 yd <sup>3</sup>	0.96 m <sup>3</sup>	1.25 yd <sup>3</sup>	0.96 m <sup>3</sup>	1.25 yd <sup>3</sup>
Width	2262 mm	7'5"	2262 mm	7'5"	2262 mm	7'5"	2262 mm	7'5"	2262 mm	7'5"
Lift capacity at max height	2622 kg	5780 lb	2486 kg	5480 lb	2368 kg	5220 lb	2830 kg	6240 lb	2560 kg	5645 lb
Breakout force	40 kN	9030 lb	38.3 kN	8606 lb	42 kN	9490 lb	42.4 kN	9530 lb	43.1 kN	9690 lb
G) Dump height @ max dump angle	2650 mm	8'8"	2575 mm	8'5"	2640 mm	8'8"	2495 mm	8'2"	2560 mm	8'5"
H) Hinge pin height	3290 mm	10'10"	3290 mm	10'10"	3290 mm	10'10"	3290 mm	10'10"	3290 mm	10'10"
J) Max operating height	4020 mm	13'2"	4170 mm	13'8"	4200 mm	13'9"	4230 mm	13'11"	4260 mm	14'0"
K) Digging depth	105 mm	4"	105 mm	4"	105 mm	4"	105 mm	4"	135 mm	5"
Grading angle	110°		106°		110°		107°		111°	
Width of dozer cutting edge	—	—	—	—	2406 mm	7'11"	—	—	2262 mm	7'11"
Clam opening — maximum	—	—	—	—	790 mm	2'7"	—	—	790 mm	2'7"
L) Reach @ full height max dump angle	730 mm	2'5"	810 mm	2'8"	700 mm	2'4"	840 mm	2'9"	730 mm	2'5"
M) Maximum rollback @ groundline	40°		40°		40°		40°		41°	
Weight	380 kg	838 lb	428 kg	944 lb	659 kg	1453 lb	466 kg	983 lb	659 kg	1453 lb

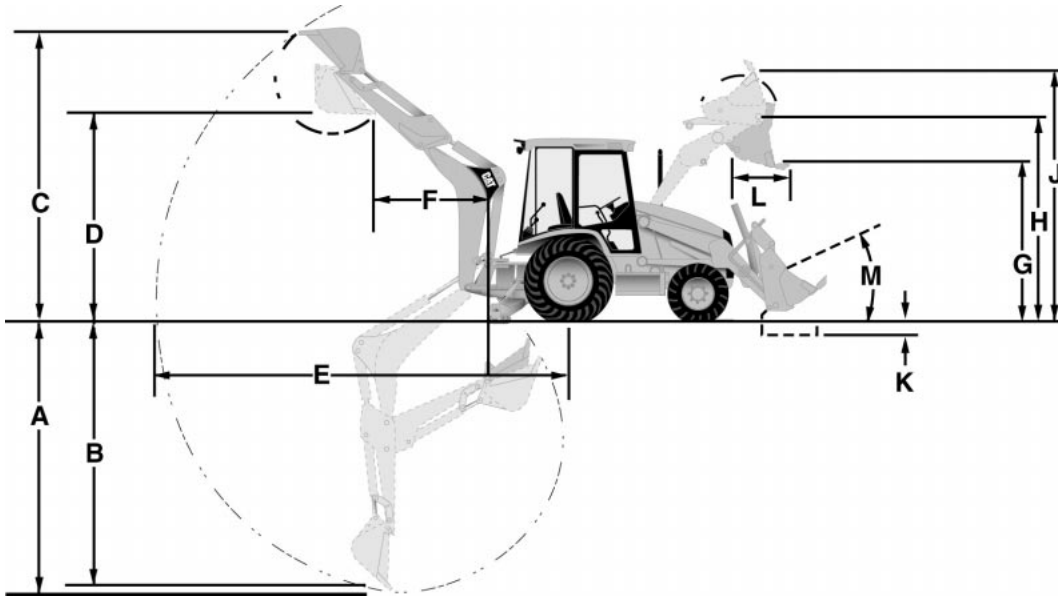

MODEL	426C									
Loader	Single Tilt									
Bucket	General Purpose		General Purpose*		General Purpose		Multi-Purpose		Multi-Purpose*	
Bucket capacity	0.96 m <sup>3</sup>	1.25 yd <sup>3</sup>	1 m <sup>3</sup>	1.31 yd <sup>3</sup>	1.07 m <sup>3</sup>	1.40 yd <sup>3</sup>	0.96 m <sup>3</sup>	1.25 yd <sup>3</sup>	1.03 m <sup>3</sup>	1.35 yd <sup>3</sup>
Width	2262 mm	7'5"	2396 mm	7'10"	2262 mm	7'5"	2262 mm	7'5"	2406 mm	7'11"
Lift capacity at full height	2826 kg	6230 lb	2930 kg	6460 lb	2876 kg	6340 lb	2771 kg	6110 lb	2750 kg	6060 lb
Breakout force	45.3 kN	10,180 lb	45.4 kN	10,200 lb	44.5 kN	10,000 lb	44.7 kN	10,030 lb	44.4 kN	9970 lb
G) Dump height @ max dump angle	2575 mm	8'5"	2610 mm	8'7"	2555 mm	8'5"	2640 mm	8'8"	2640 mm	8'8"
H) Hinge pin height	3290 mm	10'10"	3290 mm	10'10"	3290 mm	10'10"	3290 mm	10'10"	3290 mm	10'10"
J) Max operating height	4170 mm	13'8"	4170 mm	13'8"	4215 mm	13'10"	4200 mm	13'9"	4200 mm	13'9"
K) Digging depth	105 mm	4"	105 mm	4"	145 mm	6"	135 mm	5"	135 mm	5"
Grading angle	106°		107°		107°		110°		110°	
Width of dozer cutting edge	—	—	—	—	—	—	2406 mm	7'11"	2406 mm	7'11"
Clam opening — maximum	—	—	—	—	—	—	790 mm	2'7"	790 mm	2'7"
L) Reach @ full height max dump angle	810 mm	2'8"	780 mm	2'7"	780 mm	2'7"	700 mm	2'3"	700 mm	2'4"
M) Maximum rollback @ groundline	40°		40°		41°		41°		40°	
Weight	428 kg	944 lb	440 kg	970 lb	437 kg	964 lb	659 kg	1453 lb	682 kg	1504 lb


\*Recommended for use with All Wheel Steer option.



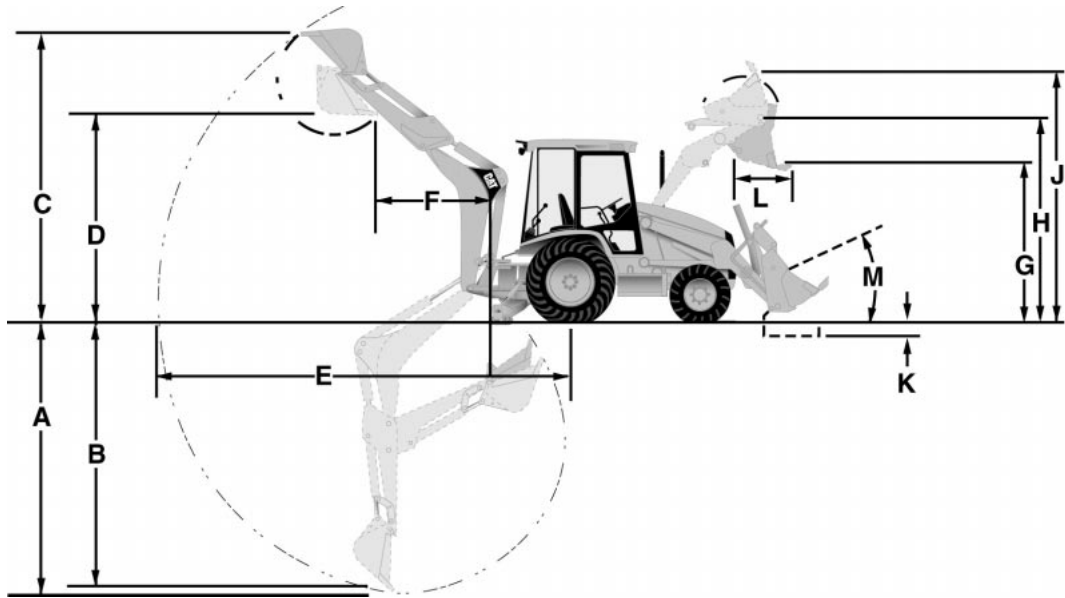


MODEL	426C							
Loader	IT Loader with QC							
Bucket	General Purpose		General Purpose*		Multi-Purpose		Multi-Purpose*	
Bucket capacity	0.96 m <sup>3</sup>	<b>1.25 yd<sup>3</sup></b>	1 m <sup>3</sup>	<b>1.31 yd<sup>3</sup></b>	0.96 m <sup>3</sup>	<b>1.25 yd<sup>3</sup></b>	1.03 m <sup>3</sup>	<b>1.35 yd<sup>3</sup></b>
Width	2262 mm	<b>7'5"</b>	2406 mm	<b>7'11"</b>	2262 mm	<b>7'5"</b>	2406 mm	<b>7'11"</b>
Lift capacity at full height	3116 kg	<b>6870 lb</b>	3190 kg	<b>7030 lb</b>	2981 kg	<b>6570 lb</b>	2955 kg	<b>6510 lb</b>
Breakout force	45.8 kN	<b>10,300 lb</b>	46.9 kN	<b>10,540 lb</b>	46.5 kN	<b>10,460 lb</b>	46.4 kN	<b>10,440 lb</b>
G) Dump height @ max dump angle	2495 mm	<b>8'2"</b>	2530 mm	<b>8'4"</b>	2560 mm	<b>8'5"</b>	2560 mm	<b>8'5"</b>
H) Hinge pin height	3290 mm	<b>10'10"</b>	3290 mm	<b>10'10"</b>	3290 mm	<b>10'10"</b>	3290 mm	<b>10'10"</b>
J) Max operating height	4170 mm	<b>13'8"</b>	4170 mm	<b>13'8"</b>	4200 mm	<b>13'9"</b>	4200 mm	<b>13'9"</b>
K) Digging depth	105 mm	<b>4"</b>	105 mm	<b>4"</b>	135 mm	<b>5"</b>	135 mm	<b>5"</b>
Grading angle	<b>107°</b>		<b>108°</b>		<b>111°</b>		<b>111°</b>	
Width of dozer cutting edge	—	—	—	—	2262 mm	<b>7'5"</b>	2262 mm	<b>7'5"</b>
Clam opening — maximum	—	—	—	—	790 mm	<b>2'7"</b>	790 mm	<b>2'7"</b>
L) Reach @ full height/max dump angle	840 mm	<b>2'9"</b>	810 mm	<b>2'8"</b>	730 mm	<b>2'5"</b>	730 mm	<b>2'5"</b>
M) Maximum rollback @ groundline	<b>40°</b>		<b>40°</b>		<b>41°</b>		<b>41°</b>	
Weight	446 kg	<b>983 lb</b>	459 kg	<b>1012 lb</b>	659 kg	<b>1453 lb</b>	682 kg	<b>1504 lb</b>

\*Recommended for use with All Wheel Steer option.

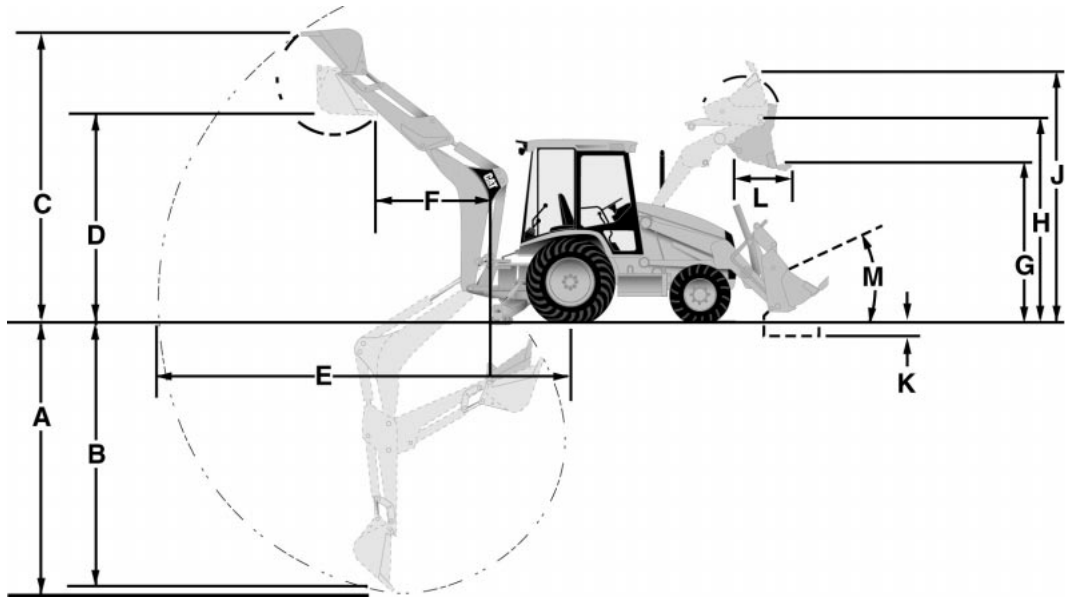


MODEL	436C									
Loader	Single Tilt									
Bucket	General Purpose*		General Purpose		General Purpose*		Multi-Purpose		Multi-Purpose*	
Bucket capacity	1 m <sup>3</sup>	1.31 yd <sup>3</sup>	1.07 m <sup>3</sup>	1.40 yd <sup>3</sup>	1.15 m <sup>3</sup>	1.50 yd <sup>3</sup>	0.96 m <sup>3</sup>	1.25 yd <sup>3</sup>	1.03 m <sup>3</sup>	1.35 yd <sup>3</sup>
Width	2406 mm	7'11"	2262 mm	7'5"	2396 mm	7'10"	2262 mm	7'5"	2406 mm	7'11"
Lift capacity at full height	3000 kg	6610 lb	2946 kg	6490 lb	2901 kg	6390 lb	2845 kg	6270 lb	2821 kg	6210 lb
Breakout force	45.7 kN	10,270 lb	44.9 kN	10,080 lb	44.4 kN	9990 lb	45 kN	10,120 lb	44.8 kN	10,060 lb
G) Dump height @ max dump angle	2670 mm	8'9"	2620 mm	8'7"	2590 mm	8'6"	2705 mm	8'11"	2305 mm	7'7"
H) Hinge pin height	3350 mm	11'0"	3350 mm	11'0"	3350 mm	11'0"	3350 mm	11'0"	3350 mm	11'0"
J) Max operating height	4230 mm	13'11"	4270 mm	14'0"	4270 mm	14'0"	4260 mm	14'0"	4260 mm	14'0"
K) Digging depth	43 mm	2"	85 mm	3"	85 mm	3"	75 mm	3"	75 mm	3"
Grading angle	108°		108°		108°		111°		111°	
Width of dozer cutting edge	—	—	—	—	—	—	2262 mm	7'5"	2406 mm	7'11"
Clam opening — maximum	—	—	—	—	—	—	790 mm	2'7"	790 mm	2'7"
L) Reach @ full height max dump angle	750 mm	2'6"	750 mm	2'6"	750 mm	2'6"	670 mm	2'2"	670 mm	2'2"
M) Maximum rollback @ groundline	39°		40°		40°		40°		40°	
Weight	440 kg	970 lb	437 kg	964 lb	456 kg	1003 lb	659 kg	1453 lb	682 kg	1504 lb

\*Recommended for use with All Wheel Steer option.

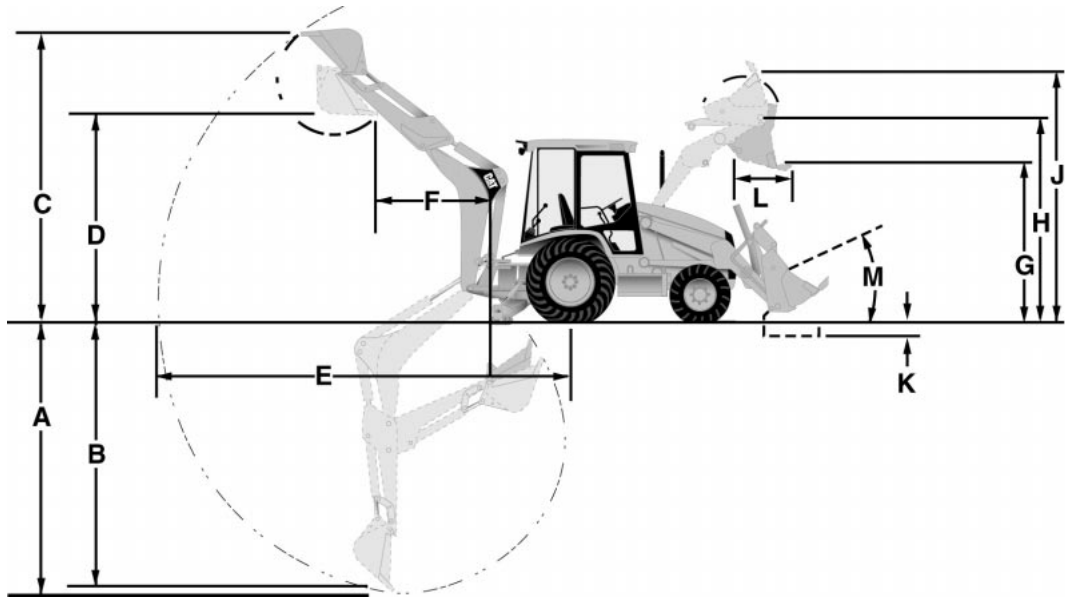


MODEL	436C							
Loader	IT Loader with QC							
Bucket	General Purpose*		General Purpose*		Multi-Purpose		Multi-Purpose*	
Bucket capacity	1 m <sup>3</sup>	1.31 yd <sup>3</sup>	1.15 m <sup>3</sup>	1.50 yd <sup>3</sup>	0.96 m <sup>3</sup>	1.25 yd <sup>3</sup>	1.03 m <sup>3</sup>	1.35 yd <sup>3</sup>
Width	2406 mm	7'11"	2406 mm	7'11"	2262 mm	7'5"	2262 mm	7'5"
Lift capacity at full height	3264 kg	7190 lb	3211 kg	7080 lb	3056 kg	6730 lb	3031 kg	6680 lb
Breakout force	46.8 kN	10,510 lb	45.9 kN	10,310 lb	46.6 kN	10,460 lb	46.4 kN	10,420 lb
G) Dump height @ max dump angle	2590 mm	8'6"	2540 mm	8'4"	2630 mm	8'8"	2630 mm	8'8"
H) Hinge pin height	3350 mm	11'0"	3350 mm	11'0"	3350 mm	11'0"	3350 mm	11'0"
J) Max operating height	4290 mm	14'1"	4330 mm	14'3"	4320 mm	14'2"	4320 mm	14'2"
K) Digging depth	42 mm	2"	80 mm	3"	75 mm	3"	75 mm	3"
Grading angle	109°		109°		112°		112°	
Width of dozer cutting edge	—	—	—	—	2262 mm	7'5"	2406 mm	7'11"
Clam opening — maximum	—	—	—	—	790 mm	2'7"	790 mm	2'7"
L) Reach @ full height/max dump angle	780 mm	2'7"	780 mm	2'7"	700 mm	2'4"	700 mm	2'4"
M) Maximum rollback @ groundline	39°		40°		40°		40°	
Weight	459 kg	1012 lb	473 kg	1043 lb	659 kg	1453 lb	682 kg	1504 lb

\*Recommended for use with All Wheel Steer option.

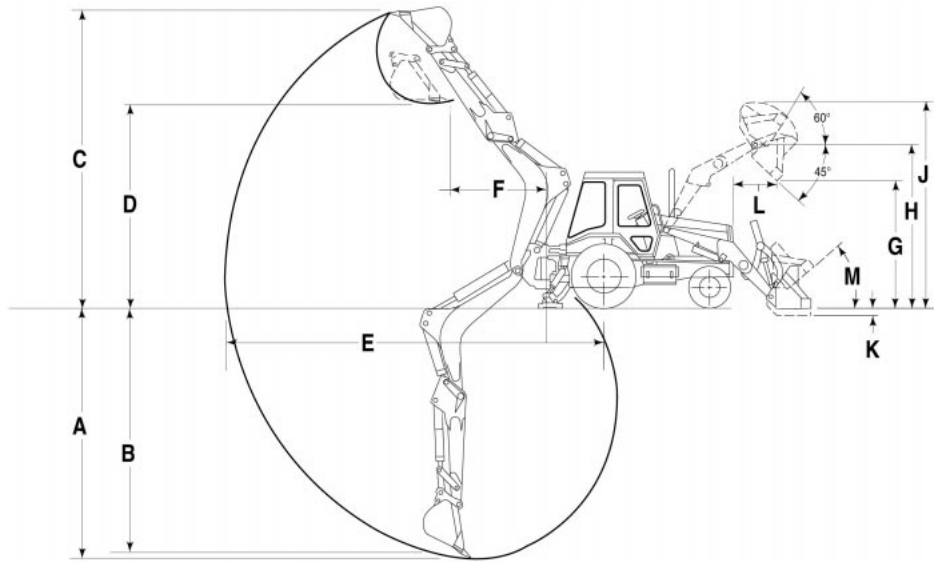


MODEL	446B					
	General Purpose		General Purpose		Multi-Purpose	
Loader						
Bucket capacity	1.1 m <sup>3</sup>	1.5 yd <sup>3</sup>	1.3 m <sup>3</sup>	1.75 yd <sup>3</sup>	1.05 m <sup>3</sup>	1.375 yd <sup>3</sup>
Width	2434 mm	8'0"	2434 mm	8'0"	2434 mm	8'0"
Lift capacity at full height	3970 kg	8760 lb	3905 kg	8610 lb	3790 kg	8350 lb
Breakout force	56 kN	12,600 lb	51.7 kN	11,610 lb	57.4 kN	12,900 lb
G) Dump height @ 45 degrees	2699 mm	8'10"	2657 mm	8'9"	2731 mm	9'0"
H) Hinge pin height	3490 mm	11'5"	3490 mm	11'5"	3490 mm	11'5"
J) Overall operating height — fully raised	4410 mm	14'3"	4198 mm	13'9"	4410 mm	14'6"
K) Digging depth	162 mm	6.4"	162 mm	6.4"	143 mm	5.6"
Grading angle	115°		115°		115°	
Width of dozer cutting edge	—	—	—	—	2434 mm	8'0"
Clam opening — maximum	—	—	—	—	1000 mm	3'3"
L) Reach @ full height/45 degrees	868 mm	2'10"	910 mm	3'0"	868 mm	2'10"
M) Maximum rollback @ groundline	40°		40°		40°	
Weight	553 kg	1217 lb	608 kg	1338 lb	849 kg	1868 lb

NOTE: All 446B specifications are effective with S/N 5BL00500.

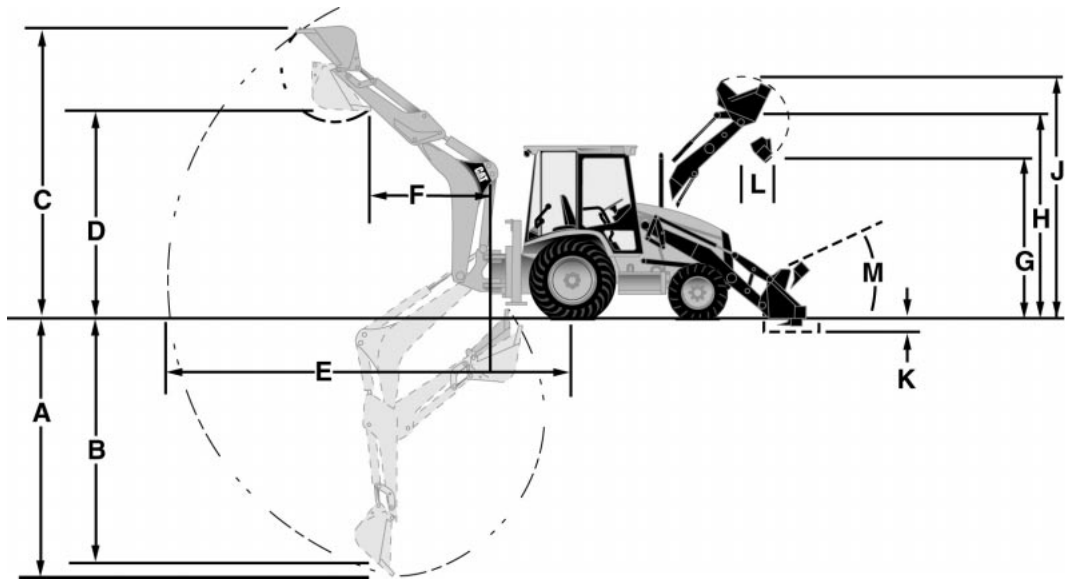

MODEL	428C							
Loader	Single Tilt				Parallel Lift			
Bucket	General Purpose		Multi-Purpose		General Purpose		Multi-Purpose	
Bucket capacity	1 m <sup>3</sup>	1.30 yd <sup>3</sup>	1.03 m <sup>3</sup>	1.35 yd <sup>3</sup>	1 m <sup>3</sup>	1.30 yd <sup>3</sup>	1.03 m <sup>3</sup>	1.35 yd <sup>3</sup>
Width	2396 mm	7'10"	2406 mm	7'11"	2396 mm	7'10"	2406 mm	7'11"
Lift capacity at full height	2340 kg	5160 lb	2145 kg	4730 lb	3295 kg	7260 lb	3060 kg	6740 lb
Breakout force	38.5 kN	8660 lb	41.1 kN	9240 lb	50.1 kN	11,270 lb	53.7 kN	12,080 lb
G) Dump height @ max dump angle	2570 mm	8'5"	2605 mm	8'7"	2565 mm	8'5"	2600 mm	8'6"
H) Hinge pin height	3270 mm	10'9"	3270 mm	10'9"	3270 mm	10'9"	3270 mm	10'9"
J) Max operating height	4150 mm	13'7"	4175 mm	13'8"	4150 mm	13'7"	4175 mm	13'8"
K) Digging depth	135 mm	5"	165 mm	7"	135 mm	5"	165 mm	7"
Grading angle	108°		111°		111°		114°	
Width of dozer cutting edge	—	—	2406 mm	7'11"	—	—	2406 mm	7'11"
Clam opening — maximum	—	—	927 mm	3'0"	—	—	927 mm	3'1"
L) Reach @ full height/max dump angle	825 mm	2'9"	745 mm	2'5"	820 mm	2'8"	735 mm	2'5"
M) Maximum rollback @ groundline	39°		40°		40°		40°	
Weight	445 kg	981 lb	700 kg	1544 lb	445 kg	981 lb	685 kg	1510 lb

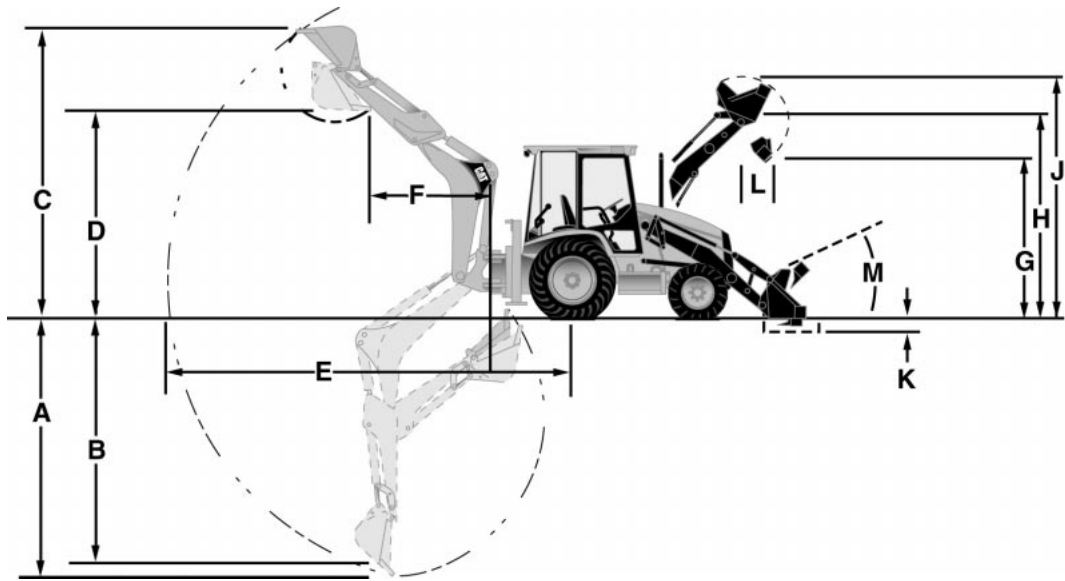


MODEL	438C					
Loader	Single Tilt					
Bucket	General Purpose		General Purpose		Multi-Purpose	
Bucket capacity	1 m <sup>3</sup>	1.30 yd <sup>3</sup>	1.15 m <sup>3</sup>	1.50 yd <sup>3</sup>	1.03 m <sup>3</sup>	1.35 yd <sup>3</sup>
Width	2396 mm	7'10"	2396 mm	7'10"	2406 mm	7'11"
Lift capacity at full height	2390 kg	5270 lb	2300 kg	5070 lb	2200 kg	4850 lb
Breakout force	39.3 kN	8840 lb	38 kN	8550 lb	40.4 kN	9090 lb
G) Dump height @ max dump angle	2670 mm	8'9"	2615 mm	8'7"	2700 mm	8'10"
H) Hinge pin height	3360 mm	11'0"	3360 mm	11'0"	3360 mm	11'0"
J) Max operating height	4240 mm	13'11"	4285 mm	14'1"	4270 mm	14'0"
K) Digging depth	40 mm	2"	80 mm	3"	70 mm	2.75"
Grading angle	110°		110°		113°	
Width of dozer cutting edge	—	—	—	—	2406 mm	7'11"
Clam opening — maximum	—	—	—	—	927 mm	3'1"
L) Reach @ full height/max dump angle	800 mm	2'8"	800 mm	2'8"	720 mm	2'4"
M) Maximum rollback @ groundline	38°		39°		38°	
Weight	445 kg	981 lb	635 kg	1400 lb	685 kg	1510 lb

# Backhoe Loaders

## Loader Performance Data

### ● General/Multi-Purpose Buckets

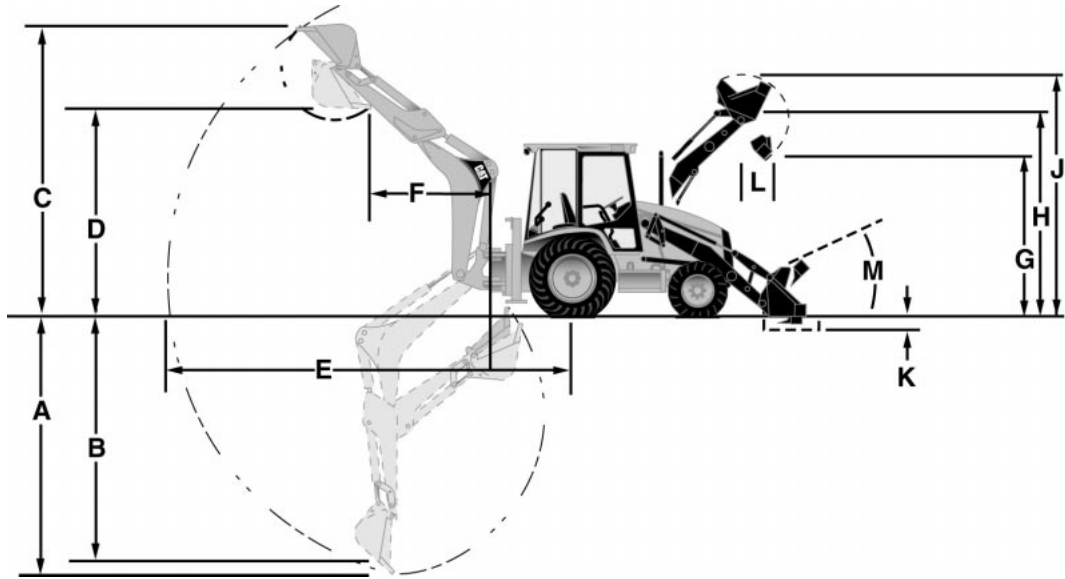

MODEL	438C					
Loader	Parallel Lift					
Bucket	General Purpose		General Purpose		Multi-Purpose*	
Bucket capacity	1 m <sup>3</sup>	<b>1.30 yd<sup>3</sup></b>	1.15 m <sup>3</sup>	<b>1.50 yd<sup>3</sup></b>	1.03 m <sup>3</sup>	<b>1.35 yd<sup>3</sup></b>
Width	2396 mm	<b>7'10"</b>	2396 mm	<b>7'10"</b>	2406 mm	<b>7'11"</b>
Lift capacity at full height	3355 kg	<b>7390 lb</b>	3300 kg	<b>7270 lb</b>	3120 kg	<b>6880 lb</b>
Breakout force	50.4 kN	<b>11,340 lb</b>	49.4 kN	<b>11,110 lb</b>	53.4 kN	<b>12,010 lb</b>
G) Dump height @ max dump angle	2655 mm	<b>8'9"</b>	2600 mm	<b>8'6"</b>	2690 mm	<b>8'10"</b>
H) Hinge pin height	3360 mm	<b>11'0"</b>	3360 mm	<b>11'0"</b>	3360 mm	<b>11'0"</b>
J) Max operating height	4240 mm	<b>13'11"</b>	4285 mm	<b>14'1"</b>	4270 mm	<b>14'0"</b>
K) Digging depth	40 mm	<b>2"</b>	80 mm	<b>3"</b>	70 mm	<b>2.75"</b>
Grading angle	<b>113°</b>		<b>113°</b>		<b>116°</b>	
Width of dozer cutting edge	—	—	—	—	2406 mm	<b>7'11"</b>
Clam opening — maximum	—	—	—	—	927 mm	<b>3'1"</b>
L) Reach @ full height/45 degrees	780 mm	<b>2'7"</b>	780 mm	<b>2'7"</b>	700 mm	<b>2'3"</b>
M) Maximum rollback @ groundline	<b>38°</b>		<b>39°</b>		<b>39°</b>	
Weight	445 kg	<b>981 lb</b>	635 kg	<b>1400 lb</b>	700 kg	<b>1544 lb</b>

\*Recommended for use with All Wheel Steer option.

**Standard Duty Buckets (SD)**  
416C, 426C, 436C, 428C, 438C

Width		SAE Heaped Capacity		SAE Struck Capacity		Weight		No. of Teeth
mm	in	L	ft <sup>3</sup>	L	ft <sup>3</sup>	kg	lb	
305	12	70	2.5	60	2.1	116	256	3
457	18	127	4.5	99	3.5	135	298	4
610	24	198	7.0	156	5.5	153	337	5
762	30	255	9.5	198	7.0	171	377	5
914	36	311	11.5	227	8.0	191	421	6

**Extreme Service Buckets (ES)**  
416C, 426C, 436C, 428C, 438C

Width		SAE Heaped Capacity		SAE Struck Capacity		Weight		No. of Teeth
mm	in	L	ft <sup>3</sup>	L	ft <sup>3</sup>	kg	lb	
457	18	113	4.0	83	2.9	151	333	4
610	24	170	6.0	140	4.9	172	379	5

**Heavy Duty Buckets (HD)**  
416C, 426C, 436C, 428C, 438C

Width		SAE Heaped Capacity		SAE Struck Capacity		Weight		* No. of Teeth
mm	in	L	ft <sup>3</sup>	L	ft <sup>3</sup>	kg	lb	
305	12	71	2.5	60	2.1	125	276	3
400	16	99	3.5	85	3.0	146	322	3
457	18	127	4.5	99	3.5	152	335	4
610	24	198	7.0	156	5.5	177	390	5
762	30	269	9.5	198	7.0	194	428	5
914	36	326	11.5	227	8.0	218	481	6

\*Bolt-on teeth available.

**High Capacity Buckets (HC)**  
416C, 426C, 436C, 428C, 438C

Width		SAE Heaped Capacity		SAE Struck Capacity		Weight		No. of Teeth
mm	in	L	ft <sup>3</sup>	L	ft <sup>3</sup>	kg	lb	
457	18	184	6.5	127	4.5	163	359	4
610	24	225	9.0	184	6.5	192	423	4
762	30	311	11.0	227	8.0	211	465	5
914	36	396	14.0	283	10.0	234	516	6

Teeth Options:

- Utility — Short
- Penetration — Long
- Abrasion

**Heavy Duty Buckets (HD)**  
446B

Width		SAE Heaped Capacity		SAE Struck Capacity		Weight		No. of Teeth
mm	in	L	ft <sup>3</sup>	L	ft <sup>3</sup>	kg	lb	
457	18	200	7.0	180	6.0	189	417	3
610	24	260	9.0	240	8.0	226	498	5
762	30	340	12.0	300	10.0	247	545	5
914	36	440	15.0	380	13.0	283	624	6

**Extreme Service Buckets (ES)**  
446B

Width		SAE Heaped Capacity		SAE Struck Capacity		Weight		No. of Teeth
mm	in	L	ft <sup>3</sup>	L	ft <sup>3</sup>	kg	lb	
610	24	200	7.0	160	5.5	215	474	5
762	30	260	9.0	200	7.0	297	655	5






# Backhoe Loaders

## Lifting Capacity

● 416C

### KEY

- A — Boom lift **lb** kg
- B — Stick lift **lb** kg

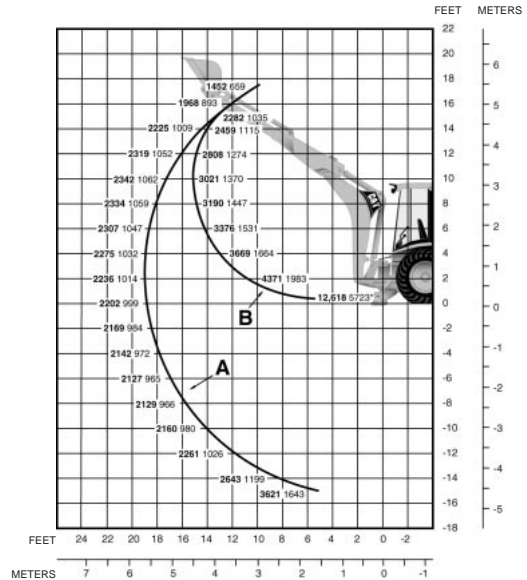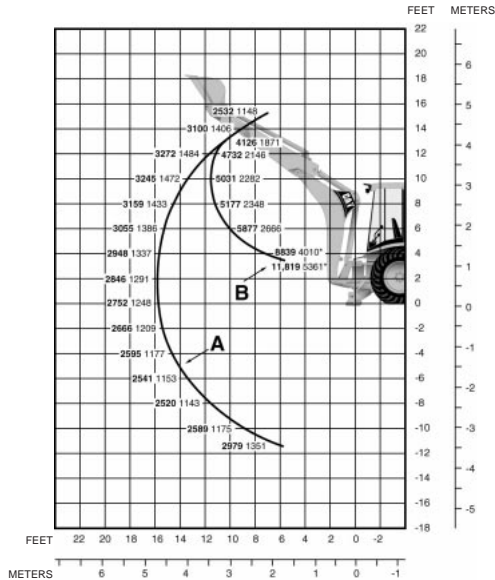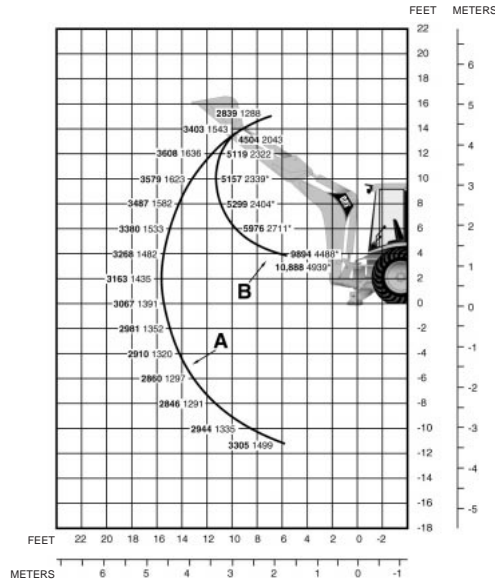


**NOTE:** Lift capacities are over-end values. Machine equipped with 2WD, OROPS, general-purpose bucket, and 145 kg (320 lb) counterweight. Extensible stick includes 567 kg (1250 lb) counterweight.


\*Indicates lift capacity is stability limited.

KEY


- A — Boom lift lb kg
- B — Stick lift lb kg

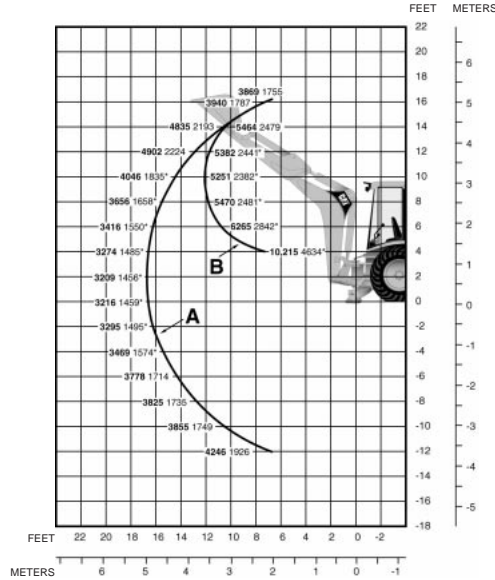

Standard Stick

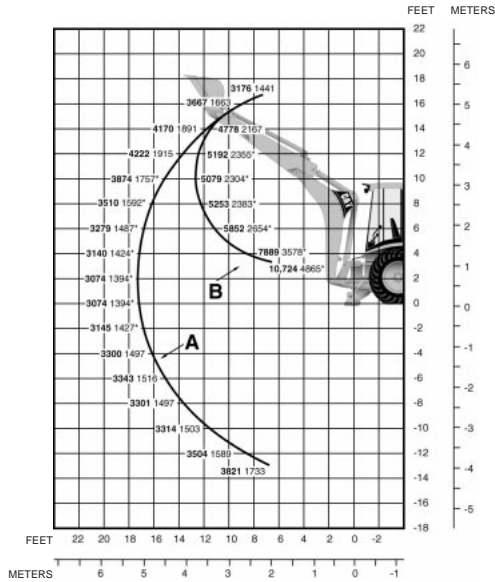

Extendible Stick —  
Retracted

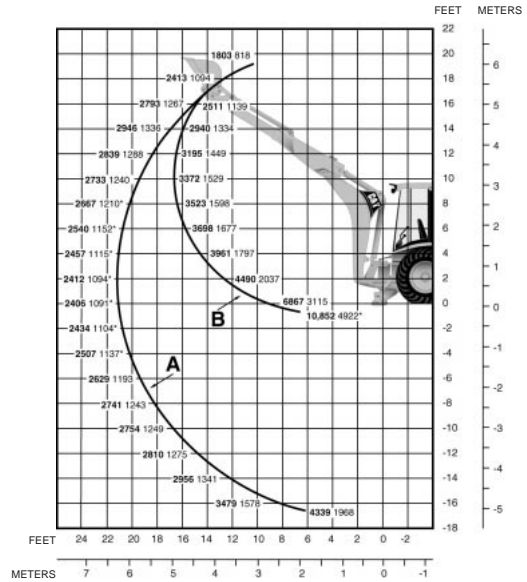




Extendible Stick —  
Extended

**NOTE:** Lift capacities are over-end values. Machine equipped with 2WD, OROPS, general-purpose bucket, and 145 kg (320 lb) counterweight. Extendible stick includes 567 kg (1250 lb) counterweight.

\*Indicates lift capacity is stability limited.

### KEY


- A — Boom lift **lb kg**
- B — Stick lift **lb kg**

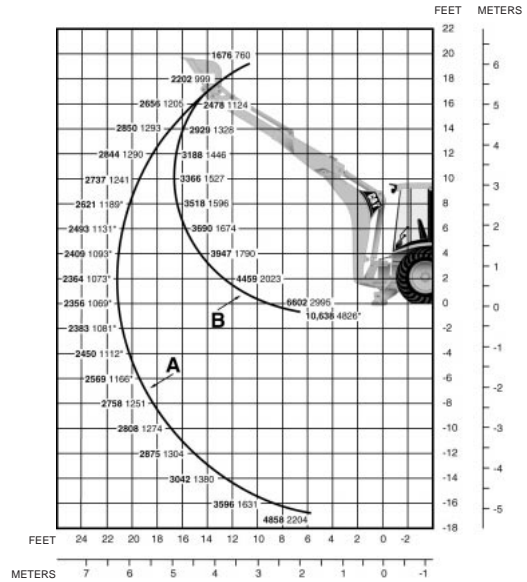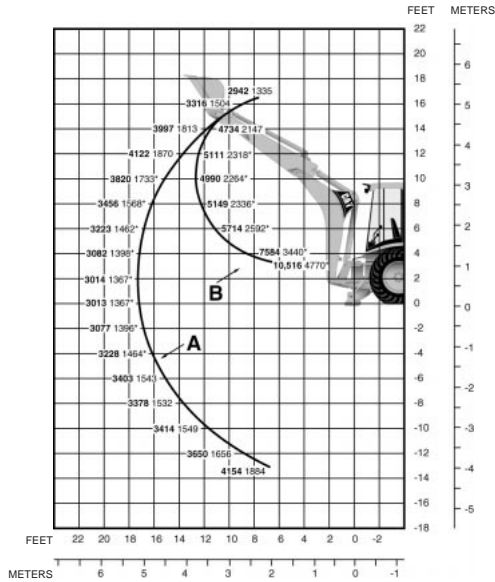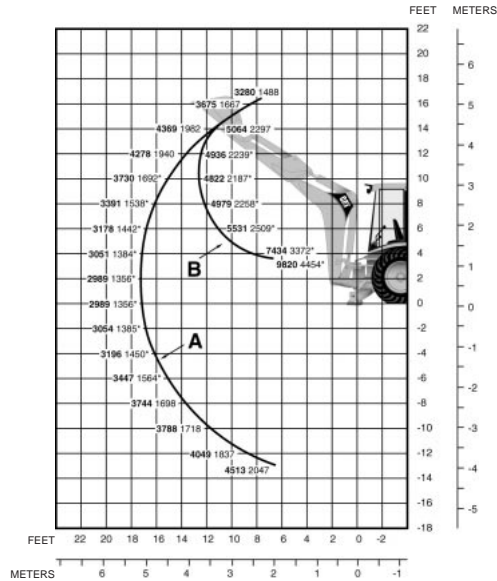


**NOTE:** Lift capacities are over-end values. Machine equipped with 2WD, OROPS, general-purpose bucket, and 254 kg (560 lb) counterweight. Extendible stick includes 567 kg (1250 lb) counterweight.  
 \*Indicates lift capacity is stability limited.

KEY


- A — Boom lift lb kg
- B — Stick lift lb kg

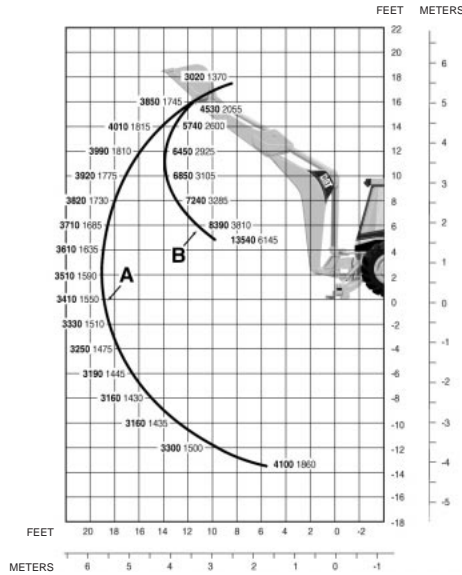

Standard Stick

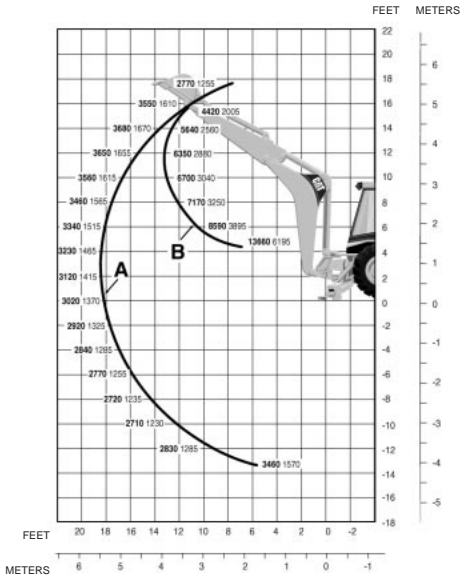

Extendible Stick —  
Retracted

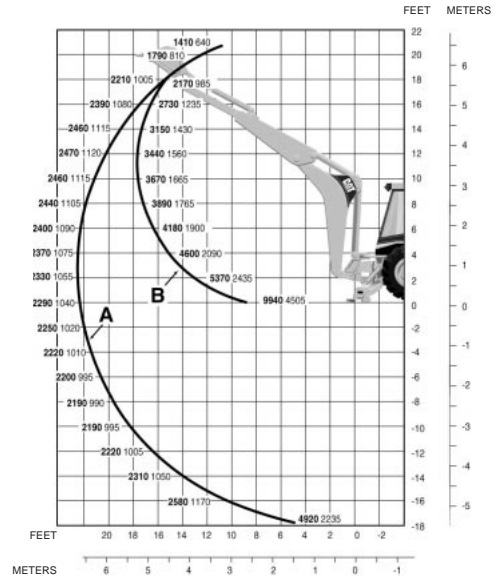

Extendible Stick —  
Extended

**NOTE:** Boom is at 65°.


Lift capacities are over-end values. Standard stick measured using a 455 kg (1000 lb) counterweight. Extendible stick measured using a 680 kg (1500 lb) counterweight.

# Backhoe Loaders


Lifting Capacity  
● 428C

## KEY


- A — Boom lift lb kg
- B — Stick lift lb kg

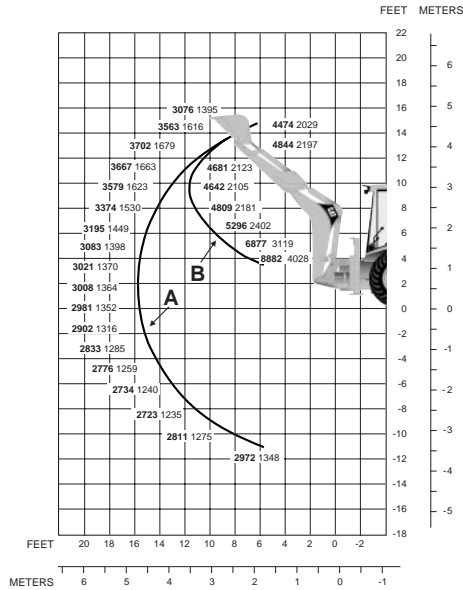

Standard Stick

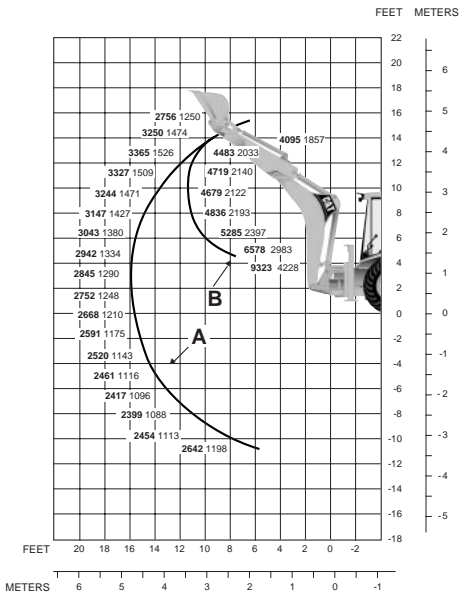

Extendible Stick —  
Retracted

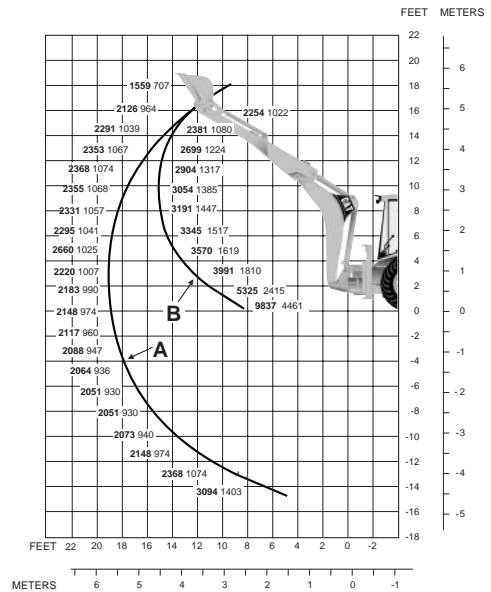



Extendible Stick —  
Extended

**NOTE:** Boom is at 65°.


Machine configuration includes 11LX16, 12PR, F3 laborer front and 16.9X28, 10PR, R4 rear tires, cab, two wheel drive, parallel lift loader, 1 m<sup>3</sup> (1.3 yd<sup>3</sup>) GP bucket, 610 mm (24") heavy duty bucket, base counterweight 16 kg (35 lb).

KEY

- A — Boom lift lb kg
- B — Stick lift lb kg

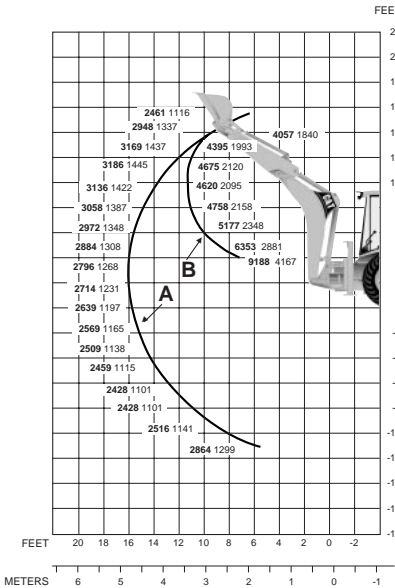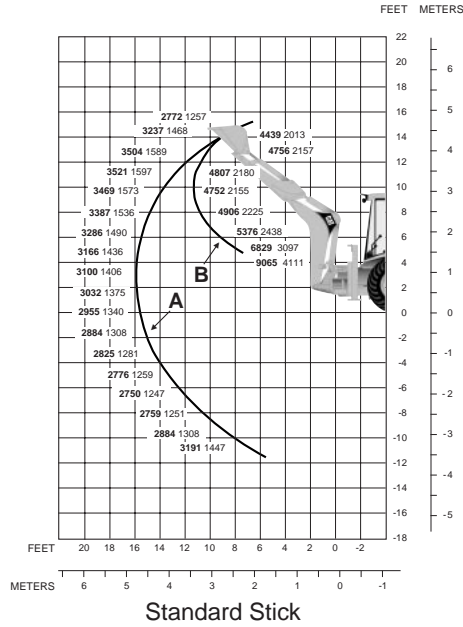

Extendible Stick — Retracted

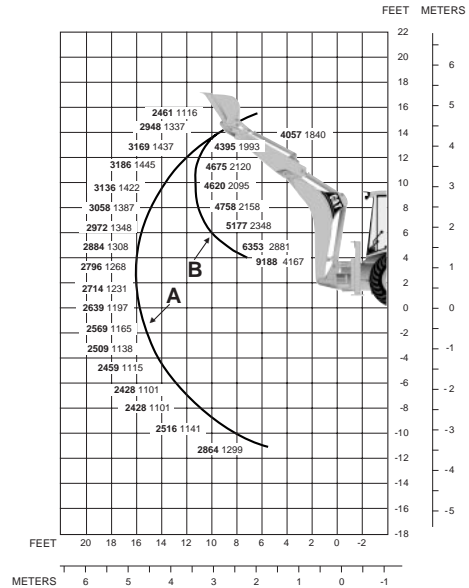

Extendible Stick — Extended

**NOTE:** Boom is at 65°.

Machine configuration includes 12.5/80X18, 10PR, I-3 implement front and 18.4/15X26, 12PR, R4 rear tires, cab, all wheel drive, parallel lift loader, 1 m<sup>3</sup> (1.3 yd<sup>3</sup>) GP bucket, 610 mm (24") heavy duty bucket, base counterweight 16 kg (35 lb).

Dimensions	Centerpivot					
	416C		426C		436C	
Overall transport length	6890 mm	22'7"	7260 mm	23'10"	7300 mm	23'11"
Overall length (loader on ground)	6870 mm	22'6"	7240 mm	23'9"	7255 mm	23'10"
Overall transport height	3585 mm	11'9"	3770 mm	12'4"	3750 mm	12'4"
Overall width, without bucket	2352 mm	7'9"	2352 mm	7'9"	2352 mm	7'9"
Height to top of cab	2770 mm	9'1"	2770 mm	9'1"	2787 mm	9'2"
Height to top of stack	2670 mm	8'9"	2670 mm	8'9"	2710 mm	8'11"
Height to top of steering wheel	1940 mm	6'4"	1940 mm	6'4"	1965 mm	6'5"
Ground clearance (minimum)	297 mm	12"	291 mm	12"	352 mm	14"
Rear axle centerline to front grill	2660 mm	8'9"	2660 mm	8'9"	2660 mm	8'9"
Front wheel tread	1871 mm	6'2"	1922 mm	6'4"	1828 mm	6'0"
Rear wheel tread	1714 mm	5'8"	1714 mm	5'8"	1714 mm	5'8"
Rear wheel tread AWS	—	—	1890 mm	6'2"	1890 mm	6'2"
Wheel base: 2WD	2100 mm	6'11"	2100 mm	6'11"	2100 mm	6'11"
4WD	2100 mm	6'11"	2100 mm	6'11"	2100 mm	6'11"

Dimensions	Centerpivot		Sideshift			
	446B		428C		438C	
Overall transport length	7954 mm	26'1"	5760 mm	18'11"	5740 mm	18'10"
Overall length (loader on ground)	7922 mm	26'0"	5710 mm	18'9"	5665 mm	18'7"
Overall transport height	4193 mm	13'9"	3740 mm	12'3"	3765 mm	12'4"
Overall width, without bucket	2434 mm	8'0"	2392 mm	7'10"	2392 mm	7'10"
Height to top of cab	2864 mm	9'5"	2900 mm	9'6"	2900 mm	9'6"
Height to top of stack	2960 mm	9'9"	2700 mm	8'10"	2750 mm	9'0"
Height to top of steering wheel	2111 mm	6'11"	1940 mm	6'4"	1940 mm	6'4"
Ground clearance (machine main frame)	332 mm	13"	320 mm	13"	335 mm	13"
Rear axle centerline to front grill	2752 mm	9'0"	2613 mm	8'7"	2620 mm	8'7"
Front wheel tread	1970 mm	6'6"	1780 mm	5'10"	1780 mm	5'10"
Rear wheel tread	1800 mm	5'11"	1714 mm	5'7"	1714 mm	5'7"
Rear wheel tread AWS	—	—	—	—	1890 mm	6'2"
Wheel base: 2WD	2233 mm	7'4"	2100 mm	6'11"	2100 mm	6'11"
4WD	2233 mm	7'4"	2100 mm	6'11"	2100 mm	6'11"

**Work tools for Caterpillar backhoe loaders are divided into four groups**

**Technical Assistance**

<p><b>Caterpillar Factory Work Tools (Cat):</b> Cat work tools installed on machines or shipped separately from the factory. Includes the most popular work tools such as buckets, forks and material-handling arms. (Note: hydraulic hammers are shipped separately.) <i>Order from Machine Orders Division.</i></p>	<p><b>Cat Factory Work Tools</b> (919) 550-1470</p>
<p><b>Caterpillar Work Tools (CWT):</b> Cat work tools specifically designed for the Cat backhoe loader by the Caterpillar Work Tool division. <i>Orders inside U.S.: (800) 255-2372. Outside U.S.: 00 1 (785) 456-2224.</i></p>	<p><b>Cat Work Tools Product Support</b> (800) 255-2372</p>
<p><b>Wain Roy™ brand products by Woods Equipment Company (WR):</b> Work tools and dedicated coupler system designed and manufactured to Cat specifications. <i>Orders inside U.S.: (800) 848-3447. Outside U.S.: 00 1 (815) 732-2124.</i></p>	<p><b>Wain Roy Product Support</b> (978) 928-3362</p>
<p><b>Alitec Power Attachments (AL):</b> Work tools approved for use on Caterpillar backhoe loaders. <i>Orders inside U.S.: (800) 790-0557. Outside U.S.: 00 1 (317) 852-8622.</i></p>	<p><b>Alitec Product Support</b> (800) 790-0557</p>

6

**Auxiliary hydraulics: Hydraulic work tools may require auxiliary hydraulics. Refer to the following key for hydraulic requirements: (3rd valve is standard on all IT machines)**

Multi-function loader hydraulics (3rd valve is required)	<b>MP</b>
Bi-directional flow backhoe hydraulics required	<b>BD</b>
Uni-directional flow backhoe hydraulics (universal lines) required	<b>UD</b>



Loader Work Tools	Work Tool Group	Auxiliary Hydraulics
IT Hydraulic Quick Coupler	Cat	—
General Purpose Bucket	Cat	—
Multi-Purpose Bucket	Cat	MP
Loader Forks	Cat	—
Material-Handling Arm	Cat	—
Broom	CWT	MP
Side-Dump Bucket	CWT	MP
Bale Spear	CWT	—
Rake	CWT	—
Angle Blade	CWT	MP
Asphalt Cutter	CWT	—
Single-Tilt Hydraulic QC for IT Tools	CWT	—
Single-Tilt General Purpose Bucket	Cat	—
Single-Tilt Multi-Purpose Bucket	Cat	MP
Single-Tilt Multi-Purpose Bucket with Fold-Over Forks	Cat	MP
<b>Backhoe Work Tools</b>		
Standard-Duty Bucket	Cat	—
Heavy-Duty Bucket	Cat	—
High-Capacity Bucket	Cat	—
Extreme-Service Bucket	Cat	—
446B Heavy-Duty Bucket	Cat	—
446B Extreme-Service Bucket	Cat	—
12" Narrow Bucket	Cat	—
Mechanical Quick Coupler (Pin Grabber)	Cat	—
H70 Hydraulic Hammer	Cat	UD
H90C Hydraulic Hammer	Cat	UD
Quick Coupler for Case Buckets (Pin Puller)	CWT	—
Quick Coupler for Cat or Case Buckets (Pin Puller)	CWT	—
446B Quick Coupler (Pin Puller)	CWT	—
Vibratory Plate Compactor	CWT	UD
Ripper	CWT	—
Ditch-Cleaning Bucket/Swinger Quick Coupler	WR	BD
Dedicated Quick Coupler (Mechanical or Hydraulic)	WR	—
Ripper Bucket	WR	—
JAW Bucket	WR	BD
Grading Blade	WR	—
Grapple (Mechanical or Hydraulic)	WR	—
Cemetery Bucket	WR	—
Concrete-Removal Bucket	WR	—
Ripper	WR	—
Railroad Cribbing Bucket	WR	—
Cold Planer	AL	UD
Auger	AL	BD

# FOREST PRODUCTS

## CONTENTS

### CUT-TO-LENGTH

Methodology	7-2
Harvesters	
Features	7-2
Specifications	7-3
Dimensions	7-4
Ground pressure	7-5
Forwarders	
Features	7-8
Specifications	7-9
Dimensions	7-10
Range dimensions	7-11
Ground pressure	7-12

### WHOLE TREE

Wheel skidders	
Features	7-14
Specifications	7-15
Grapple: SAE definitions	7-16
Specifications	7-16
Track skidders	
Features	7-19
Specifications	7-20
Drawbar pull	7-21
Grapple specifications	7-23
Forestry machines	
Introduction	7-25
Range dimensions	7-25
Shipping dimensions	7-26
Major component weights	7-27
Knuckleboom loaders	
Introduction	7-28
Features	7-28
Specifications	7-29
Range diagram	7-30
Lift capacities	7-31
Dimensions	7-31

### MILLYARD

Load capacity curves for wheel loaders and integrated tool carriers	7-32
Log loader lift and range diagrams	7-43

### WORK TOOLS

Harvesting heads	
Features	7-61
Specifications	7-62
Dimensions	7-63
Selection guide	7-64
Grapples for heel boom log loaders	7-65
Woodchip dozers and scoops	7-66

### TABLES

Log volume tables	7-69
Weights of commercially important woods	7-71
Estimating number of trees	7-74
Comparison of log rules	7-74
Measurement definitions	7-75

**Methodology:**

- **The Cut-To-Length method.** Is the most common Scandinavian way of timber extraction growing rapidly worldwide, today utilizing only two machines for the felling, processing, bucking, cross-cutting, sorting and forwarding to the roadside. Increasing working season, less labor intensive, more safe, more selective cuttings, increasing environmental awareness, more challenging lay-out of cutting blocks, better documentation, more sensitive areas including less road building, mills demand for just in time deliveries are only a few of modern sustainable forestry practices challenges. The CTL method can meet most of these requirements in a variety of applications.

**Harvesters:**

- **Features.** The Caterpillar line of harvesters is one of the most recent forest products introductions by Caterpillar. The product line includes three models designed and built to provide customers with efficient solutions, in a wide variety of forestry applications. This complete line of wheeled harvesters produces high quality logs quickly by utilizing ample hydraulic flow and state-of-the-art controls to achieve both high feeding force and speed to the harvesting head.

By utilizing the pendulum arm suspension technology, the operator is able to maneuver the machine in the tightest of thinning areas. Once in position, the operator can take full advantage of the extended reach to access trees in very dense conditions. All Caterpillar Harvesters are powered by a Caterpillar® 3126 DITA Engine which provides the necessary hydraulic flow and tractive mobility the machines need to harvest on steep slopes and unfavorable terrain, giving the customer the tools they need to drive an efficient and productive harvesting operation.

Caterpillar harvesters can be used in a wide variety of applications, from first thinning to final felling, including a wide range of tree sizes. The 550, 570, and 580 Harvesters provide the versatility, durability and reliability today's logger needs to optimize the benefits of a cut-to-length harvesting system.


## Specifications

## Forest Products Harvesters



MODEL	<b>550</b>	<b>570</b>	<b>580</b>
Gross Power @ 2200 RPM	122 kW 169 ps <b>163 hp</b>	165 kW 229 ps <b>221 hp</b>	165 kW 229 ps <b>221 hp</b>
Net Power @ 2200 RPM	115 kW 160 ps <b>154 hp</b>	157 kW 219 ps <b>211 hp</b>	157 kW 219 ps <b>211 hp</b>
Engine Model	<b>3126 DITA</b>		<b>3126 DITA</b>
Displacement	7.2 L <b>439 in<sup>3</sup></b>	7.2 L <b>439 in<sup>3</sup></b>	7.2 L <b>439 in<sup>3</sup></b>
Peak Torque @ 1400 RPM	753 N•m <b>555 ft-lb</b>	962 N•m <b>710 ft-lb</b>	962 N•m <b>710 ft-lb</b>
Fuel Tank			
Service Refill Capabilities	400 L <b>104 U.S. gal</b>	400 L <b>104 U.S. gal</b>	400 L <b>104 U.S. gal</b>
Cooling System			
Service Refill Capabilities	50 L <b>13.2 U.S. gal</b>	50 L <b>13.2 U.S. gal</b>	50 L <b>13.2 U.S. gal</b>
Engine Oil			
Service Refill Capabilities	30 L <b>7.8 U.S. gal</b>	30 L <b>7.8 U.S. gal</b>	30 L <b>7.8 U.S. gal</b>
Hydraulic Pump Sizes	<b>160 cc</b>		<b>190 cc</b>
Hydraulic System Tank			
Service Refill Capabilities	150 L <b>39 U.S. gal</b>	150 L <b>39 U.S. gal</b>	150 L <b>39 U.S. gal</b>
Transmission	<b>4WD Hydrostatic</b>		<b>6WD Hydrostatic</b>
Max. Travel Speeds:			
Off-road in 1st Gear	9 km/h <b>5.6 mph</b>	9 km/h <b>5.6 mph</b>	9 km/h <b>5.6 mph</b>
Roading in 2nd Gear	18 km/h <b>11.2 mph</b>	18 km/h <b>11.2 mph</b>	18 km/h <b>11.2 mph</b>
Tractive Ability	200 kN <b>45,000 lb</b>	200 kN <b>45,000 lb</b>	200 kN <b>45,000 lb</b>
Harvesting Head Match	<b>HH45, HH55</b>		<b>HH65, HH75</b>
Boom/Stick Reach	10.1 m <b>33 ft-lb</b>	10.1 m <b>33 ft-lb</b>	10.1 m <b>33 ft-lb</b>
Boom/Stick Lifting Capacity:			
18 tons/meter	180 kN•m gross <b>40,500 lb</b> 120 kN•m net <b>27,000 lb</b>	180 kN•m gross <b>40,500 lb</b> 120 kN•m net <b>27,000 lb</b>	<b>NA</b> <b>NA</b>
22 tons/meter	<b>NA</b> <b>NA</b>	220 kN•m gross <b>49,500 lb</b> 150 kN•m net <b>33,750 lb</b>	220 kN•m gross <b>49,500 lb</b> 150 kN•m net <b>33,750 lb</b>
Suspension:			
Fore/Aft	<b>15/15°</b>		<b>15/15°</b>
Side-to-Side	<b>25/25°</b>		<b>25/25°</b>
Tires (Pattern & Width)	<b>600/65-34 14PR (4)</b> <b>700/55-34 14PR (4)</b>	<b>600/65-34 14PR (4)</b> <b>700/55-34 14PR (4)</b>	<b>600/55-26.5 16PR (4)*</b> <b>700/50-26.5 16PR (4)*</b> <b>700/55-34 14PR (2)**</b>

\*Front.  
\*\*Rear.

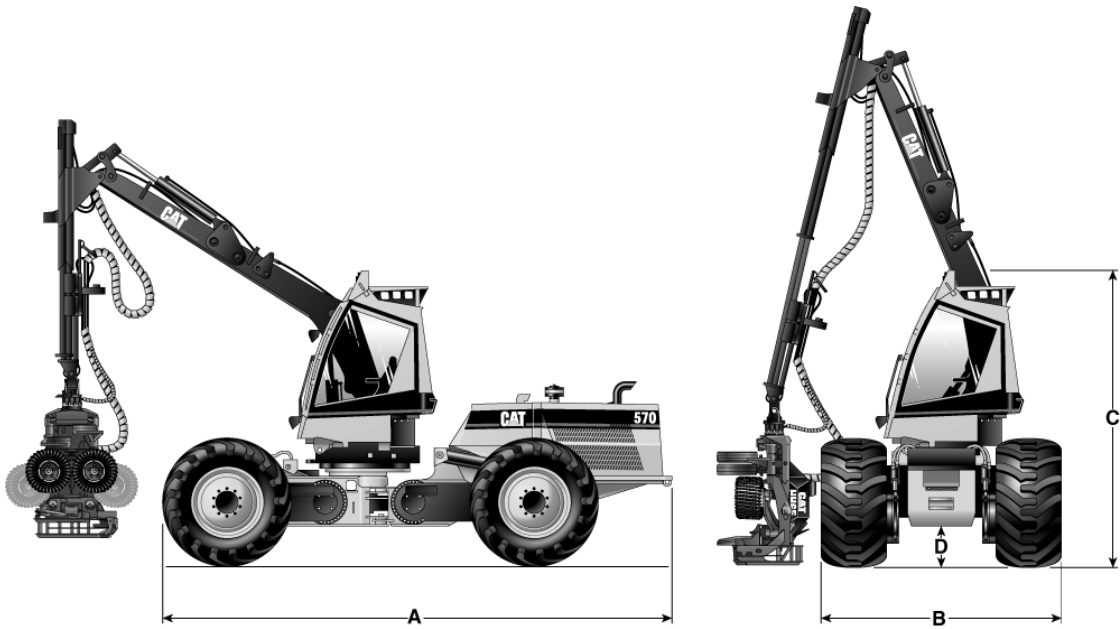


MODEL	550		570		580	
A Length	6.65 m	21'10"	6.79 m	22'3"	7.30 m	23'11"
B Width	2.78 m	9'2"	2.78 m	9'2"	2.99 m	9'10"
C Height	3.17 m	10'5"	2.95-3.17 m	9'8"-10'5"	3.17 m	10'5"
D Ground Clearance	180-940 mm	7.1-37"	0-1219 mm	0-48"	120-1160 mm	4.7-46"
Shipping Weight	15 000 kg	<b>33,000 lb</b>	17 000 kg	<b>37,500 lb</b>	19 000 kg	<b>42,000 lb</b>

**Ground pressure is one way to explain environmental impact done by forestry equipment.**

This is how it is calculated: The actual tire's radius × Width of tire = Estimated contact area  
Actual axle weight/(Number of tires × Estimated contact area) = GROUND PRESSURE.

**This is the common way of calculating ground pressure for off-road vehicles ref: Skogforsk, Feric**


	600 Size/Tires Set Up		700 Size/Tires Set Up	
Tire Radius	825 mm	<b>32.48 in</b>	825 mm	<b>32.48 in</b>
Tire Width:				
600 × 34 tires	600 mm	<b>23.62 in</b>		
700 × 34 tires			700 mm	<b>27.56 in</b>
Contact Area	4950 cm <sup>2</sup>	<b>767.1776 in<sup>2</sup></b>	5775 cm <sup>2</sup>	<b>895.1488 in<sup>2</sup></b>
Number of Wheels/Bogies	2	<b>2</b>	2	<b>2</b>
Total Contact Area	9900 cm <sup>2</sup>	<b>1534.355 in<sup>2</sup></b>	11 550 cm <sup>2</sup>	<b>1790.298 in<sup>2</sup></b>
FE Low Axle Weight				
4.3 m center front HH45	8380 kg	<b>18,474 lb</b>	8380 kg	<b>18,474 lb</b>
FE High Axle Weight				
10.1 m center front HH45	10 240 kg	<b>22,575 lb</b>	10 240 kg	<b>22,575 lb</b>
Rear Axle Weight:				
4.3 m	7050	<b>15,542</b>	7050	<b>15,542</b>
10.1 m	5190	<b>11,442</b>	5190	<b>11,442</b>
Ground Pressure:				
Front min.	83.00983 kPa	<b>12.04024 psi</b>	71.15128 kPa	<b>10.31895 psi</b>
Front max.	101.4344 kPa	<b>14.71302 psi</b>	86.94381 kPa	<b>12.60964 psi</b>
Rear min.	69.83523 kPa	<b>10.12934 psi</b>	59.85877 kPa	<b>8.681238 psi</b>
Rear max.	51.41062 kPa	<b>7.457204 psi</b>	44.06625 kPa	<b>6.391116 psi</b>
Ground Pressure:				
Front min.	0.846465 kp/cm <sup>2</sup>		0.725541 kp/cm <sup>2</sup>	
Front max.	1.034343 kp/cm <sup>2</sup>		0.88658 kp/cm <sup>2</sup>	
Rear min.	0.712121 kp/cm <sup>2</sup>		0.61039 kp/cm <sup>2</sup>	
Rear max.	0.524242 kp/cm <sup>2</sup>		0.449351 kp/cm <sup>2</sup>	
Ground Pressure:				
Front min.	8.300898 N/cm <sup>2</sup>		7.115055 N/cm <sup>2</sup>	
Front max.	10.14334 N/cm <sup>2</sup>		8.694292 N/cm <sup>2</sup>	
Rear min.	6.983452 N/cm <sup>2</sup>		5.985816 N/cm <sup>2</sup>	
Rear max.	5.14101 N/cm <sup>2</sup>		4.40658 N/cm <sup>2</sup>	



**Ground pressure is one way to explain environmental impact done by forestry equipment.**

This is how it is calculated: The actual tire's radius × Width of tire = Estimated contact area  
Actual axle weight/(Number of tires × Estimated contact area) = GROUND PRESSURE.


**This is the common way of calculating ground pressure for off-road vehicles ref: Skogforsk, Feric**

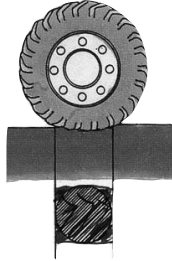	<b>Short/Long Pendulum Arm Configuration</b>		<b>Long/Long Pendulum Arm Configuration</b>		
Tire Radius	825 mm	<b>32.48 in</b>	825 mm	<b>32.48 in</b>	
Tire Width	700 mm	<b>27.6 in</b>	700 mm	<b>27.6 in</b>	
700 × 34 tires					
Contact Area	5775 cm <sup>2</sup>	<b>896.448 in<sup>2</sup></b>	5775 cm <sup>2</sup>	<b>896.448 in<sup>2</sup></b>	
Number of Wheels/Bogies:					
Short/long pendulum arms	2	<b>2</b>	2	<b>2</b>	
Long/long pendulum arms					
Total Contact Area	11 550 cm <sup>2</sup>	<b>1792.896 in<sup>2</sup></b>	11 550 cm <sup>2</sup>	<b>1792.896 in<sup>2</sup></b>	
FE Low Axle Weight					
4.3 m center front	10 280 kg	<b>22,663 lb</b>	10 330 kg	<b>22,773 lb</b>	
FE High Axle Weight					
10.1 m center front	11 400 kg	<b>25,132 lb</b>	11 480 kg	<b>25,309 lb</b>	
Rear Axle Weight 4.3 m:					
180 kN•m boom HH65	7320	<b>16,137</b>	7980	<b>17,593</b>	
220 boom HH65					
Rear Axle Weight 10.1 m					
Ballast tires	6200	<b>13,668</b>	6830	<b>15,057</b>	
Ground Pressure:					
Front min.	87.28343 kPa	<b>12.64044 psi</b>	87.70796 kPa	<b>12.7018 psi</b>	
Front max.	96.79291 kPa	<b>14.01754 psi</b>	97.47216 kPa	<b>14.11627 psi</b>	
Rear min.	62.15124 kPa	<b>9.000522 psi</b>	67.75504 kPa	<b>9.812616 psi</b>	
Rear max.	52.64176 kPa	<b>7.62342 psi</b>	57.99084 kPa	<b>8.398145 psi</b>	
Ground Pressure:					
Front min.	0.890043 kp/cm <sup>2</sup>		0.894372 kp/cm <sup>2</sup>		
Front max.	0.987013 kp/cm <sup>2</sup>		0.993939 kp/cm <sup>2</sup>		
Rear min.	0.633766 kp/cm <sup>2</sup>		0.690909 kp/cm <sup>2</sup>		
Rear max.	0.536797 kp/cm <sup>2</sup>		0.591342 kp/cm <sup>2</sup>		
Ground Pressure:					
Front min.	8.728254 N/cm <sup>2</sup>		8.770707 N/cm <sup>2</sup>		
Front max.	9.679192 N/cm <sup>2</sup>		9.747116 N/cm <sup>2</sup>		
Rear min.	6.21506 N/cm <sup>2</sup>		6.775435 N/cm <sup>2</sup>		
Rear max.	5.264122 N/cm <sup>2</sup>		5.799025 N/cm <sup>2</sup>		

**Ground pressure is one way to explain environmental impact done by forestry equipment.**

This is how it is calculated: The actual tire's radius × Width of tire = Estimated contact area  
Actual axle weight/(Number of tires × Estimated contact area) = GROUND PRESSURE.

**This is the common way of calculating ground pressure for off-road vehicles ref: Skogforsk, Feric**

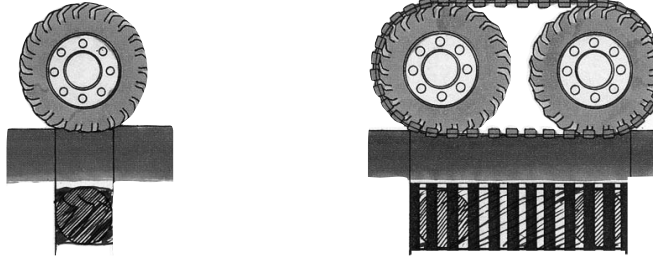

Rear

Front w/o

Front Tracks

	Rear		Front w/o		Front Tracks	
Tire Radius	825 mm	<b>32.48 in</b>	675 mm	<b>26.57 in</b>	675 mm	<b>22.44 in</b>
CC Distance Wheels					1497	58.93
Tire Width	700 mm	<b>27.6 in</b>	600 mm	<b>23.62 in</b>	700 mm	<b>27.55 in</b>
Contact Area	5775 cm <sup>2</sup>	<b>896.448 in<sup>2</sup></b>	4050 cm <sup>2</sup>	<b>627.5834 in<sup>2</sup></b>	15 204 cm <sup>2</sup>	<b>2241.744 in<sup>2</sup></b>
Number of Wheels/Bogies	2	<b>2</b>	4	<b>4</b>	2	<b>2</b>
Total Contact Area	11 550 cm <sup>2</sup>	<b>1792.896 in<sup>2</sup></b>	16 200 cm <sup>2</sup>	<b>2510.334 in<sup>2</sup></b>	30 408 cm <sup>2</sup>	<b>4483.487 in<sup>2</sup></b>
Rear Axle Weight 4.3 m						
Ballast Tires	HH75					
4.3 m center front	7430 kg	<b>16,380 lb</b>				
Rear Axle Weight 10.1 m						
10.1 m center front	5550 kg	<b>12,235 lb</b>				
FE Low Axle Weight 4.3 m						
Tracks 1500 kg			13 000 kg	<b>28,659 lb</b>	14 500 kg	<b>31,966 lb</b>
FE High Axle Weight 10.1 m			14 880 kg	<b>32,804 lb</b>	16 380 kg	<b>36,111 lb</b>
Ground Pressure:						
Min.	63.0852 kPa	<b>9.136057 psi</b>	78.69534 kPa	<b>11.41641 psi</b>	46.76283 kPa	<b>7.129718 psi</b>
Max.	47.12286 kPa	<b>6.824155 psi</b>	90.0759 kPa	<b>13.06759 psi</b>	52.82588 kPa	<b>8.054222 psi</b>
Ground Pressure:						
Min.	0.64329 kp/cm <sup>2</sup>		0.802469 kp/cm <sup>2</sup>		0.476848 kp/cm <sup>2</sup>	
Max.	0.480519 kp/cm <sup>2</sup>		0.918519 kp/cm <sup>2</sup>		0.538674 kp/cm <sup>2</sup>	
Ground Pressure:						
Min.	6.308456 N/cm <sup>2</sup>		7.869454 N/cm <sup>2</sup>		4.676236 N/cm <sup>2</sup>	
Max.	4.712238 N/cm <sup>2</sup>		9.007498 N/cm <sup>2</sup>		5.282534 N/cm <sup>2</sup>	



- **Features.** The Caterpillar line of forwarders is one of the most recent forest products introductions by Caterpillar. The product lineup includes two models, the 554 and 574, designed and built to provide efficient solutions to loggers in a wide variety of forestry applications.

This line of forwarders loads and transports heavy loads quickly using ample hydraulic flow and state-of-the-art controls. Both models feature high lifting capacities and traveling speeds to deliver logs to the landing as efficiently as possible.

Using the optimal front-powered bogie lift and hydrostatic/mechanical 8WD transmission, the operator is able to maneuver the machine in the tightest of thinning areas. Once in position, the operator can take full advantage of the extended reach and lifting capabilities to access logs in extremely adverse conditions.

Caterpillar Forwarders can be used in a wide variety of applications — from first thinning to final fell. These forwarders provide the durability and reliability today's logger needs to optimize the benefits of a cut-to-length harvesting system.



554




574

**MODEL**

Gross Power @ 2200 RPM	91 kW	124 ps	122 hp	122 kW	169 ps	163 hp
Net Power @ 2200 RPM	83 kW	113 ps	111 hp	115 kW	160 ps	154 hp
Engine Model	3054 DITA			3126 DITA		
Displacement	4 L		243 in <sup>3</sup>	7.2 L		439 in <sup>3</sup>
Peak Torque @ 1600 RPM	446 N•m		329 ft-lb	753 N•m		555 ft-lb
Service Refill Capabilities:						
Fuel Tank	90 L		23.4 U.S. gal	125 L		32.5 U.S. gal
Cooling System	33 L		8.6 U.S. gal	40 L		11 U.S. gal
Transmission	8WD Hydrostatic/Mechanic			8WD Hydrostatic/Mechanic		
Max. Travel Speeds:						
Off-road in 1st Gear	10 km/h		6.2 mph	7 km/h		4.3 mph
Roading in 2nd Gear	25 km/h		15.5 mph	13 km/h		8 mph
Roading in 3rd Gear	NA		NA	25 km/h		15.5 mph
Knuckleboom Loader Options:						
F61-72	7.2 m/23.6 ft			NA		
F61-85	8.45 m/27.7 ft			NA		
F71-72	NA			7.2 m/23.6 ft		
F71-85	NA			8.45 m/27.7 ft		
F71-100	NA			10 m/32.8 ft		
Pay Load	10 000 kg		22,000 lb	14 000 kg		30,800 lb
Loader Net Lifting Capacity	68 kN•m		15,300 lb	75 kN•m		16,875 lb
Tractive Ability	125 kN		28,125 lb	170 kN		38,250 lb
Suspension:						
Front Bogie	Floating/Powered*			Powered		
Rear Bogie	Floating			Floating		
Tires (Pattern & Width)	600/50-22.5 12PR B (8)			700/50-26.5 16PR (8)		
	700/40-22.5 12PR (8)			600/50-26.5 16PR (8)		
	600/22.5 16PR (8)					

\*Optional.

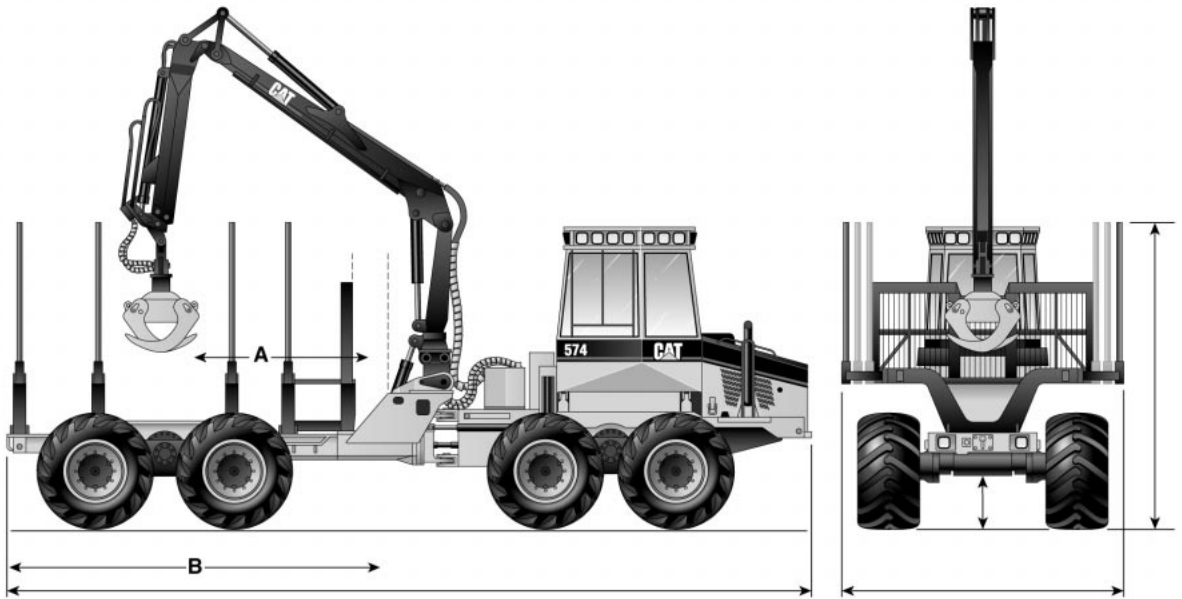

MODEL	554		574	
Length	8638 mm	28.4'	9360 mm	30.7'
Width	2590 mm	102"	2830 mm	111"
Height	3720 mm	147"	3690 mm	145"
Ground Clearance	515 mm	20.2"	650 mm	25.6"
Shipping Weight*	13 000 kg	28,500 lb	17 000 kg	37,000 lb
Frame Lengths				
Standard	1880-2300 mm	74"-90.5"	1980-2400 mm	77.9"-94.5"
B	3920 mm	154.3"	4100 mm	161.4"
Max. Log Length	4600 mm	181.1"	4800 mm	189"
Long				
A	1700-2600 mm	67"-102.4"	2600-3200 mm	102.4"-126"
B	4800 mm	189"	5400 mm	212.6"
Max. Log Length	5200 mm	204.7"	6400 mm	252"
Load Area				
Set Up				
High Gate:				
Max. Width	4.39 m <sup>2</sup>	47.25 ft <sup>2</sup>	4.85 m <sup>2</sup>	52.2 ft <sup>2</sup>
Med. Width	4.14 m <sup>2</sup>	44.56 ft <sup>2</sup>	4.38 m <sup>2</sup>	47.14 ft <sup>2</sup>
Min. Width	3.90 m <sup>2</sup>	41.58 ft <sup>2</sup>	3.92 m <sup>2</sup>	42.19 ft <sup>2</sup>
Low Gate:				
Max. Width	3.60 m <sup>2</sup>	38.75 ft <sup>2</sup>	3.33 m <sup>2</sup>	35.84 ft <sup>2</sup>
Med. Width	2.89 m <sup>2</sup>	31.11 ft <sup>2</sup>	3.02 m <sup>2</sup>	32.51 ft <sup>2</sup>
Min. Width	2.72 m <sup>2</sup>	29.28 ft <sup>2</sup>	2.70 m <sup>2</sup>	29.06 ft <sup>2</sup>
Turning Radius:				
Front Bogie Lifted	7.19 m	23.6'	7.80 m	25.6'
Articulation	6.58 m	21.6'	6.95 m	22.8'
Articulation	44°	44°	44°	44°


\*Payload = (load area) × (average log length) × (wood density) × (load density).

554	574
<p><b>Log Loader F61 F72</b>            7.2 m (23.6 ft) reach            1400 mm (4.6 ft) telescopic extension            360 degrees of slewing angle            63 kN•m net lifting moment            FX 35 grapple            For medium density logs</p>	<p><b>Log Loader F71 F73</b>            7.2 m (23.6 ft) reach            1400 mm (4.6 ft) telescopic extension            380 degrees of slewing angle            75 kN•m net lifting moment            FX 35 grapple            For all density logs</p>
<p><b>Log Loader F61 FT85</b>            8.45 m (27.7 ft) reach            2650 mm (8.7 ft) telescopic extension            380 degrees of slewing angle            43 kN•m net lifting moment            FX 25 grapple            For low density logs and long reach</p>	<p><b>Log Loader F71 FT84</b>            8.45 m (27.7 ft) reach            2650 mm (8.7 ft) telescopic extension            380 degrees of slewing angle            70 kN•m net lifting moment            FX 35 grapple            For all density logs and long reach</p>
	<p><b>Log Loader F71 FT100</b>            10 m (32.8 ft) reach            4200 mm (13.8 ft) telescopic extension            380 degrees of slewing angle            66 kN•m net lifting moment            FX 35 grapple            For applications requiring extreme reach capability</p>

**Ground pressure is one way to explain environmental impact done by forestry equipment.**

This is how it is calculated: The actual tire's radius × Width of tire = Estimated contact area  
Actual axle weight/(Number of tires × Estimated contact area) = GROUND PRESSURE.

**This is the common way of calculating ground pressure for off-road vehicles ref: Skogforsk, Feric**

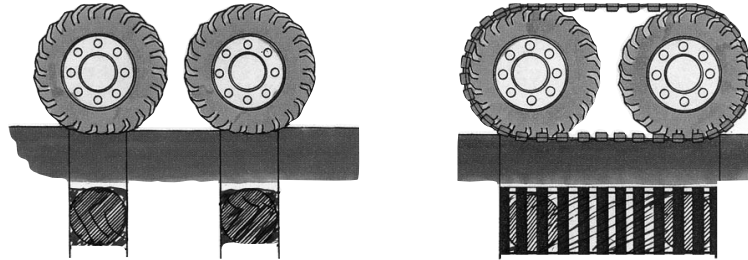

**Bare Tires**


**With Tracks**

Tire Radius			585 mm	23.03 in
Trelleborg 700 × 22.5				
Contact surface	585 mm	23.03 in		
CC Distance Wheels			1300	51.18
Tire Width	700 mm	27.6 in		
Track Width, Estimated			800 mm	31.49 in
Contact Area	4095 cm <sup>2</sup>	635.628 in <sup>2</sup>	15 080 cm <sup>2</sup>	2336.873 in <sup>2</sup>
Number of Wheels/Bogies	4	4	2	2
Total Contact Area	16 380 cm <sup>2</sup>	2542.512 in <sup>2</sup>	30 160 cm <sup>2</sup>	4673.746 in <sup>2</sup>
FE Low Axle Weight	8000 kg	17,636 lb		
Tracks weight: 1000 kg/pair			9000 kg	19,841 lb
FE High Axle Weight	8000 kg	17,636 lb		
Tracks weight: 1000 kg/pair			9000 kg	19,841 lb
Rear Axle Weight No Load	5000 kg	11,023 lb	6000 kg	13,227 lb
Rear Axle Weight Loaded	15 000 kg	33,068 lb	16 000 kg	35,273 lb
Ground Pressure:				
Front min.	47.89573 kPa	6.936447 psi	29.26388 kPa	4.245203 psi
Front max.	47.89573 kPa	6.936447 psi	29.26388 kPa	4.245203 psi
Rear unl.	29.93483 kPa	4.335476 psi	19.50925 kPa	2.830064 psi
Rear load	89.80449 kPa	13.00603 psi	52.02467 kPa	7.547051 psi
Ground Pressure:				
Front min.	0.4884 kp/cm <sup>2</sup>		0.298408 kp/cm <sup>2</sup>	
Front max.	0.4884 kp/cm <sup>2</sup>		0.298408 kp/cm <sup>2</sup>	
Rear unl.	0.30525 kp/cm <sup>2</sup>		0.198939 kp/cm <sup>2</sup>	
Rear load	0.915751 kp/cm <sup>2</sup>		0.530504 kp/cm <sup>2</sup>	
Ground Pressure:				
Front min.	4.789524 N/cm <sup>2</sup>		2.926358 N/cm <sup>2</sup>	
Front max.	4.789524 N/cm <sup>2</sup>		2.926358 N/cm <sup>2</sup>	
Rear unl.	2.993452 N/cm <sup>2</sup>		1.950905 N/cm <sup>2</sup>	
Rear load	8.980357 N/cm <sup>2</sup>		5.202414 N/cm <sup>2</sup>	

**Ground pressure is one way to explain environmental impact done by forestry equipment.**

This is how it is calculated: The actual tire's radius × Width of tire = Estimated contact area  
Actual axle weight/(Number of tires × Estimated contact area) = GROUND PRESSURE.

**This is the common way of calculating ground pressure for off-road vehicles ref: Skogforsk, Feric**

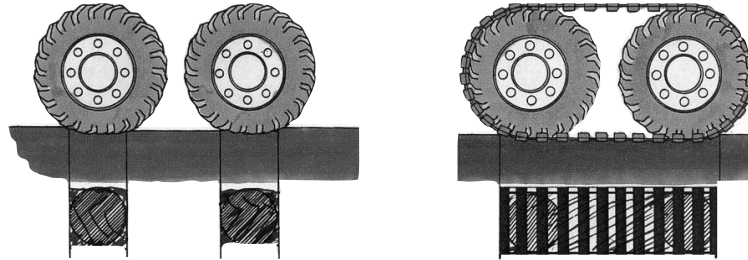

**Bare Tires**

**With Tracks**

	Bare Tires		With Tracks	
Tire Radius			675 mm	26.57 in
Trelleborg 700 × 26.5				
Contact surface	675 mm	26.57 in		
CC Distance Wheels			1497	58.93
Tire Width	700 mm	27.6 in	800 mm	31.49 in
Contact Area	4725 cm <sup>2</sup>	733.332 in <sup>2</sup>	17 376 cm <sup>2</sup>	2692.395 in <sup>2</sup>
Number of Wheels/Bogies	4	4	2	2
Total Contact Area	18 900 cm <sup>2</sup>	2933.328 in <sup>2</sup>	34 752 cm <sup>2</sup>	5384.79 in <sup>2</sup>
FE Low Axle Weight	10 000 kg	22,000 lb	11 800 kg	26,014 lb
FE High Axle Weight	10 000 kg	22,000 lb	11 800 kg	26 014 lb
Rear Axle Weight No Load	7000 kg	15,432 lb		
Width may vary by track type			8800 kg	19,400 lb
Rear Axle Weight Loaded	21 000 kg	46,296 lb		
Tracks 1800 kg/pair			22 800 kg	50,264 lb
CG Over Bogie Center				
Ground Pressure:				
Front min.	51.88704 kPa	7.500014 psi	33.29836 kPa	4.831015 psi
Front max.	51.88704 kPa	7.500014 psi	33.29836 kPa	4.831015 psi
Rear unl.	36.32093 kPa	5.260919 psi	24.83268 kPa	3.60274 psi
Rear load	108.9628 kPa	15.78276 psi	64.33921 kPa	9.33444 psi
Ground Pressure:				
Front min.	0.529101 kp/cm <sup>2</sup>		0.339549 kp/cm <sup>2</sup>	
Front max.	0.529101 kp/cm <sup>2</sup>		0.339549 kp/cm <sup>2</sup>	
Rear unl.	0.37037 kp/cm <sup>2</sup>		0.253223 kp/cm <sup>2</sup>	
Rear load	1.111111 kp/cm <sup>2</sup>		0.656077 kp/cm <sup>2</sup>	
Ground Pressure:				
Front min.	5.188651 N/cm <sup>2</sup>		3.329802 N/cm <sup>2</sup>	
Front max.	5.188651 N/cm <sup>2</sup>		3.329802 N/cm <sup>2</sup>	
Rear unl.	3.632056 N/cm <sup>2</sup>		2.483242 N/cm <sup>2</sup>	
Rear load	10.89617 N/cm <sup>2</sup>		6.433855 N/cm <sup>2</sup>	

**525B/535B Features:**

- **Proven Cat 3126 diesel engine** is direct injection turbocharged and aftercooled.
- **Lock-up torque converter clutch**, an industry exclusive on Caterpillar Wheel Skidders...provides operating speed increases with improved power and fuel efficiencies.
- **5 speed forward powershift transmission...** provides better match of engine power to skidding requirements, with ease of operation.
- **Long wheelbase** for stability with large grapple loads and uphill skidding.
- **Front Axle Cradle oscillation** — helps improve machine stability with grapples and provides excellent ride for operator.
- **Enclosed oil disk brakes**, sealed, adjustment free, and fade resistant.
- **Locking differentials** — selectable from the cab to improve traction and controls wheel slip.
- **Dual wheel capable axles** available.
- **Load Sensing Hydraulic System** — variable displacement pressure compensating hydraulic system provides reduced power requirements when there is no hydraulic demand, significantly reduced heat generation, and improving fuel efficiency.
- **Single, dual-function arch and cable skidder options** available to meet various logging requirements.

- **Outstanding operator environment**, superior visibility, logical control placement, and significantly reduced hydraulic, steering, and transmission control efforts. ROPS structures meet OSHA regulations for roll-over and falling objects.
- **Single lever** grapple control.
- **Easy servicing** — minimal daily requirements, grouped and accessible grease fittings, accessible hydraulic oil sight gauges, engine oil dipstick and fuel cap. Access to components have been improved.

**545 Features:**

- **Proven Cat 3306 direct injected turbocharged and aftercooled diesel engine** provides power and outstanding durability and reliability.
- **Lock-up torque converter clutch**, an industry exclusive on Caterpillar Wheel Skidders...provides operating speed increases with improved power and fuel efficiencies.
- **Cradle Axle Oscillation.**
- **Enclosed oil disk brakes**, sealed, adjustment free, and fade resistant.
- **Locking differentials** — selectable from the cab to improve traction and controls wheel slip.
- **Protection for operator and machine** — ROPS structures and guarding provide operator and machine protection in the most severe logging environments.
- **Available with dual function** arch or cable skidder arrangements.

## Specifications

## Forest Products Wheel Skidders



<b>MODEL</b>	<b>525B</b>		<b>535B</b>		<b>545</b>	
Flywheel Power	119 kW	<b>160 hp</b>	134 kW	<b>180 hp</b>	149 kW	<b>200 hp</b>
Operating Weight	11 700 kg	<b>35,800 lb</b>	16 920 kg	<b>37,300 lb</b>	19 050 kg	<b>42,000 lb</b>
Engine Model	<b>3126 DITA</b>		<b>3126 DITA</b>		<b>3306 DITA</b>	
Rated Engine RPM	<b>2200</b>		<b>2200</b>		<b>2200</b>	
No. Cylinders	<b>6</b>		<b>6</b>		<b>6</b>	
Displacement	7.24 L	<b>442 in<sup>3</sup></b>	7.24 L	<b>442 in<sup>3</sup></b>	10.5 L	<b>638 in<sup>3</sup></b>
Oscillation, type	<b>front axle cradle</b>		<b>front axle cradle</b>		<b>front axle cradle</b>	
Oscillation, degrees	<b>±15°</b>		<b>±15°</b>		<b>±15°</b>	
Tires, standard axle	<b>24.5-32</b> <b>30.5-37</b> — — —		<b>30.5-32</b> <b>35.5-32</b> <b>73/44-32</b> <b>68/50-32</b> <b>Dual 30.5-24.5</b>		<b>30.5-32</b> <b>35.5/32</b> <b>73/44-32</b> <b>68/50-32</b>	
Wide tire axle	<b>35.5-32</b> <b>73 × 44-32</b> <b>68 × 50-30</b> <b>Dual 30.5-24.5</b>		— — — —		— — — —	
Turning Diameter (outside rear wheel)*	12 m	<b>39'4"</b>	12 m	<b>39'4"</b>	11.4 m	<b>37'5"</b>
Heavy Duty Winch Line Pull, max. at stall, bare drum	166.9 kN	<b>37,500 lb</b>	194 kN	<b>43,600 lb</b>	201 kN	<b>45,200 lb</b>
Line Speed at Rated Engine RPM, full drum	103 m/min	<b>340 fpm</b>	103 m/min	<b>340 fpm</b>	103 m/min	<b>340 fpm</b>
Winch Weight	817 kg	<b>1800 lb</b>	817 kg	<b>1800 lb</b>	817 kg	<b>1800 lb</b>
Drum Capacity,						
— 19 mm ( <b>0.75"</b> )	45 m	<b>148'</b>	45 m	<b>148'</b>	45 m	<b>148'</b>
— 22 mm ( <b>0.875"</b> )	32 m	<b>106'</b>	32 m	<b>106'</b>	32 m	<b>106'</b>
— 25.4 mm ( <b>1.00"</b> )	25 m	<b>82'</b>	25 m	<b>82'</b>	25 m	<b>82'</b>
Flange Diameter	457 mm	<b>18"</b>	457 mm	<b>18"</b>	457 mm	<b>18"</b>
Drum Width	171 mm	<b>6.75"</b>	171 mm	<b>6.75"</b>	171 mm	<b>6.75"</b>
Drum Diameter	254 mm	<b>10"</b>	254 mm	<b>10"</b>	254 mm	<b>10"</b>
Fuel Tank Refill Capacity	315 L	<b>83 U.S. gal</b>	315 L	<b>83 U.S. gal</b>	378 L	<b>100 U.S. gal</b>
Hydraulic System Refill Capacity	75 L	<b>19.5 U.S. gal</b>	74 L	<b>19.5 U.S. gal</b>	75 L	<b>19.5 U.S. gal</b>
<b>GENERAL DIMENSIONS*</b>						
Length with Dozer @ ground	6.93 m	<b>22'9"</b>	6.93 m	<b>22'9"</b>	7.95 m	<b>26'1"</b>
Wheelbase	3.53 m	<b>11'7"</b>	3.53 m	<b>11'7"</b>	3.84 m	<b>12'7"</b>
Width over Tires*	3.39 m	<b>11'1"</b>	3.39 m	<b>11'1"</b>	3.39 m	<b>11'1"</b>
Height to Top of ROPS	3.23 m	<b>10'7"</b>	3.23 m	<b>10'7"</b>	3.37 m	<b>11'1"</b>
Height to Exhaust	2.38 m	<b>7'10"</b>	2.38 m	<b>7'10"</b>	2.38 m	<b>7'10"</b>
Ground Clearance*	582 mm	<b>22.9"</b>	582 mm	<b>22.9"</b>	605 mm	<b>23.8"</b>
Tread Width*	2.61 m	<b>8'7"</b>	2.61 m	<b>8'7"</b>	2.61 m	<b>8'7"</b>
Dozer Width	2.68 m	<b>8'9"</b>	2.68 m	<b>8'9"</b>	3.14 m	<b>10'4"</b>

\*With standard tires.



## GRAPPLES

Grapples for Caterpillar Skidders are designed and built to Caterpillar specifications. All arches and grapples are factory installed and fully supported by Caterpillar. The following pages contain information on the available models, which are presented here to suggest a range of grapple possibilities. The specifications were supplied by the manufacturer and follow the SAE definitions listed below.

### SAE specification definition

**Reach (A, B, C, D)** — The horizontal distance from the vertical center of the rear axle to the vertical center of the grapple fore and aft pivot.

- A) With the grapple in its highest farthest position
- B) With the grapple in its lowest farthest position
- C) With the grapple in its highest fully retracted position
- D) With the grapple in its lowest fully retracted position

**Lift (E, F, G, H)** — The vertical distance from the horizontal center of the rear axle to the horizontal center of the grapple fore and aft pivot.

- E) With the grapple in its highest farthest position
- F) With the grapple in its lowest farthest position
- G) With the grapple in its highest fully retracted position
- H) With the grapple in its lowest fully retracted position

**Loaded Tire Radius (J)** — Vertical distance from horizontal center of axle to horizontal reference plane.

**Maximum Grapple Opening (K)** — The horizontal distance between the tips of the grapple arms when grapple is fully open.

**Area of Opening (L)** — The available area with grapple in tips together position.

**Minimum Log Size (M)** — The smallest diameter which the grapple can close on.


**Grapple Length (N, O, P)** — The distance from the grapple fore and aft pivot to tips of grapple arms.

- N) With grapple fully open
- O) With grapple in tips together position
- P) With grapple fully closed





● Single-Function Arch

**Single-function arch**


- Versatile attachment suitable for selection or clear cut applications. Reach consists of one vertical arc and typical application is short cycles and/or larger diameter timber.

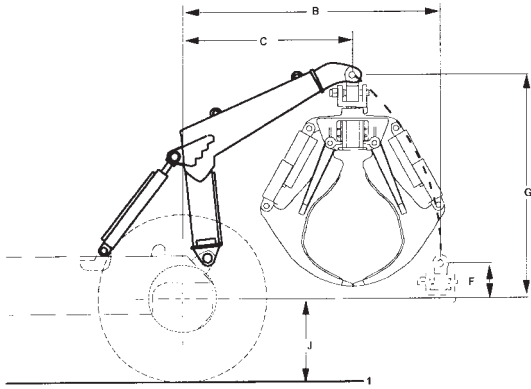


- KEY**
- 1 — Horizontal Reference Plane
  - 2 — Fully Open
  - 3 — Tip to Tip
  - 4 — Fully Closed



**Sorting grapple** is designed to pick up individual or several stems for quick cycles of 305 mm (12") or larger diameter trees.




**Bunching grapple** is designed to gather bundled stems and maximize grapple loads of 305 mm (12") or smaller diameter trees.




Grapples for 525B		B	C	F	G	J	K	M	N	O	P	L
100" Sorting	mm	2517.1	1662.2	342.9	2169.2	737	2540	76.2	1562.1	2044.7	1828.8	0.84 m <sup>2</sup>
	in	99.1	65.4	13.5	85.4	29	100	3	61.5	80.5	72	9 ft <sup>2</sup>
110" Bunching	mm	2517.1	1662.2	342.9	2169.2	737	2794	76.2	1879.6	2171.7	1358.9	1.04 m <sup>2</sup>
	in	99.1	65.4	13.5	85.4	29	110	3	74	85.5	53.5	11.2 ft <sup>2</sup>

**Dual-function arch**




- Extended range provides extra reach for grabbing large bundles of feller bunched, small diameter logs.
- Ability to position load closer to tractor for improved stability and traction.
- Ability to push machine out of soft conditions.
- Typical applications include longer cycles and smaller diameter bunched timber.

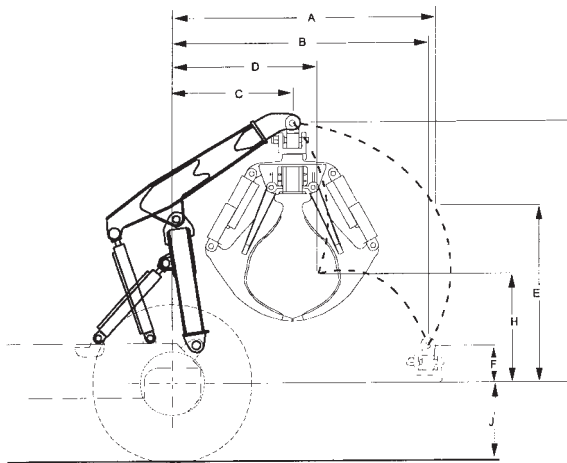



**KEY**  
 1 — Horizontal Reference Plane  
 2 — Fully Open  
 3 — Tip to Tip  
 4 — Fully Closed



**Sorting grapple** is designed to pick up individual or several stems for quick cycles of 305 mm (12") or larger diameter trees.



**Bunching grapple** is designed to gather bundled stems and maximize grapple loads of 305 mm (12") or smaller diameter trees.



**Grapples  
for 525B**

		A	B	C	D	E	F	G	H	J	K	M	N	O	P	L
100" Sorting	mm	2725	2654	1242	1491	1829	379	2695	1125	732	2540	76	1562.1	2044.7	1828.8	0.84 m <sup>2</sup>
	in	107	104	49	58.7	72	15	106	44	29	100	3	61.5	80.5	72	9 ft <sup>2</sup>
110" Bunching	mm	2725	2654	1242.1	1491	1829	379	2695	1125	732	2794	134.6	1978.7	2225	1516	1.04 m <sup>2</sup>
	in	107	104	49	58.7	72	15	106	44	29	110	5.3	78	88	59.7	11.2 ft <sup>2</sup>
120" Bunching	mm	2725	2654.3	1242.1	1491	1829	379	2695	1125	732	3048	134.6	1874.5	2263	1532	1.16 m <sup>2</sup>
	in	107	104.5	49	58.7	72	15	106	44	29	120	5.3	74	89	60.3	12.5 ft <sup>2</sup>

**535B**

		A	B	C	D	E	F	G	H	J	K	M	N	O	P	L
123" Bunching	mm	2819	2743	1321	1575	1727	279	2642	1016	864	3124	147	1981	2388	1575	1.34 m <sup>2</sup>
	in	111	108	52	62	68	11	104	40	34	123	5.8	78	94	62	14.4 ft <sup>2</sup>

**545**

		A	B	C	D	E	F	G	H	J	K	M	N	O	P	L
129" Bunching	mm	3073	2921	1575	1295	1880	381	2769	1803	864	3277	147	2057	2515	1600	1.49 m <sup>2</sup>
	in	121	115	62	51	74	15	109	71	34	129	5.8	81	99	63	16 ft <sup>2</sup>

**Features 517 and 527:**

- **Exceptional balance** — roller frames extended to rear significantly improves traction capability under heavy loads and uphill skidding applications.
- **Excellent ground clearance** — no diagonal braces allow tractor to pass over stumps and debris, reduces maneuvering for reduced cycle times and minimizes soil impact. Smooth belly pans are also less likely to hang up in mud or debris in soft ground or swamp logging applications.
- **Outstanding sidehill stability** — wide gauge and long track roller frames provide excellent sidehill capability.
- **Improved flotation** — more track on ground distributes tractor weight and propulsion forces over a much larger area than conventional track skidders or wheel skidders. This improves flotation capabilities, gradeability and significantly reduces soil impact.
- **Superior component durability** — final drives are raised above the work area, isolating the powertrain from ground impact shock loads and abrasive materials.
- **Outstanding reliability and durability** — built to handle the toughest logging conditions.

# Forest Products Track Skidders

## Specifications



MODEL	517 Cable		517 Grapple		527 Cable		527 Grapple	
Flywheel Power	89 kW	<b>120 hp</b>	89 kW	<b>120 hp</b>	112 kW	<b>150 hp</b>	112 kW	<b>150 hp</b>
Operating Weight*	17 330 kg	<b>38,200 lb</b>	18 350 kg	<b>40,450 lb</b>	17 236 kg	<b>38,000 lb</b>	21 380 kg	<b>47,140 lb</b>
Engine Model	<b>3304 DIT</b>		<b>3304 DIT</b>		<b>3304 DIT</b>		<b>3304 DIT</b>	
Rated Engine RPM	<b>2200</b>		<b>2200</b>		<b>2200</b>		<b>2200</b>	
No. of Cylinders	<b>4</b>		<b>4</b>		<b>4</b>		<b>4</b>	
Bore	121 mm	<b>4.75"</b>	121 mm	<b>4.75"</b>	121 mm	<b>4.75"</b>	121 mm	<b>4.75"</b>
Stroke	152 mm	<b>6"</b>	152 mm	<b>6"</b>	152 mm	<b>6"</b>	152 mm	<b>6"</b>
Displacement	7 L	<b>425 in<sup>3</sup></b>	7 L	<b>425 in<sup>3</sup></b>	7 L	<b>425 in<sup>3</sup></b>	7 L	<b>425 in<sup>3</sup></b>
Track Rollers (Each Side)	<b>8</b>		<b>8</b>		<b>7</b>		<b>7</b>	
Width of Standard Track Shoe	660 mm	<b>2'2"</b>	660 mm	<b>2'2"</b>	560 mm	<b>1'10"</b>	560 mm	<b>1'10"</b>
Length of Track on Ground	2.91 m	<b>9'7"</b>	2.91 m	<b>9'7"</b>	2.85 m	<b>9'4"</b>	2.85 m	<b>9'4"</b>
Ground Contact Area (W/Std. Shoe)	3.52 m <sup>2</sup>	<b>5458 in<sup>2</sup></b>	3.52 m <sup>2</sup>	<b>5458 in<sup>2</sup></b>	3.19 m <sup>2</sup>	<b>4940 in<sup>2</sup></b>	3.19 m <sup>2</sup>	<b>4940 in<sup>2</sup></b>
Track Gauge	2 m	<b>6'7"</b>	2 m	<b>6'7"</b>	2.16 m	<b>7'1"</b>	2.16 m	<b>7'1"</b>
GENERAL DIMENSIONS:								
Height (To Top of ROPS)	2.48 m	<b>8'1"</b>	2.48 m	<b>8'1"</b>	3.30 m	<b>10'10"</b>	3.30 m	<b>10'10"</b>
Overall Length (With Blade)	4.97 m	<b>16'4"</b>	5.75 m	<b>18'10"</b>	4.94 m	<b>16'3"</b>	6.07 m	<b>19'11"</b>
(Without Blade)	4.10 m	<b>13'5"</b>	4.87 m	<b>16'0"</b>	4.35 m	<b>14'3"</b>	5.6 m	<b>18'5"</b>
Width (W/O Trunnion)	2.91 m	<b>9'7"</b>	2.91 m	<b>9'7"</b>	2.72 m	<b>8'11"</b>	2.72 m	<b>8'11"</b>
Ground Clearance	635 mm	<b>2'1"</b>	635 mm	<b>2'1"</b>	531.8 mm	<b>1'8.9"</b>	531.8 mm	<b>1'8.9"</b>
PAT Blade Widths:								
Straight	2.74 m	<b>9'0"</b>	2.74 m	<b>9'0"</b>	3.35 m	<b>11'0"</b>	3.17 m	<b>10'5"</b>
Angle	2.48 m	<b>8'1"</b>	2.48 m	<b>8'1"</b>	3.10 m	<b>10'2"</b>	2.92 m	<b>9'7"</b>
Fuel Tank Capacity	260 L	<b>69 U.S. gal</b>	260 L	<b>69 U.S. gal</b>	256 L	<b>67 U.S. gal</b>	256 L	<b>67 U.S. gal</b>
Winch								
Line Pull, max at stall, bare drum**	31 260 kg	<b>68,780 lb</b>	31 260 kg	<b>68,780 lb</b>	31 389 kg	<b>69,200 lb</b>	31 389 kg	<b>69,200 lb</b>
Line Speed at Rated Engine RPM, bare drum**	40.5 m/min	<b>133 fpm</b>	40.5 m/min	<b>133 fpm</b>	44 m/min	<b>143 fpm</b>	44 m/min	<b>143 fpm</b>
Winch Weight	1500 kg	<b>3300 lb</b>	1500 kg	<b>3300 lb</b>	1500 kg	<b>3300 lb</b>	1500 kg	<b>3300 lb</b>
Drum Capacity: Recommended	122 m	<b>400'0"</b>	122 m	<b>400'0"</b>	122 m	<b>400'0"</b>	122 m	<b>400'0"</b>
Optional	88 m	<b>290'0"</b>	88 m	<b>290'0"</b>	88 m	<b>290'0"</b>	88 m	<b>290'0"</b>
Cable Size: Recommended	19 mm	<b>0.75"</b>	19 mm	<b>0.75"</b>	19 mm	<b>0.75"</b>	19 mm	<b>0.75"</b>
Optional	22 mm	<b>0.88"</b>	22 mm	<b>0.88"</b>	22 mm	<b>0.88"</b>	22 mm	<b>0.88"</b>
Drum Diameter	254 mm	<b>10"</b>	254 mm	<b>10"</b>	254 mm	<b>10"</b>	254 mm	<b>10"</b>

\*All models include coolant, lubricants, full fuel tank, and operator.


517 Cable includes enclosed cab and 4PAT blade.

517 Grapple includes enclosed cab, 4PAT blade, swing boom, and 0.74 m<sup>2</sup> (8 ft<sup>2</sup>) grapple.

527 Cable includes lubricants, coolant, ROPS Canopy, 100% Fuel, operator, 5A blade, open cab, and towing winch.

527 Grapple includes lubricants, coolant, ROPS Canopy, 100% Fuel, operator, 5P blade, track roller guard, 660 mm (2'2") tri-link track, Swing Grapple, 100' Sorting head, and enclosed cab.


\*\*With 22 mm (0.88") cable.

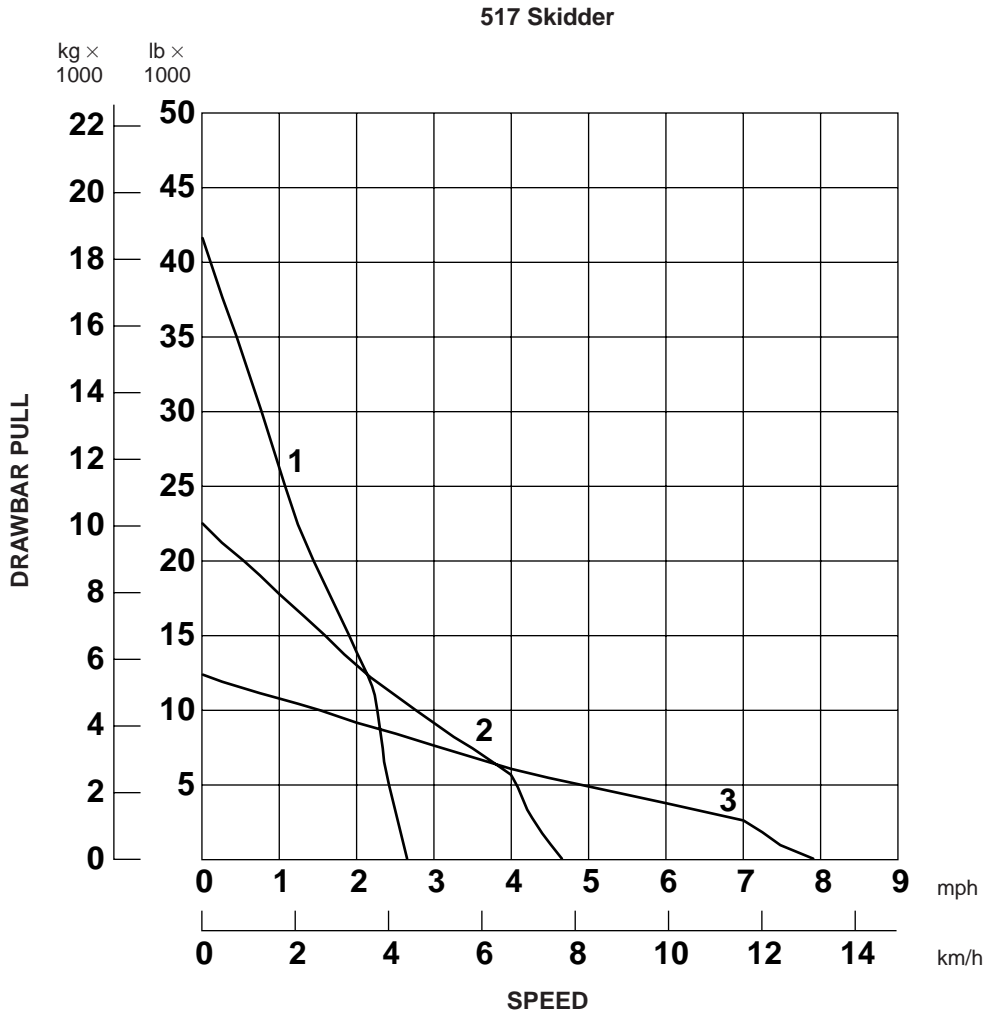

7

- KEY**
- 1 — 1st Gear
  - 2 — 2nd Gear
  - 3 — 3rd Gear

**NOTE:** Usable pull will depend upon weight and traction of equipped tractor.

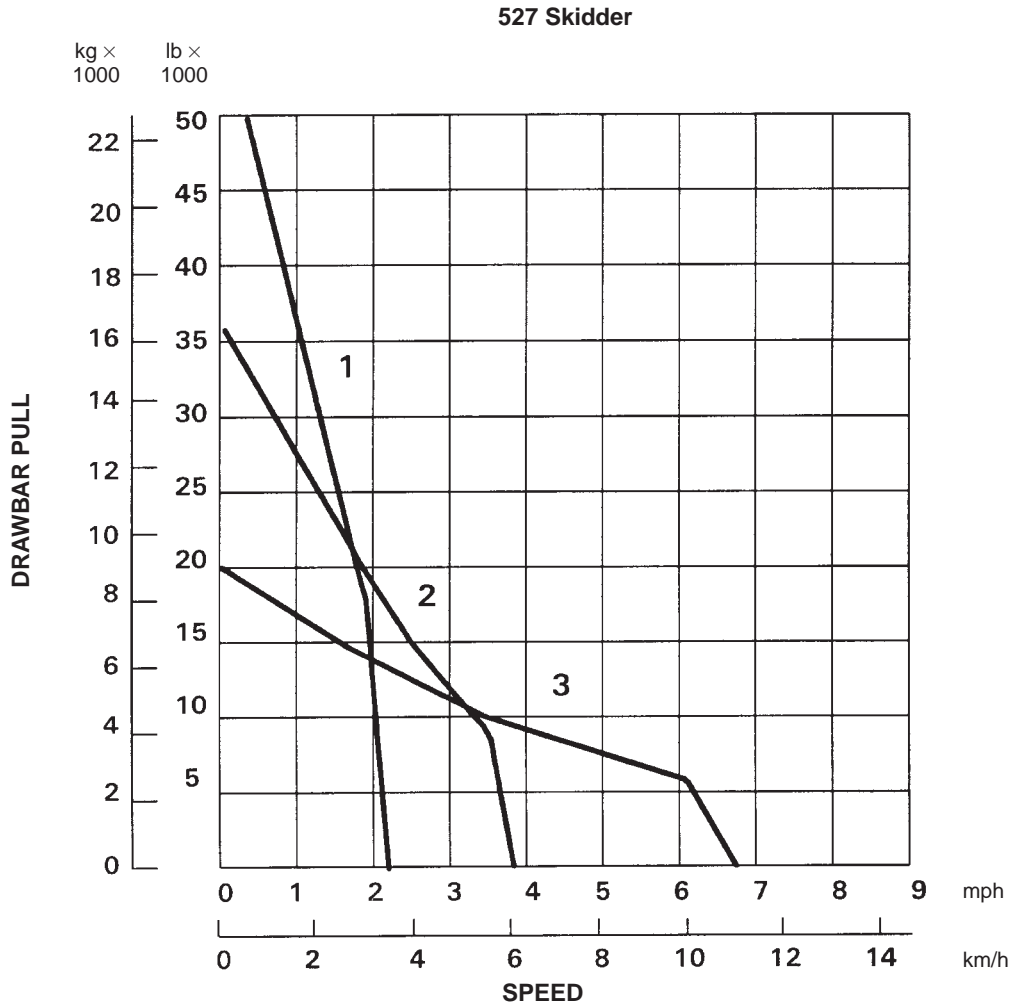

- KEY**
- 1 — 1st Gear
  - 2 — 2nd Gear
  - 3 — 3rd Gear

**NOTE:** Usable pull will depend upon weight and traction of equipped tractor.

**GRAPPLES**

Fixed boom Grapples for Cat 517 and 527 Skidders are built and supplied by Caterpillar. Swing boom grapples are built to Caterpillar specifications. The following contains information on some of the available models, which are presented here to suggest a range of grapple possibilities.

**Reach (A, B)** — The horizontal distance from the vertical center of the rear idler to the vertical center of the grapple fore and aft pivot.

- A) With the grapple in its lowest fully extended position.
- B) With the grapple in its highest fully retracted position.

**Lift (C, E)** — The vertical distance from the ground to the center of the grapple fore and aft pivot.

- C) With the grapple in its lowest fully extended position.
- E) With the grapple in its highest fully retracted position.


**Maximum Grapple Opening (K)** — The horizontal distance between the tips of the grapple arms when grapple is fully open.

**Area of Opening (L)** — The available area with grapple in tips together position.

**Minimum Log Size (M)** — The smallest diameter which the grapple can close.

**Grapple Length (N, O, P)** — The distance from the grapple fore and aft pivot to tips of grapple arms.

- N) With grapple fully open.
- O) With grapple in tips together position.
- P) With grapple fully closed.

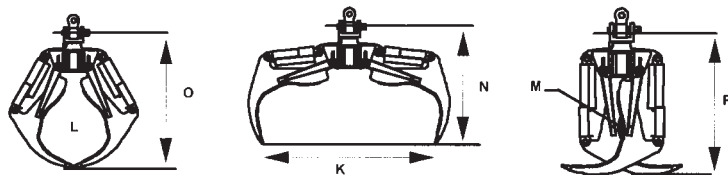


**Sorting Grapple**

- Used for 305 mm (12") or larger diameter trees.
- Designed to pick up individual or several stems for quick cycles.

**Bunching Grapple**

- Used for 305 mm (12") or smaller diameter trees.
- Designed to gather bundle of stems and maximize grapple loads.

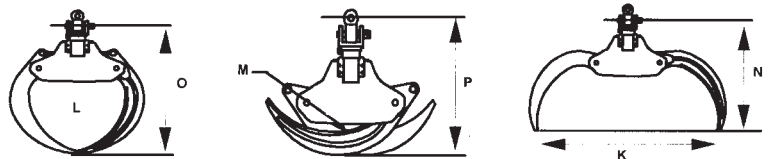



Grapples for 517		K	M	N	O	P	L
84" Sorting	mm	2130	76	1680	1980	1740	0.74 m <sup>2</sup>
	in	84	3	66	78	68.5	8 ft <sup>2</sup>
90" Sorting	mm	2290	102	1640	1920	1310	0.74 m <sup>2</sup>
	in	90	4	64	75	51	8 ft <sup>2</sup>
Grapples for 527		K	M	N	O	P	L
100" Sorting	mm	2540	76	1560	2040	1830	0.84 m <sup>2</sup>
	in	100	3	61.5	80.5	72	9 ft <sup>2</sup>
102" Bunching	mm	2590	76	1780	2020	136	0.93 m <sup>2</sup>
	in	102	3	70	79.5	53.5	10 ft <sup>2</sup>



**Swing-boom**

- Ability to reach and lift over the side to collect scattered logs.
- Has decking and loading capability.
- Excellent reach to the rear and side for maximum skidder versatility.


- Suitable for hard to reach timber on steep slopes, soft ground, or selection harvest and thinning.
- Reduces cycle times by reducing the amount of maneuvering of the skidder to reach logs.

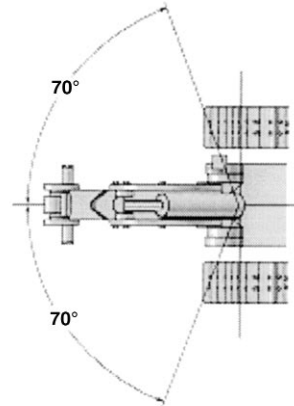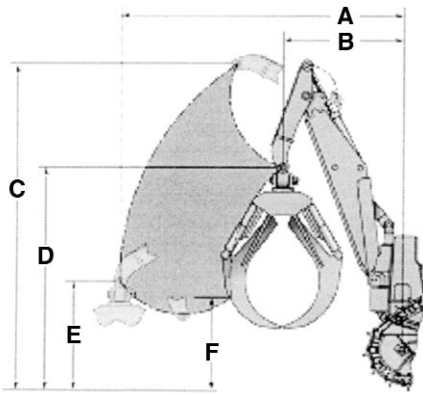

<b>Swing-boom</b>		<b>A</b>	<b>B</b>	<b>C</b>	<b>D</b>	<b>E</b>	<b>F</b>
517	mm	3269	1241	4092	2800	1366	1166
	in	129	49	161	110	54	46
527	mm	3544	1515	4048	2792	1358	1158
	in	139	60	160	110	53	46

**Single-function arch**


- Versatile attachment suitable for selection and clear cut applications.
- Reach consists of one vertical arc.
- Typical application includes short cycles and/or larger diameter timber.

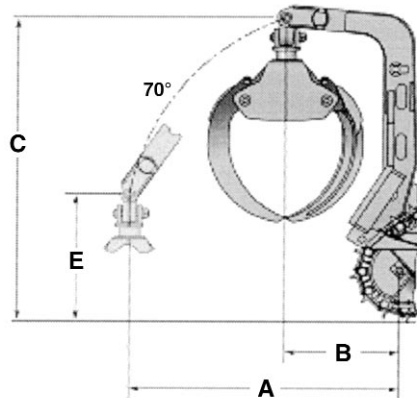

<b>Single-function</b>		<b>A</b>	<b>B</b>	<b>C</b>	<b>D</b>	<b>E</b>	<b>F</b>
517	mm	2465	909	2974	—	1000	—
	in	96	36	117	—	39	—
527	mm	2619	1105	2970	—	1231	—
	in	103	44	117	—	49	—


**Introduction**

Caterpillar forestry machines are specifically designed for tough forest work. Each model uses purpose built booms and sticks designed by Caterpillar for maximum performance and durability.

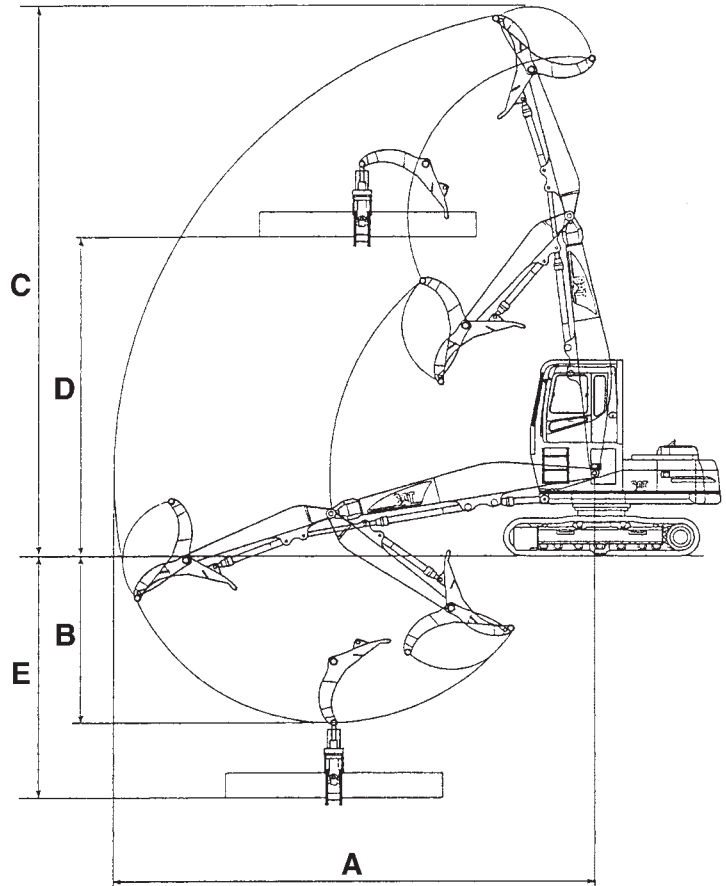

**Working Envelope**

	320C FM w/high wide carbody		320C FM w/reinforced carbody	
	m	ft	m	ft
A Max. Reach	10.98	36'0"	10.98	36'0"
B Max. Depth	4	13'1"	4.17	13'8"
C Max. Height	12.63	41'5"	12.46	40'10"
D Max. Deck Height	7.37	24'2"	7.20	23'7"
E Max. Deck Depth	5.68	18'8"	5.85	19'2"

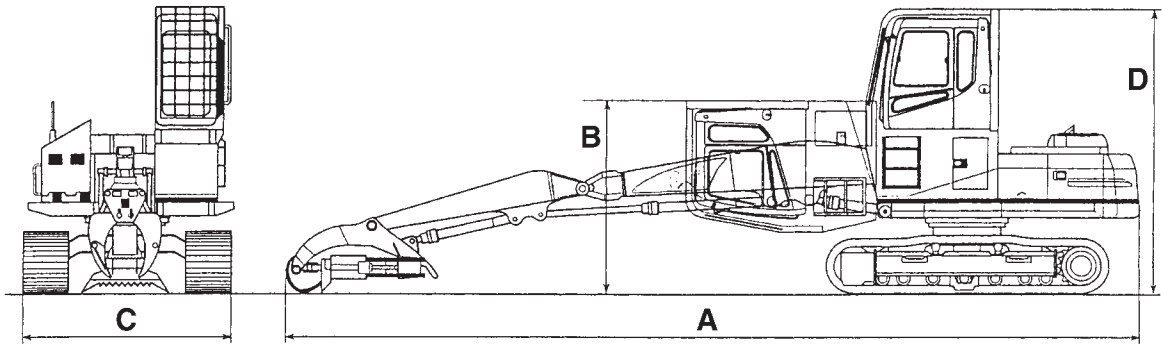

**Shipping Dimensions**

	<b>320C FM</b> w/high wide carbody 1.22 m (4'0") cab riser		<b>320C FM</b> w/high wide carbody 457 mm (18") cab riser		<b>320C FM</b> w/reinforced carbody 1.22 m (4'0") cab riser		<b>320C FM</b> w/reinforced carbody 457 mm (18") cab riser	
	m	ft	m	ft	m	ft	m	ft
<b>A</b> Overall Length	13.62	<b>44'8"</b>	13.62	<b>44'8"</b>	13.62	<b>44'8"</b>	13.62	<b>44'8"</b>
<b>B</b> Overall Height	3.11	<b>10'3"</b>	3.66	<b>12'0"</b>	2.94	<b>9'8"</b>	3.49	<b>11'5"</b>
<b>C</b> Overall Width	3.31	<b>10'10"</b>	3.31	<b>10'10"</b>	3.26	<b>10'8"</b>	3.26	<b>10'8"</b>
<b>D</b> Cab Height	4.55	<b>14'11"</b>	3.79	<b>12'5"</b>	4.38	<b>14'5"</b>	3.62	<b>11'11"</b>

Forest Machine	320C FM	
	kg	lb
<b>Booms*</b>		
Special application	2190	4840
LL Boom	2610	5750
<b>Sticks** (for Special application)</b>		
Special application	750	1650
<b>Sticks (for LL Boom)</b>		
LL Stick	905	2000
<b>Upperstructure (complete w/o counterweight)</b>		
w/1.22 m (4'0") cab riser	7400	16,310
w/457 mm (18") cab riser	7180	15,830
<b>Undercarriage (for high wide carbody)</b>		
— 600 mm (2'0") shoe	8850	19,510
— 700 mm (2'4") shoe	9175	20,230
— 800 mm (2'7") shoe	9165	20,210
<b>Undercarriage (reinforced carbody)</b>		
— 600 mm (2'0") shoe	8390	18,500
— 700 mm (2'4") shoe	8710	19,200
— 800 mm (2'7") shoe	8700	19,180
Counterweight — Standard	3865	8520
— Heavy	5830	12,850

\*Boom weights include boom, boom lines, boom cylinders and rod end pins, stick cylinder and head end pin.

\*\*Stick weights include stick and stick lines.

**Introduction:**

The 539 features 180 gross horsepower (134 kW), maximum reach of 32 ft (9.8 m), swing speed of 10.5 rpm and operating weight of 32,219 lb (17 827 kg). The main structures are purpose-built to handle the stress loads of pull-through delimiting and truck loading. The operator station is ergonomically designed to enhance operator productivity and comfort, and the load-sensing hydraulic system offers speed, power and precise control. Factory installed attachments, such as a fifth-wheel trailer, continuous-rotation grapple and a pull-through delimitter, are available to increase machine application flexibility.

**Features:**

- The Cat 3126 DITA (direct-injected, turbocharged and aftercooled) six-cylinder, 7.2-liter engine produces 168 net horsepower (125 kW) at 2,200 rpm. High-pressure unit injectors provide fast engine response, excellent fuel efficiency and low emissions. All engine service points are easily accessed through two doors at the back of the loader.
- The 539 structures feature a main frame with integral fuel tank that eliminates the need for an external counterweight. The large diameter swing bearing matches the strength of the entire frame. The platform frame incorporates four wide-base stabilizers, and the boom and stick have large diameter double shear pins, wide boom-foot width and a single boom hoist cylinder to simplify the system for high reliability.
- The operator's station allows unobstructed sight lines to the work area while providing a safe, comfortable work environment. Low-effort joysticks control all implement functions, and the joystick consoles are suspended as part of the seat structure to move with the seat. A convenient lever deactivates hydraulic functions when the operator leaves the cab.
- High-pressure, load-sensing hydraulics offer reduced maintenance, extended component life, cooler oil temperatures and increased performance compared to other systems. Two variable displacement, axial piston pumps power the boom, stick, swing and attachments. One single-section, gear-type pump powers the pilot circuit for the controls.
- Factory-installed attachments can enhance versatility. Attachments include a fifth-wheel trailer, a pull-through delimitter with topping saw, continuous-rotation grapple, and ground saw hydraulics.


The Caterpillar 539 Knuckleboom Loader is designed and built to increase production while enhancing safety and operator comfort.



**539**

**MODEL**

Flywheel Power		
Gross	134 kW	<b>180 hp</b>
Net	125 kW	<b>168 hp</b>
Operating Weight	17 830 kg	<b>36,220 lb</b>
Engine Model	<b>3126 DITA</b>	
Rated Engine RPM	<b>2200</b>	
No. Cylinders	<b>6</b>	
Displacement	7.2 L	<b>439 in<sup>3</sup></b>
Lift Capacity @ Ground Level		
Over Front 6 m ( <b>20'</b> )	6265 kg	<b>13,780 lb</b>
7.5 m ( <b>25'</b> )	4635 kg	<b>10,190 lb</b>
9.0 m ( <b>30'</b> )	2825 kg	<b>6210 lb</b>
Maximum Reach	9.8 m	<b>32'</b>
Swing Speed RPM	<b>10.5</b>	
Swing Torque	73.3 kN•m	<b>54,090 ft-lb</b>
Main Implement Hydraulics		
Max. Flow	2 × 208 L/min	<b>2 × 55 gpm</b>
Implement	34 450 kPa	<b>5000 psi</b>
Swing	31 005 kPa	<b>4500 psi</b>
Pilot System		
Max. Flow	41 L/min	<b>10.8 gpm</b>
Max. Pressure	2450 kPa	<b>350 psi</b>
Cylinders Bore × Stroke		
Stick (one)	152.4 × 914.4	<b>6" × 36"</b>
Boom (one)	152.4 × 1320.8	<b>6" × 52"</b>
Stabilizers (four)	152.4 × 596.9	<b>6" × 23.5"</b>
Refill Capacities:		
Fuel Tank	492 L	<b>130 U.S. gal</b>
Cooling System	31.5 L	<b>8.3 U.S. gal</b>
Engine Crankcase	25 L	<b>6.6 U.S. gal</b>
Hydraulic System (includes tank)	454 L	<b>120 U.S. gal</b>

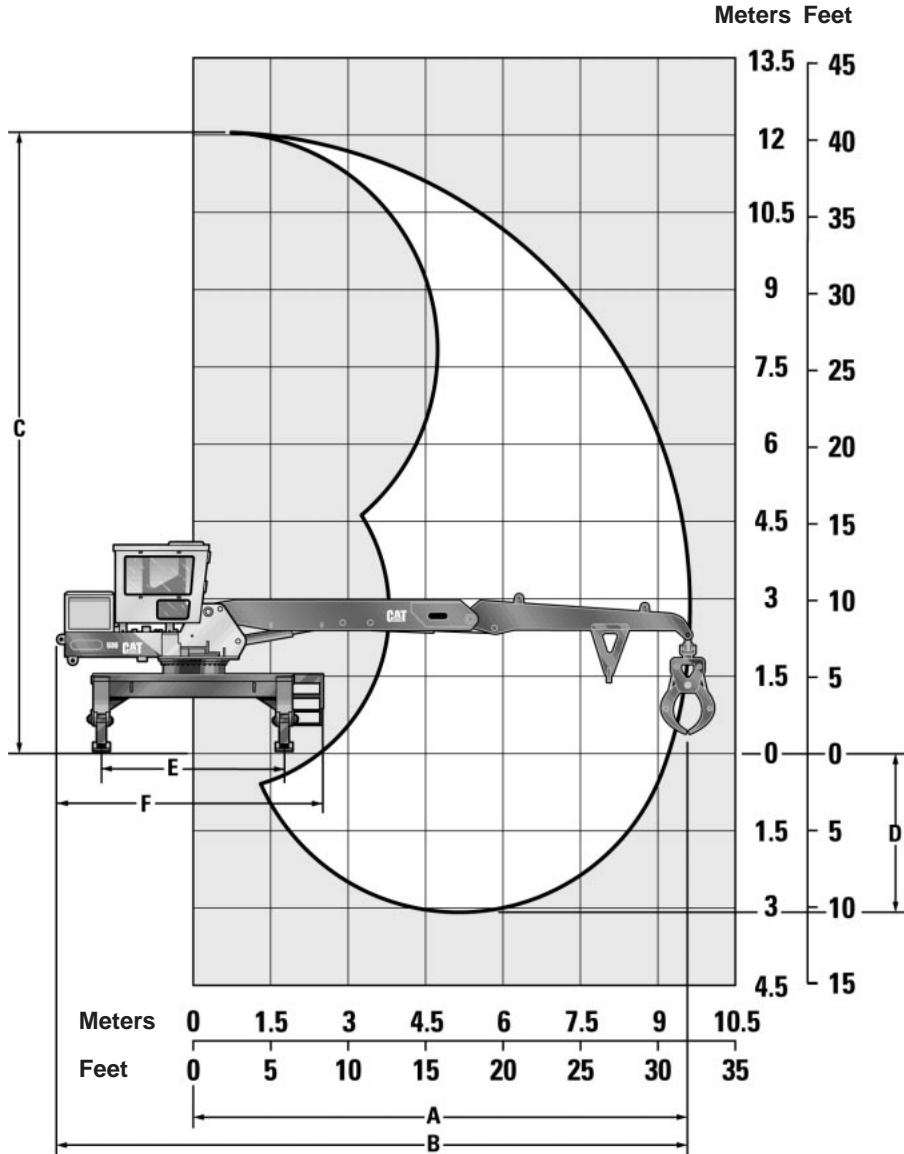

**MODEL**

**539**


A	Maximum reach	9.80 m	32'2"
B	Shipping length	12.50 m	41'0"
C	Maximum height	12.24 m	40'2"
D	Maximum depth below ground level	3.13 m	10'3"
E	Stabilizer length center to center	3.91 m	12'10"
F	Length from front of platform frame to rear of loader	5.22 m	17'2"

## 539 Lift Capacities

Lift Point Height		3.0 m/10.0 ft	4.5 m/15.0 ft	6.0 m/20.0 ft	7.5 m/25.0 ft	9.0 m/30.0 ft
		Over Front	Over Front	Over Front	Over Front	Over Front
12.0 m 40.0 ft	kg lb					
10.5 m 35.0 ft	kg lb					
9.0 m 30.0 ft	kg lb			5782 12,719		
7.5 m 25.0 ft	kg lb			5613 12,349	5022 11,048	
6.0 m 20.0 ft	kg lb		6742 14,793	5782 12,721	5040 11,089	4395 9,668
4.5 m 15.0 ft	kg lb		7625 16,775	6140 13,509	5135 11,296	4235 9,317
3.0 m 10.0 ft	kg lb		8687 19,111	6550 14,410	5230 11,505	4120 9,065
1.5 m 5.0 ft	kg lb		9173 20,180	6654 14,639	5112 11,247	3759 8,269
†0.0 m †0.0 ft	kg lb	12,688 27,914	8611 18,944	6265 13,784	4635 10,198	2825 6,216
-1.5 m -5.0 ft	kg lb	9325 20,514	6900 15,181	5088 11,194	3440 7,569	
-3.0 m -10.0 ft	kg lb					

Lift capacity ratings are based on SAE standard J1097. Includes boom and stick weight (87% of hydraulic lift capacity).  
†Ground line.

## Dimensions

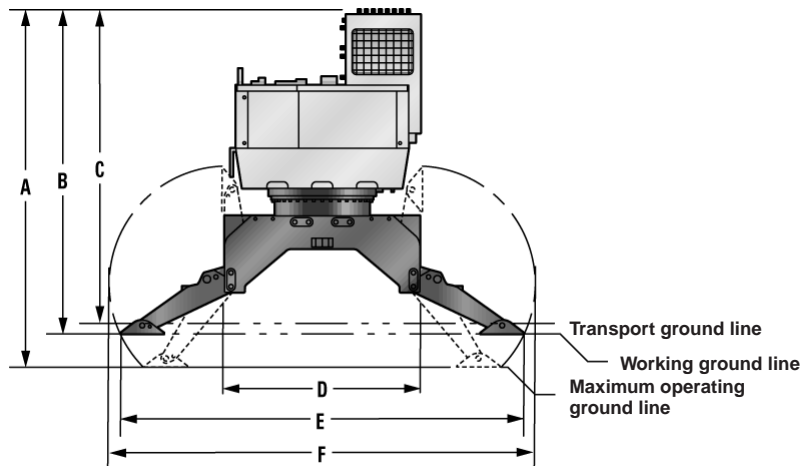

MODEL	539		539	
A Max. cab height during operation	4.6 m	15'1"	D Transport width	2.6 m 8'6"
B Operating height	4.2 m	13'9"	E Operating width	5.2 m 17'1"
C Transport height	4.1 m	13'5.5"	F Maximum width	5.4 m 17'11"



## LOAD CAPACITY CURVES FOR WHEEL LOADERS AND INTEGRATED TOOLCARRIERS EQUIPPED WITH FORKS

### Definitions:

*Hydraulic Capacity:* Weight that the hydraulic system will lift with the rear of the loader anchored and the load center of gravity midway on the fork tines. Hydraulic capacity is not increased by counterweighting.

*Tipping Load:* The loaded weight positioned as described above, which will lift the rear wheels off the ground with the machine in a static condition. Static tipping load curves for wheel loaders equipped with log or lumber forks are based on full machine articulation.

Tipping load capacities are affected by counterweight and distance of the load center of gravity from the front axle and degree of articulation. Fork center of gravity and fork weight can also affect tipping load.

*Maximum Operating Load:* Maximum operating load should be based on static tipping load ratings (tines level) and requires a firm, smooth, well-maintained operating area. Maximum operating loads can be affected by:

- Underfoot conditions.
- Position or height the load is carried.
- Fork position or attitude.
- Degree machine is articulated during maneuvering.



### Example problem:

#### Wheel Loader Selection 966G vs 950G

Optimum millyard performance depends on efficient and proper use of wheel loaders performing unloading, sorting and decking applications. The following steps will aid in the proper wheel loader selection.

**Step 1:** Determine the basic mill requirements (job description).

#### EXAMPLE:

Logs arrive at the mill on trucks equipped with double bunk trailers. Logs are a variety of hardwoods, but white oak makes up the majority of wood received. The trucks must be off-loaded by a wheel loader equipped with log forks.

In addition to the off-loading, a primary loader requirement is to supply the mill with raw material in a load-and-carry operation. The loader must also sort logs by species, grade and size, and transport the excess logs from the unloading area to the storage decks.

- Maximum sawmill requirements — 544 metric tons/8 hr. day (600 U.S. tons).
- Maximum wood received — 30 truckloads/8 hr. day.
- Average number of logs per truckload — 20.
- Average log specifications:
  - length 4.9 m (16').
  - butt diameter 660 mm (26").
  - top diameter 430 mm (17").
- Maximum truck stake height — 3.98 m (13'1").
- Maximum haul distance (one way) from log storage deck to the mill — 153 m (500').
- Haul and return to mill in 2nd forward — 10% effective grade.
- Fixed times — load forks 0.7 min.
  - maneuver and dump 0.5 min.
  - truck unloading 1.0 min.
- Average log weight = 1180 kg/log (2600 lb/log)  
Refer to Weights and Measure section of this handbook to obtain appropriate log volume and density information.

**Step 2:** Determine the basic machine options and capacities.

Refer to Capacity curves in the Performance Handbook under Logging and Forest Products section. For other fork configurations not listed contact the Forest Machinery Unit for performance curves. Also refer to attachment adaptability section for information needed for performance curves.

#### EXAMPLE:

Consider a 950G vs. 966G. Both are equipped with logging fork.

#### 950G

Static Tipping Load	10 000 kg (22,000 lb)
Hydraulic Lift Capacity	11 600 kg (25,520 lb)
Maximum Operating Load	10 000 kg (22,000 lb)

#### 966G

Static Tipping Load	13 500 kg (29,700 lb)
Hydraulic Lift Capacity	14 500 kg (31,900 lb)
Maximum Operating Load	13 500 kg (29,700 lb)

**Step 3:** Determine cycle times.

Refer to Production Travel Time Charts in the Wheel Loader section of the Performance Handbook.

EXAMPLE:  
 (Supplying the mill)

Description	Time (950G)	Time (966G)
Haul and return	1.16 min	1.14 min
Load Forks*	0.7 min	0.7 min
Maneuver and dump*	0.5 min	0.5 min
TOTAL	2.36 min	2.34 min
Cycles/45-min hr =	19.06	19.23

(Off-loading trucks)

Description	Time (950G)	Time (966G)
Truck unloading*	1.0 min	1.0 min
Load Forks*	0.7 min	0.7 min
Maneuver and dump*	0.5 min	0.5 min
TOTAL	2.2 min	2.2 min
Cycles/45-min hr =	20.45	20.45

\*Fixed times which should be based on local experience.

**Step 4: Calculate Production**

EXAMPLE:

*Mill requirements:*

— 950G

$$\frac{544\,320\text{ kg (1,200,000 lb)/8 hr/day}}{10\,000\text{ kg (22,000 lb)/loader cycle}} =$$

$$\frac{55\text{ loader cycles}}{8\text{ hr/day}}$$

$$\frac{55\text{ loader cycles/8 hr/day}}{19.06\text{ cycles/45-min hr}} = \frac{2.88\text{ hr/day}}{\text{required to supply mill}}$$

— 966G

$$\frac{544\,320\text{ kg (1,200,000 lb)/8 hr/day}}{13\,500\text{ kg (29,700 lb)/loader cycle}} =$$

$$\frac{41\text{ loader cycles}}{8\text{ hr/day}}$$

$$\frac{41\text{ loader cycles/8 hr/day}}{19.23\text{ cycles/45-min hr}} = \frac{2.13\text{ hr/day}}{\text{required to supply mill}}$$

*Off-Load Requirements:*

— 950G

$$20\text{ logs/truck} \times 30\text{ truckloads/day} = 600\text{ logs/day}$$

$$600\text{ logs/day} \times 1180\text{ kg (2600 lb)/log} = 707\,616\text{ kg/day}$$

or  
1,560,000 lbs/day  
Incoming Wood

$$\frac{707\,616\text{ kg (1,560,000 lb)/8 hr/day}}{10\,000\text{ kg (22,000 lb)/loader cycle}} =$$

$$\frac{71\text{ loader cycles}}{8\text{ hr/day}}$$

$$\frac{71\text{ loader cycles/8 hr/day}}{29.45\text{ cycles/hr}} = \frac{3.47\text{ hr/day}}{\text{required to off-load wood}}$$

— 966G

$$20\text{ logs/truck} \times 30\text{ truckloads/day} = 600\text{ logs/day}$$

$$600\text{ logs/day} \times 1180\text{ kg (2600 lb)/log} = 707\,616\text{ kg/day}$$

or  
1,560,000 lbs/day  
Incoming Wood

$$\frac{707\,616\text{ kg (1,560,000 lb)/8 hr/day}}{13\,500\text{ kg (29,700 lb)/loader cycle}} =$$

$$\frac{53\text{ loader cycles}}{8\text{ hr/day}}$$

$$\frac{53\text{ loader cycles/8 hr/day}}{20.45\text{ cycles/hr}} = \frac{2.59\text{ hr/day}}{\text{required to off-load wood}}$$

*Total Production Required:*

— 950G = 2.88 hr/day to supply mill  
 3.47 hr/day to off-load  
 6.35 hr/day total time

— 966G = 2.13 hr/day to supply mill  
 2.59 hr/day to off-load wood  
 4.72 hr/day total time


**Step 5: Determine Wheel Loader selection.**

EXAMPLE:


From the production study completed and assuming 100% efficiency it appears both machines are capable of handling the maximum daily production. The 950G and 966G will have 1.65 hrs/day and 3.28 hrs/day respectively to handle unscheduled activities such as sorting, storage and yard clean-up. However, after comparing the maximum hinge pin height for the two machines, the 950G is not capable of clearing the stakes with a load. This leaves the 966G as the machine to recommend, since it can handle all restrictions and production requirements.

- 914G
- 924GZ

**914G with Caterpillar Lumber and Log Fork**

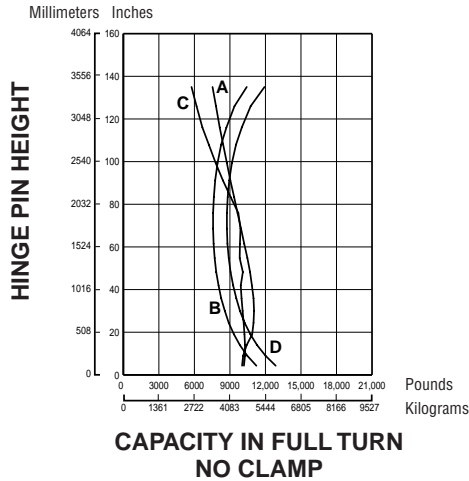

**924GZ with Caterpillar Lumber and Log Fork**

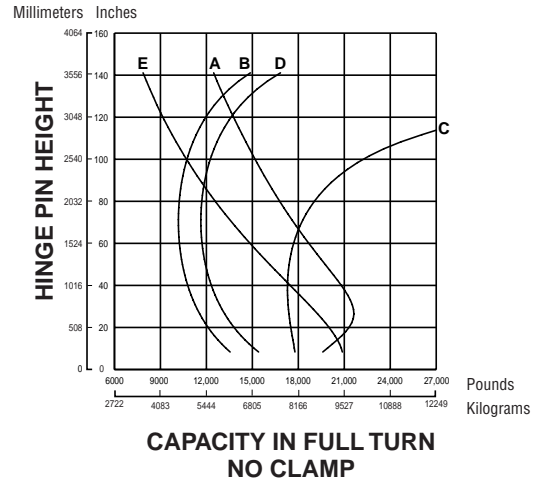

**KEY**

- A — Hydraulic Lift Capacity Fork Racked
- B — Static Tipping Load Full 40° Turn Fork Level
- C — Hydraulic Lift Capacity Fork Level
- D — Static Tipping Load Machine Straight, Fork Level

**KEY**

- A — Hydraulic Lift Capacity Fork Racked
- B — Static Tipping Load Full 40° Turn Fork Level
- C — Hydraulic Lift Capacity Fork Level
- D — Static Tipping Load Machine Straight, Fork Level
- E — Hydraulic Tilt Capacity, Fork Level


Curves based on machine with full fuel tank, operator, 17.5R25 tires and 125-9293 lumber/log fork without top clamp. Fork weight is 616 kg (1358 lb). Total operating weight, 7464 kg (16,444 lb). Forks of other dimensions or weight may affect machine capacity. Consult your Caterpillar Dealer for additional fork data.

Curves based on machine with full fuel tank, operator, 17.5R25 tires and 180-4687 lumber/log fork without top clamp. Fork weight 760 kg (1676 lb). Total operating weight, 9650 kg (21,280 lb). Forks of other dimensions or weight may affect machine capacity. Consult your Caterpillar Dealer for additional fork data.

	<b>Change in Operating Weight</b>	<b>Change in Articulated Static Tipping Load</b>	
		<b>Racked</b>	<b>Level</b>
Add ROPS canopy . . . . .	+317 kg (+700 lb)	+309 kg (+682 lb)	+233 kg (+515 lb)
Add ROPS canopy and cab . . . . .	+527 kg (+1163 lb)	+388 kg (+856 lb)	+345 kg (+762 lb)

	<b>Change in Operating Weight</b>	<b>Change in Articulated Static Tipping Load Level</b>
Without ROPS canopy and cab (platform only) . . . . .	-418 kg (-922 lb)	-258 kg (-569 lb)
Without cab (ROPS/platform) . . . . .	-207 kg (-456 lb)	-128 kg (-282 lb)

**928G with Caterpillar Lumber and Log Fork**

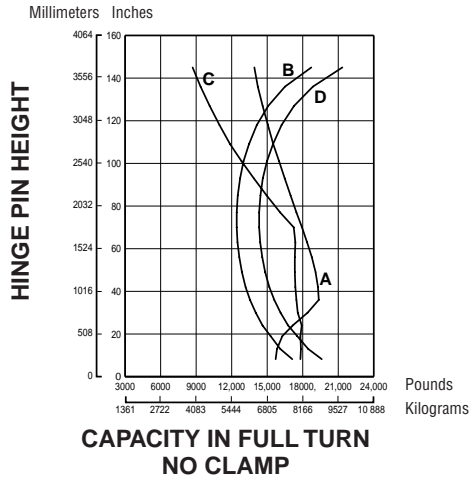


**KEY**

- A — Hydraulic Lift Capacity Fork Racked
- B — Static Tipping Load Full 40° Turn Fork Level
- C — Hydraulic Lift Capacity Fork Level
- D — Static Tipping Load Machine Straight, Fork Level

Curves based on machine with full fuel tank, operator, ROPS cab, 20.5-25 tires, 250 kg (550 lb) counterweight, lumber/log fork. Total operating weight, 11 603 kg (25,561 lb). Forks of other dimensions or weight may affect machine capacity. Consult your Caterpillar Dealer for additional fork data.

**938G with Caterpillar Millyard Fork**

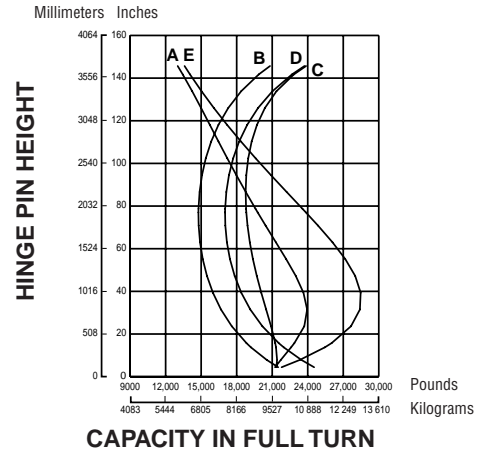


**KEY**

- A — Hydraulic Lift Capacity 40° Turn, Fork Racked
- B — Static Tipping Load Full 40° Turn Fork Level
- C — Hydraulic Lift Capacity Fork Level
- D — Static Tipping Load Machine Straight, Fork Level
- E — Hydraulic Tilt Capacity Fork Level


Curves based on machine with full fuel tank, operator, ROPS cab, 20.5-25, 16PR(L-2) tires, with 810 kg (1785 lb) rear tire ballast, 562 kg (1240 lb) counterweight, 119-8243.00 millyard fork with 1345 mm (4'5") tines, 1635 kg (3600 lb) combined weight. Total operating weight, 14 297 kg (31,520 lb).

- 938G
- 950G

**938G with  
Caterpillar Log and Lumber Fork**

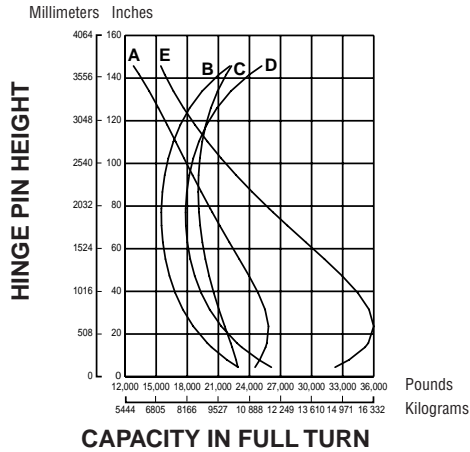

**950G with  
Caterpillar Logging Fork and Top Clamp**

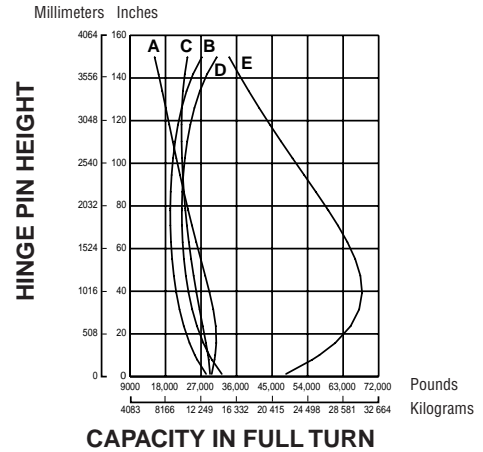

**KEY**

- A — Hydraulic Lift Capacity, Fork Racked
- B — Articulated Tipping Capacity
- C — Hydraulic Lift Capacity Fork Level
- D — Static Tipping Load Machine Straight, Fork Level
- E — Hydraulic Tilt Capacity Fork Level


Curves based on machine with full fuel tank, operator, ROPS cab, 20.5-25, 16PR(L-2) tires, and 562 kg (1240 lb) counterweight, with 810 kg (1785 lb) rear tire ballast, log and lumber fork with 1225 mm (4'0") tines, 1660 kg (3660 lb) total weight. Total operating weight, 14 332 kg (31,595 lb).

**KEY**


- A — Hydraulic Lift Capacity 35° Turn, Fork Racked
- B — Articulated Tipping Capacity
- C — Hydraulic Lift Capacity Fork Level
- D — Static Tipping Load Machine Straight, Fork Level
- E — Hydraulic Tilt Capacity Fork Level

Curves and operating weight on chart are based on machine equipped with 23.5-25 XHA tires, 1747 kg (3852 lb) counterweight, full fuel tank, operator, 2159 kg (4760 lb) 157-3467 logging fork. Total operating weight, 18 840 kg (41,540 lb). Forks of other dimensions or weight may affect machine capacity. Consult your Caterpillar dealer for additional information.

**966G with  
Caterpillar Millyard Fork**

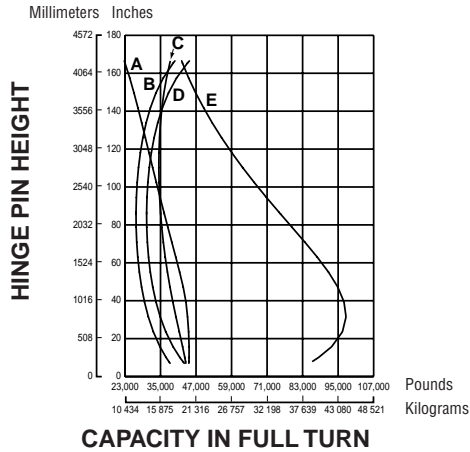

**980G with Caterpillar Millyard Fork**

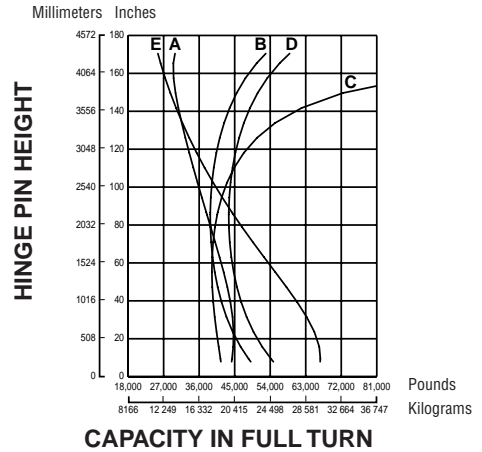

7

**KEY**

- A — Hydraulic Lift Capacity 35° Turn, Fork Racked
- B — Articulated Tipping Capacity
- C — Hydraulic Lift Capacity Fork Level
- D — Static Tipping Load Machine Straight, Fork Level
- E — Hydraulic Tilt Capacity Fork Level

Curves and operating weight on chart are based on machine equipped with 26.5R25 XHA tires, 1747 kg (3852 lb) counterweight, full fuel tank, operator, logging fork 143-7211. Total operating weight, 24 265 kg (53,500 lb).


**KEY**

- A — Hydraulic Lift Capacity 35° Turn, Fork Racked
- B — Articulated Tipping Capacity
- C — Hydraulic Lift Capacity Fork Level
- D — Static Tipping Load Machine Straight, Fork Level
- E — Hydraulic Tilt Capacity Fork Level


Curves based on logging machine with full fuel tank, ROPS cab, 29.5-25, 22PR(L-3) tires, with 1945 kg (4290 lb) ballast in rear tires, 3810 kg (8400 lb) counterweight, millyard fork weight of 1850 kg (4075 lb). Total operating weight, 32 680 kg (72,050 lb).

- 980G
- 988F Series II

**980G with  
Caterpillar Double Top Clamp Log Fork**

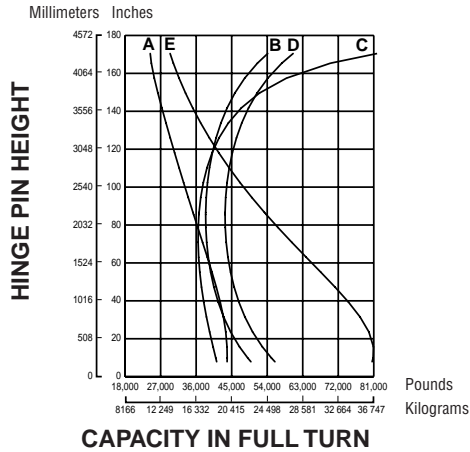

**988F Series II Logger with  
Caterpillar Millyard Fork**

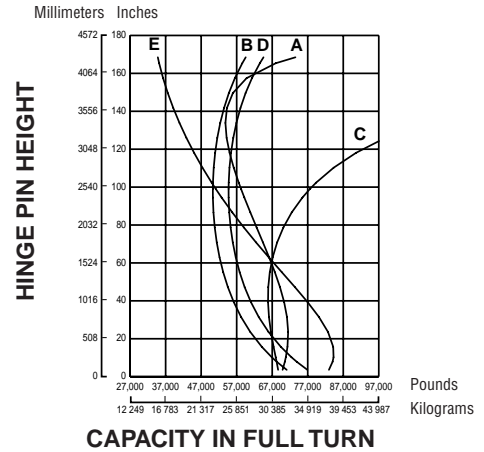

**KEY**

- A — Hydraulic Lift Capacity 35° Turn, Fork Racked
- B — Articulated Tipping Capacity
- C — Hydraulic Lift Capacity Fork Level
- D — Static Tipping Load Machine Straight, Fork Level
- E — Hydraulic Tilt Capacity Fork Level


Curves based on machine with full fuel tank, operator, ROPS cab, 29.5-25, 22PR(L-3) tires, with 2060 kg (4535 lb) ballast in rear tires, 3200 kg (7050 lb) counterweight, logging fork with 1830 mm (6'0") tines and top clamp with a combined weight of 3175 kg (7000 lb). Total operating weight, 34 010 kg (74,975 lb).

**KEY**

- A — Hydraulic Lift Capacity 30° Turn, Fork Racked
- B — Articulated Tipping Capacity
- C — Hydraulic Lift Capacity Fork Level
- D — Static Tipping Load Machine Straight, Fork Level
- E — Hydraulic Tilt Capacity Fork Level

Curves based on machine with full fuel tank, operator, ROPS cab, 35/65-33 30PR(L-4) tires. Standard 4455 kg (9825 lb) counterweight, 2690 kg (5930 lb) ballast in rear tires, 5196C2 millyard fork at 5480 kg (12,080 lb). Total operating weight, 52 765 kg (116,325 lb). Forks or other dimensions or weight will affect machine capacity.

**988F Series II Logger with  
 Caterpillar Double Top Clamp Log Fork**

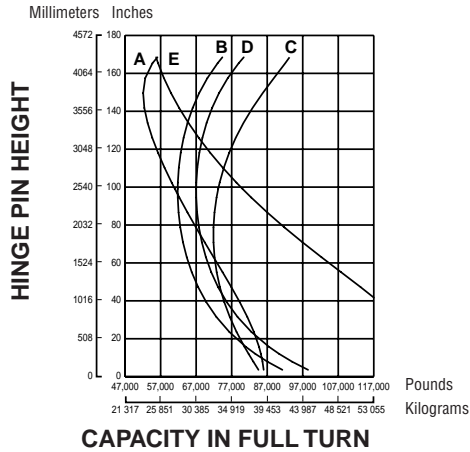


**KEY**

- A — Hydraulic Lift Capacity 30° Turn, Fork Racked
- B — Articulated Tipping Capacity
- C — Hydraulic Lift Capacity Fork Level
- D — Static Tipping Load Machine Straight, Fork Level
- E — Hydraulic Tilt Capacity Fork Level

Curves based on machine with full fuel tank, operator, ROPS cab, 35/65-33 30PR(L-4) tires. Standard log 4455 kg (9825 lb) counterweight, 2690 kg (5930 lb) ballast in rear tires, 8965C DTC log fork at 4490 kg (9900 lb). Total operating weight 51 775 kg (114,160 lb).

**990 Series II Logger with  
 Caterpillar Double Top Clamp Log Fork**

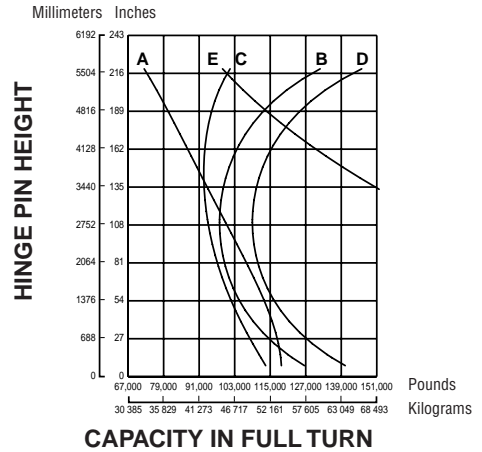

**KEY**


- A — Hydraulic Lift Capacity 35° Turn, Fork Racked
- B — Articulated Tipping Capacity
- C — Hydraulic Lift Capacity Fork Level
- D — Static Tipping Load Machine Straight, Fork Level
- E — Hydraulic Tilt Capacity Fork Level

Curves based on machine with full fuel tank, operator, ROPS cab, 45/65x39 X-MINE D2 radial tires 4788 kg (10,555 lb) ballast in rear tires, 7845 kg (17,295 lb) logger counterweight, 114-3557.02 log fork with 2438 mm (8'0") tines and top clamp at 5896 kg (13,000 lb), 1292.1 mm (4'3") link. Total operating weight 87 705 kg (193,360 lb).




- IT14G
- 924G

**IT14G with Caterpillar Lumber and Log Fork**

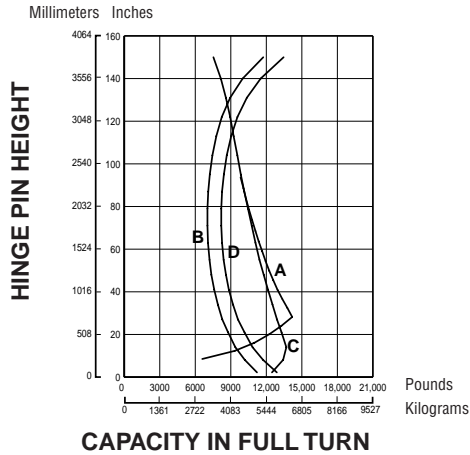

**924G with Caterpillar Lumber and Log Fork**

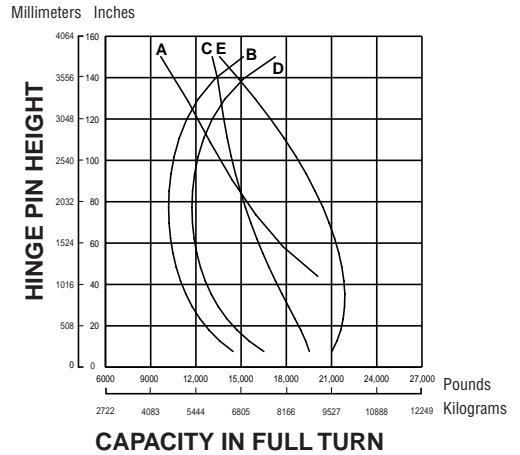

**KEY**

- A — Hydraulic Lift Capacity Fork Racked
- B — Static Tipping Load Full 40° Turn Fork Level
- C — Hydraulic Lift Capacity Fork Level
- D — Static Tipping Load Machine Straight, Fork Level


Curves and operating weight are based on machine equipped with 17.5R25 tires, full fuel tank, 9816C2 lumber and log fork without top clamp. Fork weight is 803 kg (1770 lb). Total operating weight 8020 kg (17,668 lb). Forks of other dimensions or weight may affect machine capacity. Consult your Caterpillar Dealer for additional fork data.

**KEY**

- A — Hydraulic Lift Capacity Fork Racked
- B — Static Tipping Load Full 40° Turn Fork Level
- C — Hydraulic Lift Capacity Fork Level
- D — Static Tipping Load Machine Straight, Fork Level
- E — Hydraulic Tilt Capacity, Fork Level

Curves and operating weight are based on machine equipped with 17.5R25 tires, full fuel tank, 180-8355 lumber and log fork without top clamp. Fork weight is 1160 kg (2558 lb). Total operating weight 10 424 kg (22,985 lb). Forks of other dimensions or weight may affect machine capacity. Consult your Caterpillar Dealer for additional fork data.

**IT28G with Caterpillar Lumber and Log Fork**

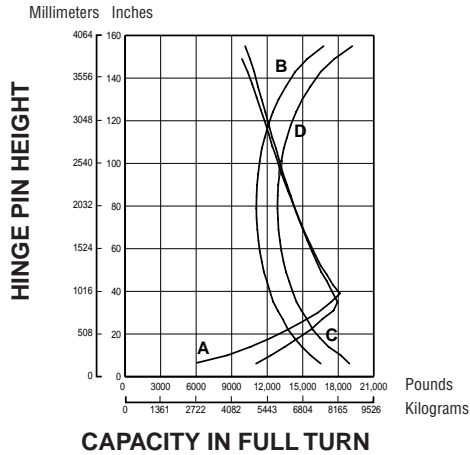


**KEY**

- A — Hydraulic Lift Capacity Fork Racked
- B — Static Tipping Load Full 40° Turn Fork Level
- C — Hydraulic Lift Capacity Fork Level
- D — Static Tipping Load Machine Straight, Fork Level

Curves and operating weight are based on machine equipped with 20.5-25 tires, 250 kg (550 lb) counterweight, full fuel tank, 80 kg (176 lb) operator, lumber and log fork. Fork weight 1325 kg (2919 lb). Total operating weight 11 908 kg (26,233 lb). Forks of other dimensions or weight may affect machine capacity. Consult your Caterpillar Dealer for additional fork data.

**IT38G with Caterpillar Millyard Fork and Quick Coupler**

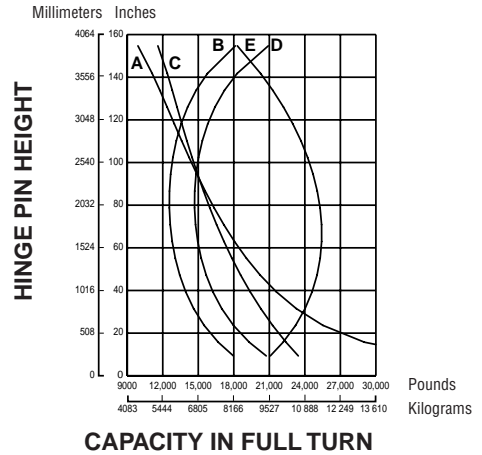


**KEY**

- A — Hydraulic Lift Capacity 40° Turn, Fork Racked
- B — Articulated Tipping Capacity
- C — Hydraulic Lift Capacity Fork Level
- D — Static Tipping Load Machine Straight, Fork Level
- E — Hydraulic Tilt Capacity Fork Level

Curves based on machine with full fuel tank, operator, ROPS cab, 20.5-25, 16PR(L-2) tires, with 810 kg (1785 lb) rear tire ballast, 760 kg (1675 lb) counterweight, mill-yard fork 103-8617 with 9753C2 coupler 1345 mm (4'5") tines, 1815 kg (4000 lb) combined weight. Total operating weight, 14 097 kg (31,080 lb). Forks of other dimensions or weight may affect machine capacity. Consult your Caterpillar Dealer for additional information.

**IT62G with  
Caterpillar Logger Grapple**

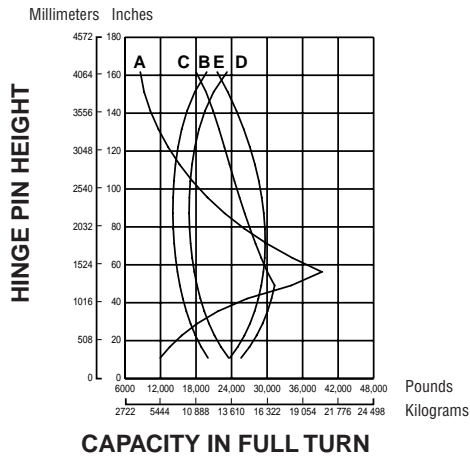


**KEY**

- A — Hydraulic Lift Capacity Fork Racked
- B — Static Tipping Capability Full Turn, Fork Level
- C — Hydraulic Lift Capability Fork Level
- D — Static Tipping Capability Straight, Fork Level
- E — Hydraulic Tilt Capability, Fork Level

Curves and operating weight are based on machine equipped with 23.5R25 XHA tires, full fuel tank, operator, 119-2302 logger grapple. Total operating weight 19 750 kg (43,530 lb).

LIFT AND RANGE DIAGRAM

320C Log Loader

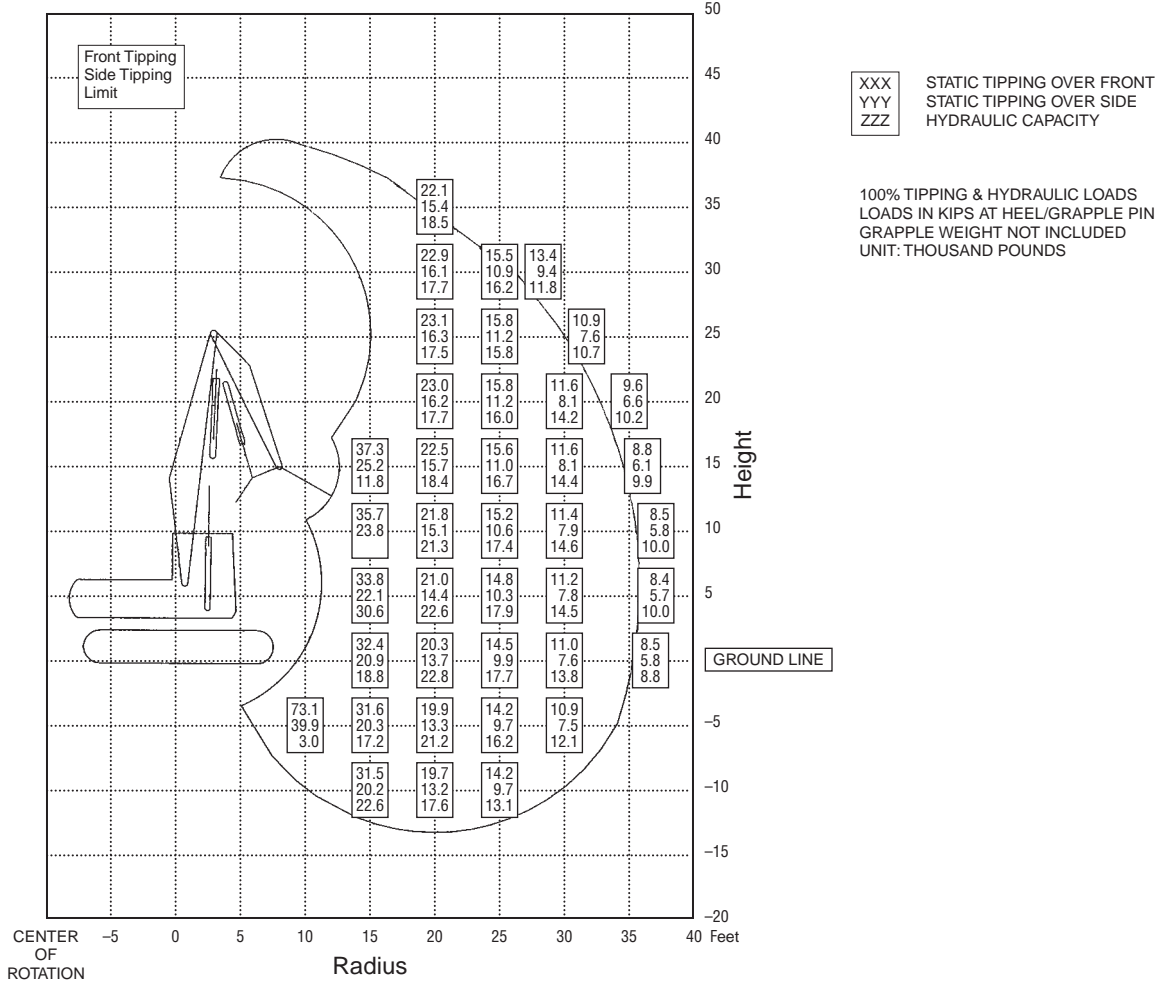


- Undercarriage — long
- Logging Front — Caterpillar 320B LL HB-36, 10 970 mm (36'0") maximum reach
- Capacity, lbs., (thousands)
  - Top Number: Tipping over front
  - Middle Number: Tipping over side
  - Bottom Number: Hydraulic capacity

- All capacities are 100% stability and 100% hydraulic with no deration for friction (100% efficiency)
  - Grapple weight is not included
- Calculations, weights and machine specifications are subject to change at any time without notice.

**LIFT AND RANGE DIAGRAM**

**322B High Wide Forest Machine — Under/Under**

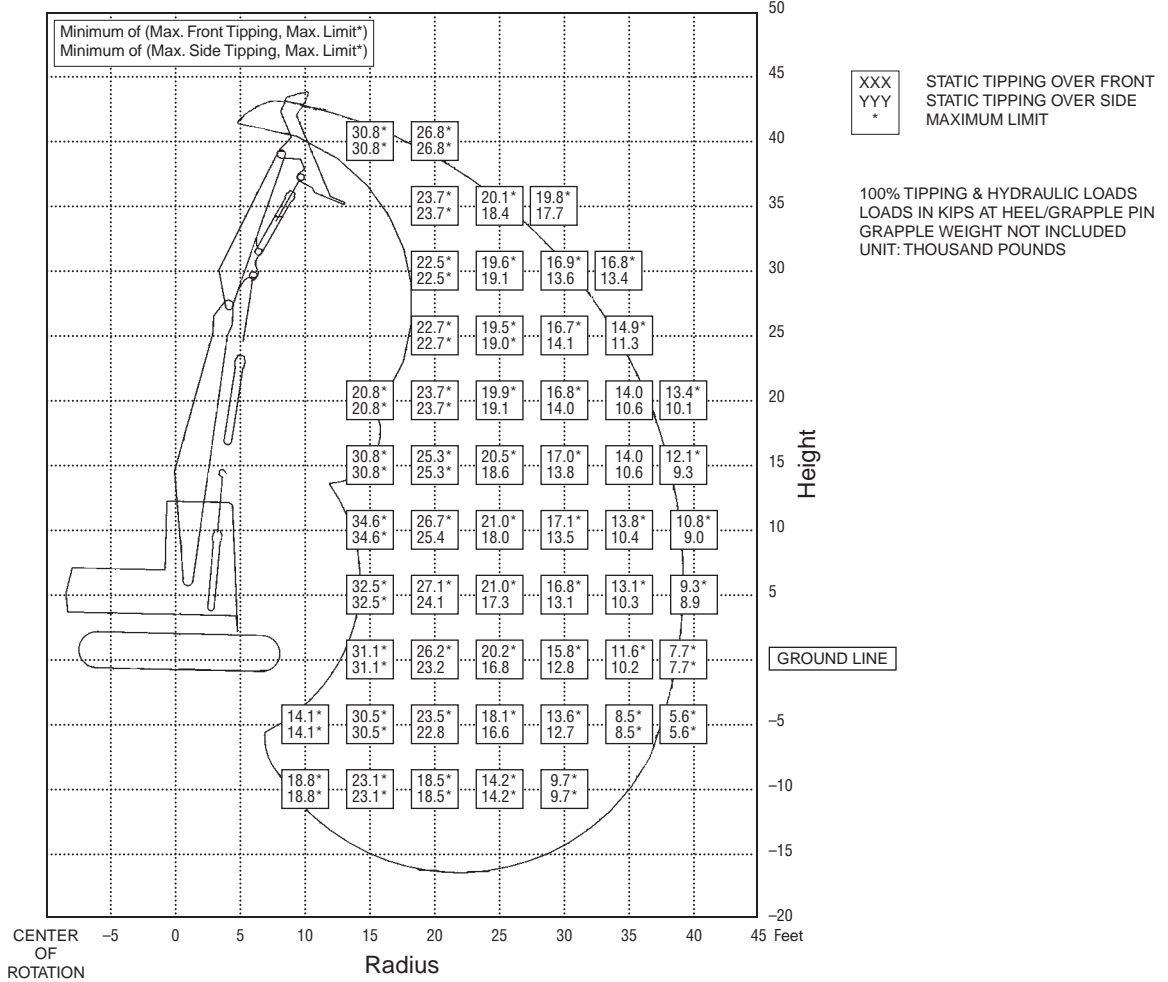


- Undercarriage — long, extended gauge
- Logging Front — Caterpillar 322B LL Under/Under Log Loader, 11 580 mm (38'0") maximum reach
- Capacity, lbs., (thousands)  
 Top Number: Tipping over front  
 Middle Number: Tipping over side  
 Bottom Number: Hydraulic capacity

- All capacities are 100% stability and 100% hydraulic with no deration for friction (100% efficiency)
- Grapple weight is not included

Calculations, weights and machine specifications are subject to change at any time without notice.

LIFT AND RANGE DIAGRAM


322B High Wide Forest Machine — Over/Under

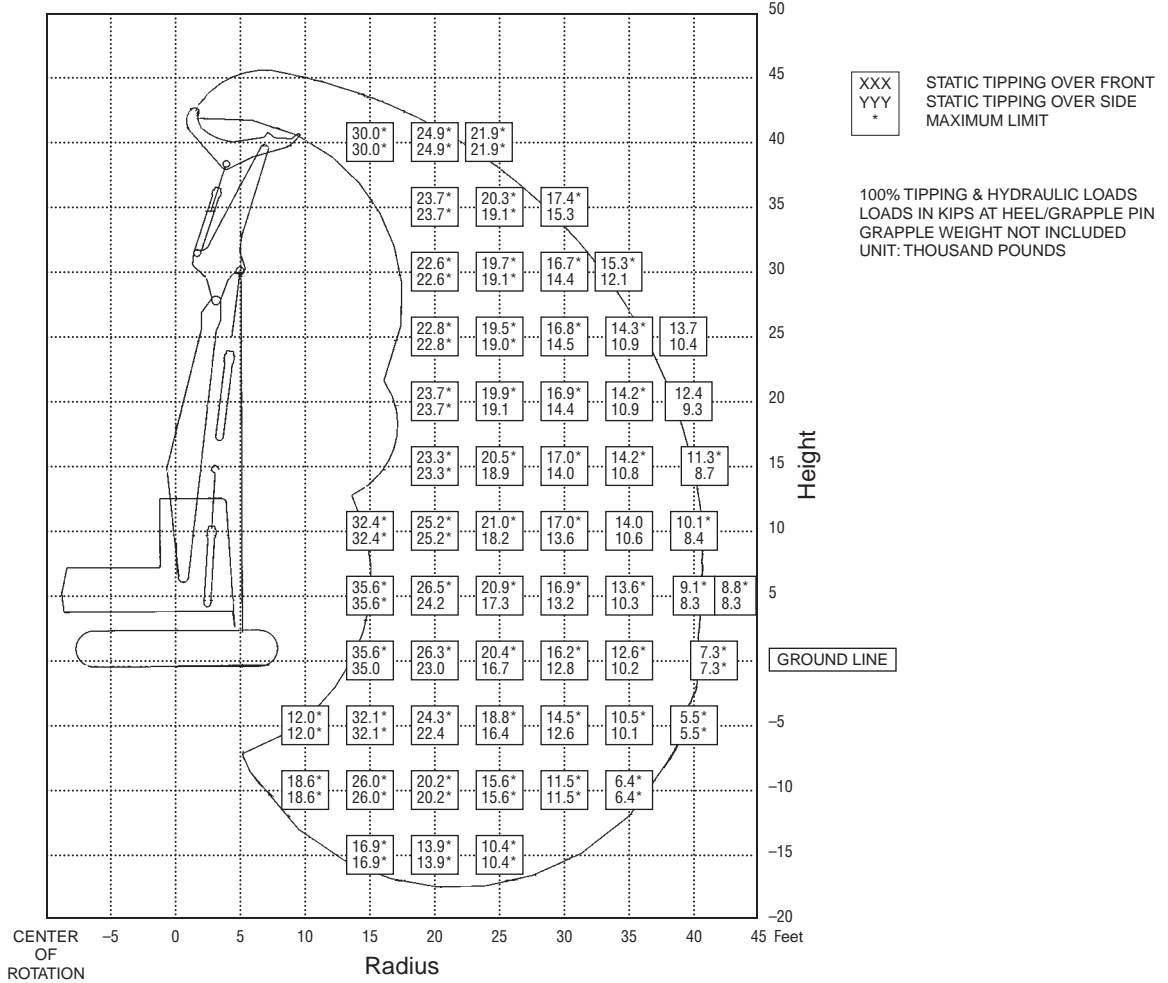

- Undercarriage — long, extended gauge
  - Logging Front — Caterpillar 322B LL Over/Under Log Loader, 12 500 mm (41'0") maximum reach
  - Capacity, lbs., (thousands)
    - Top Number: Tipping over front
    - Middle Number: Tipping over side
    - Bottom Number: Hydraulic capacity
  - All capacities are 100% stability and 100% hydraulic with no deration for friction (100% efficiency)
  - Grapple weight is not included
- Calculations, weights and machine specifications are subject to change at any time without notice.

**LIFT AND RANGE DIAGRAM**

**322B High Wide Forest Machine — B-N-T**

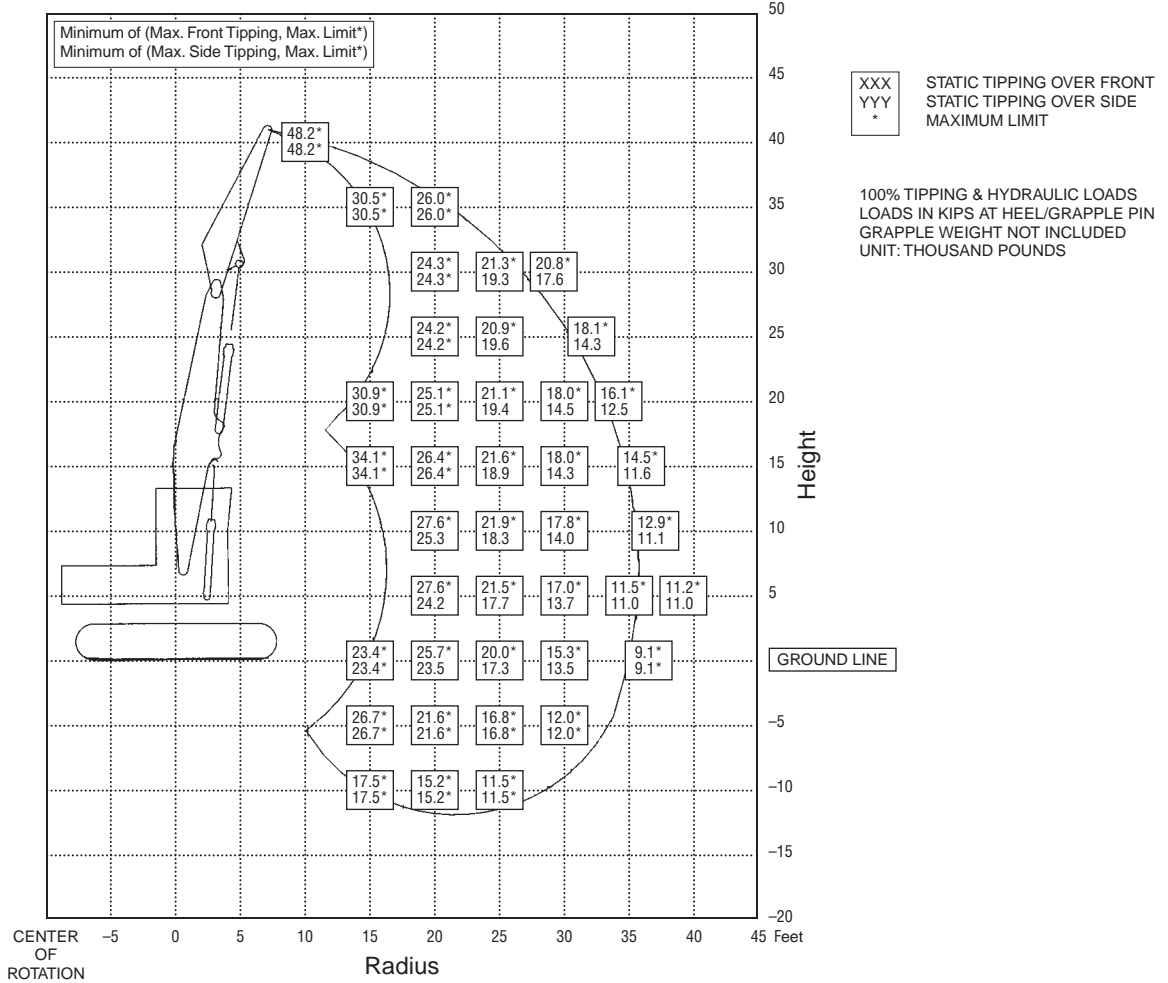


- Undercarriage — long, extended gauge
- Logging Front — Caterpillar 322B LL Butt-N-Top Log Loader, 10 970 mm (36'0") maximum reach
- Capacity, lbs., (thousands)  
 Top Number: Tipping over front  
 Middle Number: Tipping over side  
 Bottom Number: Hydraulic capacity

- All capacities are 100% stability and 100% hydraulic with no deration for friction (100% efficiency)
- Grapple weight is not included

Calculations, weights and machine specifications are subject to change at any time without notice.

LIFT AND RANGE DIAGRAM

325B High Wide Forest Machine — Under/Under

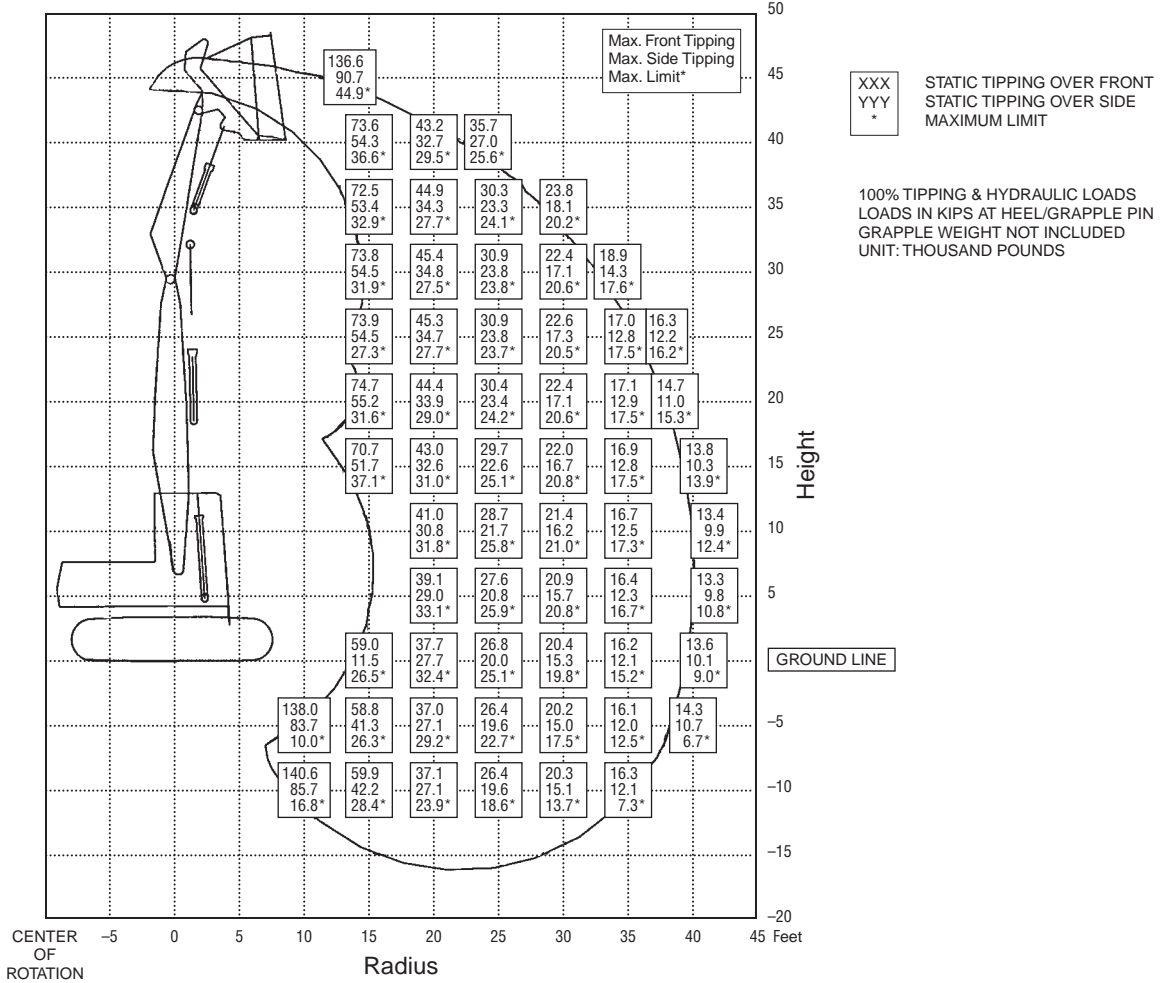


- Undercarriage — long, extended gauge
- Logging Front — Caterpillar 325B LL Under/Under Log Loader, 12 190 mm (40'0") maximum reach
- Capacity, lbs., (thousands)  
 Top Number: Tipping over front  
 Middle Number: Tipping over side  
 Bottom Number: Hydraulic capacity

- All capacities are 100% stability and 100% hydraulic with no deration for friction (100% efficiency)
  - Grapple weight is not included
- Calculations, weights and machine specifications are subject to change at any time without notice.



**LIFT AND RANGE DIAGRAM**

**325B High Wide Forest Machine — Over/Under**

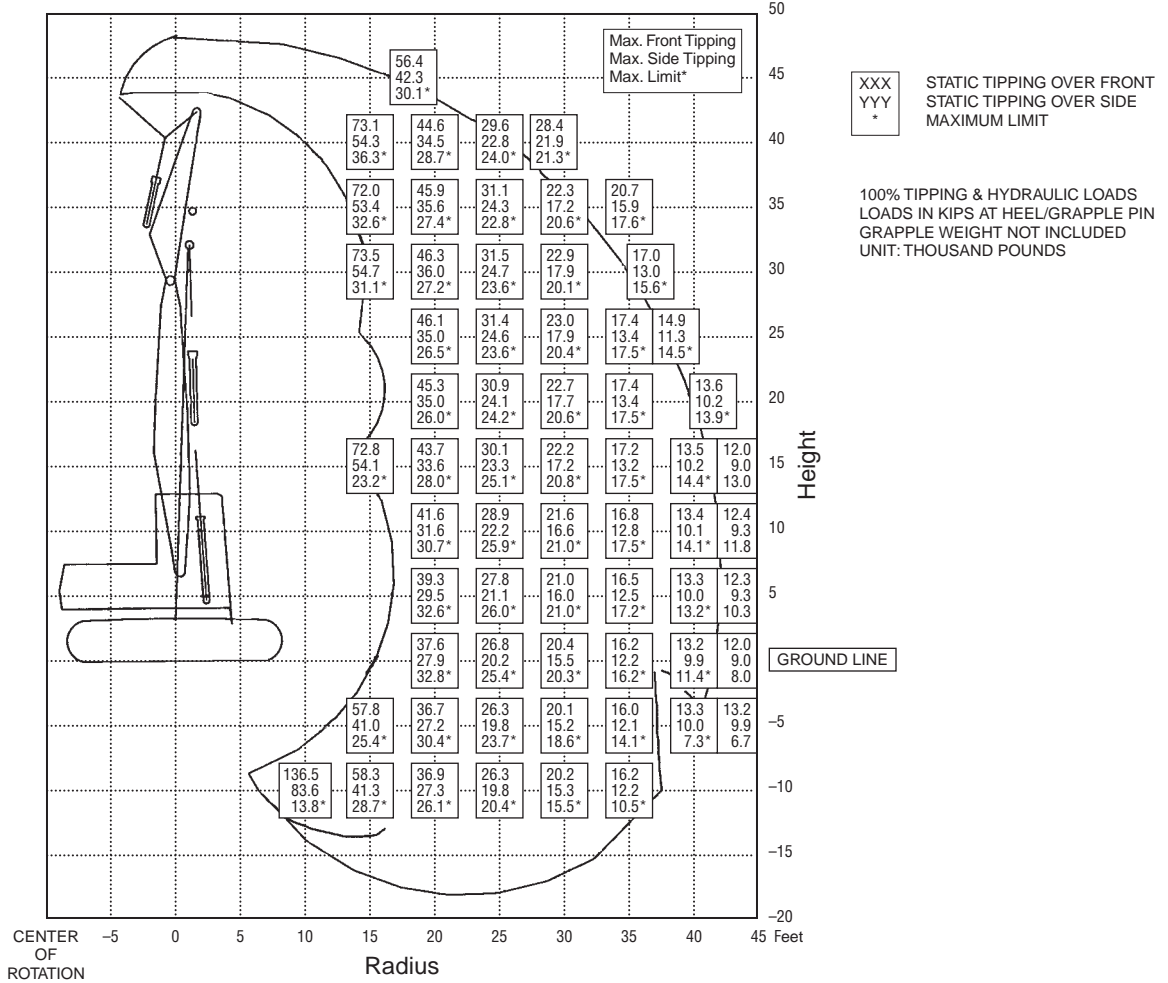


- Undercarriage — long, extended gauge
- Logging Front — Caterpillar 325B LL Over/Under Log Loader, 12 800 mm (42'0") maximum reach
- Capacity, lbs., (thousands)  
 Top Number: Tipping over front  
 Middle Number: Tipping over side  
 Bottom Number: Hydraulic capacity

- All capacities are 100% stability and 100% hydraulic with no deration for friction (100% efficiency)
- Grapple weight is not included

Calculations, weights and machine specifications are subject to change at any time without notice.

LIFT AND RANGE DIAGRAM

325B High Wide Forest Machine — B-N-T

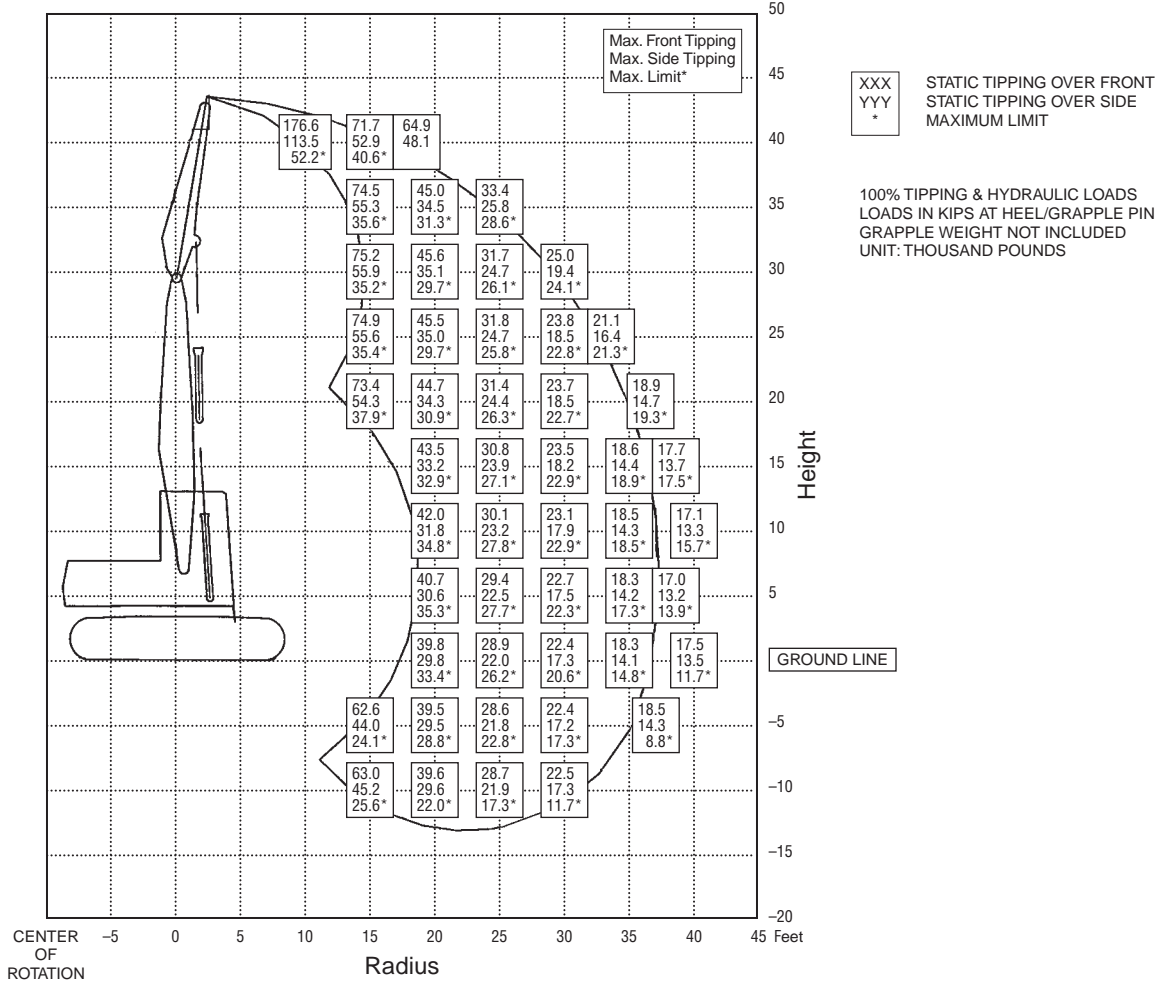


- Undercarriage — long, extended gauge
- Logging Front — Caterpillar 325B LL Butt-N-Top Log Loader, 11 280 mm (37'0") maximum reach
- Capacity, lbs., (thousands)  
 Top Number: Tipping over front  
 Middle Number: Tipping over side  
 Bottom Number: Hydraulic capacity

- All capacities are 100% stability and 100% hydraulic with no deration for friction (100% efficiency)
  - Grapple weight is not included
- Calculations, weights and machine specifications are subject to change at any time without notice.

**LIFT AND RANGE DIAGRAM**

**325B High Wide Forest Machine  
with Hoist Cylinder Adapter**

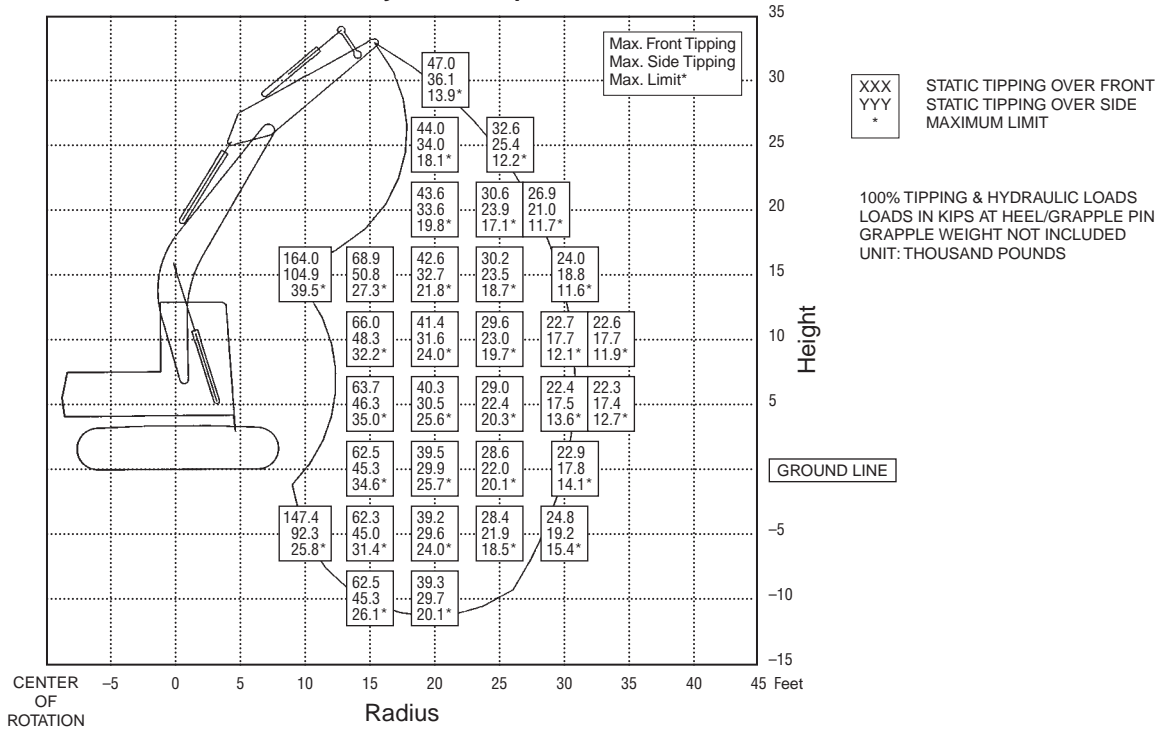


- Undercarriage — long, extended gauge
- Excavator Front — Caterpillar 325B LL with hoist cylinder adapter, heavy counterweight, R-Boom, R-Stick, 9450 mm (31'0") maximum reach
- Capacity, lbs., (thousands)  
 Top Number: Tipping over front  
 Middle Number: Tipping over side  
 Bottom Number: Hydraulic capacity

- All capacities are 100% stability and 100% hydraulic with no deration for friction (100% efficiency)

■ Grapple weight is not included  
 Calculations, weights and machine specifications are subject to change at any time without notice.

**LIFT AND RANGE DIAGRAM**

**325B High Wide Forest Machine  
without Hoist Cylinder Adapter**

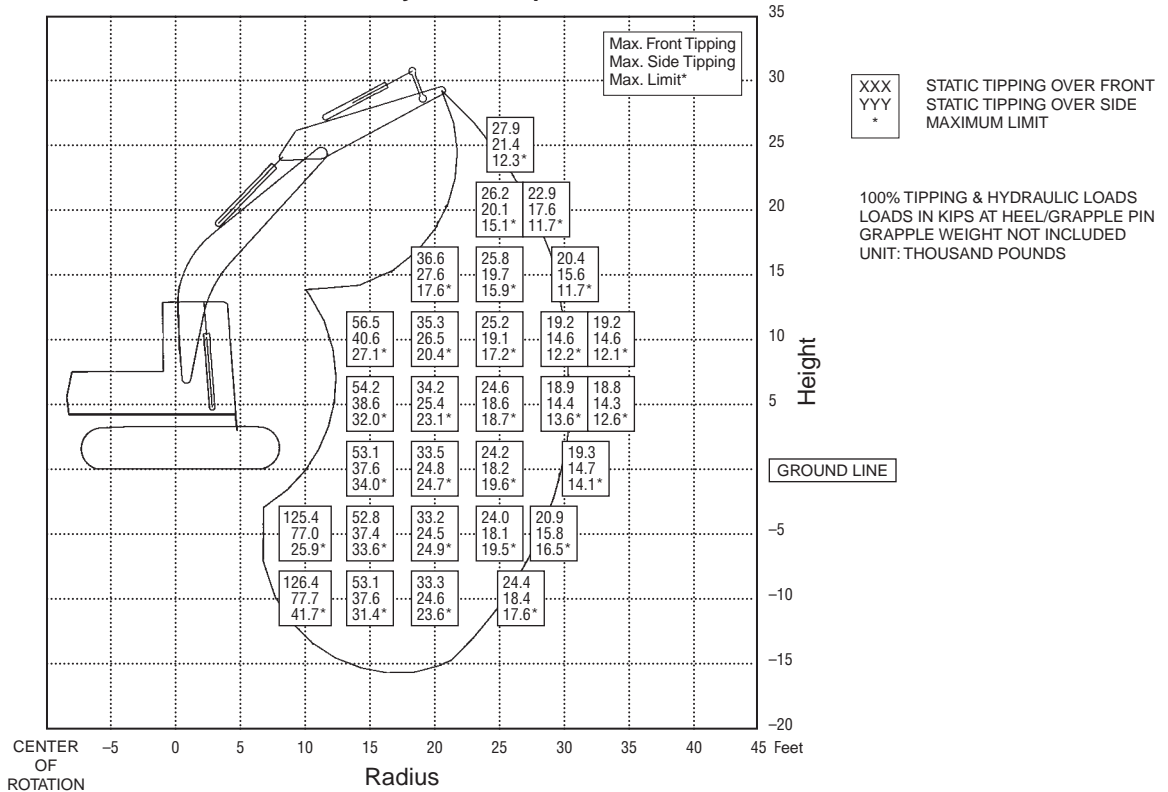

- Undercarriage — long, extended gauge
- Excavator Front — Caterpillar 325B LL without hoist cylinder adapter, R-Boom, R-Stick, 9300 mm (30'6") maximum reach
- Capacity, lbs., (thousands)


Top Number: Tipping over front  
 Middle Number: Tipping over side  
 Bottom Number: Hydraulic capacity

- All capacities are 100% stability and 100% hydraulic with no deration for friction (100% efficiency)
- Grapple weight is not included

Calculations, weights and machine specifications are subject to change at any time without notice.

**LIFT AND RANGE DIAGRAM**

**325B High Wide Forest Machine  
with Hoist Cylinder Adapter**

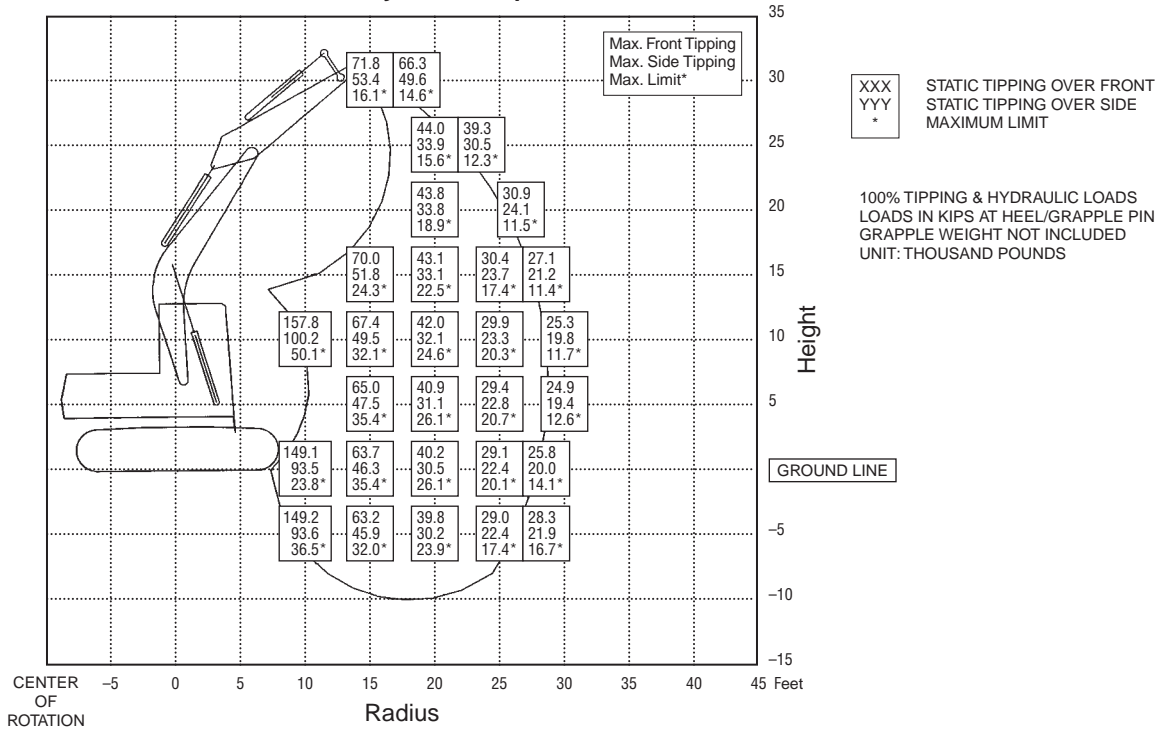


- Undercarriage — long, extended gauge
- Excavator Front — Caterpillar 325B LL with hoist cylinder adapter, heavy counterweight, M-Boom, R-Stick, 8530 mm (28'0") maximum reach
- Capacity, lbs., (thousands)
  - Top Number: Tipping over front
  - Middle Number: Tipping over side
  - Bottom Number: Hydraulic capacity

- All capacities are 100% stability and 100% hydraulic with no deration for friction (100% efficiency)
- Grapple weight is not included

Calculations, weights and machine specifications are subject to change at any time without notice.

LIFT AND RANGE DIAGRAM

325B Standard Gauge Forest Machine  
without Hoist Cylinder Adapter

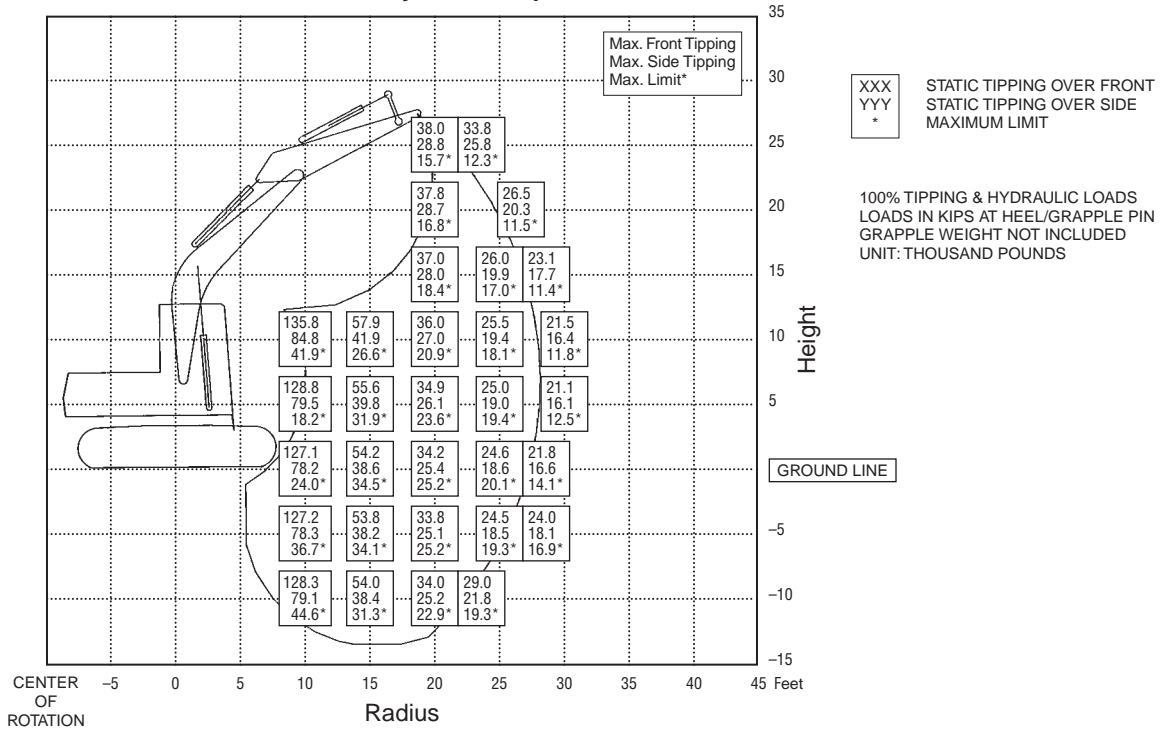


- Undercarriage — long, standard gauge
- Excavator Front — Caterpillar 325B LL without hoist cylinder adapter, M-Boom, R-Stick, 8530 mm (28'0") maximum reach
- Capacity, lbs., (thousands)  
 Top Number: Tipping over front  
 Middle Number: Tipping over side  
 Bottom Number: Hydraulic capacity

- All capacities are 100% stability and 100% hydraulic with no deration for friction (100% efficiency)
- Grapple weight is not included

Calculations, weights and machine specifications are subject to change at any time without notice.

**LIFT AND RANGE DIAGRAM**

**330B High Wide Forest Machine — Under/Under**

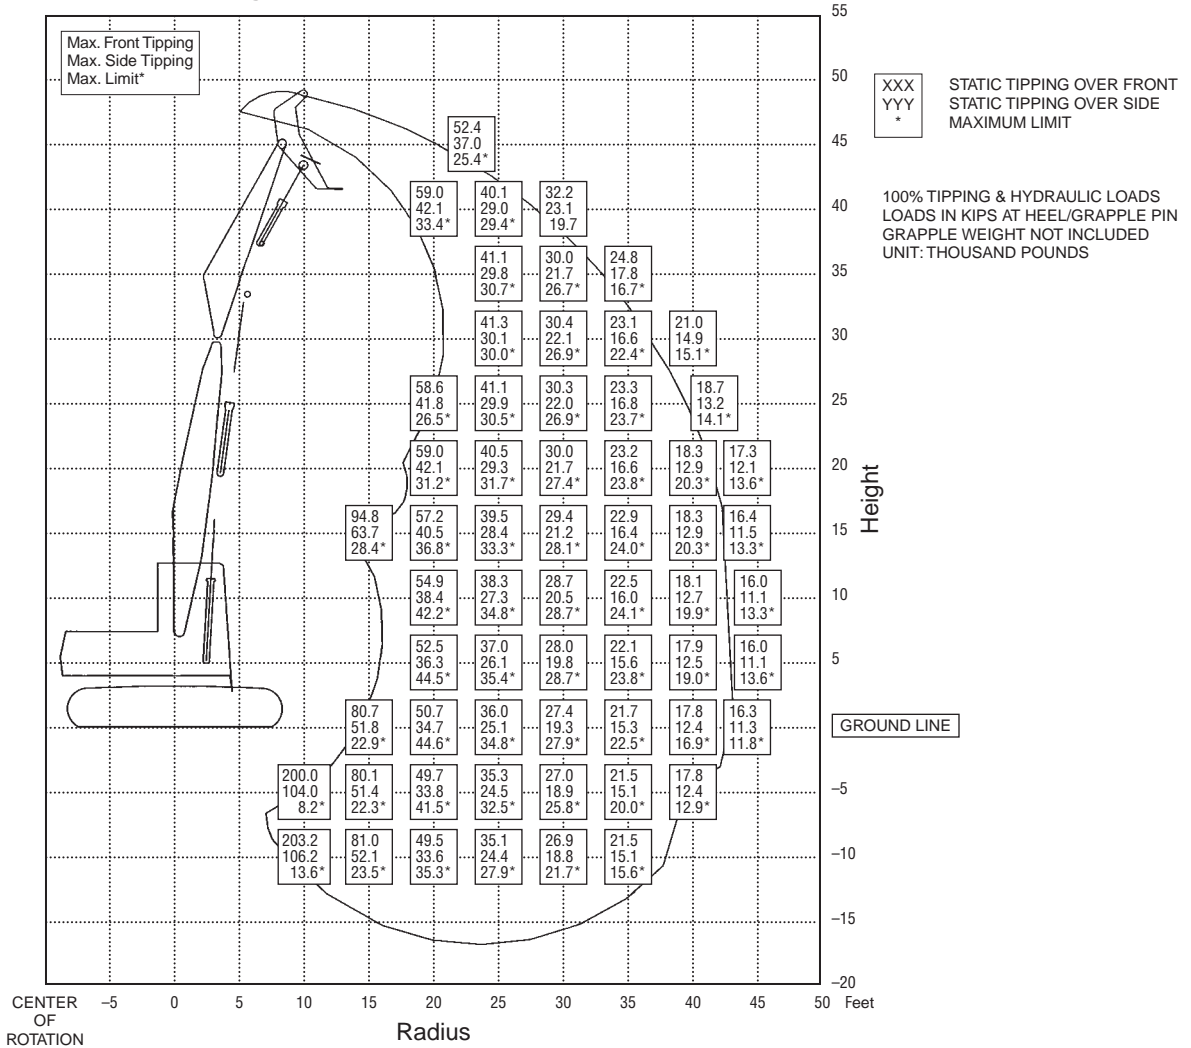


- Undercarriage — long, extended gauge
- Logging Front — Caterpillar 330B LL Under/Under Log Loader, 13 100 mm (43'0") maximum reach
- Capacity, lbs., (thousands)  
 Top Number: Tipping over front  
 Middle Number: Tipping over side  
 Bottom Number: Hydraulic capacity

- All capacities are 100% stability and 100% hydraulic with no deration for friction (100% efficiency)
- Grapple weight is not included

Calculations, weights and machine specifications are subject to change at any time without notice.

LIFT AND RANGE DIAGRAM

330B High Wide Forest Machine — Over/Under

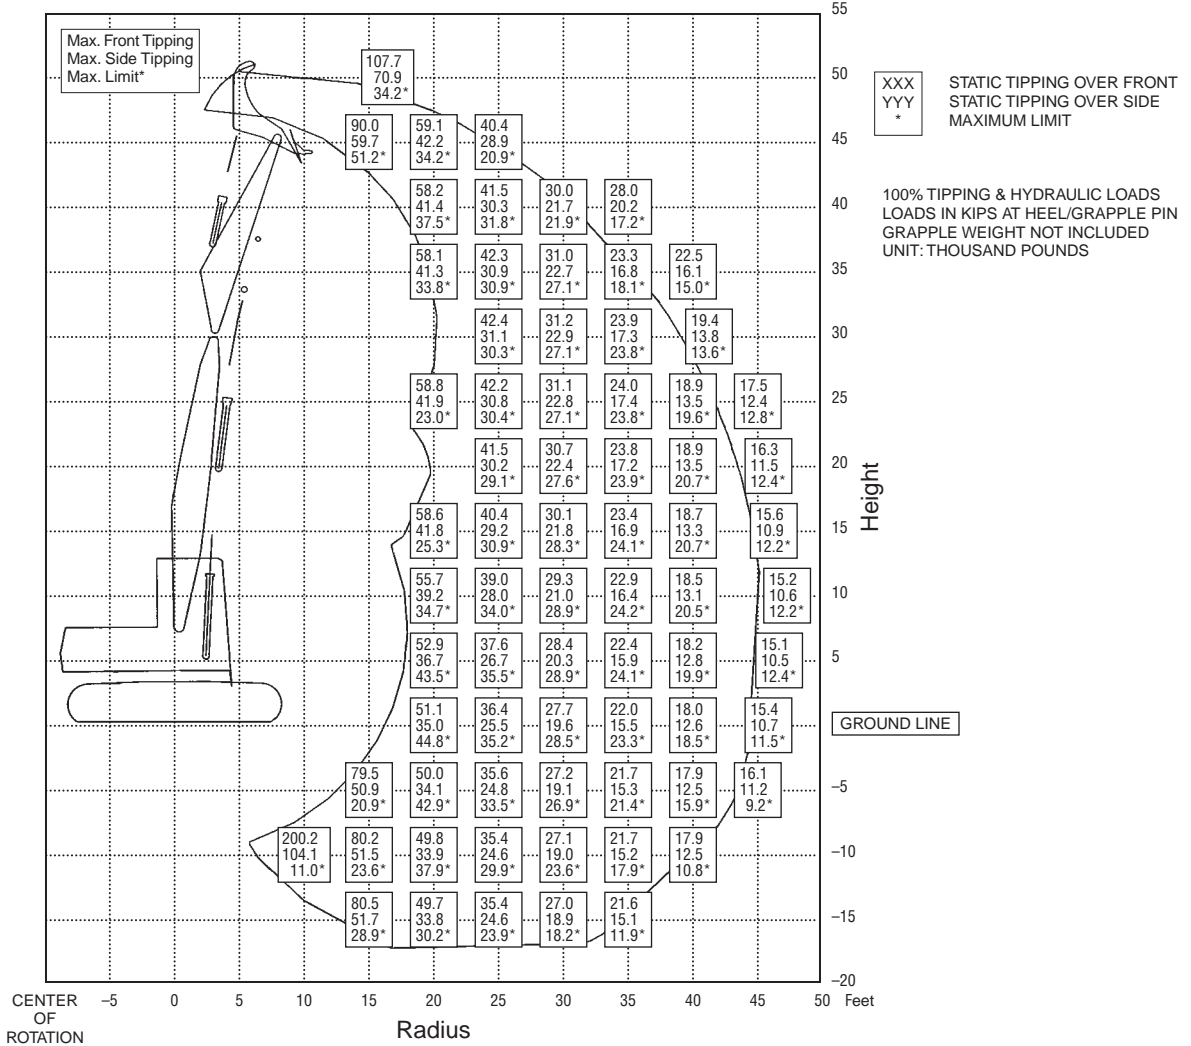


- Undercarriage — long, extended gauge
- Logging Front — Caterpillar 330B LL Over/Under Log Loader, 13 700 mm (45'0") maximum reach
- Capacity, lbs., (thousands)  
 Top Number: Tipping over front  
 Middle Number: Tipping over side  
 Bottom Number: Hydraulic capacity

- All capacities are 100% stability and 100% hydraulic with no deration for friction (100% efficiency)
  - Grapple weight is not included
- Calculations, weights and machine specifications are subject to change at any time without notice.



**LIFT AND RANGE DIAGRAM**

**330B High Wide Forest Machine — B-N-T**

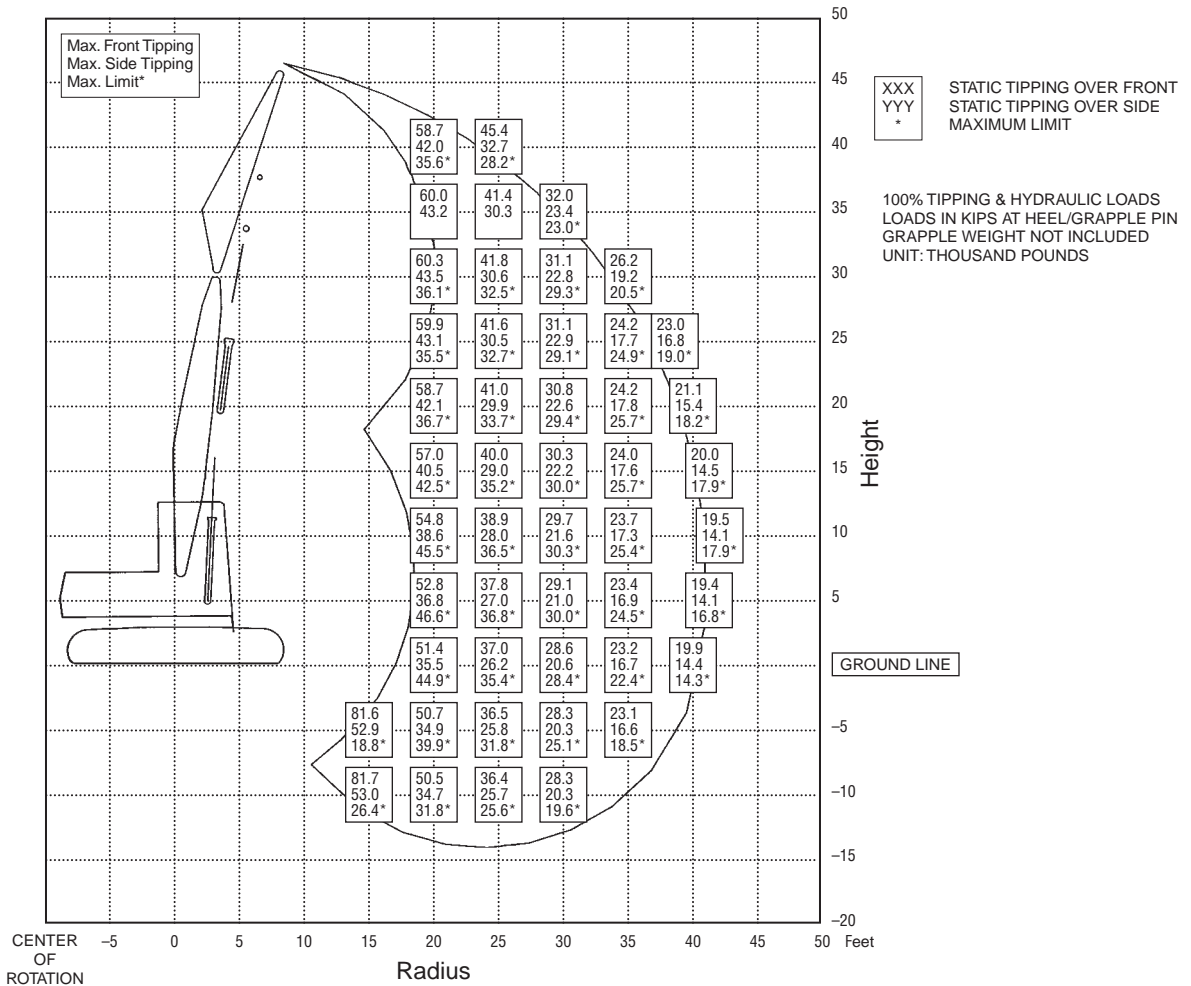


- Undercarriage — long, extended gauge
- Logging Front — Caterpillar 330B LL Butt-N-Top Log Loader, 12 190 mm (40'0") maximum reach
- Capacity, lbs., (thousands)  
 Top Number: Tipping over front  
 Middle Number: Tipping over side  
 Bottom Number: Hydraulic capacity

- All capacities are 100% stability and 100% hydraulic with no deration for friction (100% efficiency)
  - Grapple weight is not included
- Calculations, weights and machine specifications are subject to change at any time without notice.

LIFT AND RANGE DIAGRAM

330B High Wide Forest Machine  
with Hoist Cylinder Adapter

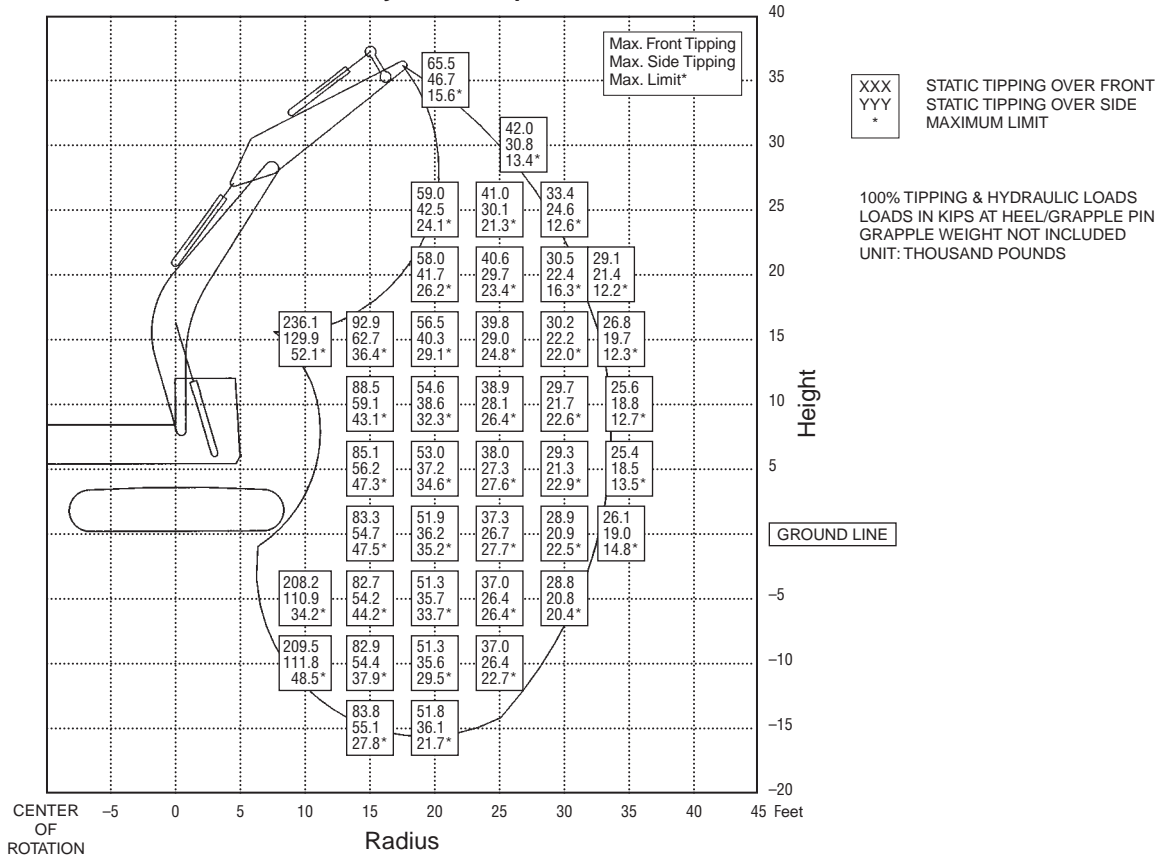


- Undercarriage — long, extended gauge
- Excavator Front — Caterpillar 330B LL with hoist cylinder adapter, R-Boom, R-Stick, 10 100 mm (33'0") maximum reach
- Capacity, lbs., (thousands)  
 Top Number: Tipping over front  
 Middle Number: Tipping over side  
 Bottom Number: Hydraulic capacity

- All capacities are 100% stability and 100% hydraulic with no deration for friction (100% efficiency)
- Grapple weight is not included

Calculations, weights and machine specifications are subject to change at any time without notice.

**LIFT AND RANGE DIAGRAM**


**330B High Wide Forest Machine  
without Hoist Cylinder Adapter**

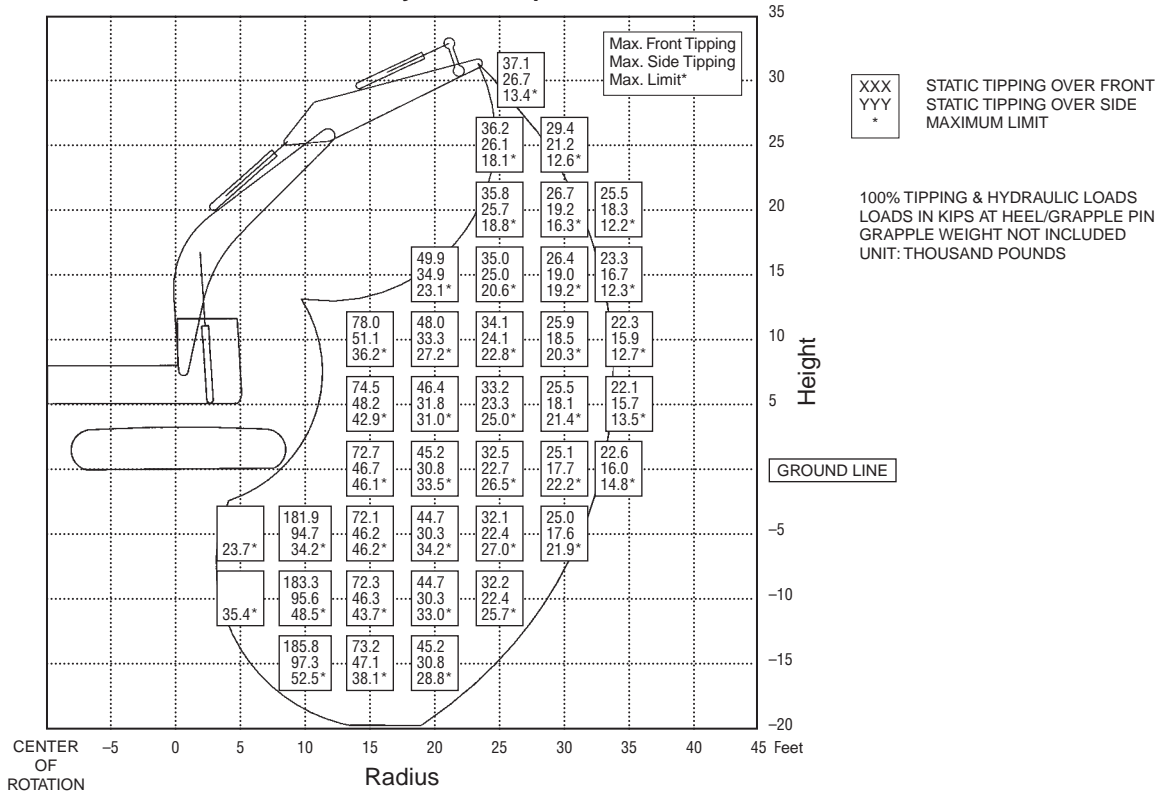

- Undercarriage — long, extended gauge
- Excavator Front — Caterpillar 330B LL without hoist cylinder adapter, 10 100 mm (33'0") maximum reach
- Capacity, lbs., (thousands)  
 Top Number: Tipping over front  
 Middle Number: Tipping over side  
 Bottom Number: Hydraulic capacity

- All capacities are 100% stability and 100% hydraulic with no deration for friction (100% efficiency)
  - Grapple weight is not included
- Calculations, weights and machine specifications are subject to change at any time without notice.


**LIFT AND RANGE DIAGRAM**  
**330B High Wide Forest Machine**  
**with Hoist Cylinder Adapter**

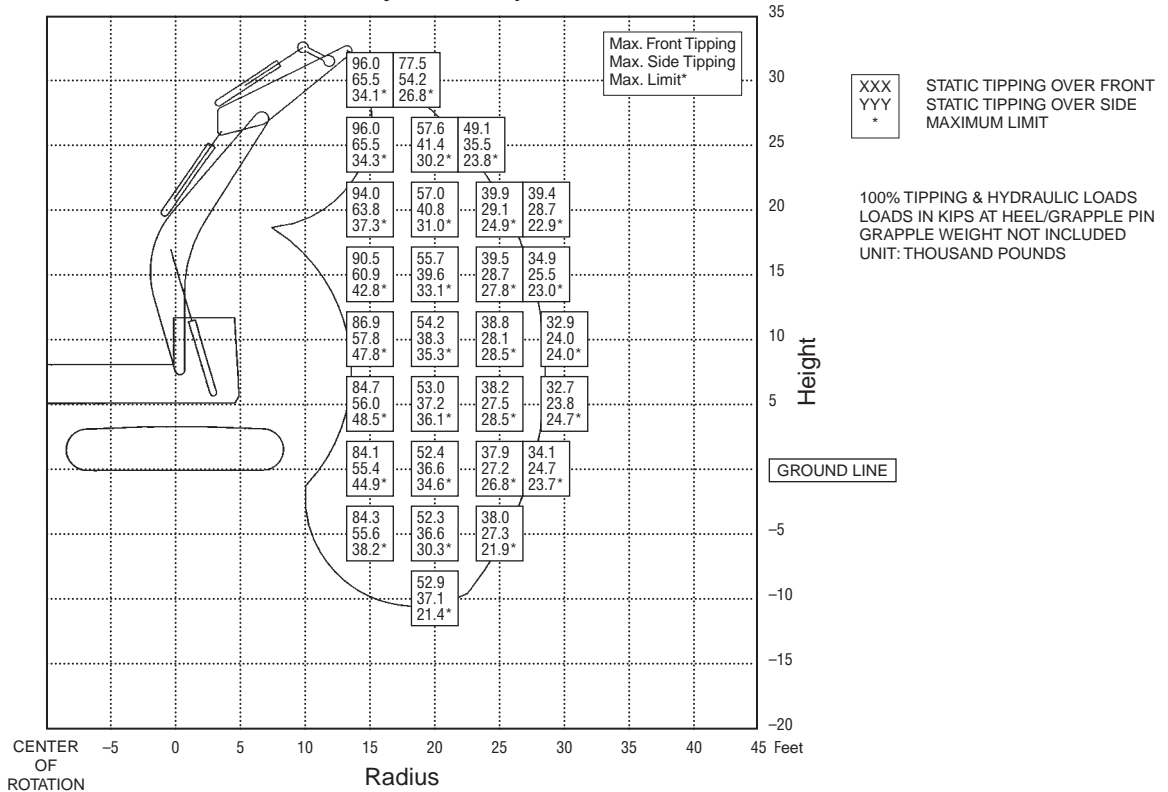

- Undercarriage — long, extended gauge
  - Excavator Front — Caterpillar 330B LL with hoist cylinder adapter, heavy counterweight, M-Boom, M-Stick, 8530 mm (28'0") maximum reach
  - Capacity, lbs., (thousands)
    - Top Number: Tipping over front
    - Middle Number: Tipping over side
    - Bottom Number: Hydraulic capacity
  - All capacities are 100% stability and 100% hydraulic with no deration for friction (100% efficiency)
  - Grapple weight is not included
- Calculations, weights and machine specifications are subject to change at any time without notice.

**LIFT AND RANGE DIAGRAM**

**330B Forest Machine  
without Hoist Cylinder Adapter**

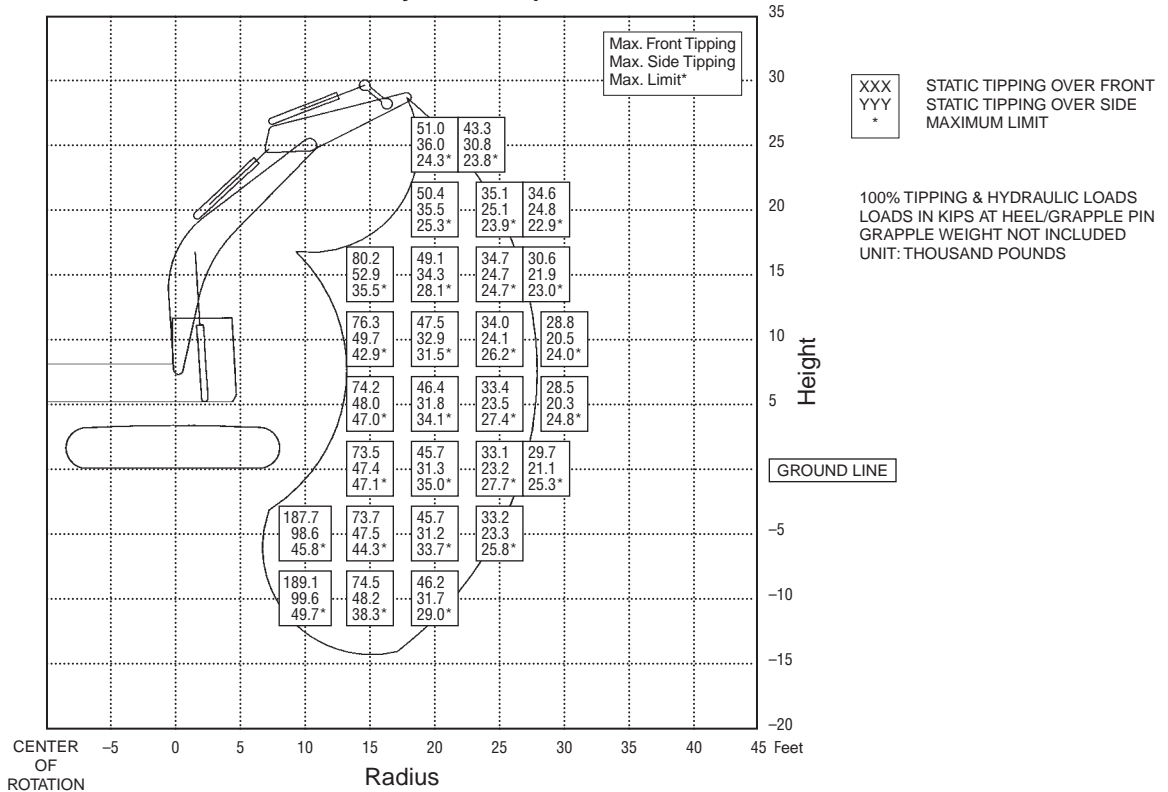

- Undercarriage — long, standard gauge
- Excavator Front — Caterpillar 330B LL without hoist cylinder adapter, M-Boom, M-Stick, 8530 mm (28'0") maximum reach
- Capacity, lbs., (thousands)
  - Top Number: Tipping over front
  - Middle Number: Tipping over side
  - Bottom Number: Hydraulic capacity

- All capacities are 100% stability and 100% hydraulic with no deration for friction (100% efficiency)
- Grapple weight is not included

Calculations, weights and machine specifications are subject to change at any time without notice.

**Features:**

- The Caterpillar product line of harvesting heads is matched to the Caterpillar carriers. Four models of harvesting heads have been designed and built to handle a wide variety of forestry applications, while providing customers with efficient solutions to ensure success. This complete line of harvesting heads produces high quality logs quickly by utilizing ample hydraulic flow and state-of-the-art controls to achieve both high feeding force and speed.



To ensure the highest accuracy when bucking and measuring, these heads feature a patented design that automatically centers the tree with the feed rollers while simultaneously varying pressure to provide maximum grip. Exact diameter measurements are made by digital sensors built into the delimiting knives. These features, combined with hydraulic control of the knives, will help prevent any unnecessary tree damage while processing.

Caterpillar harvesting heads can be used in a wide variety of applications, from first thinning to clearcutting, in a wide range of diameters. These heads will provide the versatility, durability and reliability today's logger needs to optimize the benefits of a cut-to-length harvesting system.



<b>MODEL</b>	<b>HH45</b>	<b>HH55</b>	<b>HH65</b>	<b>HH75</b>
Felling Diameter	45/50 cm <b>18"/20"</b>	55 cm <b>22"</b>	65 cm <b>26"</b>	65/75 cm <b>26"/30"</b>
Delimiting Diameter	43 cm <b>17"</b>	53 cm <b>21"</b>	53 cm <b>21"</b>	58 cm <b>23"</b>
Feed Force	14.7@25 kN@mpa <b>3298@3625 lbs@psi</b>	19.4@25 kN@mpa <b>4354@3625 lbs@psi</b>	19.4@25 kN@mpa <b>4354@3625 lbs@psi</b>	26.7@25 kN@mpa <b>6009@3625 lbs@psi</b>
Feed Speed	0-5.0 m/s <b>0-16.0 ft/s</b>	0-5.0 m/s <b>0-16.0 ft/s</b>	0-5.0 m/s <b>0-16.0 ft/s</b>	0-5.0 m/s <b>0-16.0 ft/s</b>
Knives	<b>1 fixed 3 moveable</b>	<b>1 fixed 3 moveable</b>	<b>1 fixed 3 moveable</b>	<b>1 fixed 4 moveable</b>
Feed Roller Motor Displacement	2 × 332 cm <sup>3</sup> <b>2 × 20.3 in<sup>3</sup></b>	2 × 560 cm <sup>3</sup> <b>2 × 34.2 in<sup>3</sup></b>	2 × 560 cm <sup>3</sup> <b>2 × 34.2 in<sup>3</sup></b>	2 × 857 cm <sup>3</sup> <b>2 × 52.3 in<sup>3</sup></b>
Weight	710 kg <b>1565 lb</b>	950 kg <b>2095 lb</b>	1000 kg <b>2205 lb</b>	1460 kg <b>3219 lb</b>
Optimum Tree Size	0.1-0.2 m <sup>3</sup> <b>0.13-0.26 yd<sup>3</sup></b>	0.15-0.45 m <sup>3</sup> <b>0.20-0.59 yd<sup>3</sup></b>	0.2-0.5 m <sup>3</sup> <b>0.26-0.65 yd<sup>3</sup></b>	0.25-0.80 m <sup>3</sup> <b>0.33-1.05 yd<sup>3</sup></b>

\*When selecting Harvesting Heads other factors must be taken into consideration. For example: tree species, hardness and softness of the wood, number of limbs as well as the type of carrier to be used in a specific application.

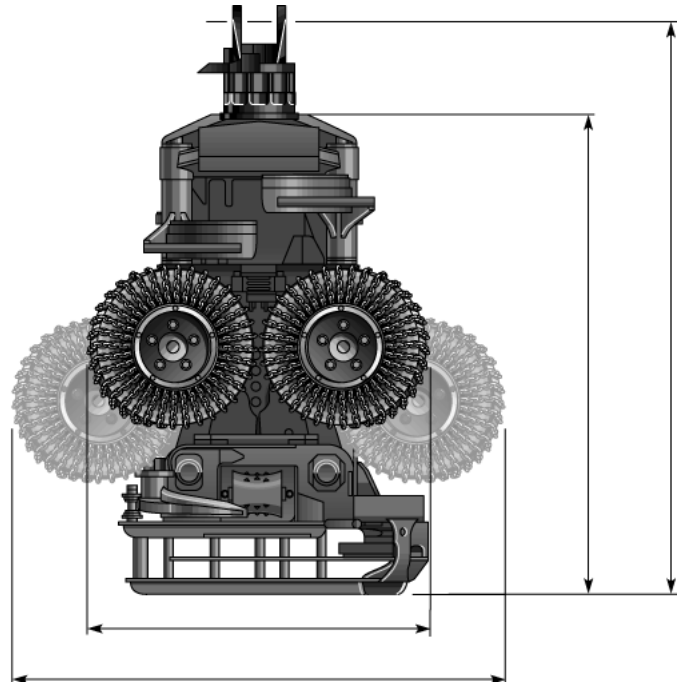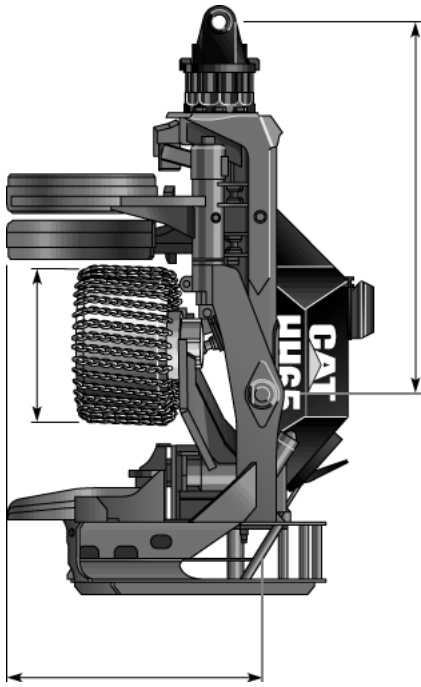

7

MODEL	HH45		HH55		HH65		HH75	
A	660 mm	2'2"	795 mm	2'7"	795 mm	2'7"	1320 mm	4'4"
B	320 mm	1'1"	450 mm	1'6"	450 mm	1'6"	510 mm	1'8"
C	1030 mm	3'5"	1120 mm	3'8"	1120 mm	3'8"	1170 mm	3'10"
D	780 mm	2'7"	930 mm	3'1"	930 mm	3'1"	1020 mm	3'4"
E	1180 mm	3'10"	1460 mm	4'9"	1460 mm	4'9"	1635 mm	5'4"
F	1370 mm	4'6"	1470 mm	4'10"	1520 mm	5'0"	1795 mm	5'11"
G	1630 mm	5'4"	1700 mm	5'7"	1750 mm	5'9"	2090 mm	6'10"



**Wheel Harvesters Heads Selection**


Wheeled Carrier	HH45	HH55	HH65	HH75
550	X	X		
570		X	X	
580			X	X

**Track Harvesters Heads Selection**

Track Carrier	HH45	HH55	HH65	HH75
315C	X	X	X	
320C			X	X
322C				X
325C				X

**Features:**

- **Full 360° continuous rotation.**
- **Applicable to** shovel logging and sorting applications.
- **Paddle style tines** are made of abrasion resistant material.
- **Induction hardened pins and bushings.**
- **Heavy well hydraulic cylinders** with large diameter rod and integral load check valves.

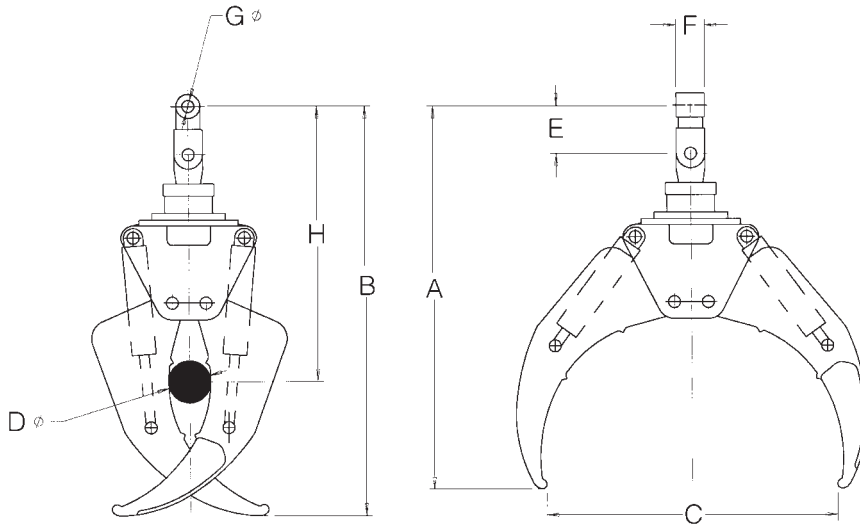

7

**Dimensions:**


Grapple Model		A	B	C	D	E	F	G	H
B52 (320B LL/322B LL)	mm	1854	2006	1372	195	254	152	63	1371
	in	73	79	54	7.7	10	6	2.5	54
B60 (325B LL/330B LL)	mm	2032	2160	1524	218	254	152	63	1448
	in	80	85	60	8.6	10	6	2.5	57

<b>WHEEL TRACTOR MODEL</b>	<b>814F</b>		<b>824G</b>		<b>834B</b>	
<b>Models</b>	<b>BD814US-14'</b>		<b>BD824US-15'9"</b>		<b>BD834US-20'</b>	
Replaces "S" Blade						
<b>Blade:</b>						
Capacity	16.74 m <sup>3</sup>	<b>21.9 yd<sup>3</sup></b>	24 m <sup>3</sup>	<b>31.4 yd<sup>3</sup></b>	29.8 m <sup>3</sup>	<b>39 yd<sup>3</sup></b>
Length (cutting width)	4.3 m	<b>14'4"</b>	4.78 m	<b>15'7"</b>	6.09 m	<b>20'0"</b>
Height	1.88 m	<b>6'2"</b>	2.24 m	<b>7'4"</b>	2.24 m	<b>7'4"</b>
Wing angle	<b>25°</b>		<b>30°</b>		<b>30°</b>	
<b>Weight, Installed (without hydraulics)</b>						
BD (S) Dozer	1973 kg	<b>4350 lb</b>	3630 kg	<b>8000 lb</b>	4627 kg	<b>9470 lb</b>

<b>WHEEL TRACTOR MODEL</b>	<b>814F</b>		<b>824G</b>		<b>834B</b>	
<b>Models</b>	<b>B14-20S</b>		<b>B24-27S</b>		<b>B34-40S</b>	
Replaces "S" Blade						
<b>Chip Scoop:</b>						
Lift and Carrying Capacity	15.3 m <sup>3</sup>	<b>20 yd<sup>3</sup></b>	20.6 m <sup>3</sup>	<b>27 yd<sup>3</sup></b>	34.4 m <sup>3</sup>	<b>39.5 yd<sup>3</sup></b>
Dozing Capacity	30.4 m <sup>3</sup>	<b>40 yd<sup>3</sup></b>	41.3 m <sup>3</sup>	<b>54 yd<sup>3</sup></b>	49.4 m <sup>3</sup>	<b>65 yd<sup>3</sup></b>
Width	3.73 m	<b>12'3"</b>	4.03 m	<b>13'3"</b>	4.83 m	<b>15'10"</b>
Height	2.29 m	<b>7'6"</b>	2.79 m	<b>9'2"</b>	2.25 m	<b>7'4"</b>
Depth	2.46 m	<b>8'1"</b>	2.95 m	<b>9'8"</b>	3.02 m	<b>9'11"</b>
Weight	5390 kg	<b>11,880 lb</b>	11 420 kg	<b>19,125 lb</b>	11 105 kg	<b>24,480 lb</b>

**NOTE:** For specifications of Woodchip Dozers used on track-type tractors, see the Bulldozer section in this handbook.

- Logging Forks  
 ● 950G ● 962G ● 938G  
 ● IT38G ● IT62G

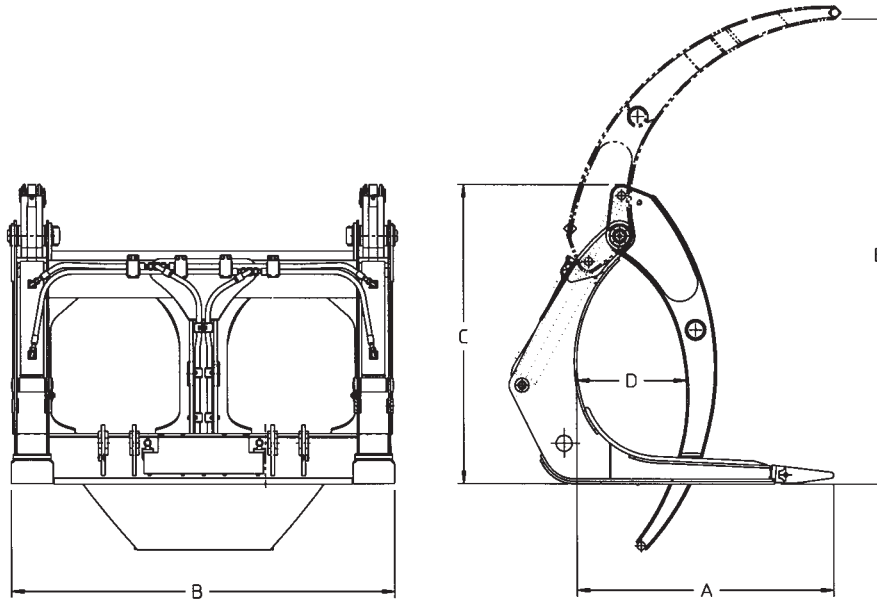


7

Model	950G/962G	950G/962G	938G	IT38G
Model	BLF950DTC	Millyard Fork	Millyard Fork	Grapple Fork
Group Number				
Logging Arrangement	157-3467	157-3466	119-8243	119-2297
Bucket Arrangement				
A — Tine Length	1626 mm 5'4"	1626 mm 5'4"	1372 mm 4'6"	1056 mm 3'6"
B — Overall Width	2261 mm 7'5"	2261 mm 7'5"	2288 mm 7'6"	1637 mm 5'4"
C — Back Height	1895 mm 6'2.59"	1890 mm 6'2.42"	1842 mm 6'1"	1905 mm 6'3"
D — Minimum Opening	1328 mm 4'4.27"	448 mm 17.64"	165 mm 6.5"	1029 mm 3'4"
E — Maximum Clamp Opening	2565 mm 8'5"	2913 mm 9'6.7"	2794 mm 9'2"	2595 mm 8'6"
Weight, Approximate	2200 kg 4860 lb	2310 kg 5100 lb	1633 kg 3600 lb	2085 kg 4600 lb

Model	IT38G	IT62G	IT62G	IT62G
Model	Millyard Fork	Millyard	Logging	Log & Lumber W/TC
Group Number				
Logging Arrangement	125-2607	163-0193.00	163-0194.00	114-3532.01
Bucket Arrangement				
A — Tine Length	1372 mm 4'6"	1626 mm 5'4"	1620 mm 5'4"	1219 mm 4'0"
B — Overall Width	2286 mm 7'6"	2261 mm 7'5"	2261 mm 7'5"	2248 mm 7'5"
C — Back Height	1902 mm 6'3"	1872 mm 6'2"	1895 mm 6'3"	1726 mm 5'8"
D — Minimum Opening	165 mm 6.5"	448 mm 17.64"	1537 mm 5'1"	1217 mm 4'0"
E — Maximum Clamp Opening	2845 mm 9'4"	2914 mm 9'7"	2565 mm 8'5"	2798 mm 9'2"
Weight, Approximate	1555 kg 3430 lb	2179 kg 4800 lb	2221 kg 4892 lb	863 kg 1900 lb

**NOTE:** Third valve required. Counterweight recommended.  
 Logging forks with millyard style clamps are available where logging application requires clamp to close between tines.  
 Contact your Caterpillar Dealer for more information.

- 990 ● 988F ● 980G
- 966G

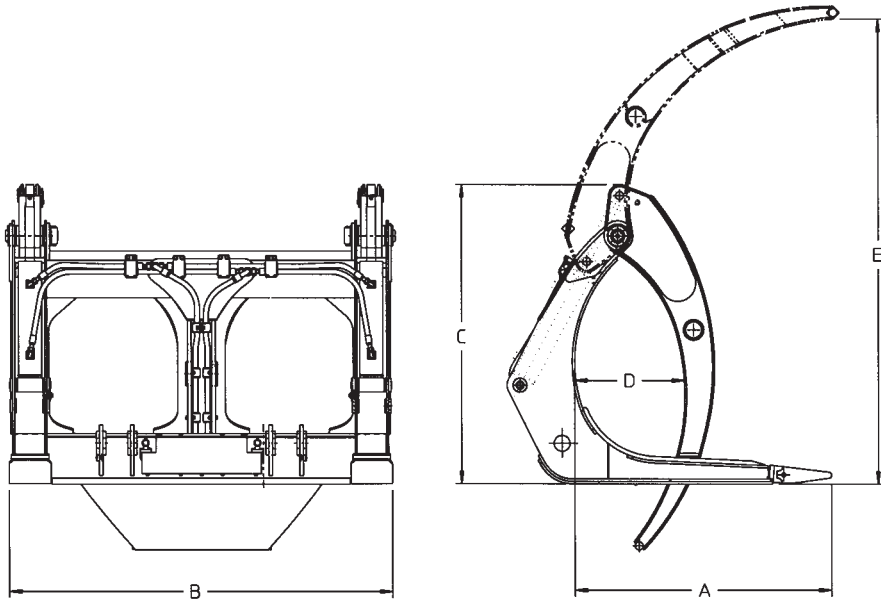

Model	990	988F	988F	980G
<b>Model</b>	<b>High Capacity Logging Fork</b>	<b>BFHC988DTC</b>	<b>BLF988DTC</b>	<b>BLF980DTC</b>
<b>Group Number</b>				
<b>Logging Arrangement</b>	<b>114-3557</b>	<b>8966</b>	<b>8965</b>	<b>125-4135</b>
<b>Bucket Arrangement</b>		<b>—</b>	<b>8965*</b>	<b>9210</b>
A — Tine Length	2438 mm <b>8'0"</b>	2286 mm <b>7'6"</b>	2286 mm <b>7'6"</b>	1829 mm <b>6'0"</b>
B — Overall Width	2762 mm <b>9'1"</b>	2743 mm <b>9'0"</b>	2775 mm <b>9'1"</b>	2756 mm <b>9'2"</b>
C — Back Height	3670 mm <b>12'0"</b>	3505 mm <b>11'6"</b>	2974 mm <b>9'9.1"</b>	2040 mm <b>6'8.3"</b>
D — Minimum Opening	2498 mm <b>8'2"</b>	2540 mm <b>8'4"</b>	2370 mm <b>7'9.3"</b>	1828 mm <b>5'11.95"</b>
E — Maximum Clamp Opening	4529 mm <b>14'10"</b>	4598 mm <b>15'0.9"</b>	3713 mm <b>12'2.2"</b>	2990 mm <b>9'9"</b>
Weight, Approximate	4930 kg <b>10,870 lb</b>	5350 kg <b>11,800 lb</b>	4490 kg <b>9400 lb</b>	3175 kg <b>7000 lb</b>

Model	980G	966G	966G	966G
<b>Model</b>	<b>Millyard Fork</b>	<b>Millyard</b>	<b>Logging</b>	<b>Log &amp; Lumber W/TC</b>
<b>Group Number</b>				
<b>Logging Arrangement</b>	<b>133-1545</b>	<b>166-8578.01</b>	<b>143-7211.00</b>	<b>143-7209.00</b>
<b>Bucket Arrangement</b>				
A — Tine Length	1829 mm <b>6'0"</b>	1618 mm <b>5'4"</b>	1618 mm <b>5'4"</b>	1524 mm <b>5'0"</b>
B — Overall Width	2388 mm <b>7'10"</b>	2416 mm <b>7'11"</b>	2416 mm <b>7'11"</b>	2502 mm <b>8'3"</b>
C — Back Height	2070 mm <b>6'10"</b>	1905 mm <b>6'3"</b>	1897 mm <b>6'3"</b>	1726 mm <b>5'8"</b>
D — Minimum Opening	254 mm <b>10"</b>	697 mm <b>2'3"</b>	1603 mm <b>5'3"</b>	1506 mm <b>4'11"</b>
E — Maximum Clamp Opening	2746 mm <b>9'0"</b>	2927 mm <b>9'7"</b>	2563 mm <b>8'5"</b>	2794 mm <b>9'2"</b>
Weight, Approximate	2742 kg <b>5450 lb</b>	2740 kg <b>6036 lb</b>	2300 kg <b>5065 lb</b>	1585 kg <b>3491 lb</b>

\*BLF988DTC with bucket arrangement — must order Link Assembly #137519.

**NOTE:** Third valve required. Counterweight recommended.

Logging forks with millyard style clamps are available where logging application requires clamp to close between tines. Contact your Caterpillar Dealer for more information.

**USE OF LOG VOLUME TABLES**

The tabulated volumes on these pages were calculated with no taper in log diameter from base to top. Therefore each value listed in the table represents the volume of a true cylinder. In practice this may occur only in short sections of large diameter trees. To obtain the volume of solid wood logs, excluding bark:

1. Establish the base diameter of the log inside the bark and above the butt flare (extreme end taper).
2. Repeat the procedure for the top (small end) of log.
3. Enter log volume table at each of the two established diameters. Move horizontally to the vertical column closest to the length of the log being measured.
4. Establish the volume figures for each end of the log, add the two together and divide by two to obtain average log volume.

**METRIC LOG VOLUMES (in Cubic Meters)**

Log Diameter (cm)	LOG LENGTH (METERS)														
	2	4	6	8	10	12	14	16	18	20	22	24	26	28	30
<b>10</b>	0.016	0.031	0.047	0.063	0.078	0.094	0.12	0.13	0.14	0.16	0.17	0.19	0.20	0.22	0.24
<b>15</b>	0.035	0.071	0.11	0.14	0.18	0.21	0.25	0.28	0.32	0.35	0.39	0.42	0.46	0.49	0.53
<b>20</b>	0.06	0.13	0.19	0.25	0.31	0.38	0.44	0.50	0.57	0.63	0.69	0.75	0.82	0.86	0.94
<b>25</b>	0.10	0.20	0.30	0.39	0.49	0.59	0.69	0.79	0.88	0.98	1.08	1.18	1.28	1.37	1.47
<b>30</b>	0.14	0.28	0.42	0.57	0.71	0.85	0.99	1.13	1.27	1.42	1.56	1.70	1.84	1.98	2.12
<b>35</b>	0.19	0.38	0.58	0.7	0.96	1.15	1.35	1.54	1.73	1.93	2.12	2.31	2.50	2.69	2.89
<b>40</b>	0.25	0.50	0.75	1.01	1.26	1.51	1.77	2.02	2.27	2.52	2.78	3.02	3.27	3.51	3.77
<b>45</b>	0.32	0.64	0.95	1.27	1.59	1.91	2.22	2.54	2.86	3.18	3.50	3.82	4.13	4.45	4.77
<b>50</b>	0.39	0.79	1.18	1.57	1.96	2.36	2.76	3.16	3.54	3.94	4.34	4.71	5.10	5.49	5.89
<b>55</b>	0.48	0.95	1.43	1.90	2.38	2.85	3.33	3.80	4.28	4.75	5.23	5.70	6.18	6.65	7.12
<b>60</b>	0.57	1.13	1.70	2.26	2.83	3.39	3.96	4.52	5.09	5.65	6.22	6.78	7.35	7.92	8.48
<b>65</b>	0.66	1.33	1.99	2.65	3.32	3.98	4.65	5.31	5.98	6.64	7.30	7.96	8.62	9.29	9.95
<b>70</b>	0.77	1.54	2.31	3.08	3.85	4.62	5.40	6.15	6.93	7.70	8.48	9.23	10.0	10.77	11.54
<b>75</b>	0.88	1.77	2.65	3.53	4.42	5.30	6.19	7.06	7.95	8.84	9.72	10.60	11.49	12.37	13.25
<b>80</b>	1.01	2.01	3.02	4.02	5.03	6.03	7.05	8.06	9.07	10.08	11.09	12.10	13.10	14.10	15.10
<b>85</b>	1.13	2.27	3.40	4.54	5.67	6.81	7.94	9.08	10.20	11.32	12.47	13.62	14.75	15.89	17.02
<b>90</b>	1.27	2.54	3.82	5.09	6.36	7.63	8.90	10.17	11.43	12.71	13.99	15.27	16.54	17.81	19.10
<b>95</b>	1.42	2.84	4.75	5.67	7.09	8.51	9.92	11.33	12.76	14.18	15.60	17.01	18.43	19.85	21.26
<b>100</b>	1.57	3.14	4.71	6.28	7.85	9.42	11.0	12.58	14.16	15.72	17.30	18.85	20.42	22.0	23.56
<b>125</b>	2.45	4.90	7.36	9.82	12.27	14.73	17.18	19.6	22.1	24.5	27.0	29.5	32.0	34.4	36.8
<b>150</b>	3.53	7.1	10.6	14.1	17.7	21.2	24.7	28.3	31.8	35.3	38.8	42.4	45.9	49.5	53.0
<b>175</b>	4.8	9.6	14.5	19.2	24.0	28.9	33.7	38.5	43.3	48.1	53.0	57.7	62.6	67.3	72.2
<b>200</b>	6.3	12.6	18.8	25.1	31.4	37.7	44.0	50.3	56.5	62.8	69.1	75.4	81.7	88.0	94.2

**ENGLISH MEASURE LOG VOLUMES (in Cubic Feet)**

Log Diameter (inches)	LOG LENGTH (FEET)																	
	8	12	16	20	24	28	32	36	40	44	48	52	56	60	70	80	90	100
<b>4</b>	0.7	1	1.4	1.7	2.1	2.4	2.8	3.1	3.5	3.8	4.2	4.5	4.9	5.2	6.1	7	7.8	8.7
<b>6</b>	1.6	2.4	3.1	3.9	4.7	5.5	6.3	7.1	7.8	8.6	9.4	10	11	12	13	16	18	20
<b>8</b>	2.8	4.2	5.6	7	8.4	9.8	11	13	14	15	17	18	19	21	24	28	31	35
<b>10</b>	4.4	6.5	8.7	11	13	15	17	20	22	24	26	28	31	33	38	44	49	55
<b>12</b>	6.3	9.4	13	16	19	22	25	28	31	35	38	41	44	47	55	63	71	79
<b>14</b>	8.5	13	17	21	26	30	34	39	43	47	51	56	60	64	74	86	96	101
<b>16</b>	11	17	22	28	34	39	45	50	56	61	67	73	78	84	98	112	126	140
<b>18</b>	14	21	28	35	42	49	57	64	71	78	85	92	99	106	124	141	159	177
<b>20</b>	17	26	35	44	52	61	70	79	87	96	105	113	122	131	153	175	196	218
<b>22</b>	21	32	42	53	63	74	85	95	106	116	127	137	148	158	185	211	238	264
<b>24</b>	25	38	50	63	75	88	101	113	126	138	151	163	176	189	220	251	283	314
<b>26</b>	29	44	59	74	89	103	118	113	147	162	177	192	207	221	258	295	332	369
<b>28</b>	34	51	68	86	103	120	137	154	171	188	205	222	240	256	299	342	385	428
<b>30</b>	39	59	79	98	118	137	157	177	196	216	236	255	275	295	344	393	442	491
<b>32</b>	45	67	89	118	134	156	179	201	223	246	268	290	313	335	391	447	503	559
<b>34</b>	50	76	101	126	151	177	202	227	252	277	303	328	353	378	441	504	567	631
<b>36</b>	57	85	113	141	170	198	226	255	282	311	339	368	396	424	495	566	637	707
<b>38</b>	63	95	126	158	189	220	252	284	315	347	378	410	441	473	551	630	709	788
<b>40</b>	70	105	140	175	210	244	279	314	349	384	419	454	489	524	611	698	785	873
<b>50</b>	109	164	218	273	327	382	436	491	545	600	645	709	764	818	955	1091	1227	1364
<b>60</b>	157	234	314	393	471	550	628	707	785	864	943	1021	1100	1178	1374	1571	1767	1964
<b>70</b>	214	321	428	535	642	748	855	962	1069	1176	1283	1389	1497	1604	1871	2138	2405	2673
<b>80</b>	279	420	559	698	838	977	1117	1257	1396	1536	1676	1815	1955	2095	2441	2293	3142	3491

**WEIGHTS OF COMMERCIALLY IMPORTANT WOODS**

Species	kg/m <sup>3</sup> (Green)	lb/ft <sup>3</sup> (Green)
<b>A. Temperate Zone*</b>		
Alder, Red	737	46
Ash, White	769	48
Aspen	689	43
Baldcypress	817	51
Basswood	673	42
Beech	865	54
Birch, Paper	801	50
Yellow	929	58
Cedar, Alaska	577	36
Incense	721	45
Northern, White	449	28
Port-Orford	897	56
Western Red	433	27
Cherry, Black	721	45
Cottonwood, Eastern	785	49
Douglas Fir, (Coast)	881	55
(Inland Empire)	577	36
Elm, American	865	54
Fir, Alpine	449	28
Balsam	721	45
Nobel	481	30
Red	769	48
Silver	577	36
White	753	47
Gum, Black	721	45
Blue	1121	70
Red	801	50
Tupelo	897	56
Hemlock, Eastern	801	50
Western	961	60
Hickory, Pecan	993	62
True	1009	62
Larch, Western	769	48
Locust, Black	929	58
Magnolia, Cucumber	785	49

Species	kg/m <sup>3</sup> (Green)	lb/ft <sup>3</sup> (Green)
Maple, Big Leaf	753	47
Black	865	54
Red	801	50
Silver	721	45
Sugar	897	56
Oak, Black	1009	63
Chestnut	977	61
Red	1009	63
Red, Swamp	1073	67
Swamp Chestnut	1041	65
White	993	62
White, Swamp	1105	69
Pine, Jack	801	50
Loblolly	993	62
Lodgepole	625	39
Long Leaf	993	62
Norway (Red)	673	42
Short Leaf	993	62
Slash	993	62
Sugar	817	51
Western Yellow, (Ponderosa)	721	45
White (Western)	561	35
White (Eastern)	577	36
Poplar, Yellow	609	38
Redwood	801	50
Spruce, Black	513	32
Engleman	625	39
Red	545	34
Sitka	529	33
White	545	34
Sweetgum	801	50
Sycamore	833	52
Tamarack	753	47
Walnut, Black	929	58
Willow, Black	801	50

\*NOTE: Weights taken from U.S. Dept. of Agriculture handbook No. 72, Wood Handbook.



## Forest Products Tables

### Weights of Commercially Important Woods

- Southeast Asia
- West Africa

Species	kg/m <sup>3</sup> (Green)	lb/ft <sup>3</sup> (Green)
<b>B. Southeast Asia</b>		
Apitong	961	60
Bintangor	865	54
Chumprak	929	58
Ebony	1746	109
Geronggang	721	45
Jelutong	641	40
Kapur (Borneo Camphorwood)	1073	67
Keruing	1121	70
Krabak	817	51
Kruen	1121	70
Lumbayau	929	58
Mahogany, Philippine		
(Red Luan)	753	47
(White Luan)	769	48
(Yellow Luan)	769	48
Mahoni	913	57
Alayan Kauri (Damar Minyak)	817	51
Melantai	705	44
Melapi	849	53
Mangkulang	929	58
Meranti Bakau	849	53
Meranti, Dark Red	753	47
White	769	48
Yellow	769	48
Mersawa	817	51
Nyatoh	897	56
Palosapis	817	51
Pulai	545	34
Ramin	1073	67
Rosewood (Sonokelina)	1314	82
Seraya, Dark Red	753	47
Yellow	769	48
White	769	48
Teak	1073	67

Species	kg/m <sup>3</sup> (Green)	lb/ft <sup>3</sup> (Green)
<b>C. West Africa</b>		
Abura	850	53.06
Ako	800	49.94
Azobe	1300	81.16
Aniegre (Mukali)	950	59.31
Bete	900	56.19
Bosse	900	56.19
Bubinga	1000	62.43
Dibetau	750	46.82
Douka (Makore)	950	59.31
Doussie	1200	74.91
Framire	850	53.06
Fromager	550	34.34
Ilomba	750	46.82
Iroko	1200	74.91
Kokrodua (Afrormosia)	1000	62.43
Kosipo	900	56.19
Limba	750	46.82
Mahogany	750	46.82
Moabi	1100	68.67
Niangon	900	56.19
Okoume	650	40.57
Ozigo	900	56.19
Padouk	1000	62.43
Samba (Obeche)	650	40.58
Sapelli	900	56.19
Sipo	800	49.94
Tchitola	850	53.06
Tiaba	900	56.19
Tola	850	53.06

Weights of Commercially Important Woods  
 ● Australia  
 ● New Zealand  
 ● Papua New Guinea

**Forest Products  
Tables**

Species	kg/m <sup>3</sup> (Green)	lb/ft <sup>3</sup> (Green)
<b>D. Australia</b>		
Ash Alpine .....	1041	<b>65</b>
Mountain .....	1009	<b>63</b>
Silvertop .....	1330	<b>83</b>
Black Butt .....	1121	<b>70</b>
Box Long Leaf .....	993	<b>62</b>
Yellow .....	1105	<b>69</b>
Black .....	1105	<b>69</b>
Brownbarrel .....	1073	<b>67</b>
Candle Bark .....	657	<b>41</b>
Gum Grey .....	1217	<b>76</b>
Manna .....	1121	<b>70</b>
Mountain .....	1169	<b>73</b>
Mountain Grey .....	1057	<b>66</b>
River Red .....	1137	<b>71</b>
Forest Red .....	1201	<b>75</b>
Southern Blue .....	1217	<b>76</b>
Spotted .....	1201	<b>75</b>
Sydney Blue .....	1153	<b>72</b>
Iron Bark Gray .....	1330	<b>83</b>
Narrowleaved .....	1330	<b>83</b>
Red .....	1330	<b>83</b>
Jarrah .....	1169	<b>73</b>
Karri .....	1169	<b>73</b>
Mahogany Red .....	1153	<b>72</b>
White .....	1282	<b>80</b>
Myrtle .....	1169	<b>73</b>
Peppermint .....	1120	<b>70</b>
Pine Radiata .....	865	<b>54</b>
Monerey .....	865	<b>54</b>
Celerytop .....	1057	<b>66</b>
Stringy Bark Brown .....	1233	<b>77</b>
Messmate .....	1169	<b>73</b>
Yellow .....	1217	<b>76</b>
White .....	1121	<b>70</b>
Tallowood .....	1201	<b>75</b>
Wandoo .....	1282	<b>80</b>

Species	kg/m <sup>3</sup> (Green)	lb/ft <sup>3</sup> (Green)
<b>E. New Zealand</b>		
Exotic Softwoods		
Radiata Pine .....	1000	<b>62</b>
Douglas Fir .....	734	<b>45</b>
Corsican Pine .....	985	<b>61</b>
Redwood .....	1016	<b>63</b>
Larch .....	960	<b>60</b>
Indigenous Softwoods		
Mati .....	1120	<b>70</b>
Rimu .....	1130	<b>70</b>
Exotic Hardwoods		
Eucalyptus Botryoides .....	893	<b>56</b>
Eucalyptus Saligna .....	1200	<b>75</b>
Indigenous Hardwoods		
Beech — Silver .....	920	<b>57</b>
Beech — Red .....	1200	<b>75</b>
Tawa .....	1022	<b>64</b>

Species	kg/m <sup>3</sup> (Green)	lb/ft <sup>3</sup> (Green)
<b>F. Papua New Guinea</b>		
Pine, Hoop .....	520	<b>32</b>
Kauri .....	480	<b>30</b>
Klinki .....	510	<b>31</b>
Kwila .....	800	<b>50</b>
Erima .....	390	<b>24</b>
Taun .....	680	<b>42</b>
Walnut, PNG .....	560	<b>35</b>
Cedar, Pencil .....	720	<b>50</b>
Mersawa .....	650	<b>40</b>
Celtis, Hard .....	780	<b>48</b>
Rosewood, PNG .....	600	<b>37</b>
Beech, PNG .....	830	<b>51</b>
Oak, PNG .....	650	<b>40</b>
Ebony, PNG Black .....	1115	<b>69</b>
PNG White .....	720	<b>50</b>
Hardwood, Yellow .....	780	<b>48</b>
Hopea, Heavy .....	960	<b>60</b>
Light .....	710	<b>44</b>
Podocarp, Black .....	410	<b>25</b>
Terminalia, Brown .....	450	<b>28</b>

**ESTIMATING NUMBER OF TREES PER HECTARE**

Spacing (Meters)	Spacing (Meters)							
	1	2	3	4	5	6	7	8
1	10 000	5000	3333	2500	2000	1667	1428	1250
2	5000	2500	1667	1250	1000	834	714	625
3	3333	1667	1111	834	667	556	477	417
4	2500	1250	834	625	500	417	357	313
5	2000	1000	667	500	400	330	286	250
6	1667	834	556	417	333	278	238	208
7	1428	714	477	357	286	238	204	179
8	1250	625	417	313	250	208	179	156

**ESTIMATING NUMBER OF TREES PER ACRE**

Spacing (Feet)	Spacing (Feet)							
	5	6	7	8	9	10	11	12
5	1742	1452	1244	1089	968	871	792	726
6	1452	1210	1037	907	806	726	660	605
7	1244	1037	888	777	691	622	565	518
8	1089	907	777	680	605	544	495	453
9	968	806	691	605	537	484	440	403
10	871	726	622	544	484	435	396	363
11	792	660	565	495	440	396	360	330
12	726	605	518	453	403	363	330	302
13	671	558	478	418	372	335	304	279
14	622	518	444	390	346	311	283	259
15	580	484	415	363	323	290	264	242

**COMPARISON OF LOG RULES • Board Foot Values  
for 16-Foot Logs**

Diameter at Small End, Inside Bark, Inches	International 1/4 Inch	Scribner	Scribner Decimal	Spaulding	Doyle
4	5	10	10	—	—
6	20	18	20	—	4
8	40	32	30	—	16
10	65	54	60	50	36
12	95	79	80	77	64
14	135	114	110	114	100
16	180	159	160	161	144
18	230	213	210	216	196
20	290	280	280	276	256
22	355	334	330	341	324
24	425	404	400	412	400
26	500	500	500	488	484
28	585	582	580	569	576
30	675	657	660	656	676
32	770	736	740	748	784
34	875	800	800	845	900
36	980	923	920	950	1024
38	1095	1068	1070	1064	1156
40	1220	1204	1200	1185	1296

**UNIT OF MEASUREMENT DEFINITIONS**

1 board foot	= 1/12 ft <sup>3</sup> of solid wood (1' × 1' × 1")
1000 board feet	= 83.33 ft <sup>3</sup> of solid wood
1 c. unit of wood	= 100 solid ft <sup>3</sup> = 1200 board feet = 2.83 <sup>3</sup>
1 cord of wood	= 128 ft <sup>3</sup> of stacked logs = 3.62 m <sup>3</sup>
1 unit of wood	= 200 ft <sup>3</sup> of loose chips = 5.66 m <sup>3</sup>
1 cord of wood	= 0.85 units
1 Hoppus Ton	= 50 ft <sup>3</sup> (assumed) = 63.65 ft <sup>3</sup> (actual) = 600 board feet = 763.8 BF Brereton = 1.8 m <sup>3</sup> actual = 1.4 m <sup>3</sup> assumed
1 cubic meter	= 35.32 ft <sup>3</sup> = 424 board feet = 333 board feet Hoppus tons = 0.555 Hoppus Tons
1 MBF Brereton	= 2.36 m <sup>3</sup> = 785.4 board feet Hoppus
1 MBF Hoppus MBF	= 1273 board feet-Brereton = Thousand board feet
1 Super Foot	= 1 board foot
100 Super Feet	= 1000 board foot = 0.236 m <sup>3</sup>
600 Super Feet	= 50 ft <sup>3</sup>
1 lb/ft <sup>3</sup>	= 16.0185 kg/m <sup>3</sup>

**CUBIC FEET OF SOLID WOOD PER CORD**

Length of Sticks-Ft.	Diameter at Small End		
	1"-2.5"	2.5"-5.5"	Over 5.5"
2	65	84	91
4	64	82	89
8	59	77	84
12	54	71	78

**RULE OF THUMB CONVERSIONS**

1 c. unit of wood = 1.117 cords = 1.25 units of chips = 250 ft <sup>3</sup> of chips = 7.08 m <sup>3</sup>
1 cord of wood = 85 ft <sup>3</sup> of solid wood = 1.06 units of chips = 2.41 m <sup>3</sup>
1 unit of chips = 80 ft <sup>3</sup> of solid wood = 2.27 m <sup>3</sup>
1 cord of wood = 500 board feet = 1.18 m <sup>3</sup>
2000 pounds of chips = 500 pounds of pulp
1 cord = 212 ft <sup>3</sup> of chips = 6 m <sup>3</sup>



# PIPELAYERS

## CONTENTS

Features	.8-1
Specifications	.8-2
Lifting capacities	.8-3
Drawbar Pull Charts	.8-5
Travel and hook speeds	.8-6
Application	.8-7
Extreme slope operation	.1-22

## Features:

- **Planetary power shift** transmission on all models.
- **Kick-out helps prevent boom bending** as boom approaches near-vertical.
- **Sealed and Lubricated Track.**
- **Simplified Controls**, two levers control all functions including raise, lower, quick-drop and power down, high and low range and speed adjustments.
- **Modular design of major components and accessory drive system** for simplified repair.
- **Separate, self-energizing brakes** for boom and hook winches.
- **Positive track pin retention** (583R and 589).
- **Hydraulic Drawworks** with two independently driven hydraulic motors for boom and hook winches.
- **Suspended Undercarriage** for improved ride and greater operator comfort (589).




MODEL	561M		572R		583R		589		
Flywheel Power	82 kW	<b>110 hp</b>	171 kW	<b>230 hp</b>	228 kW	<b>305 hp</b>	313 kW	<b>420 hp</b>	
Operating Weight (with full fuel tank and operator)	16 240 kg	<b>35,800 lb</b>	30 110 kg	<b>66,250 lb</b>	44 750 kg	<b>98,650 lb</b>	65 366 kg	<b>151,212 lb</b>	
Engine Model	<b>3116T</b>		<b>3306TA</b>		<b>3406C TA</b>		<b>3408TA</b>		
Rated Engine RPM	<b>2100</b>		<b>2100</b>		<b>2100</b>		<b>1900</b>		
No. of Cylinders	<b>6</b>		<b>6</b>		<b>6</b>		<b>8</b>		
Displacement	6.6 L	<b>403 in<sup>3</sup></b>	10.5 L	<b>638 in<sup>3</sup></b>	14.6 L	<b>893 in<sup>3</sup></b>	18 L	<b>1099 in<sup>3</sup></b>	
Lift Capacity at 1.22 m (4'0") Overhang	18 145 kg	<b>40,000 lb</b>	40 910 kg	<b>90,000 lb</b>	63 500 kg	<b>140,000 lb</b>	104 330 kg	<b>230,000 lb</b>	
Standard Boom Length	5.49 m	<b>18'0"</b>	6.1 m	<b>20'0"</b>	6.1 m	<b>20'0"</b>	8.8 m	<b>28'10"</b>	
Width of Standard Shoe	510 mm	<b>1'8"</b>	660 mm	<b>2'2"</b>	710 mm	<b>2'4"</b>	914 mm	<b>3'0"</b>	
Length of Track on Ground	2.619 m	<b>8'7"</b>	3.167 m	<b>10'5"</b>	3.586 m	<b>11'9"</b>	4.29 m	<b>14'1"</b>	
Ground Contact Area (with standard shoes)	2.67 m <sup>2</sup>	<b>4120 in<sup>2</sup></b>	4.18 m <sup>2</sup>	<b>3250 in<sup>2</sup></b>	5.1 m <sup>2</sup>	<b>7896 in<sup>2</sup></b>	6.96 m <sup>2</sup>	<b>12,148 in<sup>2</sup></b>	
Track Gauge	2 m	<b>6'7"</b>	2.235 m	<b>7'4"</b>	2.34 m	<b>7'8"</b>	2.9 m	<b>9'6"</b>	
Fuel Tank Refill Capacity	218 L	<b>57.6 U.S. gal</b>	479 L	<b>127 U.S. gal</b>	416 L	<b>110 U.S. gal</b>	776 L	<b>205 U.S. gal</b>	
GENERAL DIMENSIONS:									
Height to Top of Stack	3.12 m	<b>10'3"</b>	3.45 m	<b>11'4"</b>	3.51 m	<b>11'6"</b>	3.92 m	<b>12'10"</b>	
Height to Top of Counterweight	1.68 m	<b>5'6"</b>	2.9 m	<b>9'6"</b>	3.41 m	<b>11'2"</b>	2.92 m	<b>9'6"</b>	
Width, Weights Retracted	3.19 m	<b>10'5"</b>	3.66 m	<b>12'0"</b>	3.63 m	<b>11'11"</b>	4.63 m	<b>15'2"</b>	
Minimum Shipping Width (both side frames removed)	2.9 m	<b>9'6"</b>	3 m	<b>9'10"</b>	3.48 m	<b>11'5"</b>	3.81 m	<b>12'6"</b>	
Shipping Width (left frame removed)	3.05 m	<b>10'0"</b>	3.66 m	<b>12'0"</b>	3.51 m*	<b>11'6"*</b>	—		
Overall Length	3.73 m	<b>12'3"</b>	4.74 m	<b>15'6"</b>	5.48 m	<b>18'0"</b>	5.94 m	<b>19'6"</b>	
Ground Clearance	438 mm	<b>17.2"</b>	414 mm	<b>16.3"</b>	537 mm	<b>1'9.1"</b>	625 mm	<b>2'0.6"</b>	
DRUMS and CABLES:									
Drum Capacity	Load	73 m	<b>239'</b>	80 m	<b>263'</b>	126 m	<b>415'</b>	152 m	<b>500'</b>
	Boom	49.4 m	<b>162'</b>	52 m	<b>170'</b>	126 m	<b>415'</b>	93 m	<b>305'</b>
Cable Diameter	Load	16 mm	<b>0.62"</b>	19 mm	<b>0.75"</b>	19 mm	<b>0.75"</b>	22 mm	<b>0.88"</b>
	Boom	16 mm	<b>0.62"</b>	19 mm	<b>0.75"</b>	19 mm	<b>0.75"</b>	22 mm	<b>0.88"</b>
Drum Diameter	Load	216 mm	<b>8.5"</b>	254 mm	<b>10"</b>	343 mm	<b>13.5"</b>	343 mm	<b>13.5"</b>
	Boom	245 mm	<b>9.63"</b>	224 mm	<b>8.5"</b>	343 mm	<b>13.5"</b>	343 mm	<b>13.5"</b>
Adjustable Counterweights		<b>14 @</b>		<b>9 @</b>		<b>2 @</b>		<b>7 @</b>	
		177 kg ea	<b>391 lb ea</b>	371 kg ea	<b>818 lb ea</b>	299 kg ea	<b>658 lb ea</b>	1315 kg ea	<b>2900 lb ea</b>
						<b>6 @</b>			
						535 kg ea	<b>1180 lb ea</b>		
						<b>5 @</b>			
						432 kg ea	<b>952 lb ea</b>		
Total Weight Extendable	3270 kg	<b>7208 lb</b>	4320 kg	<b>9524 lb</b>	9016 kg	<b>19,880 lb</b>	11 854 kg	<b>26,134 lb</b>	

\*Boom and counterweight only removed.

**561M**

LIFTING CAPACITY\* 5.49 m (18'0") BOOM

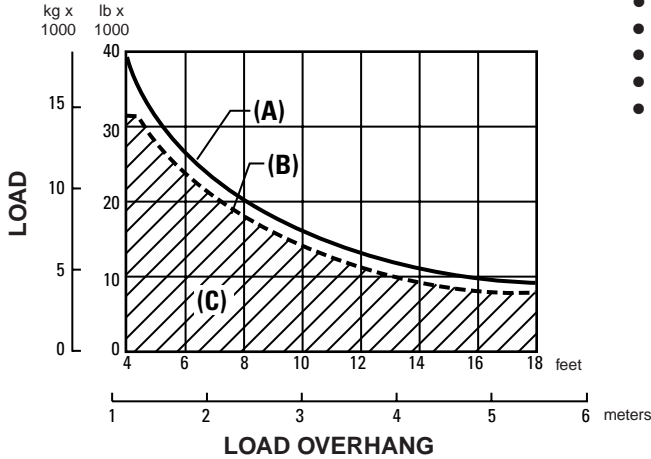

**\*Specified Equipment:**


- 16 mm (5/8") diameter wire rope.
- 18 688 kph (41,200 lb) minimum breaking strength.
- 3 part load line.
- 3 part boom line.
- 3270 kg (7208 lb) counterweight extended.
- Total operating weight 16 240 kg (35,804 lb).

KEY

- A — Max lift capacity per ANSI/SAE J743 MAR92
- B — Rated load per ANSI/ASME B30.14
- C — Working range per ANSI/ASME B30.14

**572R**

LIFTING CAPACITY\* 6.1 m (20'0") BOOM

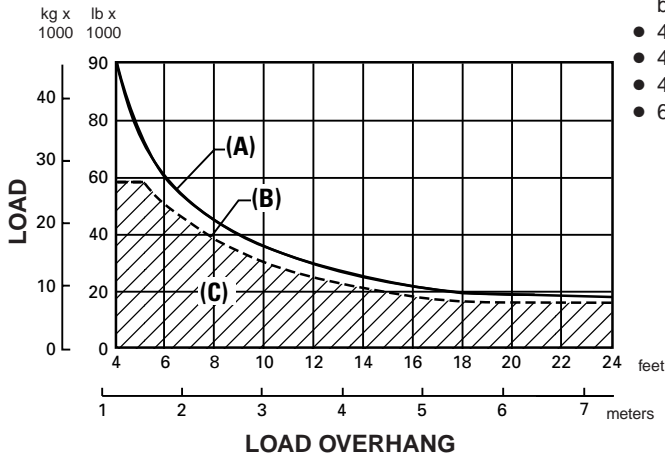

**\*Specified Equipment:**

- 19 mm (3/4") dia. wire rope 26 670 kg (58,800 lb) minimum breaking strength.
- 4 part load line.
- 4 part boom line.
- 4330 kg (9525 lb) of counterweights extended.
- 6.1 m (20'0") Boom.

KEY


- A — Max lift capacity per ANSI/SAE J743 MAR92
- B — Rated load per ANSI/ASME B30.14
- C — Working range per ANSI/ASME B30.14

**NOTE:** SAE stands for the Society of Automotive Engineers. ANSI stands for American National Standard Institute.



583R

LIFTING CAPACITY\* 6.1 m (20'0") BOOM

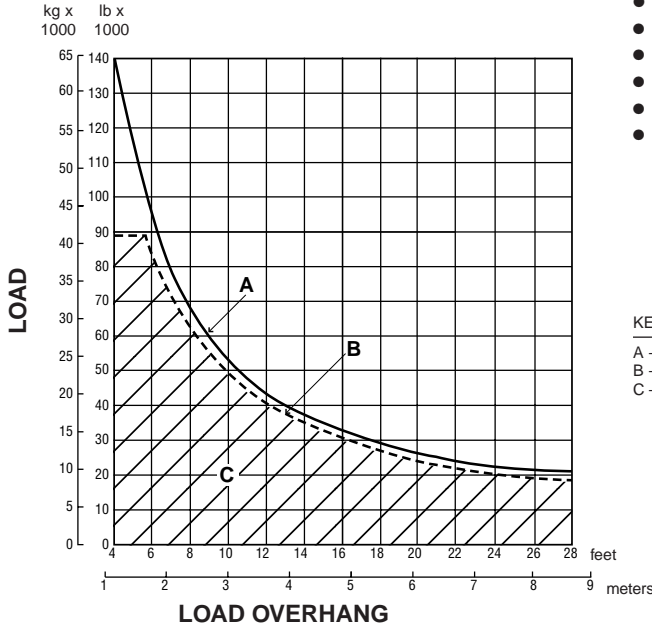

\*Specified Equipment:


- 19 mm (3/4") diameter wire rope.
- 26 672 kg (58,800 lb) minimum breaking strength.
- 6 part load line.
- 5 part boom line.
- 9036 kg (19,920 lb) counterweight extended.
- boom 6.1 m (20 ft) standard.
- total operating weight 44 748 kg (98,650 lb).

KEY

- A — Max lift capacity per ANSI/SAE J743 MAR92
- B — Rated load per ANSI/ASME B30.14
- C — Working range per ANSI/ASME B30.14

589

LIFTING CAPACITY\* 8.53 m (28'0") BOOM

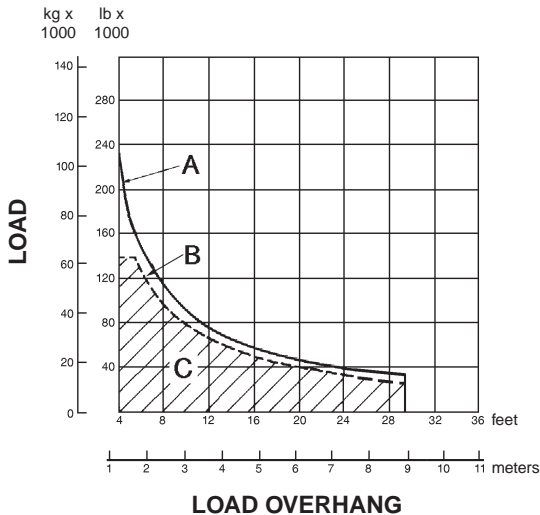

\*Specified Equipment:


- Load: 22 mm (7/8") dia. wire rope 31 389 kg (69,200 lb) minimum breaking strength.
- Boom: 22 mm (7/8") dia. wire rope 31 389 kg (69,200 lb) minimum breaking strength.
- 8 part load line.
- 8 part boom line.
- 14 633 kg (32,260 lb) of counterweights extended.
- 8.53 m (28'0") Boom.

KEY

- A — Max lift capacity per ANSI/SAE J743 MAR92
- B — Rated load per ANSI/ASME B30.14
- C — Working range per ANSI/ASME B30.14

NOTE: SAE stands for the Society of Automotive Engineers. ANSI stands for American National Standard Institute.

561M

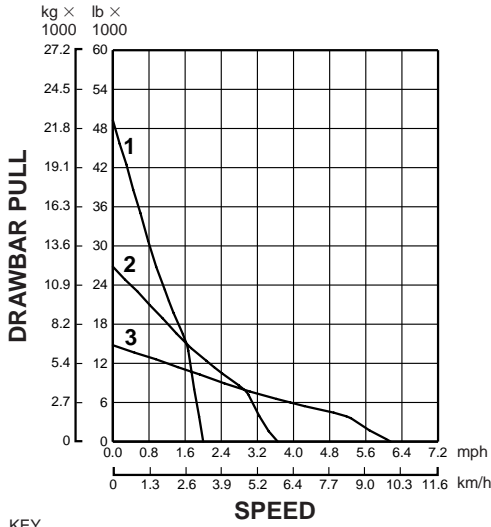


KEY


- 1 — 1st Gear
- 2 — 2nd Gear
- 3 — 3rd Gear

**NOTE:** Usable pull will depend upon weight and traction of tractor.

572R

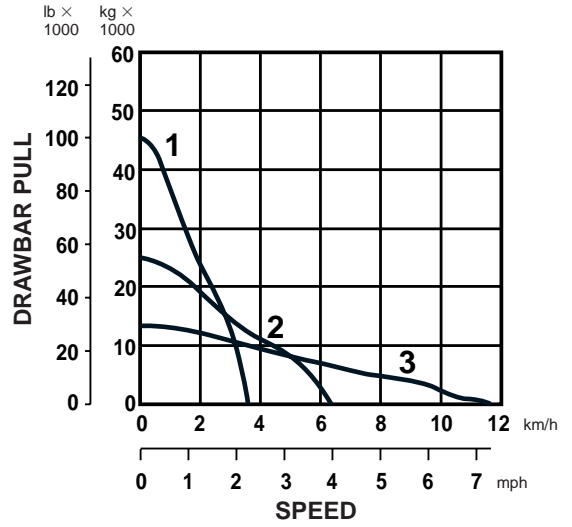


583R

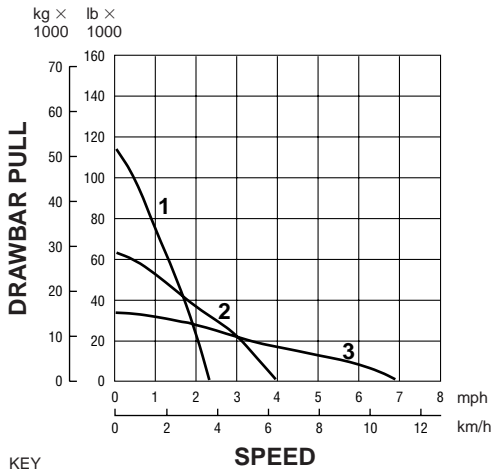

KEY

- 1 — 1st Gear
- 2 — 2nd Gear
- 3 — 3rd Gear

589

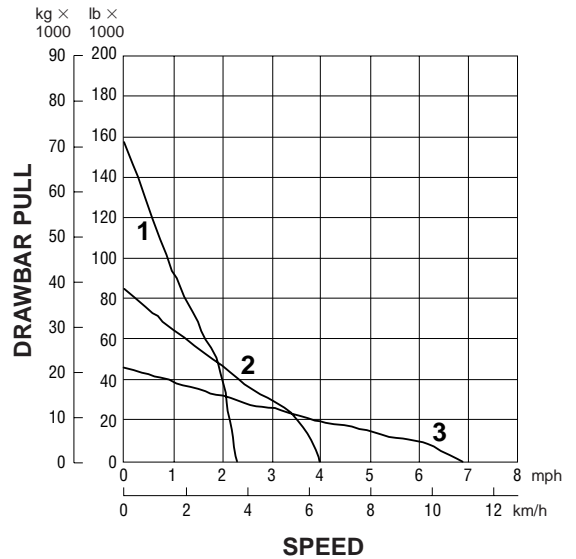

MODEL	561M				572R			
Travel	Forward		Reverse		Forward		Reverse	
Speeds (at rated RPM)	km/h	mph	km/h	mph	km/h	mph	km/h	mph
1st Gear .....	3.27	<b>2.03</b>	4.01	<b>2.49</b>	3.5	<b>2.3</b>	4.8	<b>3.0</b>
2nd Gear .....	5.81	<b>3.61</b>	7.09	<b>4.41</b>	6.9	<b>4.3</b>	8.3	<b>5.2</b>
3rd Gear .....	9.93	<b>6.17</b>	12.06	<b>7.49</b>	11.1	<b>6.9</b>	14.2	<b>8.8</b>

MODEL	583R				589			
Travel	Forward		Reverse		Forward		Reverse	
Speeds (at rated RPM)	km/h	mph	km/h	mph	km/h	mph	km/h	mph
1st Gear .....	3.5	<b>2.3</b>	4.7	<b>2.9</b>	3.5	<b>2.2</b>	4.3	<b>2.7</b>
2nd Gear .....	6.4	<b>4.0</b>	8.1	<b>5.0</b>	6.3	<b>3.9</b>	7.9	<b>4.9</b>
3rd Gear .....	10.8	<b>6.8</b>	13.8	<b>8.6</b>	10.9	<b>6.8</b>	13.7	<b>8.5</b>


MODEL	561M		572R	
Pipelayer Hook Speeds per minute, Bare drum at rated engine RPM	m/min	ft/min	m/min	ft/min
Low Raise & Lower .....	33.0	<b>108</b>	11.0	<b>37</b>
Hi Raise & Lower .....	69.5	<b>228</b>	22.0	<b>72</b>

MODEL	583R		589	
Pipelayer Hook Speeds per minute, Bare drum at rated engine RPM	m/min	ft/min	m/min	ft/min
Low Raise .....	7.5	<b>24</b>	5.8	<b>19</b>
High Raise .....	22.0	<b>73</b>	17.4	<b>57</b>
Lower (Powered) .....	30.0	<b>98</b>	23.5	<b>77</b>

### PIPELAYER APPLICATION CALCULATIONS:

#### Typical pipelayer applications on flat, firm underfoot conditions

<b>561M</b>	laying 8 to 16" pipe
<b>572R</b>	laying 16 to 24" pipe
<b>583R</b>	laying 24 to 38" pipe
<b>589</b>	laying over 40" pipe

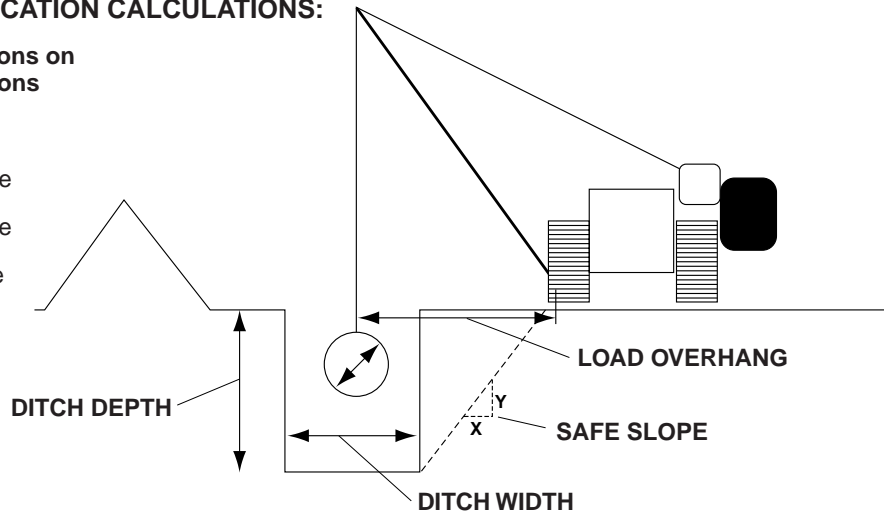

The chart above provides general information representing typical pipelayer applications. While the following scenario explores many of the variables involved in pipelaying it does not cover all the possible variables that must be considered by pipelaying contractors.

When sizing pipelayers for an application there are many considerations other than the machine's SAE rated lift capacity. These include but are not limited to:

- pipe diameter and weight per linear foot
- ditch width and depth
  - ditch width is typically  $2 \times$  pipe diameter
  - ditch depth is typically  $>2.5 \times$  pipe diameter
- distance from the ditch (safe slope) required by soil stability conditions
  - typically 2:1 (meaning the pipelayer must be  $2 \times$  ditch depth from the ditch edge)

- acceptable distance between pipe lifting points while suspended (to prevent bending)
  - determined by the pipe's bending characteristics. If the lifting points are too far apart a pipe can sag enough due to its own weight that it will damage itself.
- the operating safety factor desired by the contractor
- the length of pipe that will need to be suspended while laying-in
  - determined by pipe bending characteristics, terrain, etc.
- ground conditions, road bed preparation

An important consideration is the necessary load overhang. This is the distance from the center of the pipe to the tractor's left track rail. The load overhang required for an application can be estimated by:

- load overhang = safe slope × ditch depth + (0.5 × ditch width)

The pipelayer's rated load capacity at a specific load overhang (per ANSI/ASME B30.14) can be found in the load capacity graphs in this section of the performance handbook. Once the load capacity is determined the maximum lift point spacing can be estimated by:

- max lift point spacing =  $\frac{\text{load capacity at load overhang}}{\text{safety factor} \times \text{pipe weight per linear foot}}$

The maximum distance between pipe lift points (based on pipe bending characteristics) may be a shorter distance than the maximum spacing between lift points as calculated based on pipelayer load capacity. If this is the case, then in order to avoid damaging the pipe, the shorter distance should be considered to be the maximum distance between pipelayers.

As an example, consider a project involving 0.5" wall 24" diameter pipe which has a weight per linear foot of 125.5 lb and the soil has a safe slope of 2. Using the above formulas:

- the ditch depth would be 3 × 2 ft = 6 ft deep
- the ditch width would be 2 × 2 ft = 4 ft
- the load overhang would be 2 × 6 ft + (0.5 × 4 ft) = 14 ft

Using the 572R's lift capacity chart we find that the 572R has an ANSI rated load capacity of approximately 21,250 lb at a 14 ft load overhang.

When using rated load numbers it is important to understand that the lift capacity charts are based on SAE and ANSI test procedures that rate pipelayers on level, concrete surfaces. Working on softer underfoot conditions, working on slopes, (and other) can greatly reduce the pipelayer's load capacity.

If the contractor employs a safety factor of 2 then the maximum spacing between pipe lift points is:

$$\frac{21,250 \text{ lb}}{2 \times 125.5 \text{ lb/ft}} = 84.7 \text{ ft}$$

It is important to remember that this is the distance between the lift points, not the distance nose-to-tail between pipelayers. For this example, assume that 500 ft of pipe must be suspended during the laying-in process.

$$\frac{500 \text{ ft}}{84.7 \text{ ft per pipelayer}} = 5.9 \text{ which means that six pipelayers are needed}$$

The number of pipelayers required could also be determined by a second method:

$$\frac{\text{ft of pipe suspended} \times \text{pipe weight per ft} \times \text{safety factor}}{\text{rated load at overhang}}$$

In this case:

$$\frac{500 \text{ ft} \times 125.5 \text{ lb/ft} \times 2}{21,250 \text{ lb}} = 5.9 \text{ which again implies six pipelayers}$$

If, in this same example, soil conditions required a safe slope of 2.33 then the load overhang would have been 16 ft. At this load overhang the 572R's rated load capacity is approximately 18,125 lb. Using the equations above, this results in 72.2 ft between lift points which means that seven 572R pipelayers are now necessary. Using the second method:

$$\frac{500 \text{ ft} \times 125.5 \text{ lb/ft} \times 2}{18,125 \text{ lb}} = 6.9 \text{ again implying that seven 572R pipelayers are needed}$$

Rather than adding another pipelayer, 583R's could be used. At a 16 ft load overhang the 583R has a rated load capacity of 29,400 lb. This translates to 117.1 ft between lift points. If the pipe's bending characteristics will allow this space between lift points, the job could be done with only five 583R's.

# WHEEL TRACTOR-SCRAPERS

## CONTENTS

Features	9-1
Specifications:	
Standard Scrapers	9-2
Tandem Powered and Push-Pull Scrapers	9-3
Elevating Scrapers	9-4
Auger Scrapers	9-5
Tire Options, all models	9-7
Use of Rimpull-Speed-Gradeability curves	9-8
Use of Travel Time charts	9-10
Fixed Times for Scrapers	9-11
Use of Retarder curves	9-11
Curves/charts:	
611 Rimpull, Travel Times	9-13
613C Series II Rimpull, Travel Times	9-16
615C Series II Rimpull, Travel Times	9-19
621G Rimpull, Retarding, Travel Times	9-22
623G Rimpull, Retarding, Travel Times	9-28
627G Rimpull, Retarding, Travel Times	9-32
631E Series II Rimpull, Retarding, Travel Times	9-38
637E Series II Rimpull, Retarding, Travel Times	9-44
651E Rimpull, Retarding, Travel Times	9-50
657E Rimpull, Retarding, Travel Times	9-54
Distance vs. Production Bm <sup>3</sup> (BCY)/hr, All models	9-60
Hourly Production vs. Cycle Time Bm <sup>3</sup> (BCY)/hr, All models	9-73

## Features:

- **VHP engines** that deliver 10% more horsepower in gears 3 through 8 in the 620, 630 and 650 series.
- **Controlled throttle shifting** improves power train life by reducing fuel injection rate just prior to shifting in the 620, 630 and 650 series.
- **(HEUI) Hydraulic Electronic Unit Injection** and **(EUI) Electronic Unit Injection** electronically maintains fuel settings as well as automatically derate for altitude and air filter restrictions.
- **Hydraulic retarder** protects engine from overspeeding and extends brake life on grades in the 620, 630 and 650 series.

- **Electro-hydraulic implement controls** replaces cab pilot valve and associated lines in the 620G cab.
- **Single lever implement control** — bowl, apron, ejector, elevator, transmission hold, cushion hitch, and optional bail/auger are controlled by one lever in the 620G.
- **Simplified transmission control** on the 620G. Gear selection choices are 1, 2, and D. Operator can override transmission by manually selecting top gear.
- **627G rear engine** can be started from the cab. Tachometer can monitor either front or rear engine.
- **627G Scraper EMS information** can be viewed in the cab by pressing a tractor/scrapper switch. If EMS senses a fault in the scraper, it will automatically switch from tractor to scraper.
- **Eight speed semi-automatic power shift transmissions** used in the 620, 630, and 650 series.
- **Six speed power shift transmissions** used in the 610 series.
- **Differential lock** connects both tractor drive wheels in poor underfoot conditions for positive traction.
- **Cushion Hitch** on 620, 630, and 650 series (axle suspension on 615C Series II) absorbs haul road shocks, prevents loping as well as promotes operator comfort.

## Tandem Powered:

- **Push-Pull arrangement** allows tandem engine scrapers to assist one another in loading. Recommended for high production applications.

## Elevating:

- **Infinitely variable elevator speed** on 623G and 633F while the 610 series has a two speed elevator.

## Auger:

- **Factory installed attachment** provides self loading capability in standard and tandem powered scrapers. Wide material appetite and conditions material which promotes compaction in the fill.

# Wheel Tractor-Scrapers

## Specifications

- Standard Scrapers



MODEL	611		621G		631E Series II		651E	
Flywheel Power	197 kW	265 hp	246/272 kW	330/365 hp	335/365 kW	450/490 hp	410/452 kW	550/605 hp
Approx. Operating Weight (Empty)◀	23 900 kg	52,640 lb	32 250 kg	71,090 lb	44 210 kg	97,460 lb	61 130 kg	134,760 lb
Scraper Capacity: Struck	8 m <sup>3</sup>	10.5 yd <sup>3</sup>	10.7 m <sup>3</sup>	14 yd <sup>3</sup>	16.1 m <sup>3</sup>	21 yd <sup>3</sup>	24.5 m <sup>3</sup>	32 yd <sup>3</sup>
Heaped	11 m <sup>3</sup>	15 yd <sup>3</sup>	15.3 m <sup>3</sup>	20 yd <sup>3</sup>	23.7 m <sup>3</sup>	31 yd <sup>3</sup>	33.6 m <sup>3</sup>	44 yd <sup>3</sup>
Rated Load	16 340 kg	36,000 lb	21 770 kg	48,000 lb	34 020 kg	75,000 lb	47 175 kg	104,000 lb
Weight Distribution — Empty								
Drive	66%		68%		67%		66%	
Rear	34%		32%		33%		34%	
Weight Distribution — Loaded								
Drive	51%		53%		53%		53%	
Rear	49%		47%		47%		47%	
Engine Model	3306T		3406ETA		3408ETA		3412ETA	
Rated Engine RPM	2200		1800		2000		1900	
Displacement	10.5 L	638 in <sup>3</sup>	14.6 L	893 in <sup>3</sup>	18 L	1099 in <sup>3</sup>	27 L	1649 in <sup>3</sup>
Top Speed (Loaded)	44.4 km/h	27.6 mph	51 km/h	32 mph	53 km/h	33 mph	53 km/h	33 mph
180° Curb-to-Curb Turning Width	10.2 m	33'5"	11.7 m	38'5"	12.2 m	40'1"	13.6 m	44'7"
With ROPS Restriction	—		—		—		14.5 m	47'7"
Tires — Tractor Drive	29.5R25*L3		33.25R29**E2/E3		37.25R35**E2/E3		40.5/75R39	
Scraper	29.5R25*L		33.25R29**E2/E3		37.25R35**E2/E3		40.5/75R39	
Width of Cut	2.903 m	9'6"	3.02 m	9'11"	3.51 m	11'6"	3.85 m	12'8"
Maximum Depth of Cut	353 mm	13.9"	333 mm	13.1"	437 mm	17.2"	440 mm	17.3"
Maximum Depth of Spread	376 mm	14.8"	522 mm	20.6"	480 mm	18.9"	660 mm	26"
Fuel Tank Refill Capacity	580 L	153 U.S. gal	606 L	160 U.S. gal	814 L	215 U.S. gal	954 L	252 U.S. gal
GENERAL DIMENSIONS:								
Height to Top of Scraper	3.24 m	10'8"	3.71 m	12'2"	4.29 m	14'1"	4.71 m	15'5"
Wheelbase	7.06 m	23'2"	7.72 m	25'4"	8.77 m	28'9"	9.97 m	32'9"
Overall Length	12.02 m	39'5"	12.93 m	42'5"	14.56 m	47'9"	16.18 m	53'1"
Overall Width	3.27 m	10'9"	3.47 m	11'4"	3.94 m	12'11"	4.35 m	14'4"
Shipping Width (Draft Arm on Inside of Bowl)	—		—		3.64 m	11'11"	3.91 m	12'10"
Scraper Tread	2.06 m	6'9"	2.18 m	7'2"	2.46 m	8'1"	2.81 m	9'3"
Tractor Tread	2.06 m	6'9"	2.20 m	7'3"	2.46 m	8'1"	2.64 m	8'8"

◀ Operating weight includes standard machine, coolant, lubricants, full fuel tank, and operator.

- Specifications
- Tandem Powered
- Push-Pull

## Wheel Tractor-Scrapers



MODEL	627G		637E Series II		657E	
Flywheel Power: Tractor	246/272 kW	<b>330/365 hp</b>	335/365 kW	<b>450/490 hp</b>	410/452 kW	<b>550/605 hp</b>
Scraper	168 kW	<b>225 hp</b>	186 kW	<b>250 hp</b>	298/328 kW	<b>400/440 hp</b>
Approx. Operating Weight (Empty)◀	37 060 kg	<b>81,640 lb</b>	51 110 kg	<b>112,670 lb</b>	69 080 kg	<b>152,290 lb</b>
Scraper Capacity: Struck	10.7 m <sup>3</sup>	<b>14 yd<sup>3</sup></b>	16.1 m <sup>3</sup>	<b>21 yd<sup>3</sup></b>	24.5 m <sup>3</sup>	<b>32 yd<sup>3</sup></b>
Heaped	15.3 m <sup>3</sup>	<b>20 yd<sup>3</sup></b>	23.7 m <sup>3</sup>	<b>31 yd<sup>3</sup></b>	33.6 m <sup>3</sup>	<b>44 yd<sup>3</sup></b>
Rated Load	21 770 kg	<b>48,000 lb</b>	34 020 kg	<b>75,000 lb</b>	47 175 kg	<b>104,000 lb</b>
Weight Distribution — Empty: Front		<b>59%</b>		<b>59%</b>		<b>60%</b>
Rear		<b>41%</b>		<b>41%</b>		<b>40%</b>
Weight Distribution — Loaded: Front		<b>48%</b>		<b>49%</b>		<b>51%</b>
Rear		<b>52%</b>		<b>51%</b>		<b>49%</b>
Engine Model: Tractor	<b>3406ETA</b>		<b>3408ETA</b>		<b>3412ETA</b>	
Scraper	<b>3306T</b>		<b>3306TA</b>		<b>3408ETA</b>	
Rated Engine RPM: Tractor	<b>1800</b>		<b>2000</b>		<b>1900</b>	
Scraper	<b>2200</b>		<b>2200</b>		<b>1900</b>	
Displacement: Tractor	14.6 L	<b>893 in<sup>3</sup></b>	18 L	<b>1099 in<sup>3</sup></b>	27 L	<b>1649 in<sup>3</sup></b>
Scraper	10.5 L	<b>638 in<sup>3</sup></b>	10.5 L	<b>638 in<sup>3</sup></b>	18 L	<b>1099 in<sup>3</sup></b>
Top Speed (Loaded)	51.3 km/h	<b>32 mph</b>	53 km/h	<b>33 mph</b>	53 km/h	<b>33 mph</b>
180° Curb-to-Curb Turning Width	11.7 m	<b>38'5"</b>	12.2 m	<b>40'1"</b>	14.2 m	<b>46'7"</b>
With ROPS Restriction		—		—	15.1 m	<b>49'8"</b>
Tires — Tractor Drive	<b>33.25R29**E2/E3</b>		<b>37.25R35**E2/E3</b>		<b>40.5/75R39</b>	
Scraper	<b>33.25R29**E2/E3</b>		<b>37.25R35**E2/E3</b>		<b>40.5/75R39</b>	
Width of Cut	3.02 m	<b>9'11"</b>	3.51 m	<b>11'6"</b>	3.85 m	<b>12'8"</b>
Maximum Depth of Cut	333 mm	<b>13.1"</b>	437 mm	<b>17"</b>	440 mm	<b>17.3"</b>
Maximum Depth of Spread	522 mm	<b>20.6"</b>	480 mm	<b>18.9"</b>	660 mm	<b>26"</b>
Fuel Tank Refill Capacity: Tractor		—		—		—
Scraper	1105 L	<b>292 U.S. gal</b>	1268 L	<b>337 U.S. gal</b>	1597 L	<b>424 U.S. gal</b>
<b>GENERAL DIMENSIONS:</b>						
Height to Top of Scraper	3.71 m	<b>12'2"</b>	4.29 m	<b>14'1"</b>	4.71 m	<b>15'5"</b>
Wheelbase	7.72 m	<b>25'4"</b>	8.77 m	<b>28'9"</b>	9.92 m	<b>32'7"</b>
Overall Length	12.93 m	<b>42'5"</b>	14.56 m	<b>47'9"</b>	16.2 m	<b>53'1"</b>
Overall Width	3.47 m	<b>11'4"</b>	3.94 m	<b>12'11"</b>	4.35 m	<b>14'4"</b>
Shipping Width (Draft Arm on Inside of Bowl)		—	3.64 m	<b>11'11"</b>	3.91 m	<b>12'10"</b>
Scraper Tread	2.18 m	<b>7'2"</b>	2.46 m	<b>8'1"</b>	2.81 m	<b>9'3"</b>
Tractor Tread	2.21 m	<b>7'3"</b>	2.46 m	<b>8'1"</b>	2.64 m	<b>8'8"</b>
<b>PUSH-PULL GENERAL DIMENSIONS:</b>						
Operating Weight (Empty)◀	38 140 kg	<b>84,075 lb</b>	52 385 kg	<b>115,490 lb</b>	72 860 kg	<b>160,620 lb</b>
Overall Length	15.2 m	<b>49'7"</b>	16.49 m	<b>54'1"</b>	18.01 m	<b>59'1"</b>
Weight Distribution — Empty: Front		<b>60%</b>		<b>60%</b>		<b>60%</b>
Rear		<b>40%</b>		<b>40%</b>		<b>40%</b>
Weight Distribution — Loaded: Front		<b>49%</b>		<b>50%</b>		<b>51%</b>
Rear		<b>51%</b>		<b>50%</b>		<b>49%</b>

◀ Operating weight includes standard machine, coolant, lubricants, full fuel tank, and operator.



# Wheel Tractor-Scrapers

## Specifications ● Elevating Scrapers



MODEL	613C Series II		615C Series II		623G	
Flywheel Power	131 kW	175 hp	197.5 kW	265 hp	246/272 kW	330/365 hp
Approx. Operating Weight (Empty)◀	14 970 kg	33,000 lb	25 605 kg	56,450 lb	37 120 kg	81,840 lb
Scraper Capacity: Struck	6.8 m <sup>3</sup>	8.9 yd <sup>3</sup>	9.8 m <sup>3</sup>	12.8 yd <sup>3</sup>	13.8 m <sup>3</sup>	18 yd <sup>3</sup>
Heaped	8.4 m <sup>3</sup>	11 yd <sup>3</sup>	13 m <sup>3</sup>	17 yd <sup>3</sup>	17.6 m <sup>3</sup>	23 yd <sup>3</sup>
Rated Load	11 975 kg	26,400 lb	18 506 kg	40,800 lb	24 950 kg	55,000 lb
Weight Distribution — Empty						
Drive		63%		66%		64%
Rear		37%		34%		36%
Weight Distribution — Loaded						
Drive		49%		51%		50%
Rear		51%		49%		50%
Engine Model	3116T		3306TA		3406ETA	
Rated Engine RPM	2300		2200		1800	
Displacement	6.6 L	403 in <sup>3</sup>	10.5 L	638 in <sup>3</sup>	14.6 L	893 in <sup>3</sup>
Top Speed (Loaded)	35.1 km/h	21.8 mph	44.4 km/h	27.6 mph	51.5 km/h	32 mph
180° Curb-to-Curb Turning Width	10.9 m	29'6"	10.8 m	35'6"	10.9 m	35'8"
Tires — Standard						
Tractor	23.5R25★		29.5R25★		33.25R29★*E2	
Scraper	23.5R25★		29.5R25★		33.25R29★*E2	
Width of Cut	2.35 m	7'8.5"	2.89 m	9'6"	3.5 m	11'6"
Maximum Depth of Cut	160 mm	6.3"	413 mm	16"	330 mm	13"
Elevator Flight Spacing	406 mm	16"	413 mm	16"	520 mm	20"
Number of Flights	15		18		15	
Maximum Floor Opening	1.14 m	3'9"	1.18 m	3'10"	1.53 m	5'0"
Maximum Depth of Spread	370 mm	14.6"	439 mm	17.3"	380 mm	15"
Fuel Tank Refill Capacity	250 L	66 U.S. gal	399 L	105 U.S. gal	606 L	160 U.S. gal
GENERAL DIMENSIONS:						
Height to Top of Scraper	2.92 m	9'7"	3.3 m	11'10"	3.68 m	12'1"
Wheelbase	6.26 m	20'6.5"	6.98 m	22'11"	7.98 m	26'2"
Overall Length	10 m	32'9"	11.6 m	38'1"	13.21 m	43'4"
Overall Width	2.44 m	8'0"	3.05 m	10'0"	3.55 m	11'8"
Shipping Width (Draft Arm on Inside of Bowl)	—		—		—	
Scraper Tread	1.80 m	5'11"	2.2 m	7'3"	2.18 m	7'2"
Tractor Tread	1.80 m	5'11"	2.2 m	7'3"	2.20 m	7'3"

\* Elevator on.

◀ Operating weight includes coolants, lubricants, ROPS canopy, full fuel tank and operator.

Specifications  
 ● Standard Auger

Wheel Tractor-Scrapers



MODEL	621G		631E Series II		651E	
Flywheel Power: Tractor	246/272 kW	<b>330/365 hp</b>	335/365 kW	<b>450/490 hp</b>	410/452 kW	<b>550/605 hp</b>
Approx. Operating Weight (Empty)◀	36 780 kg	<b>81,090 lb</b>	45 980 kg	<b>101,370 lb</b>	66 575 kg	<b>146,770 lb</b>
Scraper Capacity (Heaped)	15.96 m <sup>3</sup>	<b>21 yd<sup>3</sup></b>	23.7 m <sup>3</sup>	<b>31 yd<sup>3</sup></b>	33.6 m <sup>3</sup>	<b>44 yd<sup>3</sup></b>
Rated Load	21 775 kg	<b>48,000 lb</b>	34 020 kg	<b>75,000 lb</b>	47 175 kg	<b>104,000 lb</b>
Approx. Operating Weight (Loaded)	58 550 kg	<b>129,090 lb</b>	80 000 kg	<b>176,370 lb</b>	113 750 kg	<b>250,770 lb</b>
<b>AUGER ATTACHMENT</b>						
Auger Diameter	1320 mm	<b>4'4"</b>	1524 mm	<b>5'0"</b>	1676 mm	<b>5'6"</b>
Auger RPM	<b>Variable 55 to 35 RPM</b>		<b>Variable 55 to 35 RPM</b>		<b>Variable 55 to 35 RPM</b>	
Auger Power	149 kW	<b>200 hp</b>	201 kW	<b>270 hp</b>	354 kW	<b>475 hp</b>
Hydraulic Flow	273 L/min	<b>72 gpm</b>	378 L/min	<b>100 gpm</b>	549 L/min	<b>145 gpm</b>
Cooling Flow	—	—	—	—	132 L/min	<b>35 gpm</b>
System Pressure	41 370 kPa	<b>6000 psi</b>	37 895 kPa	<b>5500 psi</b>	41 370 kPa	<b>5700 psi</b>
Auger Control	<b>electronic</b>		<b>electronic</b>		<b>electronic</b>	

◀ Operating weight includes standard machine, coolant, lubricants, full fuel tank and operator.

The auger scraper is a self-loading system that offers an alternative to conventional, push-pull or elevating scrapers. An independent hydrostatic system powers the auger which is located near the center of the bowl. The rotating auger lifts and evenly distributes over 50% of the material that flows over the scraper cutting edge. This action reduces the cutting edge resistance allowing the wheel tractor-scraper to continue moving through the cut and quickly obtain full rated loads.

**Advantages:**

- Self-load in equal or less time
- Requires shorter cut distance
- Complete material ejection (angled ejector pushes material)
- Significantly reduces dust problems in dry material
- Increased tire life
- Broader material appetite
- Better material retention on haul road (closed apron instead of open elevator)

# Wheel Tractor-Scrapers

## Specifications

### ● Tandem Powered Auger



MODEL	627G		637E Series II		657E	
Flywheel Power: Tractor	246/272 kW	<b>330/365 hp</b>	335/365 kW	<b>450/490 hp</b>	410/452 kW	<b>550/605 hp</b>
Scraper	168 kW	<b>225 hp</b>	187 kW	<b>250 hp</b>	298 kW	<b>400 hp</b>
Approx. Operating Weight (Empty)◀	41 635 kg	<b>91,790 lb</b>	54 540 kg	<b>120,235 lb</b>	75 875 kg	<b>167,270 lb</b>
Scraper Capacity (Heaped)	15.96 m <sup>3</sup>	<b>21 yd<sup>3</sup></b>	23.7 m <sup>3</sup>	<b>31 yd<sup>3</sup></b>	33.6 m <sup>3</sup>	<b>44 yd<sup>3</sup></b>
Rated Load	21 775 kg	<b>48,000 lb</b>	34 020 kg	<b>75,000 lb</b>	47 175 kg	<b>104,000 lb</b>
Approx. Operating Weight (Loaded)	63 408 kg	<b>139,790 lb</b>	88 560 kg	<b>195,235 lb</b>	123 050 kg	<b>271,270 lb</b>
AUGER ATTACHMENT						
Auger Diameter	1320 mm	<b>4'4"</b>	1524 mm	<b>5'0"</b>	1676 mm	<b>5'6"</b>
Auger RPM	<b>Variable 55 to 35 RPM</b>		<b>Variable 55 to 35 RPM</b>		<b>Variable 55 to 35 RPM</b>	
Auger Power	149 kW	<b>200 hp</b>	201 kW	<b>270 hp</b>	354 kW	<b>475 hp</b>
Hydraulic Flow	273 L/min	<b>72 gpm</b>	378 L/min	<b>100 gpm</b>	549 L/min	<b>145 gpm</b>
Cooling Flow	—	—	—	—	132 L/min	<b>35 gpm</b>
System Pressure	41 370 kPa	<b>6000 psi</b>	37 923 kPa	<b>5500 psi</b>	41 340 kPa	<b>5700 psi</b>
Auger Control	<b>electronic</b>		<b>electronic</b>		<b>electronic</b>	

◀ Operating weight includes standard machine, coolant, lubricants, full fuel tank and operator.

The auger scraper is a self-loading system that offers an alternative to conventional, push-pull or elevating scrapers. An independent hydrostatic system powers the auger which is located near the center of the bowl. The rotating auger lifts and evenly distributes over 50% of the material that flows over the scraper cutting edge. This action reduces the cutting edge resistance allowing the wheel tractor-scraper to continue moving through the cut and quickly obtain full rated loads.

#### Advantages:

- Self-load in equal or less time
- Requires shorter cut distance
- Complete material ejection (angled ejector pushes material)
- Significantly reduces dust problems in dry material
- Increased tire life
- Broader material appetite
- Better material retention on haul road (closed apron instead of open elevator)

MODEL TIRE SIZE	PLY RATING/ STAR RATING*	TYPE	MODEL TIRE SIZE	PLY RATING/ STAR RATING*	TYPE
<b>613C Series II</b>			<b>631E Series II</b>		
23.5R25◀	★	L-3	<b>637E Series II</b>		
23.5-25	20	E-3	37.25R35	★★	E-2
<b>611</b>			37.25R35◀	★★	E-3
<b>615</b>			37.25-35	42	E-3
29.5R25◀	★	L-3	<b>651E</b>		
29.5-25	28	E-3	<b>657E</b>		
26.5R25	★	L-3	40.5/75R39◀	★★	E-3
26.5R25	★★	E-3	37.5R39	★★	E-2
<b>621G</b>			*Manufacturer uses star (★) rating system instead of ply rating.		
<b>623G</b>			◀Standard Tire.		
<b>627G</b>					
33.25R29◀	★★	E-3			
33.25-29	32	E-3			
29.5R29	★★	E-2			
29.5R29	★★	E-3			
29.5-29	34	E-2			
29.5-29	34	E-3			

**USE OF RIMPULL-SPEED-GRADEABILITY CURVES**

*The following explanation applies to Rimpull-Speed-Gradeability curves for Wheel Tractor-Scrapers, Construction & Mining Trucks/Tractors and Articulated Trucks.*

Maximum speed attainable, gear range and available rimpull can be determined from curves on the following pages when machine weight and total effective grade (or total resistance) are known.

**Rimpull** is the force (in kg, lb or kN) available between the tire and the ground to propel the machine (limited by traction).

**Weight** is defined as Gross Machine Weight (kg or lb) = Machine + Payload.

**Total Effective Grade (or Total Resistance)** is grade resistance plus rolling resistance expressed as percent grade.

Grade is measured or estimated.

Rolling resistance is estimated (see Tables section for typical values.)

10 kg/metric ton (20 lb/U.S. ton) = 1% adverse grade.

Example

With a 6% grade and a rolling resistance of 40 kg/metric ton (80 lb/U.S. ton), find total resistance.

Rolling resistance = 40 kg/t ÷ 10 = 4% Effective Grade

(English: 80 lb ÷ 20 = 4%)

Total resistance = 4% rolling + 6% grade = 10%

**Altitude Derating**

Rimpull force and speed must be derated for altitude similar to flywheel horsepower. The percentage loss in rimpull force approximately corresponds to the percentage loss in flywheel horsepower. See Tables Section for altitude derations.

**Rimpull-Speed-Gradeability**

To determine gradeability performance: Read from gross weight down to the % of total resistance. (Total resistance equals actual % grade *plus* 1% for each 10 kg/metric ton (20 lb./U.S. ton) of rolling resistance.) From this weight-resistance point, read horizontally to the curve with the highest obtainable speed range, then down to the maximum speed. Usable rimpull depends upon traction and weight on drive wheels.

Example problem:

A 631E Series II with an estimated payload of 34 020 kg (75,000 lb) is operating on a total effective grade of 10%. Find the available rimpull and maximum attainable speed.

Empty weight payload = Gross Weight  
 44 200 kg + 34 020 kg = 78 220 kg  
 (97,460 lb + 75,000 lb = 172,460 lb)


*Solution:* Using graph on the next page, read from 78 220 kg (172,460 lb) (point A) on top of gross weight scale down the line to the intersection of the 10% total resistance line (point B).

Go across horizontally from B to the Rimpull Scale on the left (point D). This gives the required rimpull: 7756 kg (17,100 lb).

Where the line cuts the speed curve (point C), read down vertically (point E) to obtain the maximum speed attainable for the 10% effective grade: 12.9 km/h (8 mph).

ANSWER: The machine will climb the 10% effective grade at a maximum speed of 12.9 km/h (8 mph) in 4th gear. Available rimpull is 7756 kg (17,100 lb).



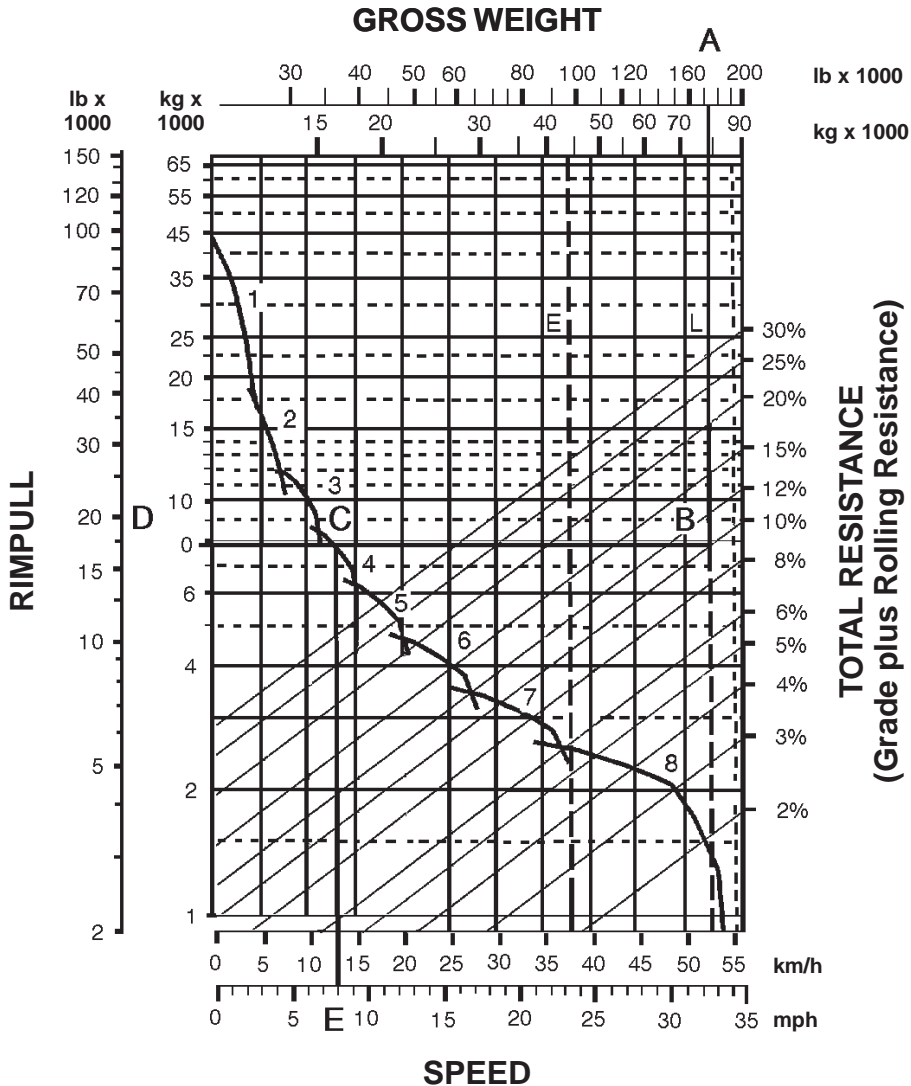

**KEY**

- 1 — 1st Gear Torque Converter Drive
- 2 — 2nd Gear Torque Converter Drive
- 3 — 3rd Gear Direct Drive
- 4 — 4th Gear Direct Drive
- 5 — 5th Gear Direct Drive
- 6 — 6th Gear Direct Drive
- 7 — 7th Gear Direct Drive
- 8 — 8th Gear Direct Drive

**KEY**

- A — Loaded 77 965 kg (171,880 lb)
- B — Intersection with 10% total resistance line
- C — Intersection with rimpull curve (4th gear)
- D — Required rimpull 7756 kg (17,100 lb)
- E — Speed 12.9 km/h (8 mph)

**USE OF TRAVEL TIME CHARTS**

The following explanation applies to travel time charts for Wheel Tractor-Scrapers, Construction & Mining Trucks and Articulated Trucks.

One-way travel time can be determined from graphs on the following pages when one-way travel distance and total resistance (expressed in percent) are known. 10 kg/metric ton (20 lb/U.S. ton) equals 1% equivalent grade.

If total resistance is negative (grade assistance greater than rolling resistance) machine may accelerate downhill requiring the use of retarder or brakes. Travel time charts cannot be used in these cases. Consult respective machine retarder curve to establish maximum safe downhill speed.

Two graphs are given for each hauling unit: one for the machine carrying its rated payload and one for the empty machine.


Travel times were derived using Caterpillar Machine Simulation Program and standard tire inputs. Travel times for machines equipped with (larger) optional tires vary slightly.

Example problem:

631E Series II hauls its rated payload 34 020 kg — 19.1 bank cubic meters (75,000 lb — 25 bank cubic yards) on a 4% road for 610 m (2000 feet) and returns on a 0% road for 760 m (2500 feet). Find the cycle time.


*Haul —*

Using the graph for the Loaded machine, read from the Travel Distance (one way) scale at 610 m (2000 feet) across to the 4% total resistance line (point A). From (point A) read down to the Travel Time (one way) scale to determine haul time = 1.4 minutes.

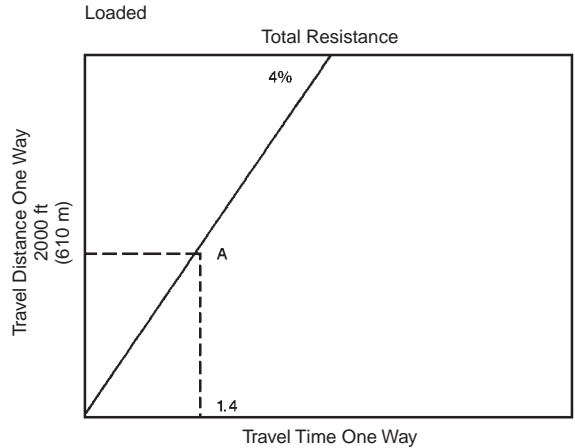

*Return —*

Using the graph for the Empty machine, read from the Travel Distance (one way) scale at 760 m (2500 feet) across to the 0% total resistance line (point A). From (point A) read down to the Travel Time (one way) scale to determine return time = 1 min.

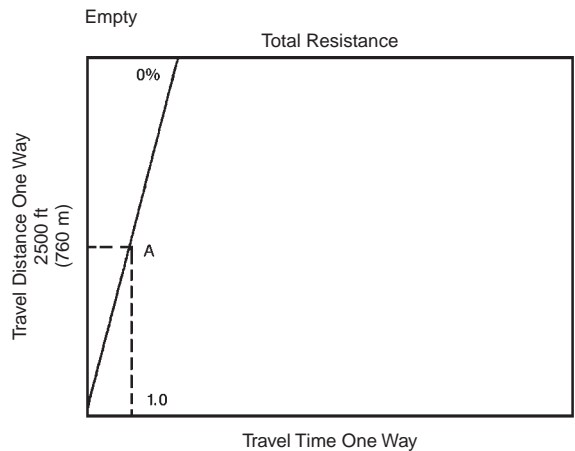

*Cycle Time* —

$$\begin{aligned}
 &= \text{load}^* + \text{haul} + \text{maneuver \& spread}^* + \text{return} \\
 &= 0.6 + 1.4 + 0.7 + 1.0 \\
 &= 3.7 \text{ min.}
 \end{aligned}$$

\*For fixed time (load, maneuver and spread) see the table below.

When cycle time and payload are known, productivity can be calculated. For a more complex example see the Earthmoving Section.



**TYPICAL FIXED TIMES FOR SCRAPERS**  
(Times may vary depending on job conditions)

Model	Loaded By	Load Time (Min.)	Maneuver and Spread or Maneuver and Dump (Min.)
613C Series II	Self	0.9	0.7
615C Series II	Self	0.9	0.7
623G	Self	0.9	0.7
611	One D6R	0.5	0.7
621G	One D8R	0.5	0.7
627G	One D8R	0.5	0.6
621G	One D9R	0.4	0.7
627G	One D9R	0.4	0.6
627F/PP	Self	0.9*	0.6
631E Series II	One D9R	0.6	0.7
637E Series II	One D9R	0.6	0.6
631E Series II	One D10R	0.5	0.7
637E Series II	One D10R	0.5	0.6
637E/PP Series II	Self	1.0*	0.6
651E	One D11R	0.6	0.7
657E	One D11R	0.6	0.6
657E	Push Pull	1.1*	0.6
	Self		
621G	Auger	0.9	0.7
627G	Auger	0.7	0.7
631E Series II	Auger	0.9	0.7
637E Series II	Auger	0.8	0.7
651E	Auger	1.3	0.7
657E	Auger	1.0	0.7

\*Load time per pair, including transfer time.

**NOTE:** Empty Weights shown on the Wheel Tractor-Scraper charts includes ROPS Canopy. The travel times will remain within acceptable limits when applied to a non-ROPS equipped machine. When calculating TMPH loadings any additional weight must be considered in establishing mean tire loads.

**USE OF RETARDER CURVES**

The following explanation applies to retarder curves for Wheel Tractor-Scrapers and Articulated Trucks.

The speed that can be maintained (without use of service brake) when the machine is descending a grade with retarder fully on can be determined from the retarder curves in this section if gross machine weight and total effective grade are known.

**Total Effective Grade (or Total Resistance)** is grade assistance *minus* rolling resistance.

10 kg/metric ton (20 lb/U.S. ton) = 1% adverse grade.

Example

15% favorable grade with 5% rolling resistance. Find Total Effective Grade.

$$\text{Total Effective Grade} = 15\% \text{ Grade Assistance} - 5\%$$

$$\text{Rolling Resistance} = 10\% \text{ Total Effective Grade Assistance.}$$

Example problem:

A 651E with an estimated payload of 47 175 kg (104,000 lb) descends a 10% total effective grade. Find constant speed and gear range with maximum retarder effort. Find travel time if the slope is 610 m (2000 ft) long.

$$\begin{aligned}
 \text{Empty Weight} + \text{Payload} &= \text{Gross Weight} \\
 &= 60\,950 \text{ kg} + 47\,175 \text{ kg} = 108\,125 \text{ kg} \\
 &= (134,370 \text{ lb} + 104,000 \text{ lb} = 238,370 \text{ lb})
 \end{aligned}$$



*Solution:* Using the retarder curve below, read from 108 125 kg (238,370 lb) (point A) on top of gross weight scale down the line to the intersection of the 10% effective grade line (point B).

Go across horizontally from point B to the intersection of the retarder curve (point C). Point C intersects at the 5 (5th gear) range.

Where point C intersects the retarder curve, read down vertically to point D on the bottom scale to obtain the constant speed: 21.7 km/h (13.5 mph).

ANSWER: The 651E will descend the slope at 21.7 km/h (13.5 mph) in 5th gear. Travel time is 1.68 minutes.


$$\frac{610 \text{ m}}{363 \text{ m/min}} = 1.68 \text{ min}$$

\*(mph × 88 = F.P.M.)

$$\frac{2000 \text{ ft}}{13.5 \text{ mph} \times 88^*} = 1.68 \text{ min}$$

NOTE: The basic Distance-Speed-Time formula is  $60 D \div S = T$  (or "60 D Street"), where 60 is minutes, D is distance, S is speed and T is time. In the above problem,  $60 \times 610 \text{ m} \div 21.7 \text{ km/h} \times 1000 = T$ .

$$\frac{60 \times 610}{21.7 \times 1000} = T = (1.68)$$

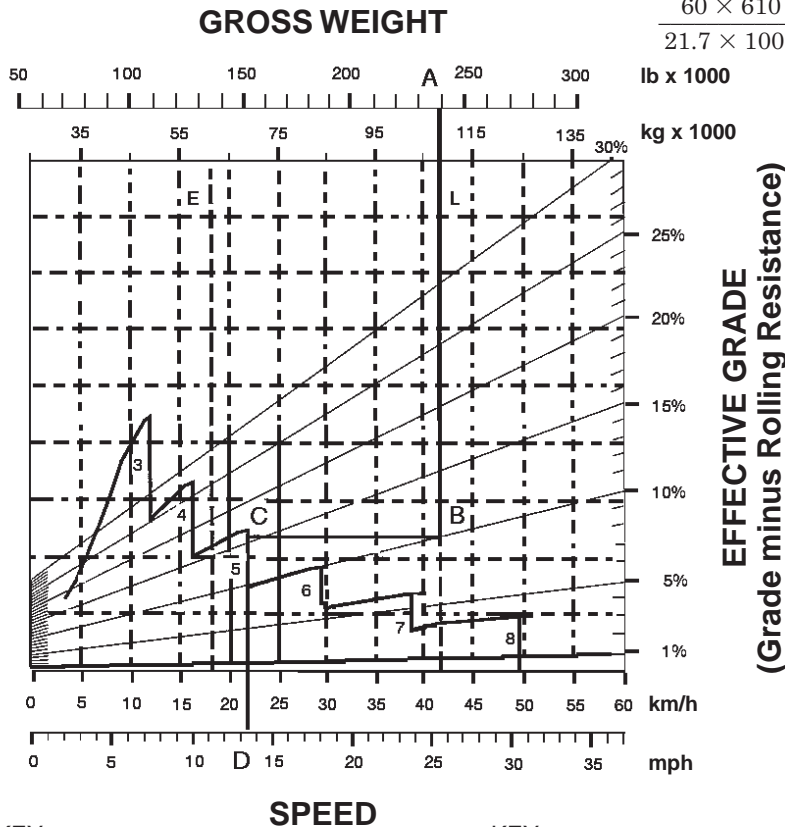


KEY

- 3 — 3rd Gear Direct Drive
- 4 — 4th Gear Direct Drive
- 5 — 5th Gear Direct Drive
- 6 — 6th Gear Direct Drive
- 7 — 7th Gear Direct Drive
- 8 — 8th Gear Direct Drive

KEY

- A — Loaded 108 125 kg (238,370 lb)
- B — Intersection with 10% effective grade line
- C — Intersection with retarder curve (5th gear)
- D — Constant speed 21.7 km/h (13.5 mph)

GROSS WEIGHT

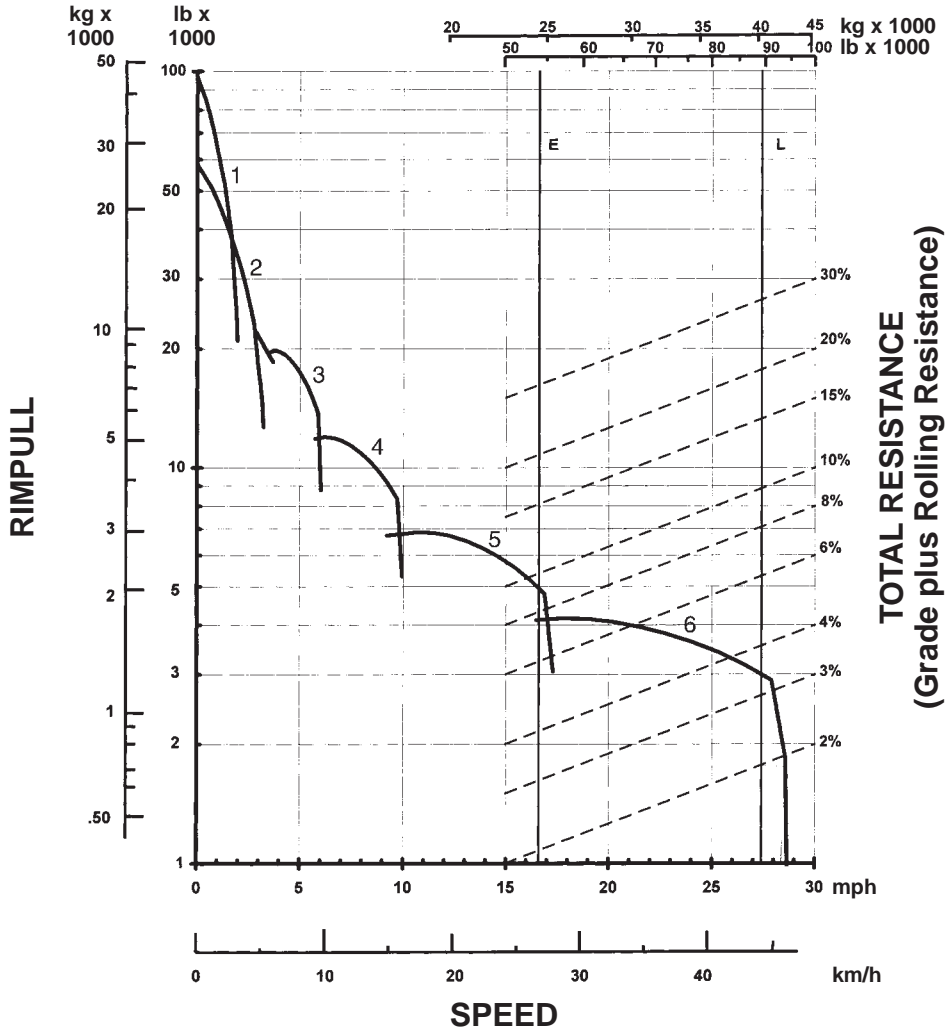


KEY

- 1 — 1st Torque Converter Drive
- 2 — 2nd Torque Converter Drive
- 3 — 3rd Torque Converter Drive
- 4 — 4th Torque Converter Drive
- 5 — 5th Torque Converter Drive
- 6 — 6th Torque Converter Drive

KEY


- E — Empty 24 430 kg (53,860 lb)
- L — Loaded 40 760 kg (89,860 lb)

**LOADED**

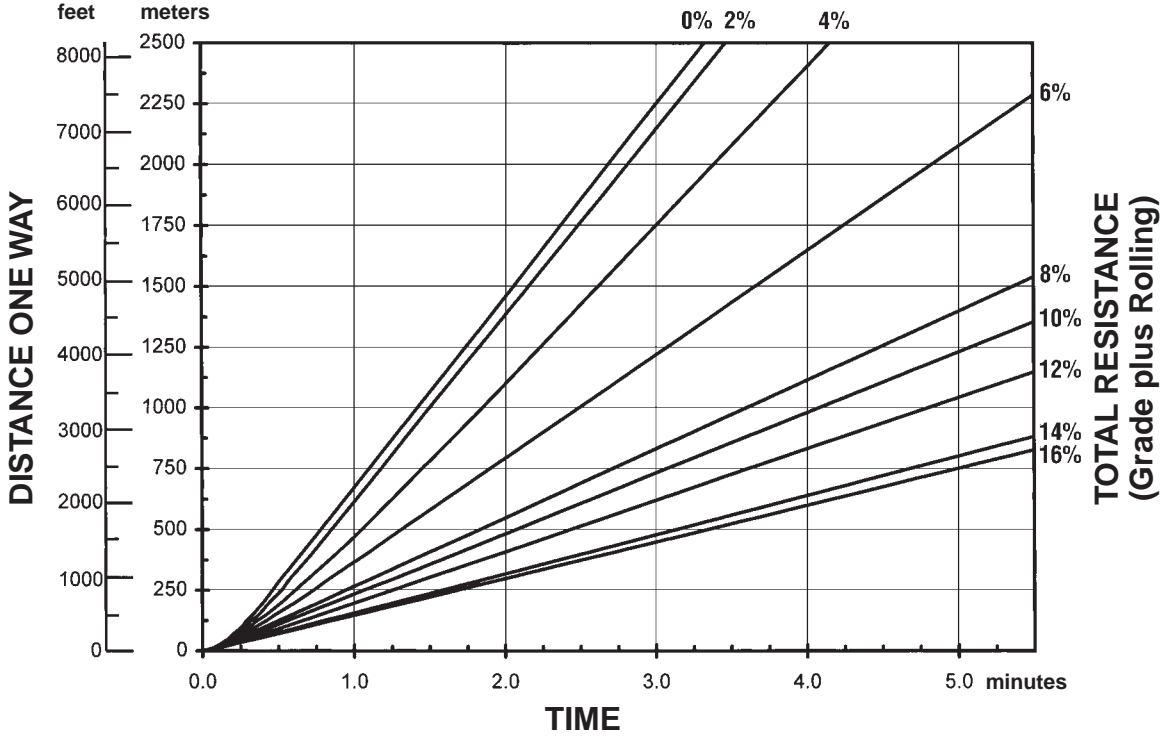


Empty weight: 24 420 kg (53,860 lb)  
Payload: 16 320 kg (36,000 lb)

**EMPTY**

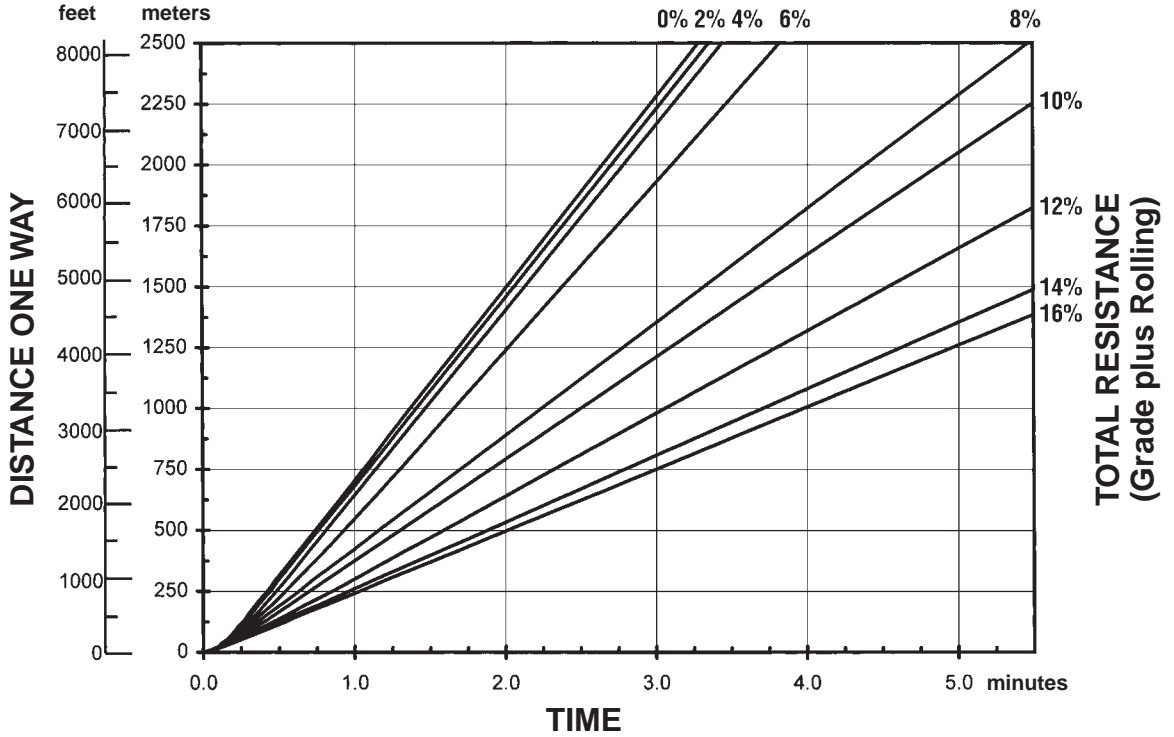

Empty weight: 24 420 kg (53,860 lb)

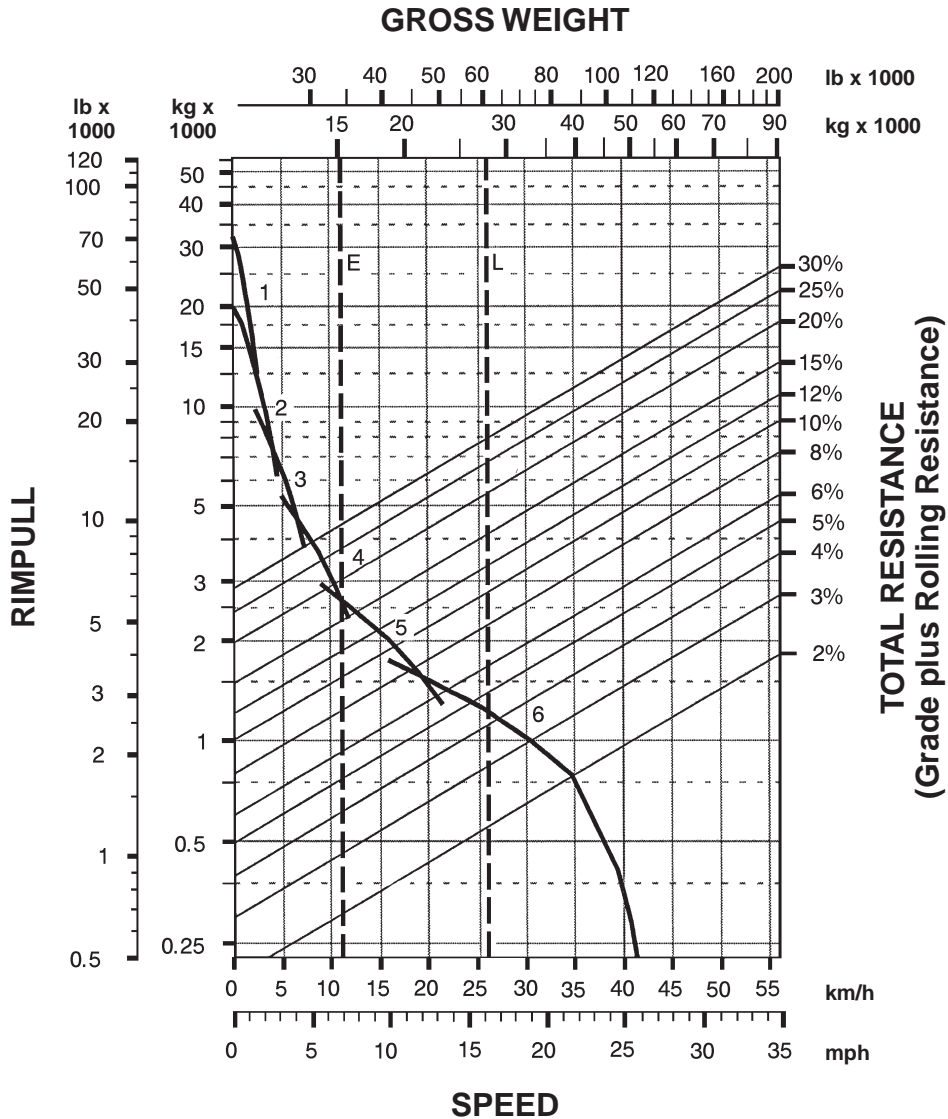


**KEY**

- 1 — 1st Torque Converter Drive
- 2 — 2nd Torque Converter Drive
- 3 — 3rd Torque Converter Drive
- 4 — 4th Torque Converter Drive
- 5 — 5th Torque Converter Drive
- 6 — 6th Torque Converter Drive

**KEY**



- E — Empty 14 970 kg (33,000 lb)
- L — Loaded 26 945 kg (59,400 lb)

**LOADED**

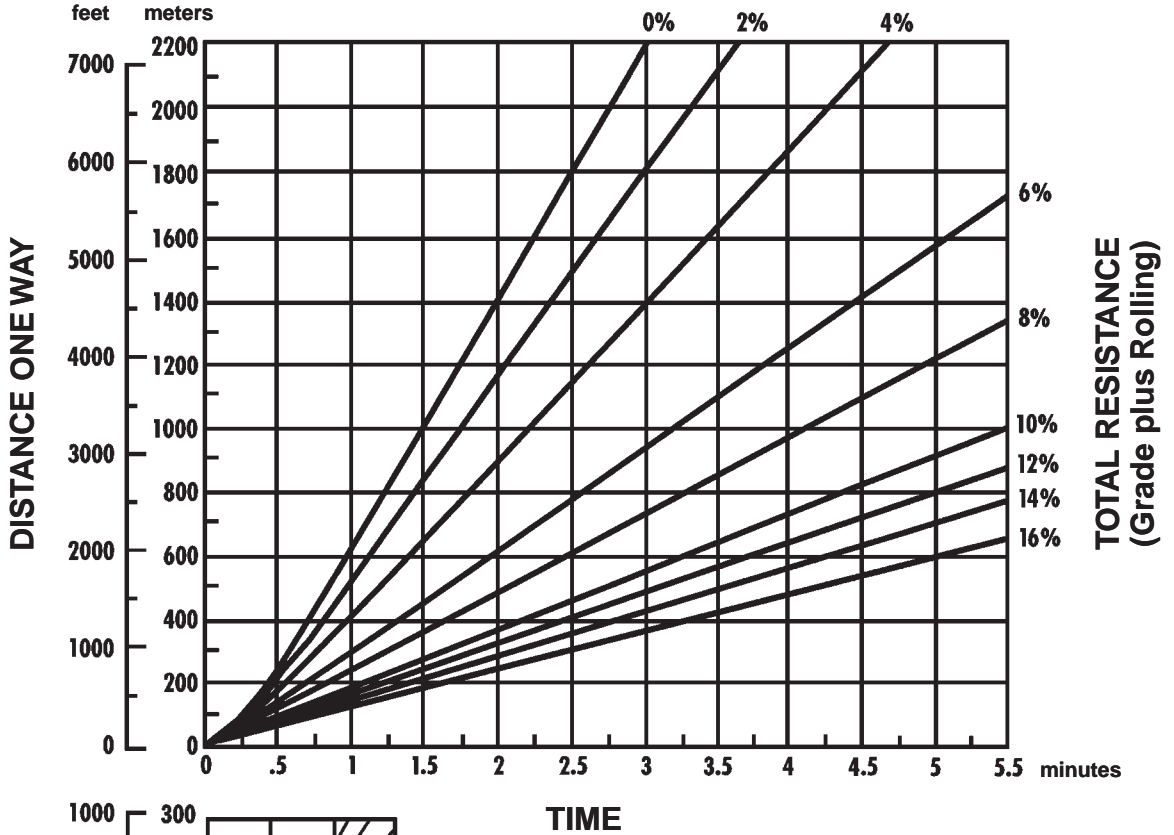


Empty weight: 14 970 kg (33,000 lb)  
 Payload: 11 975 kg (26,400 lb)

**EMPTY**

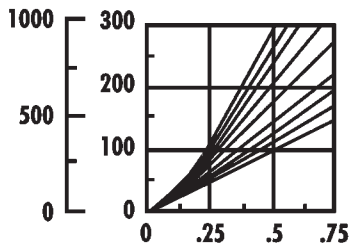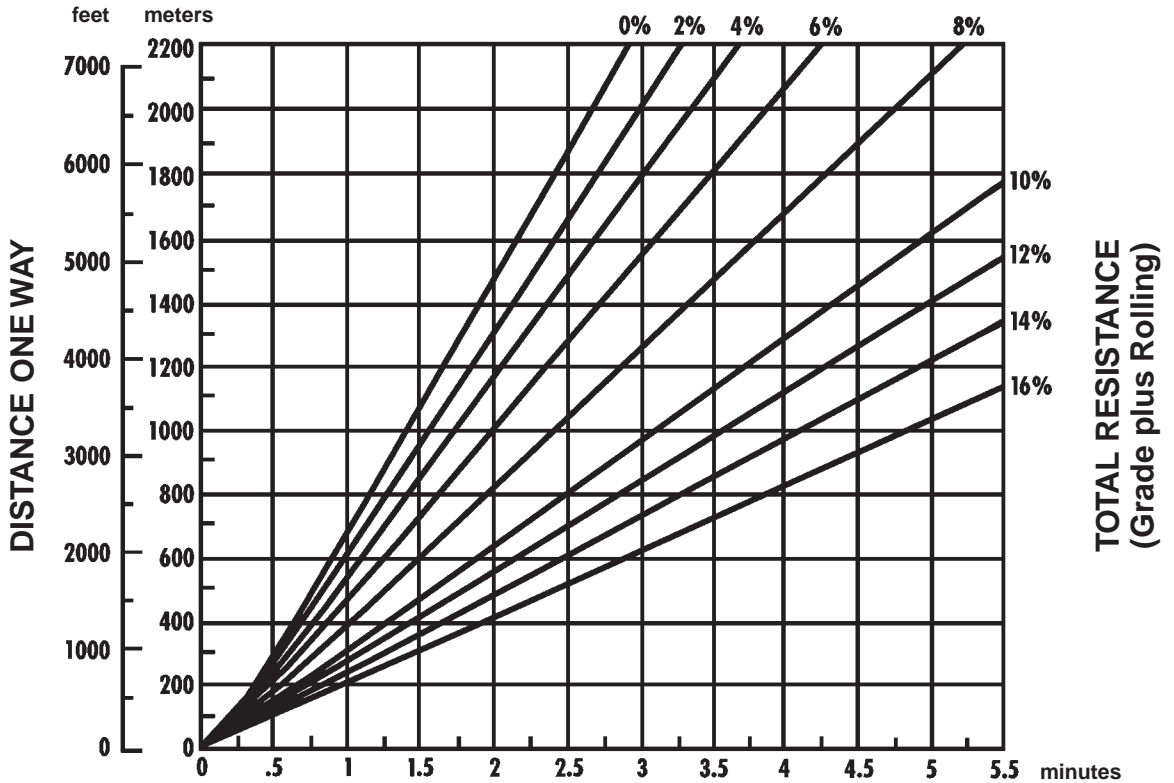

Empty weight: 14 970 kg (33,000 lb)


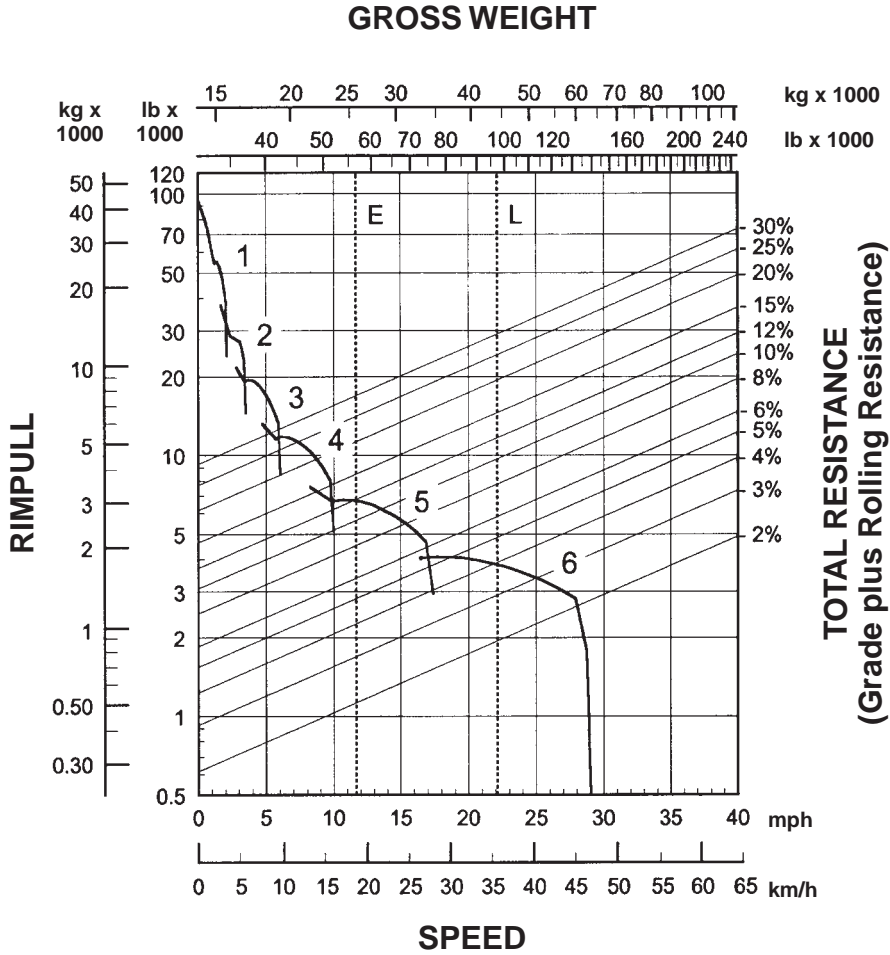


- KEY**
- 1 — 1st Gear Direct Drive
  - 2 — 2nd Gear Direct Drive
  - 3 — 3rd Gear Direct Drive
  - 4 — 4th Gear Direct Drive
  - 5 — 5th Gear Direct Drive
  - 6 — 6th Gear Direct Drive

- KEY**
- E — Empty 25 605 kg (56,450 lb)
  - L — Loaded 44 110 kg (97,250 lb)





**LOADED**

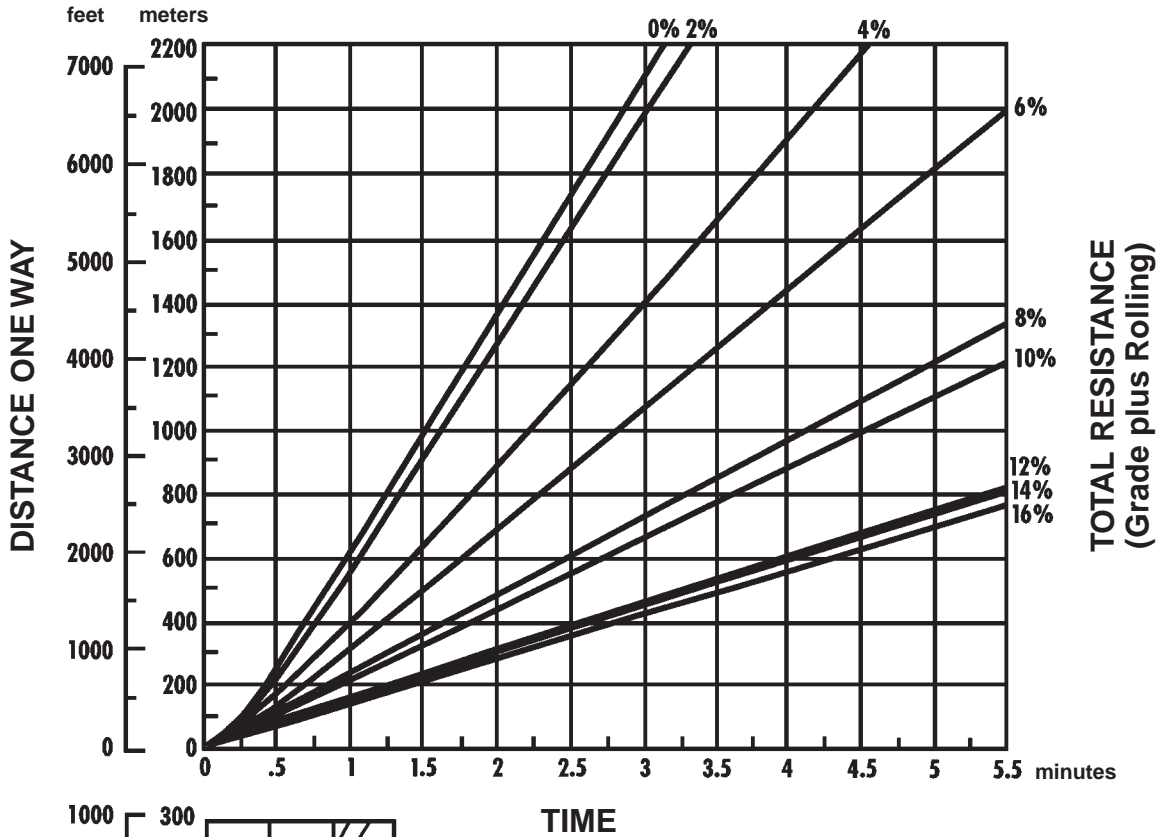


Empty weight: 25 605 kg (56,450 lb)  
 Payload: 18 506 kg (40,800 lb)

**EMPTY**

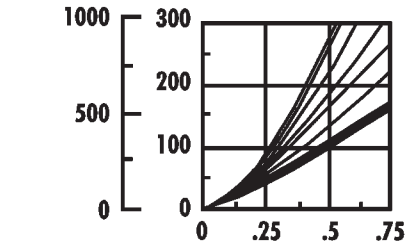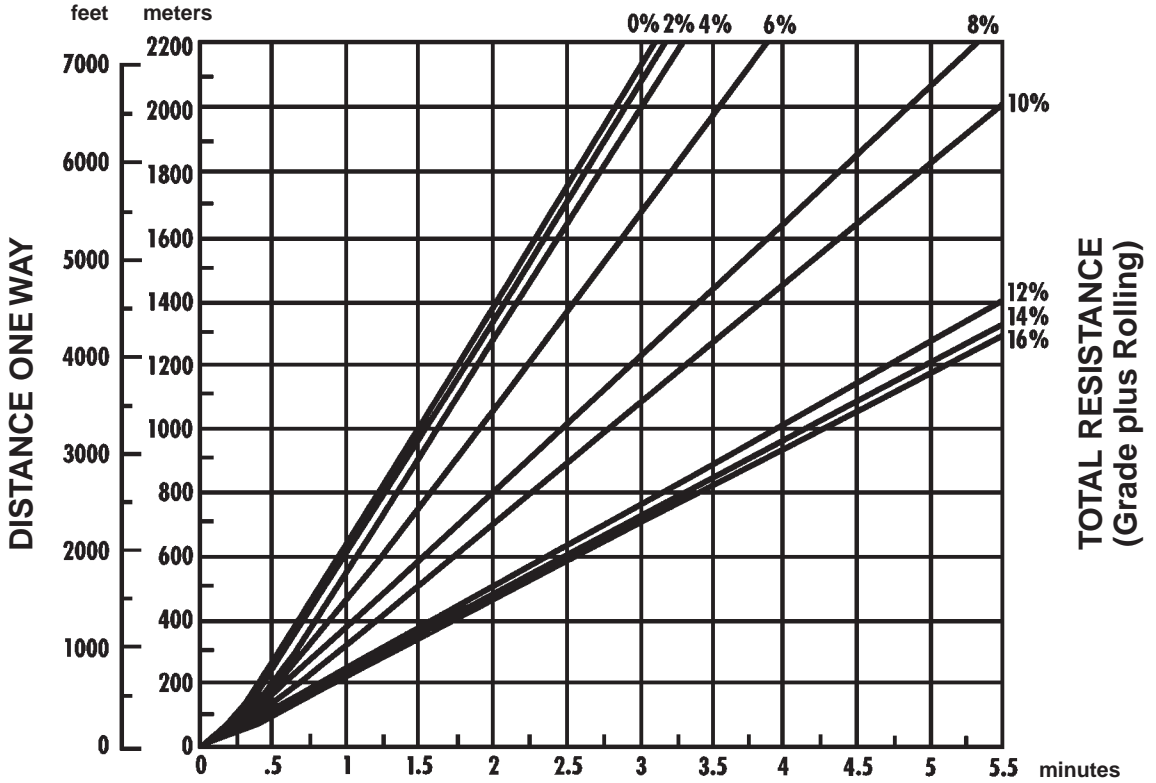

Empty weight: 25 605 kg (56,450 lb)

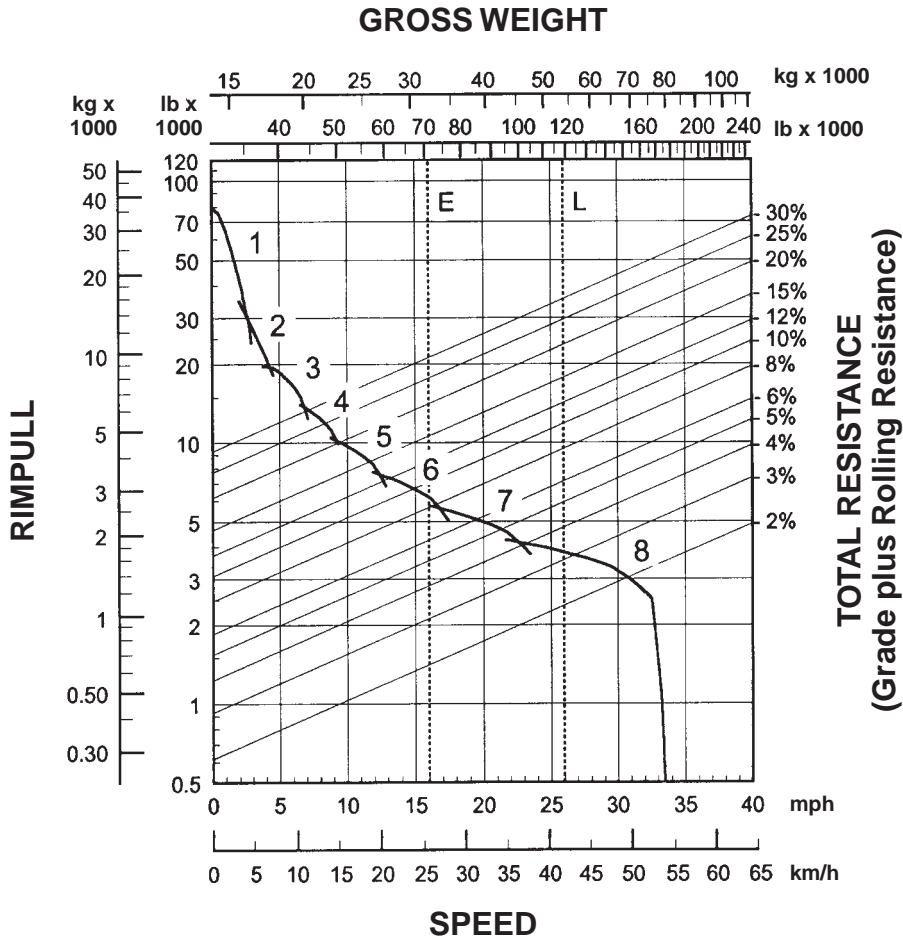


**KEY**

- 1 — 1st Gear Torque Converter Drive
- 2 — 2nd Gear Torque Converter Drive
- 3 — 3rd Gear Direct Drive
- 4 — 4th Gear Direct Drive
- 5 — 5th Gear Direct Drive
- 6 — 6th Gear Direct Drive
- 7 — 7th Gear Direct Drive
- 8 — 8th Gear Direct Drive

**KEY**

- E — Empty 32 250 kg (71,090 lb)
- L — Loaded 54 020 kg (119,090 lb)

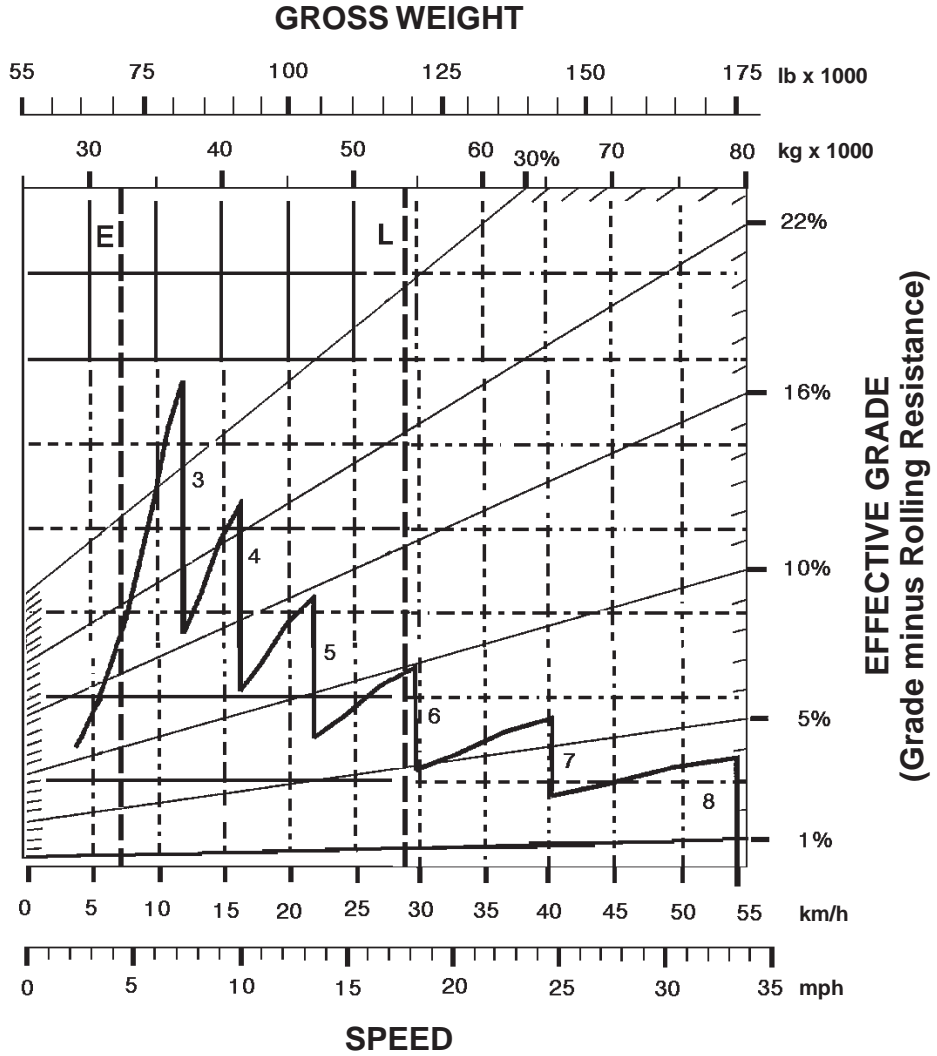



**KEY**

- 3 — 3rd Gear Direct Drive
- 4 — 4th Gear Direct Drive
- 5 — 5th Gear Direct Drive
- 6 — 6th Gear Direct Drive
- 7 — 7th Gear Direct Drive
- 8 — 8th Gear Direct Drive

**KEY**

- E — Empty 32 250 kg (71,090 lb)
- L — Loaded 54 020 kg (119,090 lb)



**LOADED**

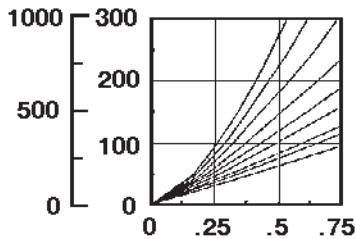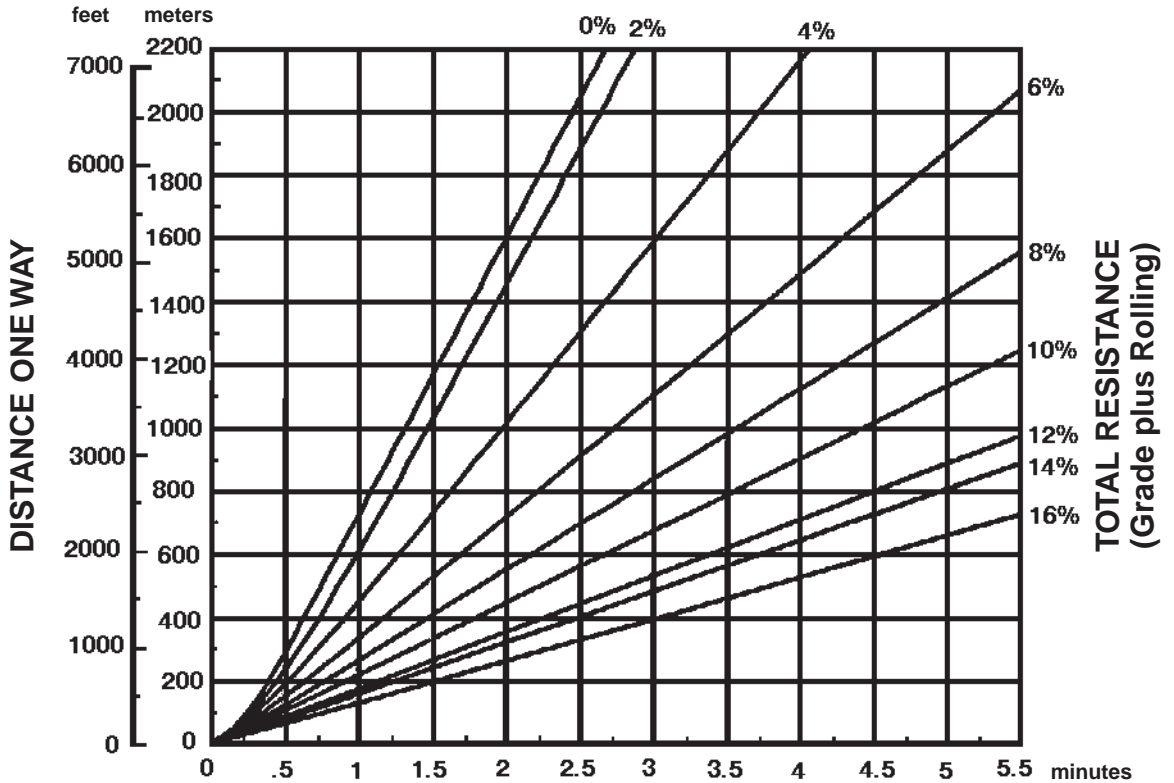

**TIME**

Empty weight: 32 250 kg (71,090 lb)  
 Payload: 21 770 kg (48,000 lb)



**EMPTY**

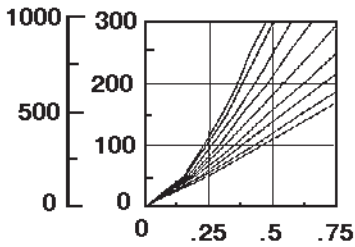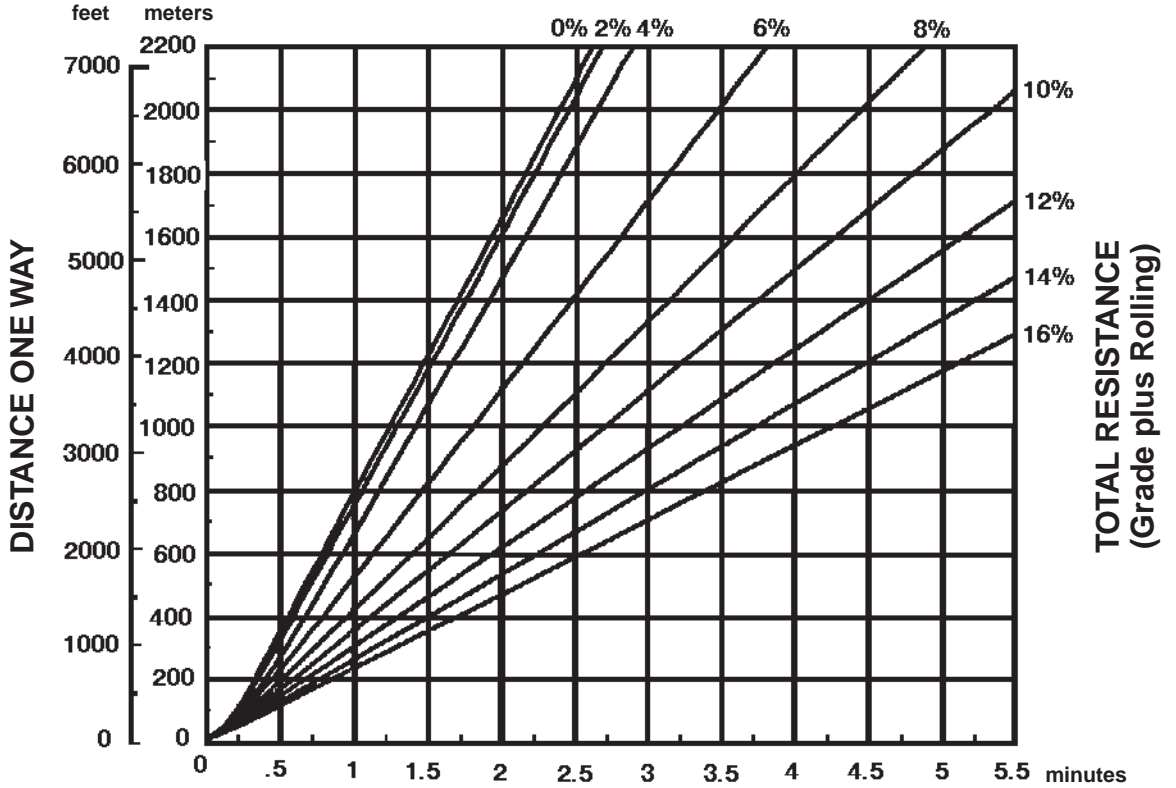

**TIME**



Empty weight: 32 250 kg (71,090 lb)

**LOADED**

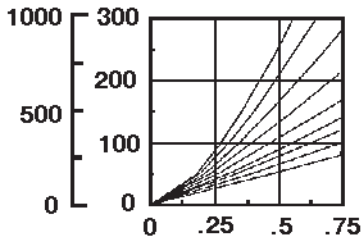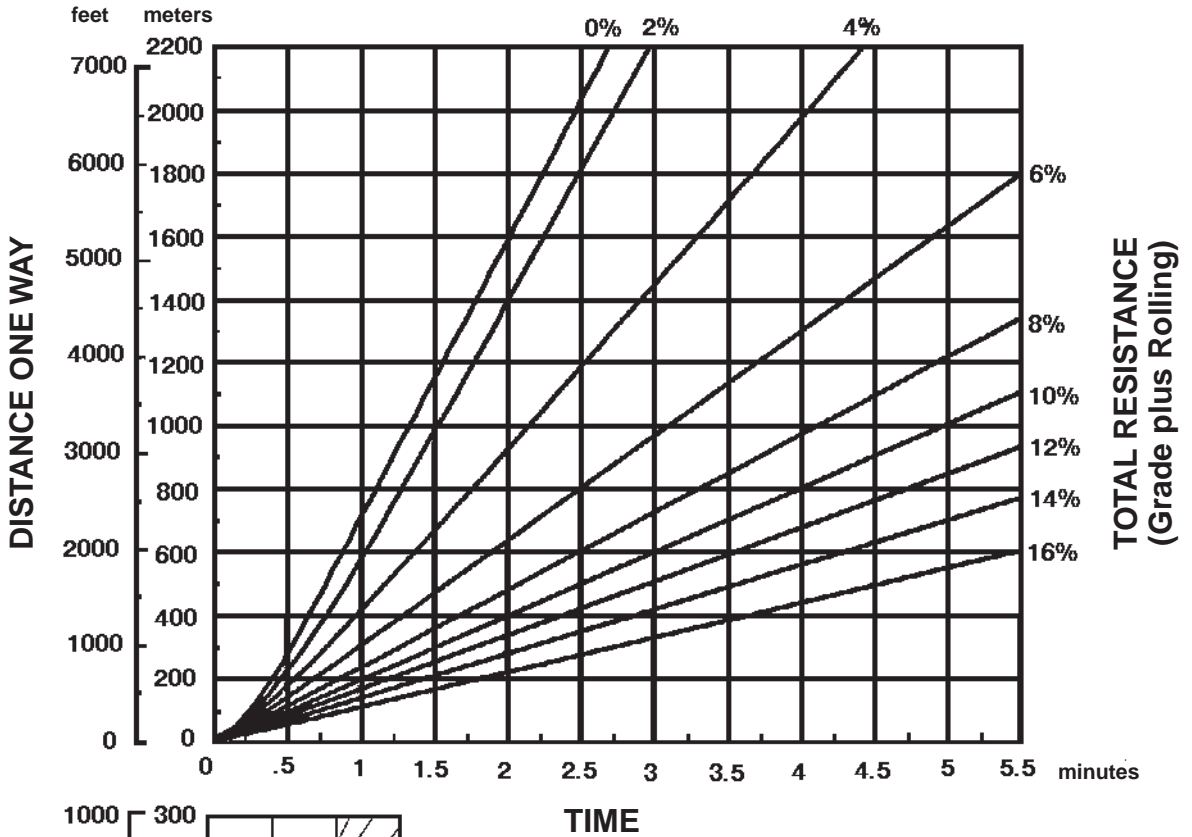

Empty weight: 36 780 kg (81,090 lb)  
 Payload: 21 775 kg (48,000 lb)


**EMPTY**

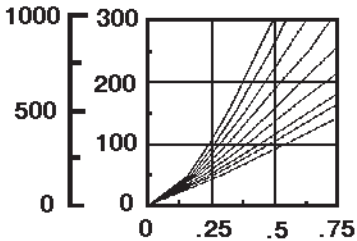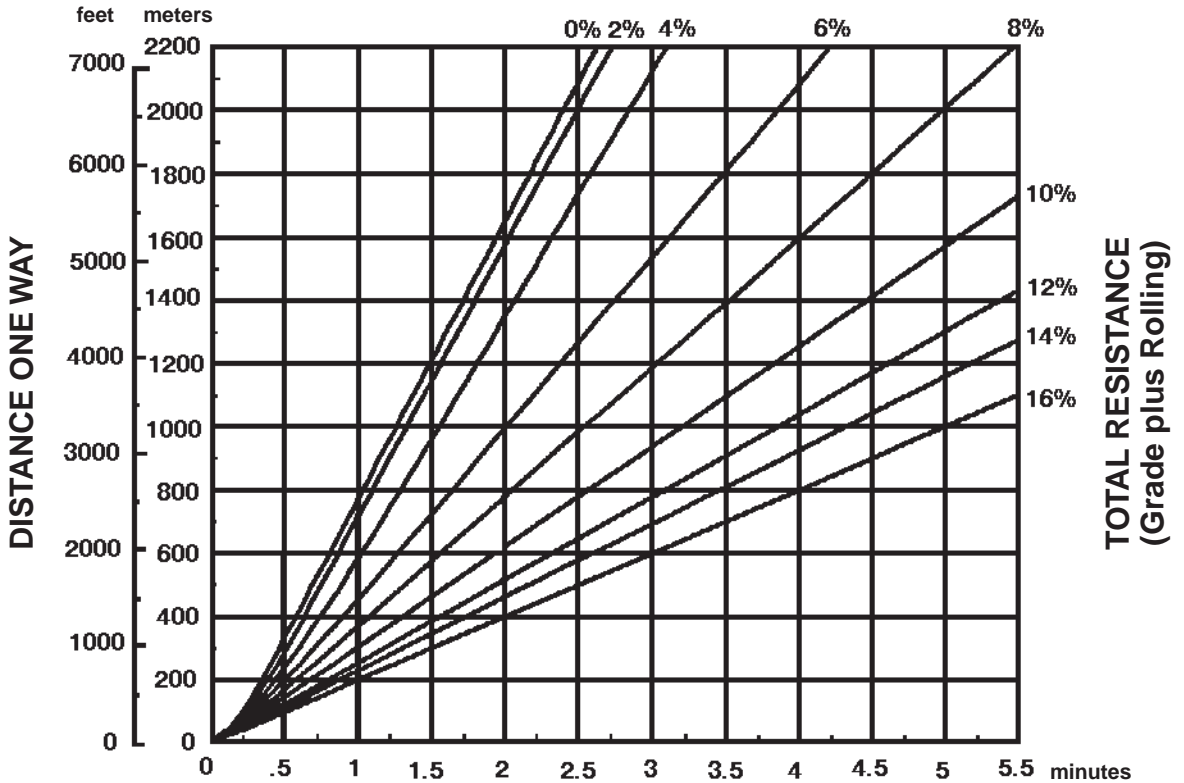

**TIME**

Empty weight: 36 780 kg (81,090 lb)



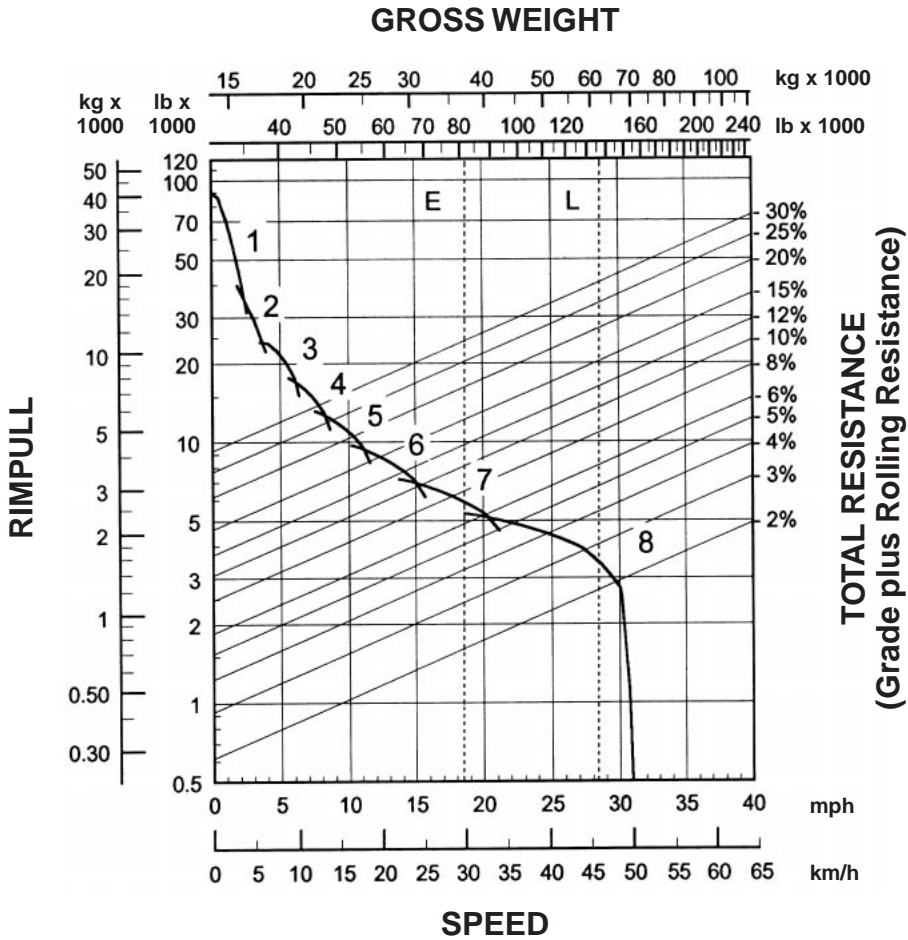


**KEY**

- 1 — 1st Gear Torque Converter Drive
- 2 — 2nd Gear Torque Converter Drive
- 3 — 3rd Gear Direct Drive
- 4 — 4th Gear Direct Drive
- 5 — 5th Gear Direct Drive
- 6 — 6th Gear Direct Drive
- 7 — 7th Gear Direct Drive
- 8 — 8th Gear Direct Drive

**KEY**

- E — Empty 37 120 kg (81,840 lb)
- L — Loaded 62 070 kg (136,840 lb)

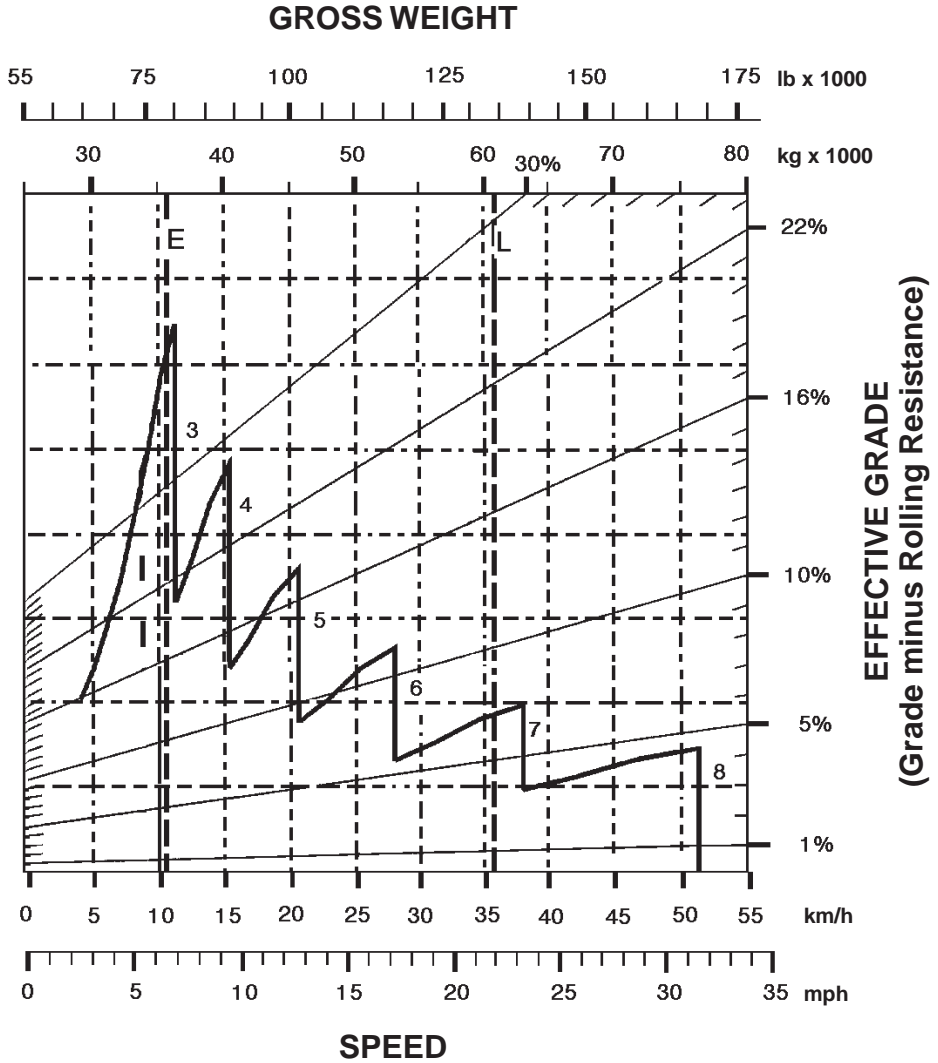



**KEY**

- 3 — 3rd Gear Direct Drive
- 4 — 4th Gear Direct Drive
- 5 — 5th Gear Direct Drive
- 6 — 6th Gear Direct Drive
- 7 — 7th Gear Direct Drive
- 8 — 8th Gear Direct Drive

**KEY**



- E — Empty 37 120 kg (81,840 lb)
- L — Loaded 62 070 kg (136,840 lb)

**LOADED**

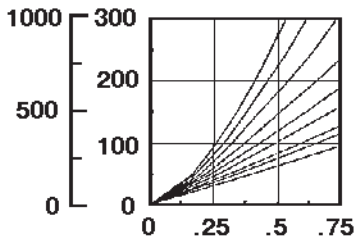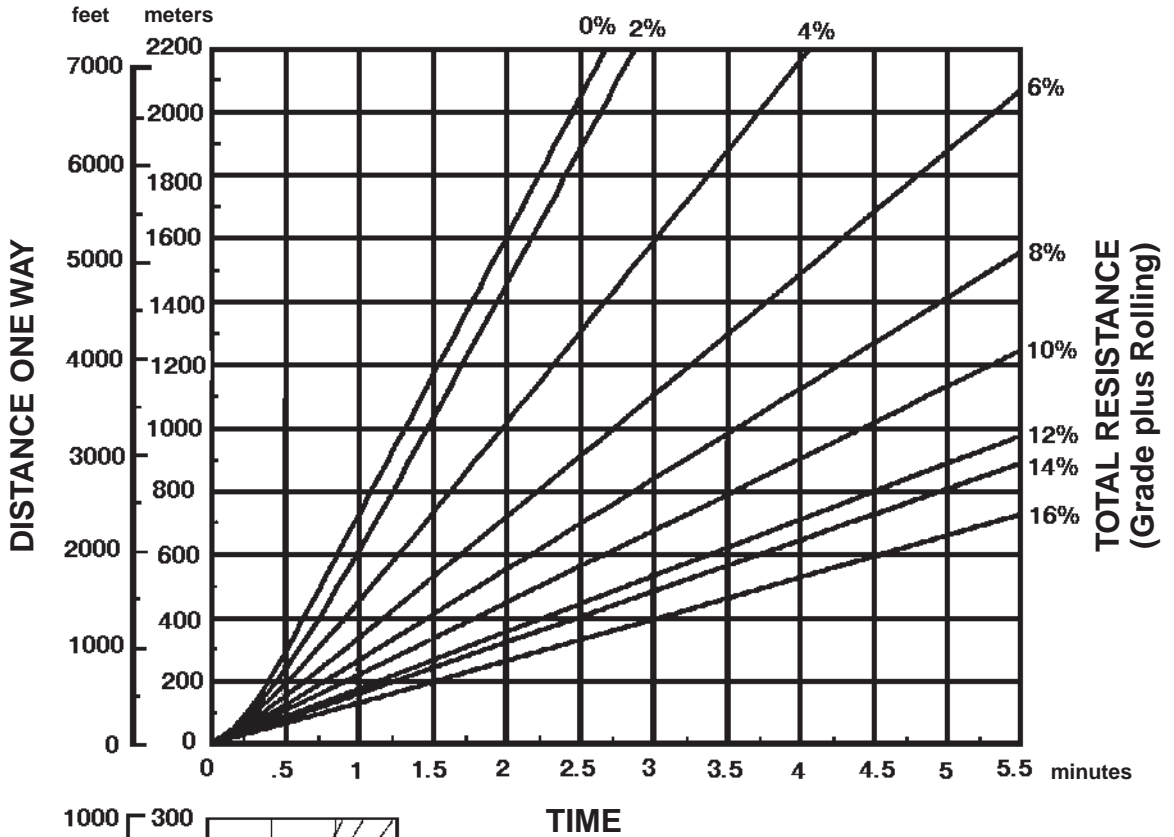


Empty weight: 37 120 kg (81,840 lb)  
 Payload: 24 950 kg (55,000 lb)

**EMPTY**

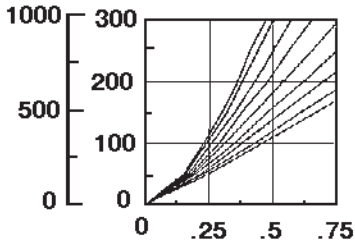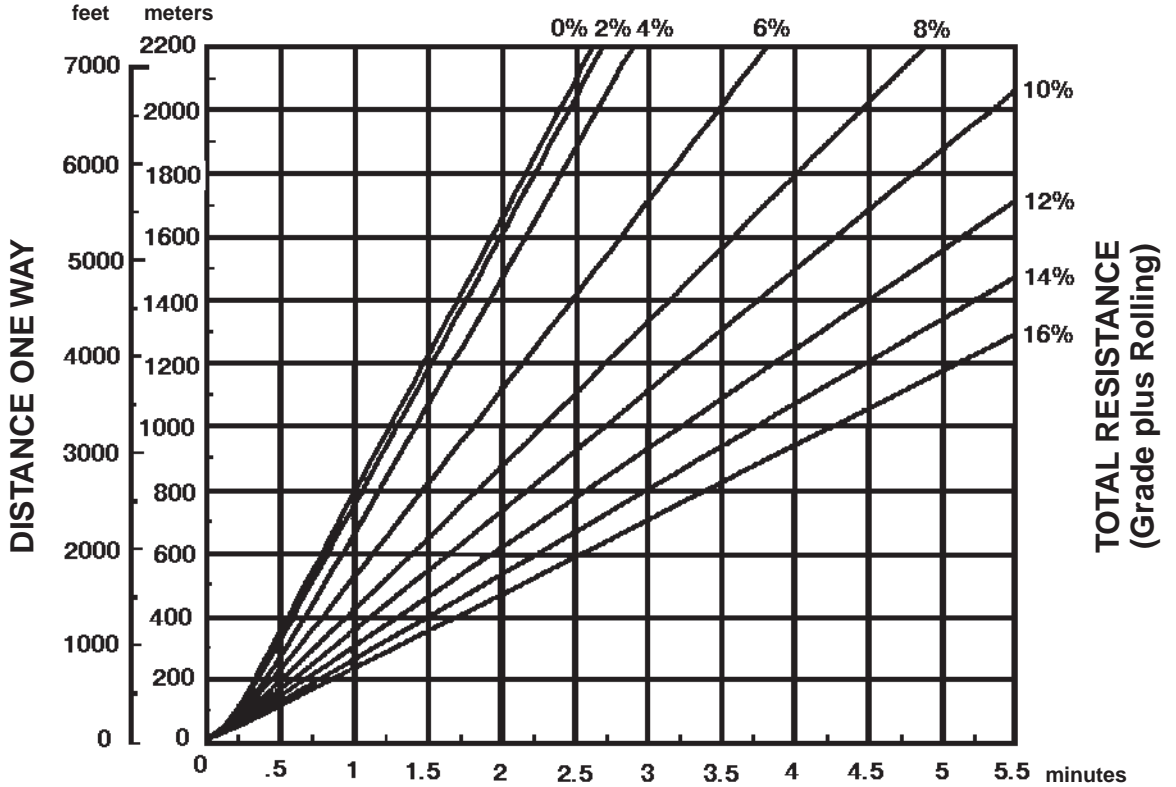

**TIME**

Empty weight: 37 120 kg (81,840 lb)

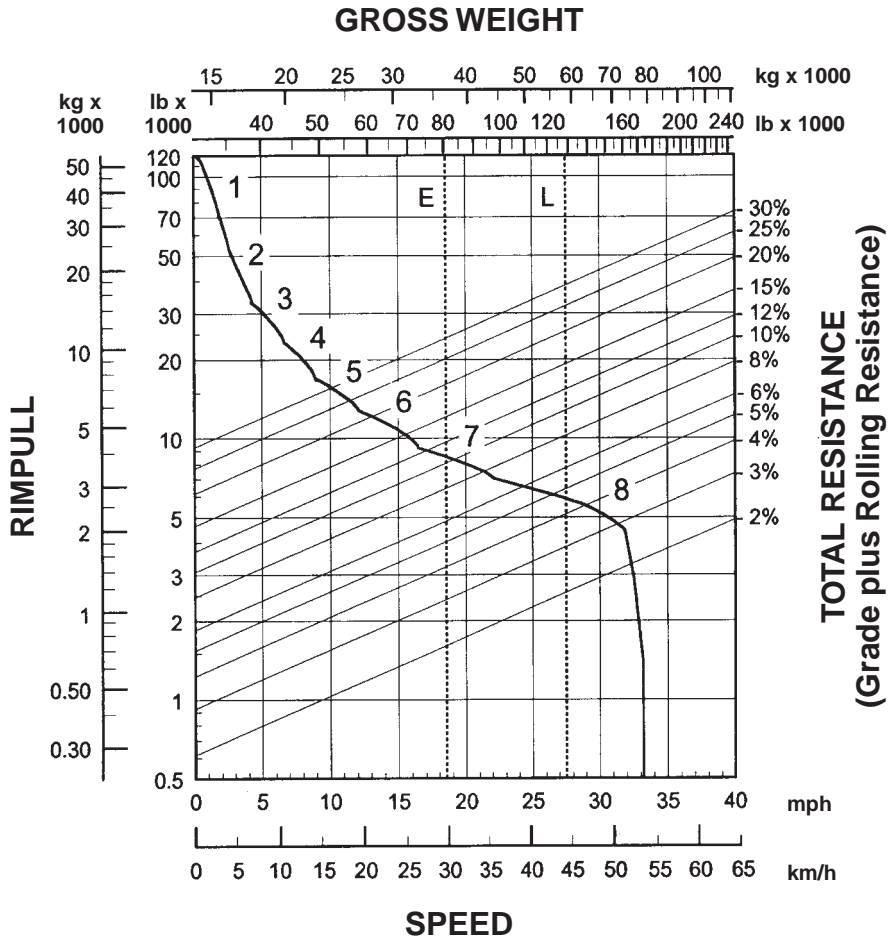


**KEY**

- 1 — 1st Gear Torque Converter Drive
- 2 — 2nd Gear Torque Converter Drive
- 3 — 3rd Gear Direct Drive
- 4 — 4th Gear Direct Drive
- 5 — 5th Gear Direct Drive
- 6 — 6th Gear Direct Drive
- 7 — 7th Gear Direct Drive
- 8 — 8th Gear Direct Drive

**KEY**

- E — Empty 37 100 kg (81,790 lb)
- L — Loaded 58 870 kg (129,790 lb)

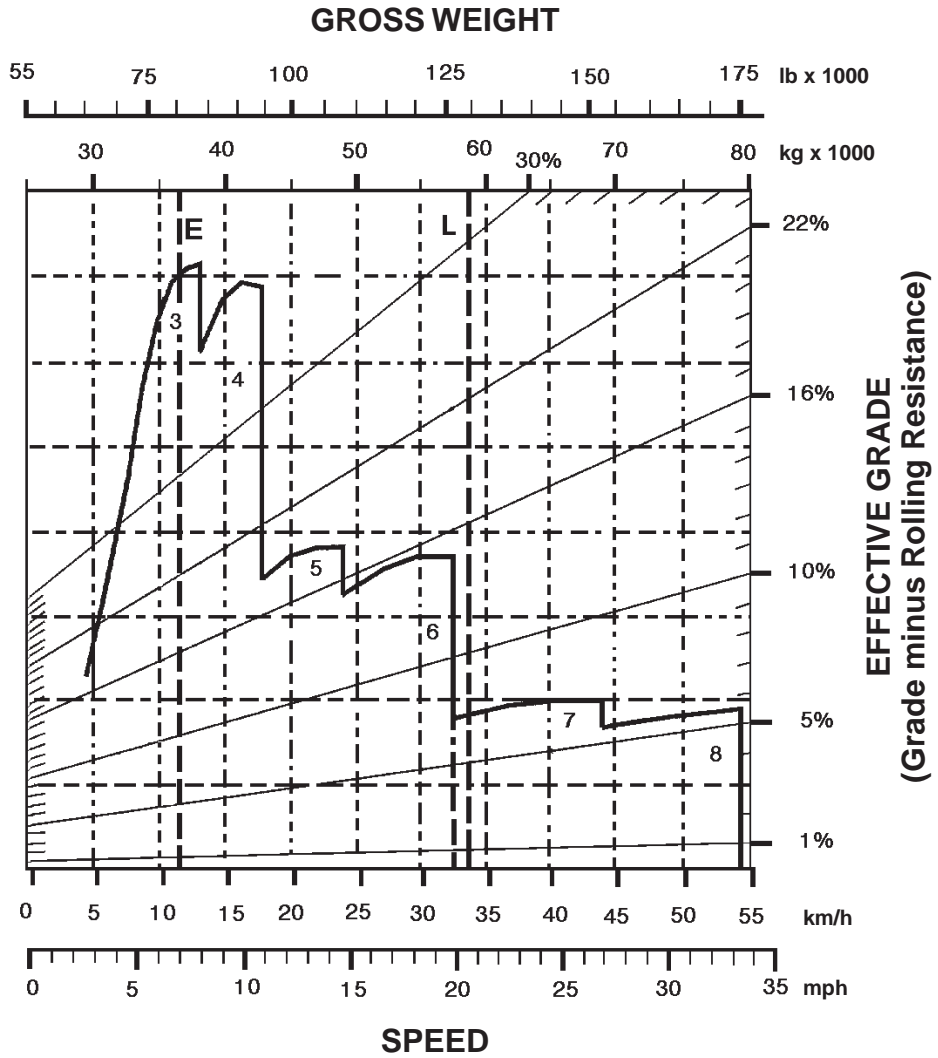

EFFECTIVE GRADE  
 (Grade minus Rolling Resistance)

**KEY**

- 3 — 3rd Gear Direct Drive
- 4 — 4th Gear Direct Drive
- 5 — 5th Gear Direct Drive
- 6 — 6th Gear Direct Drive
- 7 — 7th Gear Direct Drive
- 8 — 8th Gear Direct Drive

**KEY**



- E — Empty 37 100 kg (81,790 lb)
- L — Loaded 58 870 kg (129,790 lb)

# Wheel Tractor-Scrapers

627G Travel Time — Loaded

- 33.25R29 Tires
- Standard and Push-Pull

## LOADED

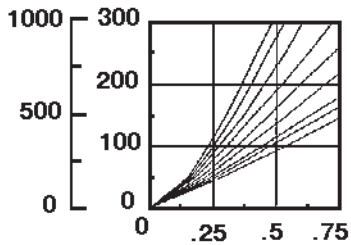
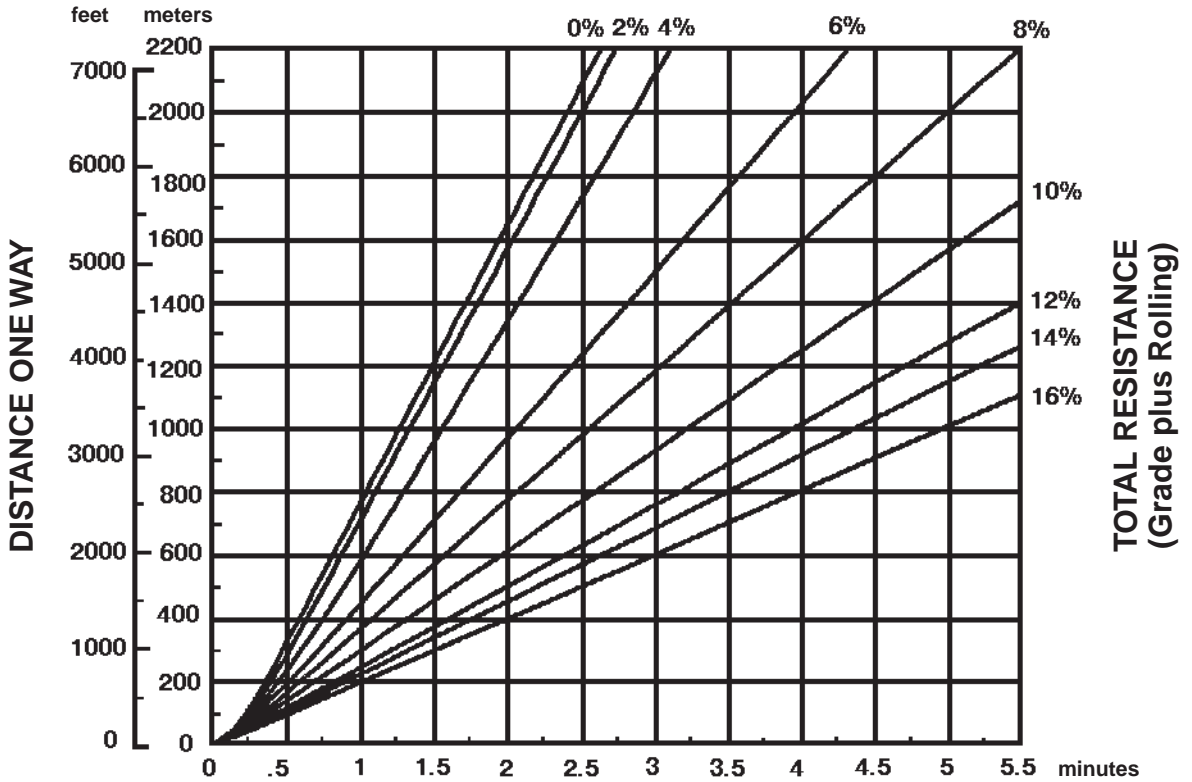


Empty weight: 37 100 kg (81,790 lb)  
 Payload: 21 775 kg (48,000 lb)

627G Travel Time — Empty  
 • 33.25R29 Tires  
 • Standard and Push-Pull

Wheel Tractor-Scrapers

EMPTY

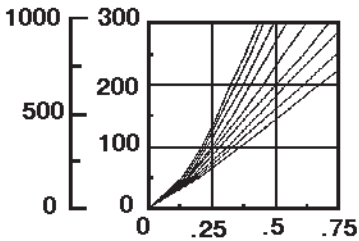
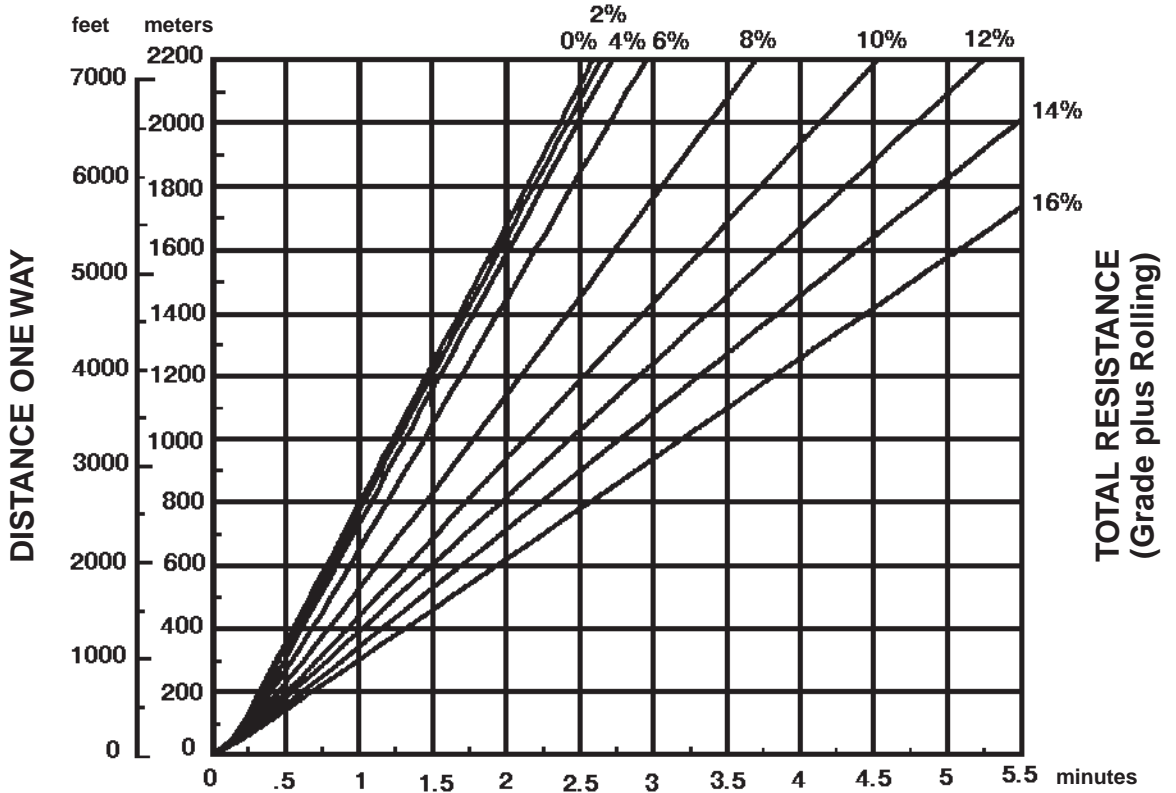


TIME

Empty weight: 37 100 kg (81,790 lb)





LOADED

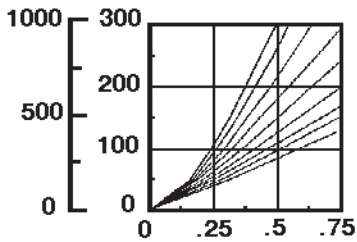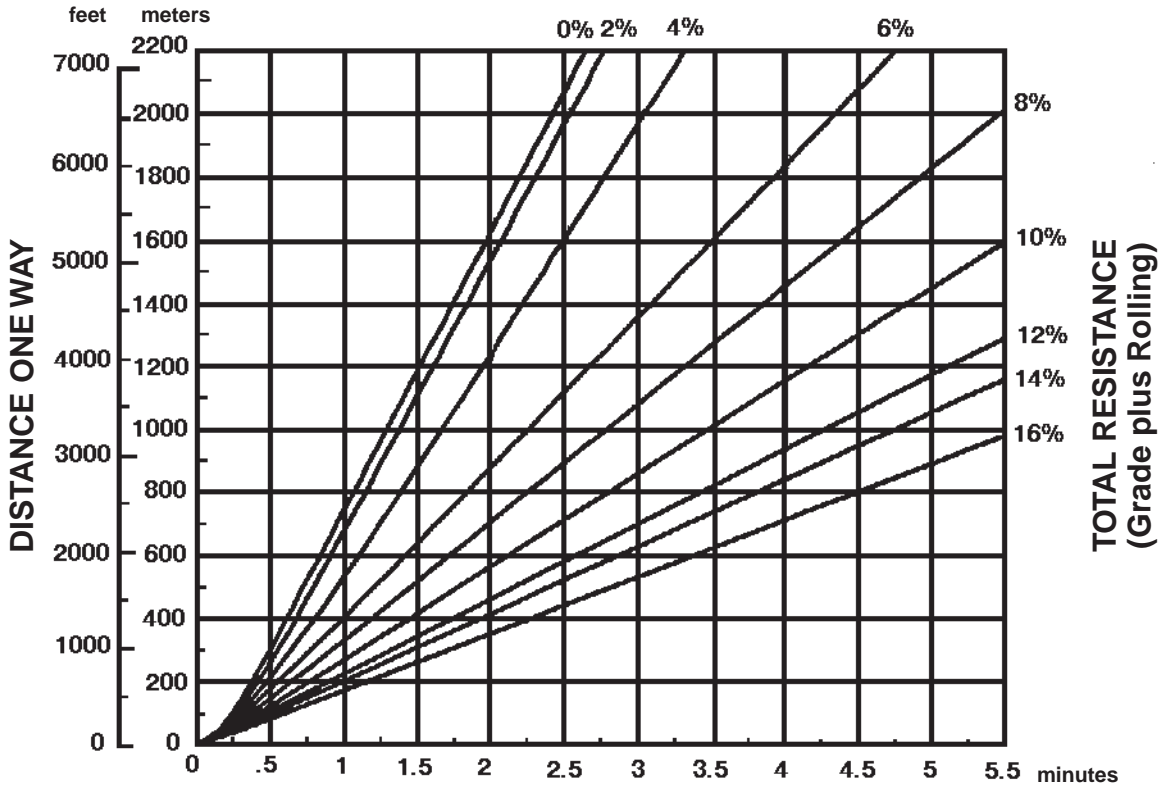


Empty weight: 41 635 kg (91,790 lb)  
Payload: 21 775 kg (48,000 lb)

**EMPTY**

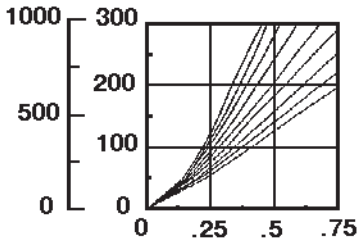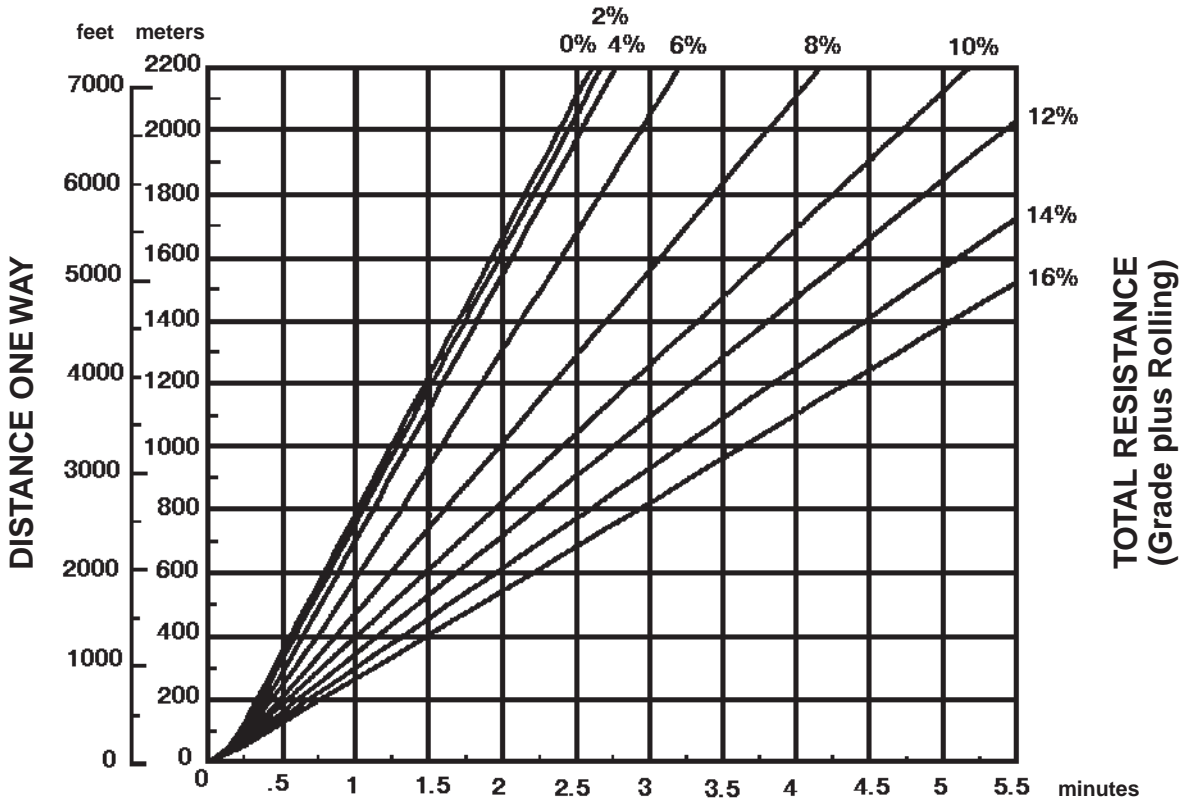

Empty weight: 41 635 kg (91,790 lb)

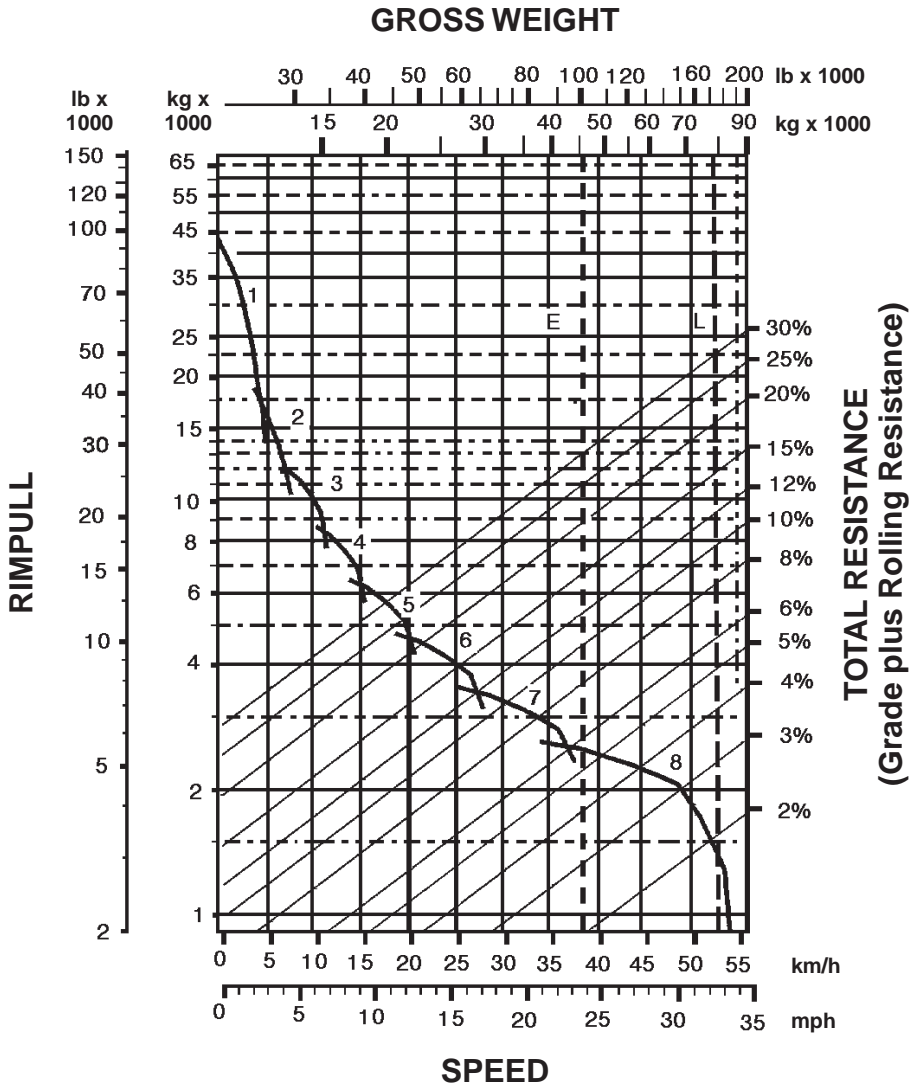


**KEY**

- 1 — 1st Gear Torque Converter Drive
- 2 — 2nd Gear Torque Converter Drive
- 3 — 3rd Gear Direct Drive
- 4 — 4th Gear Direct Drive
- 5 — 5th Gear Direct Drive
- 6 — 6th Gear Direct Drive
- 7 — 7th Gear Direct Drive
- 8 — 8th Gear Direct Drive

**KEY**

- E — Empty 44 200 kg (97,460 lb)
- L — Loaded 78 220 kg (172,460 lb)

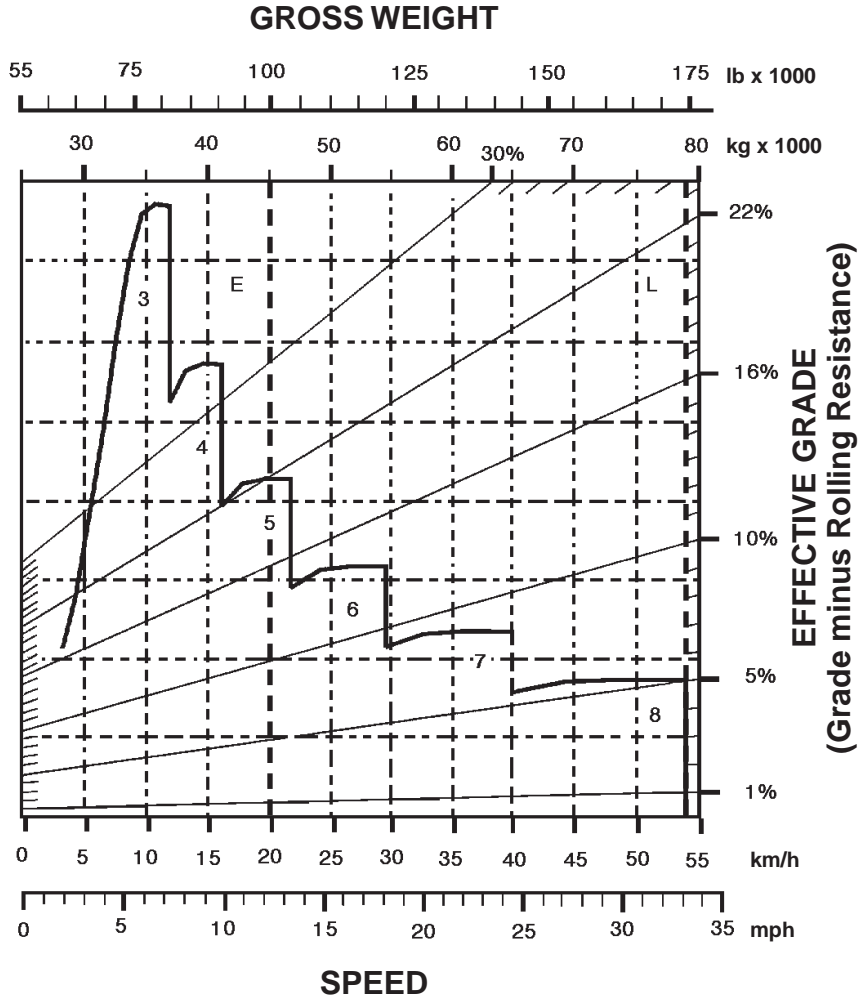



**KEY**

- 3 — 3rd Gear Direct Drive
- 4 — 4th Gear Direct Drive
- 5 — 5th Gear Direct Drive
- 6 — 6th Gear Direct Drive
- 7 — 7th Gear Direct Drive
- 8 — 8th Gear Direct Drive

**KEY**

- E — Empty 44 200 kg (97,460 lb)
- L — Loaded 78 220 kg (172,460 lb)



**LOADED**

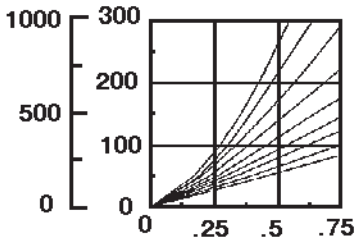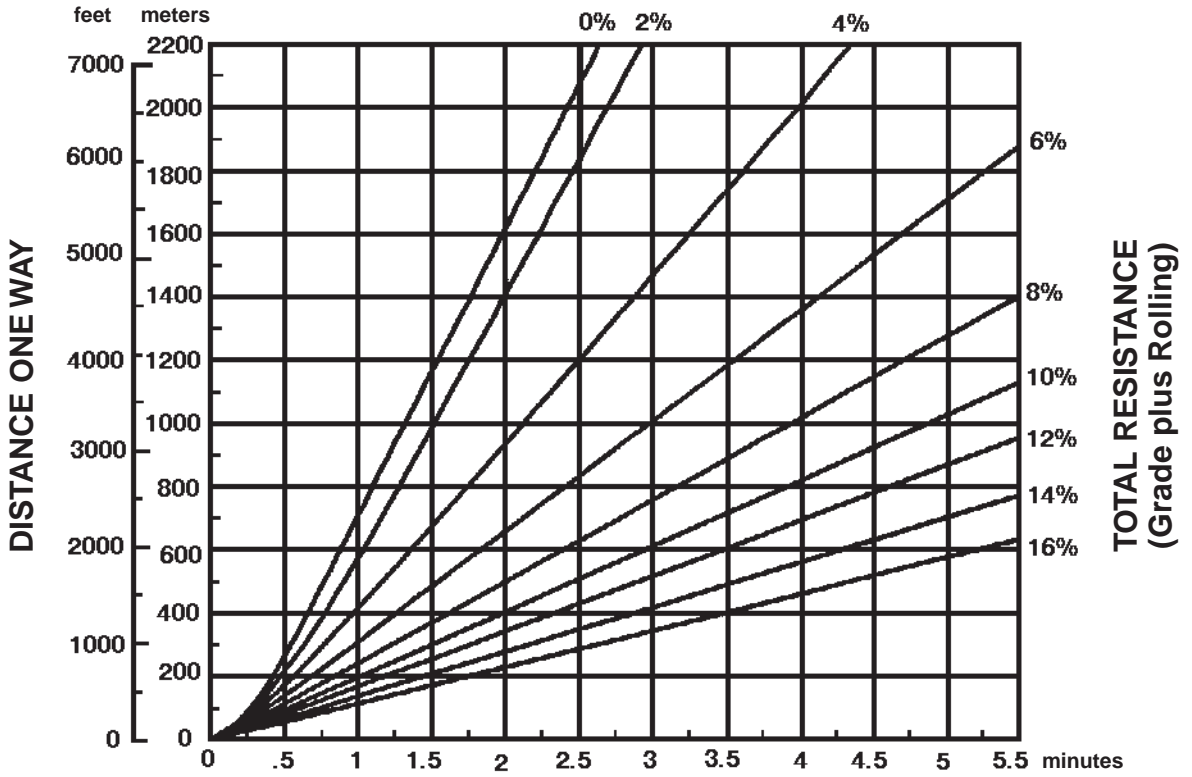

**TIME**

Empty weight: 44 200 kg (97,460 lb)  
 Payload: 34 020 kg (75,000 lb)



**EMPTY**

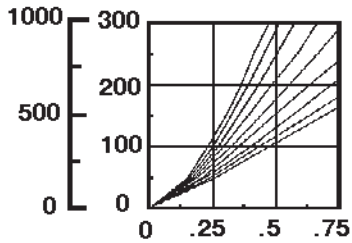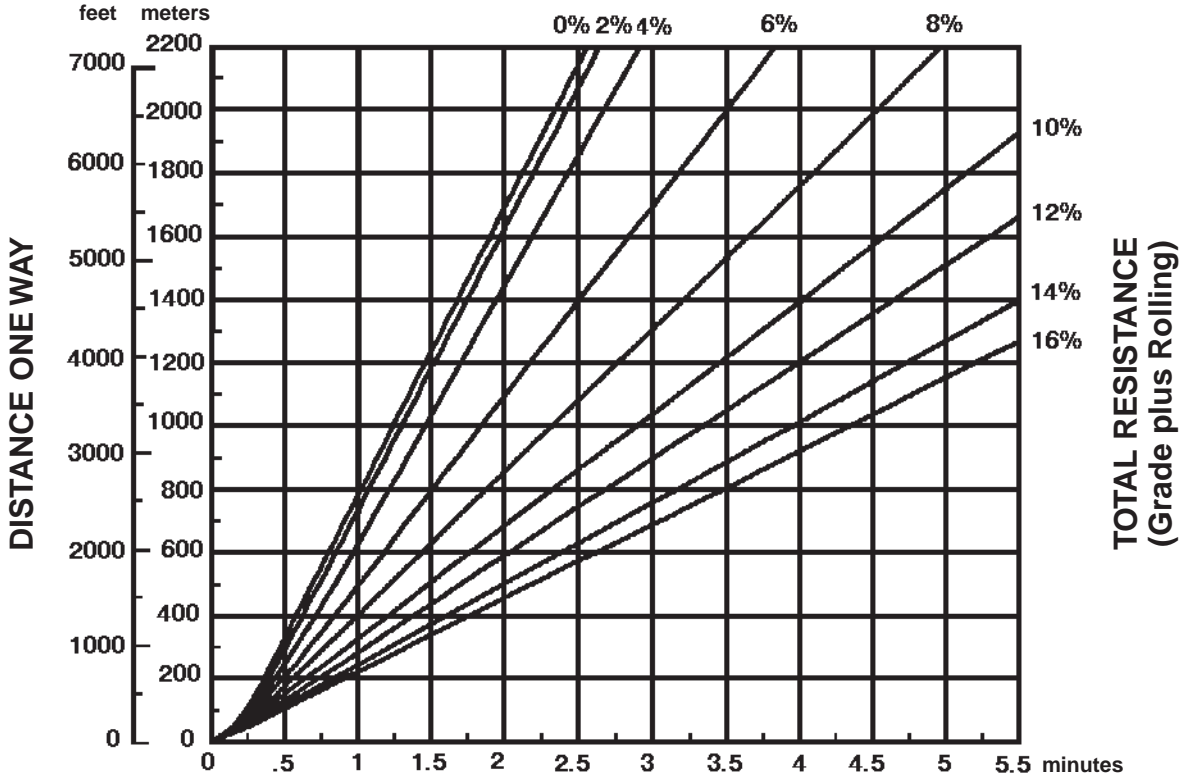

**TIME**

Empty weight: 44 200 kg (97,460 lb)



**LOADED**

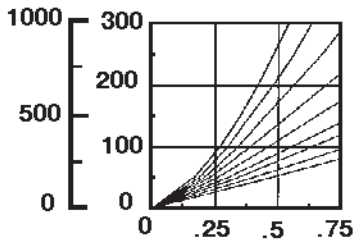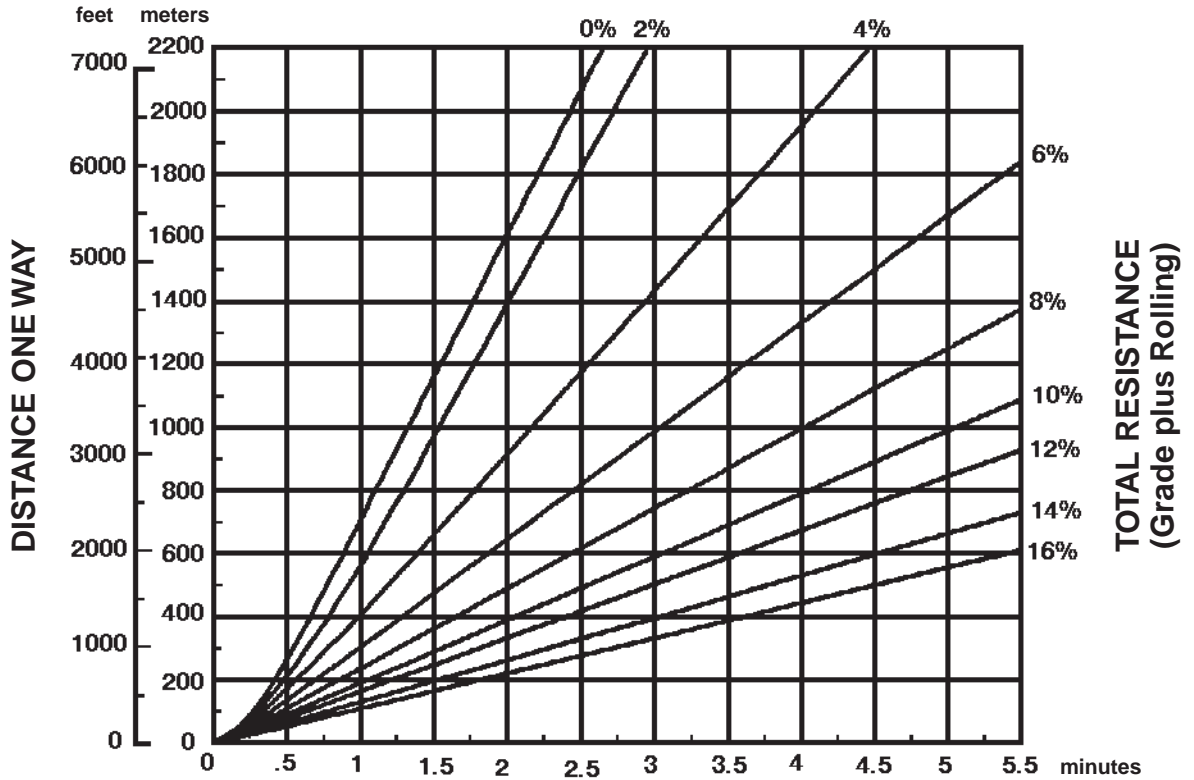

**TIME**


Empty weight: 45 980 kg (101,370 lb)  
 Payload: 34 020 kg (75,000 lb)

**EMPTY**

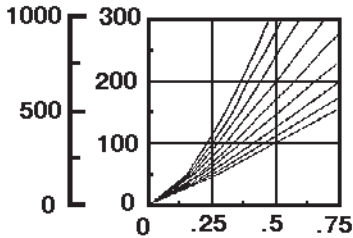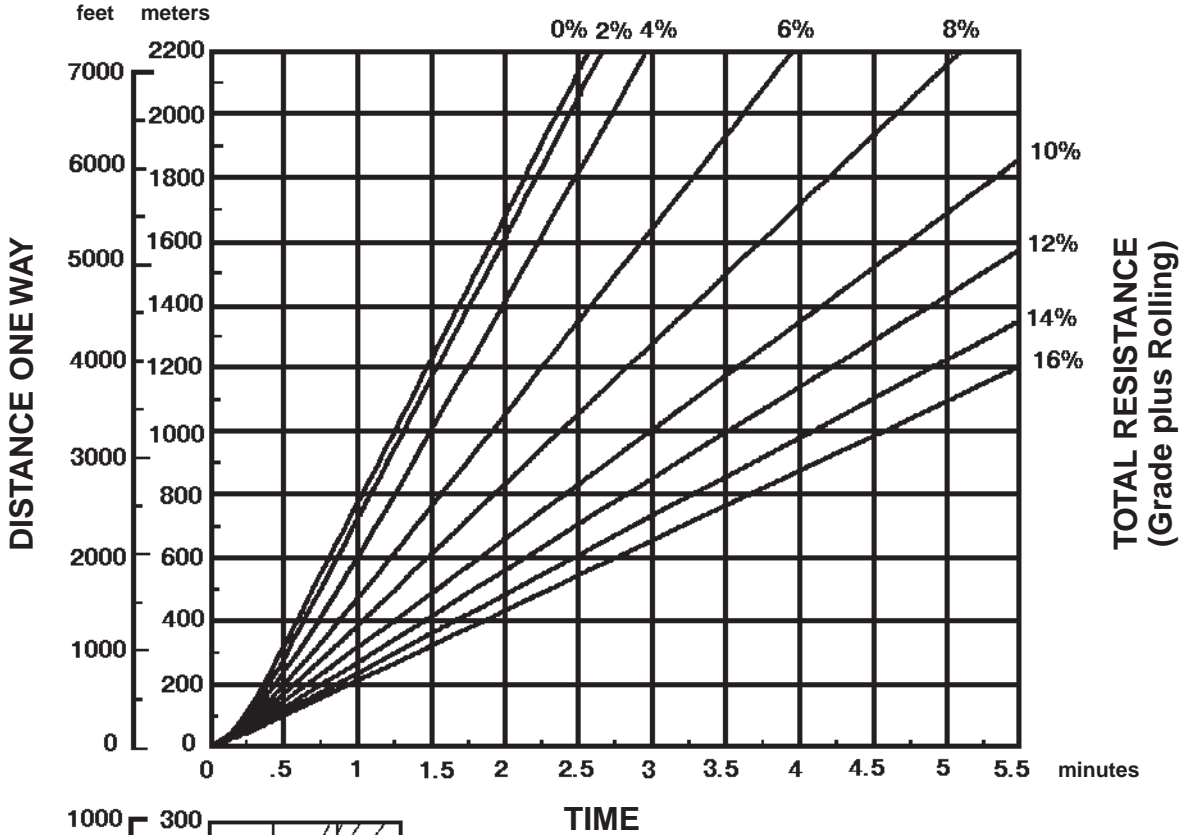

Empty weight: 45 980 kg (101,370 lb)



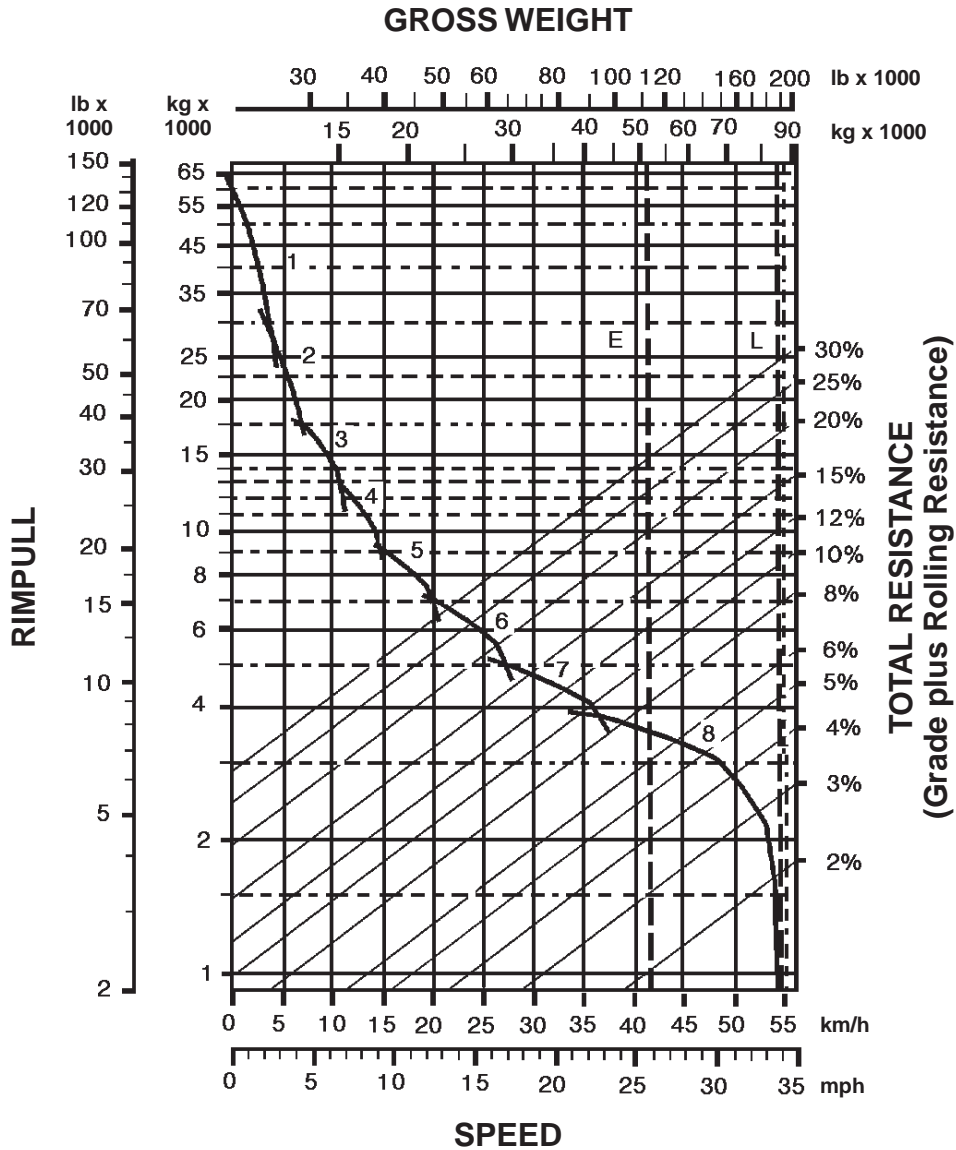


**KEY**

- 1 — 1st Gear Torque Converter Drive
- 2 — 2nd Gear Torque Converter Drive
- 3 — 3rd Gear Direct Drive
- 4 — 4th Gear Direct Drive
- 5 — 5th Gear Direct Drive
- 6 — 6th Gear Direct Drive
- 7 — 7th Gear Direct Drive
- 8 — 8th Gear Direct Drive

**KEY**

- E — Empty 51 110 kg (112,670 lb)
- L — Loaded 85 130 kg (187,670 lb)

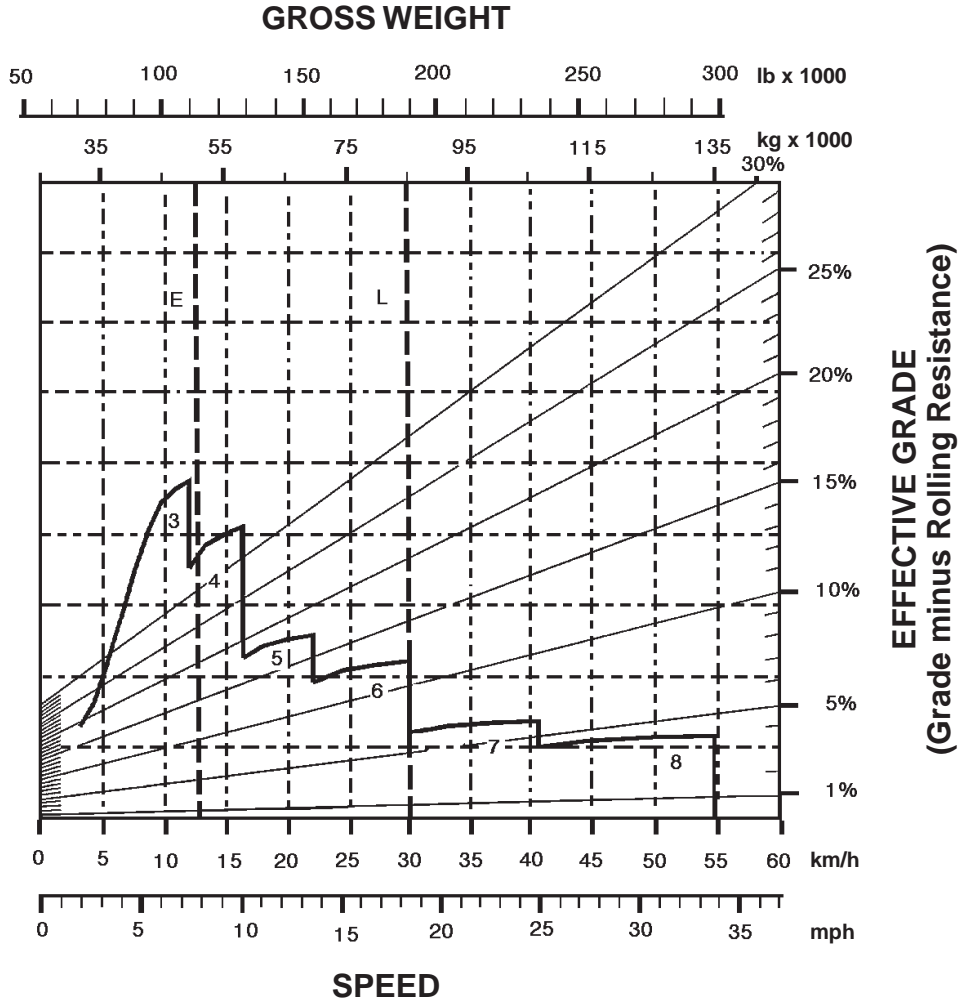

**KEY**

- 3 — 3rd Gear Direct Drive
- 4 — 4th Gear Direct Drive
- 5 — 5th Gear Direct Drive
- 6 — 6th Gear Direct Drive
- 7 — 7th Gear Direct Drive
- 8 — 8th Gear Direct Drive

**KEY**



- E — Empty 51 110 kg (112,670 lb)
- L — Loaded 85 130 kg (187,670 lb)

# Wheel Tractor-Scrapers

637E Series II Travel Time — Loaded

- 37.25R35 Tires
- Standard and Push-Pull



## LOADED

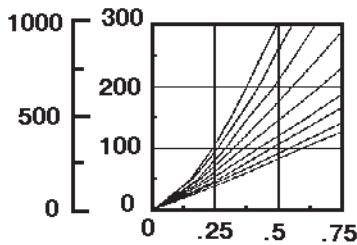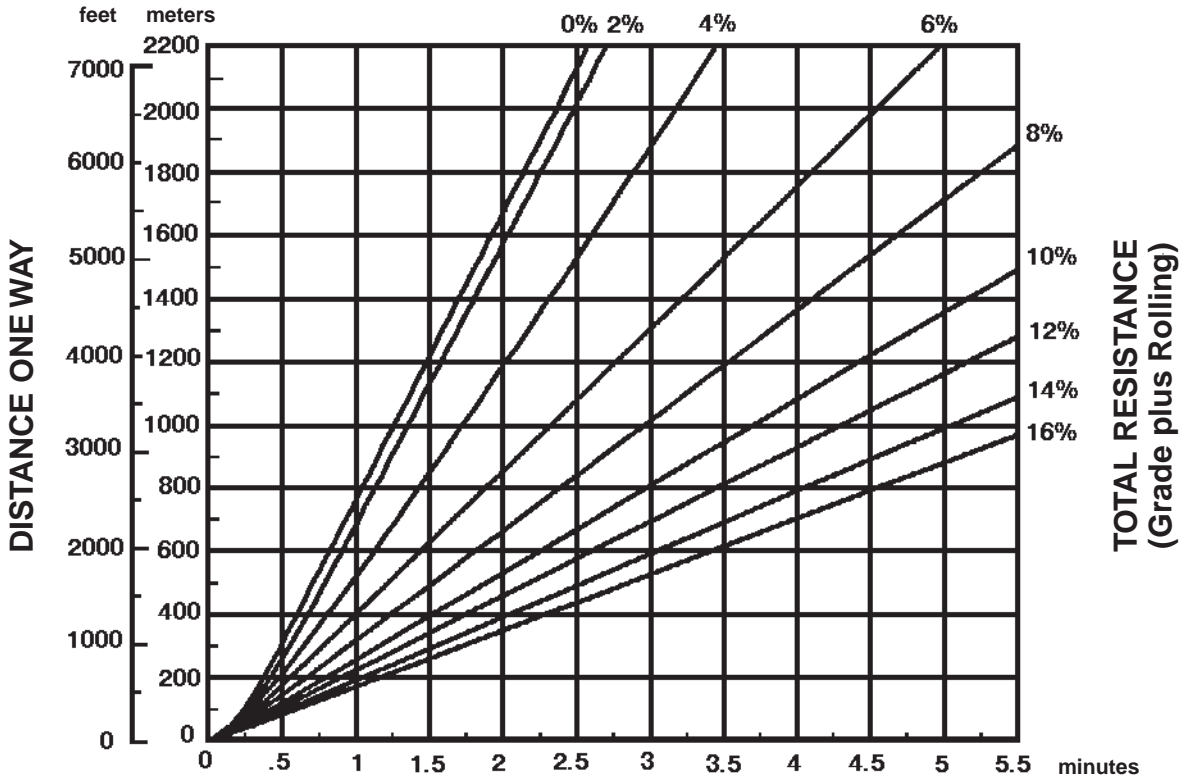

### TIME

Empty weight: 51 110 kg (112,670 lb)  
 Payload: 34 020 kg (75,000 lb)



**EMPTY**

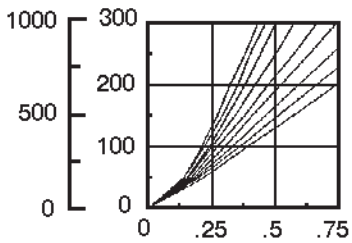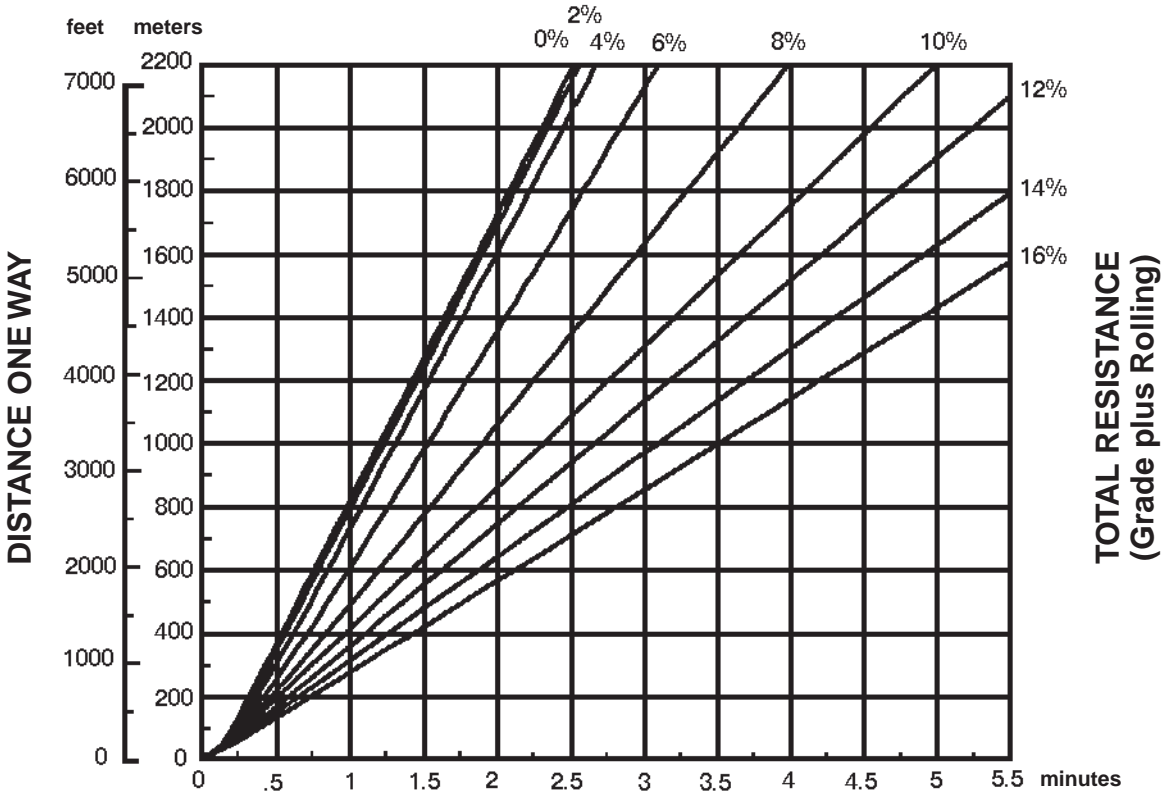

**TIME**

Empty weight: 51 110 kg (112,670 lb)



**LOADED**

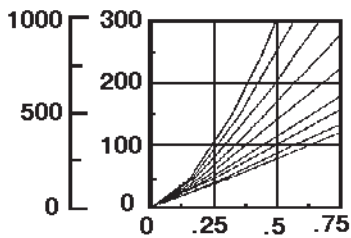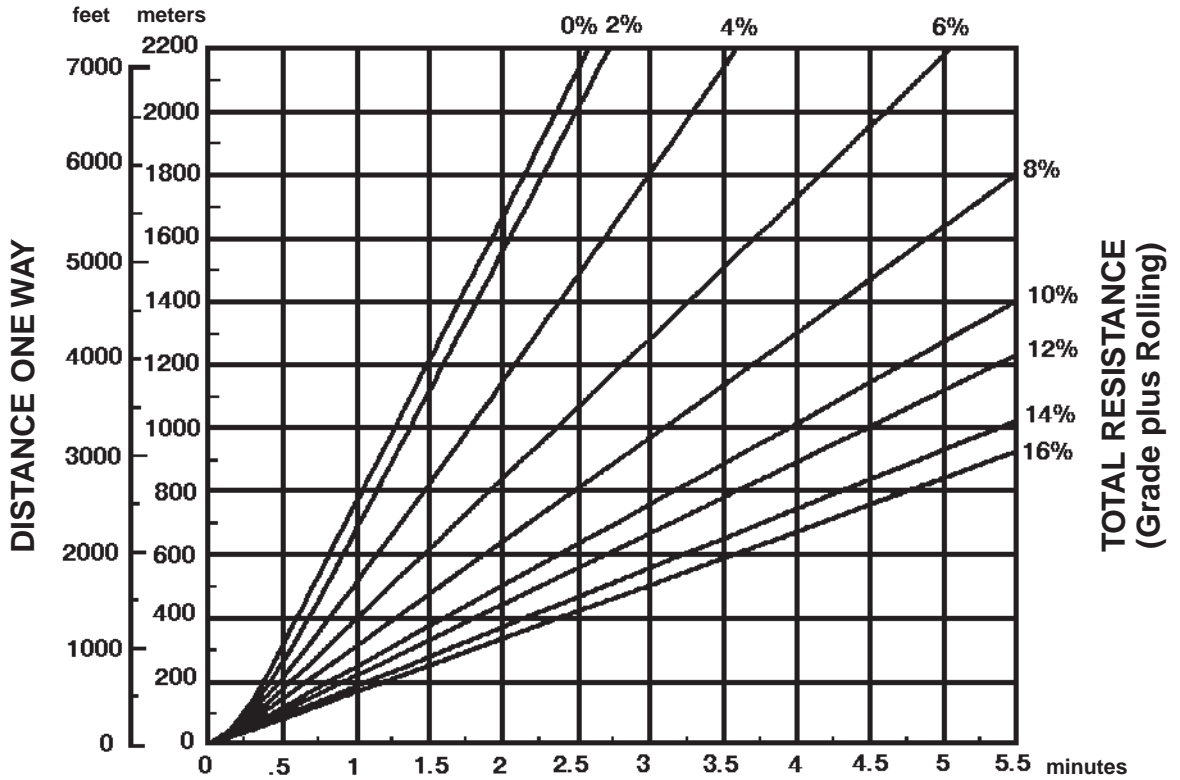

**TIME**


Empty weight: 54 540 kg (120,235 lb)  
 Payload: 34 020 kg (75,000 lb)


**EMPTY**

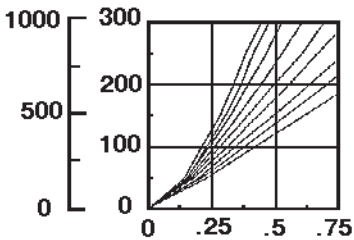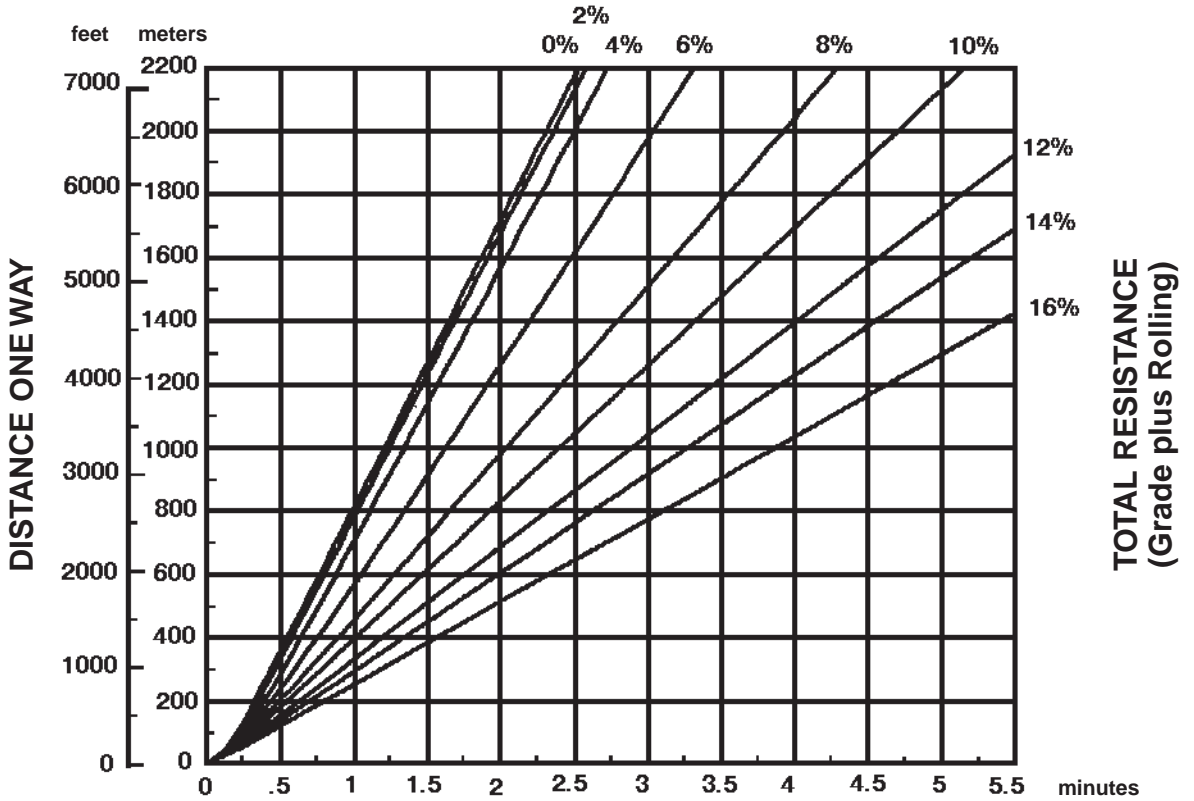

**TIME**

Empty weight: 54 540 kg (120,235 lb)

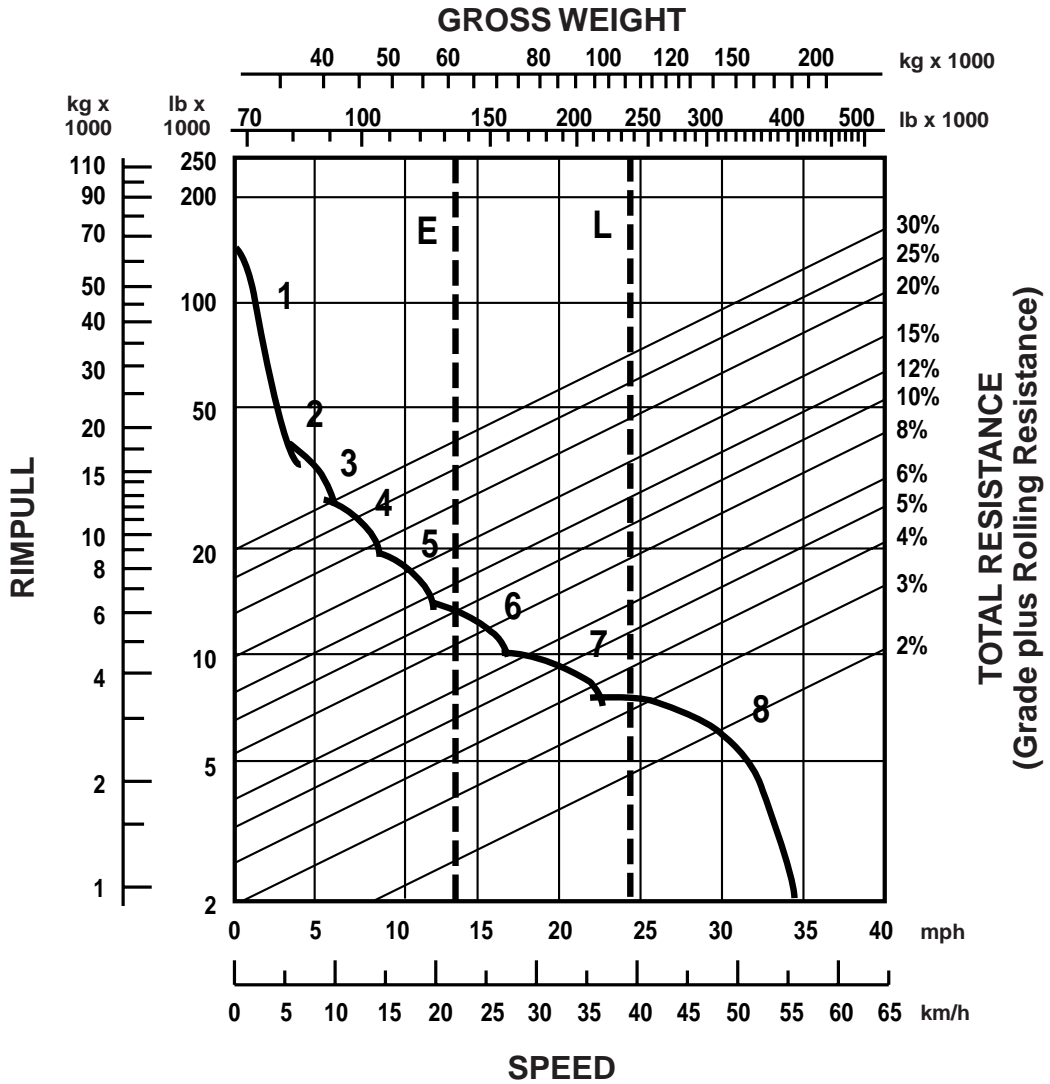

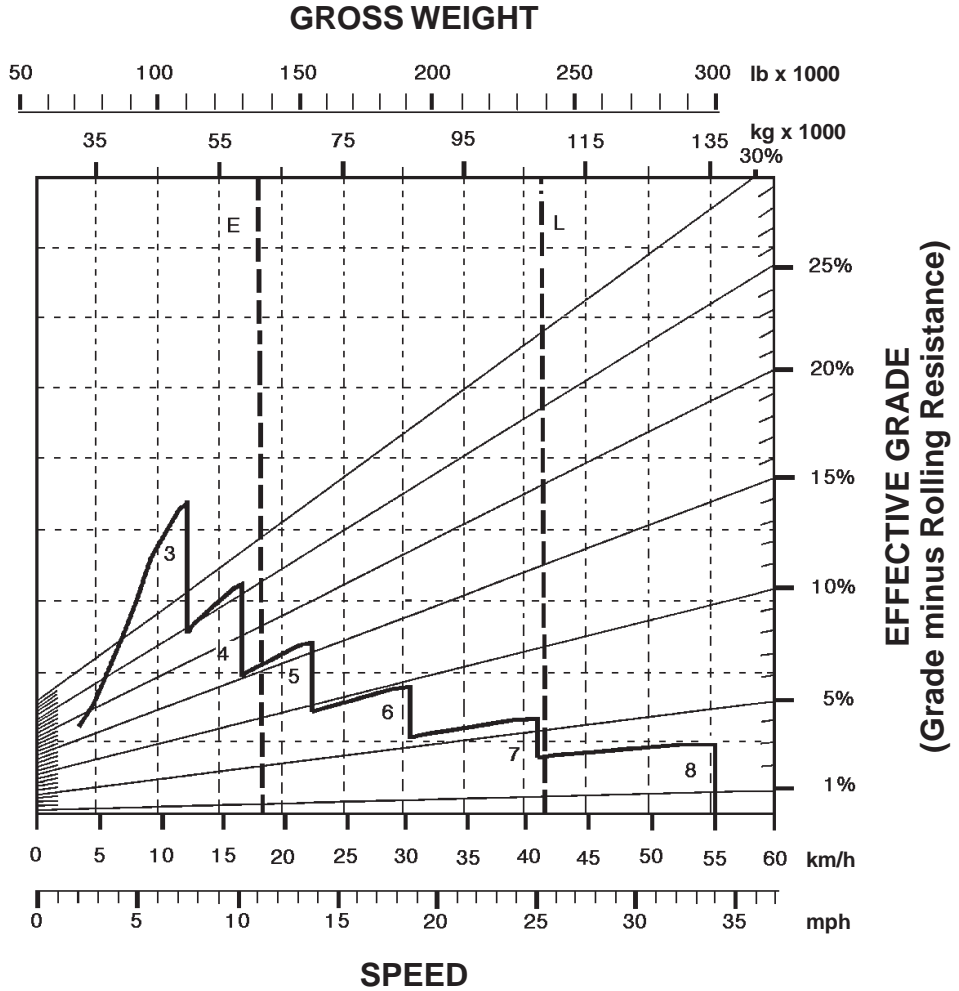

**EFFECTIVE GRADE**  
 (Grade minus Rolling Resistance)

**KEY**



- 3 — 3rd Gear Direct Drive
- 4 — 4th Gear Direct Drive
- 5 — 5th Gear Direct Drive
- 6 — 6th Gear Direct Drive
- 7 — 7th Gear Direct Drive
- 8 — 8th Gear Direct Drive

**KEY**

- E — Empty 61 130 kg (134,760 lb)
- L — Loaded 108 300 kg (238,760 lb)





**LOADED**

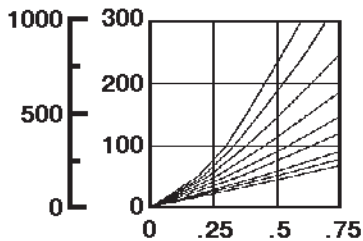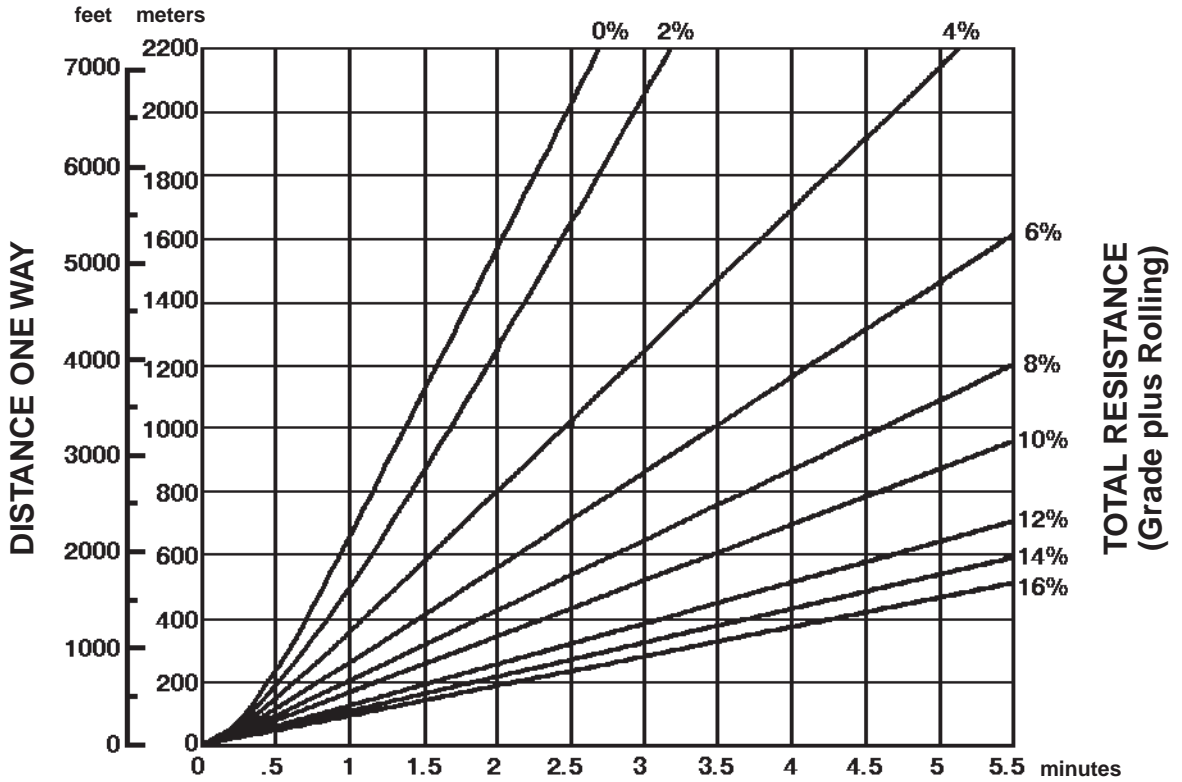


**TIME**

Empty weight: 66 575 kg (146,770 lb)  
 Payload: 47 175 kg (104,000 lb)

**EMPTY**

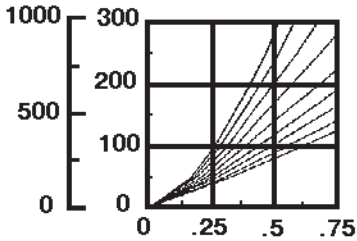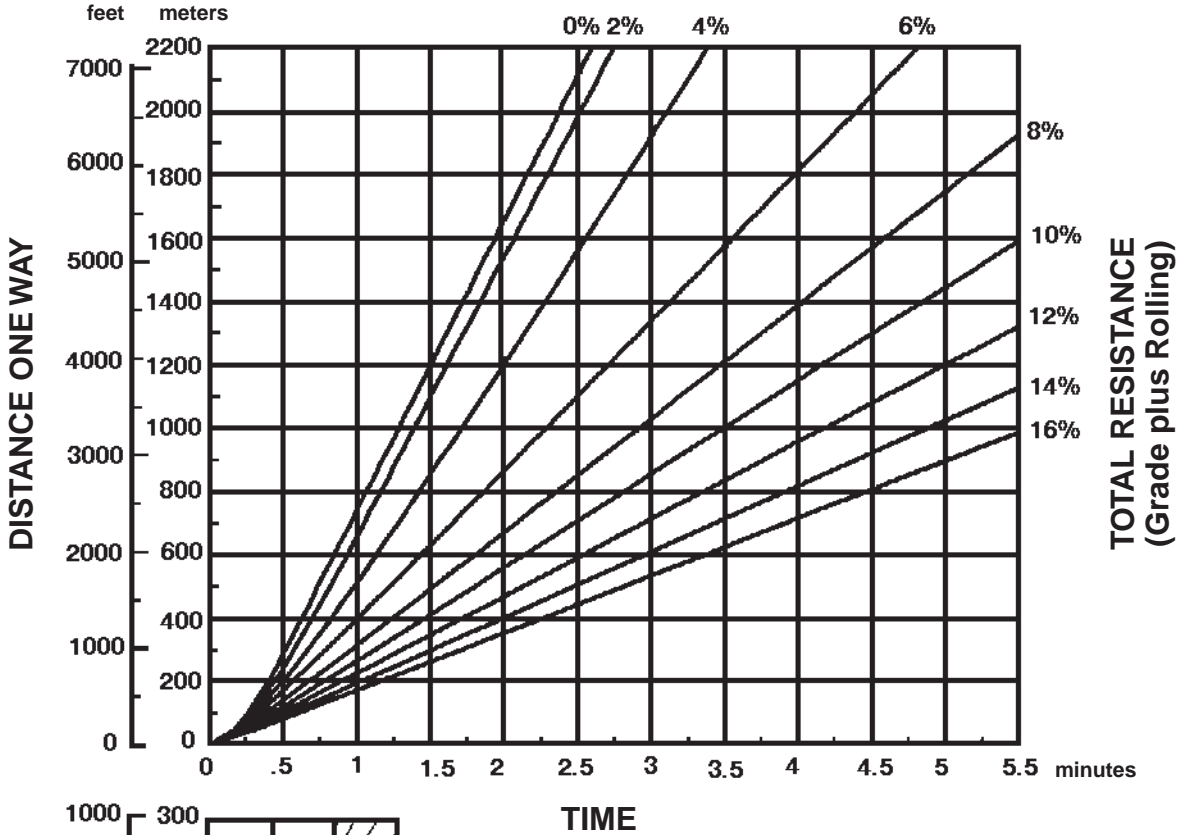

Empty weight: 66 575 kg (146,770 lb)

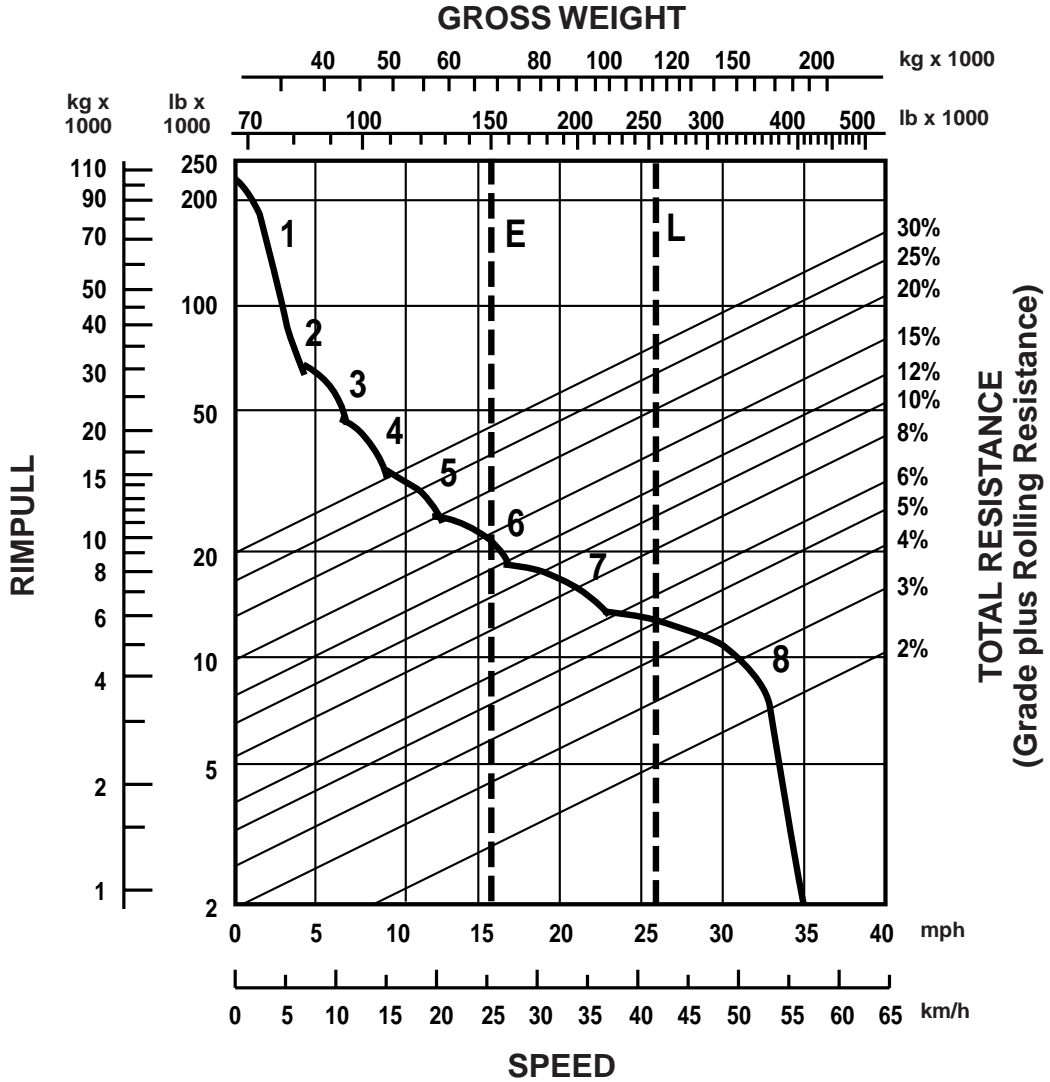


KEY

- 1 — 1st Gear Torque Converter Drive
- 2 — 2nd Gear Torque Converter Drive
- 3 — 3rd Gear Direct Drive
- 4 — 4th Gear Direct Drive
- 5 — 5th Gear Direct Drive
- 6 — 6th Gear Direct Drive
- 7 — 7th Gear Direct Drive
- 8 — 8th Gear Direct Drive

KEY

- E — Empty 69 080 kg (152,290 lb)
- L — Loaded 116 255 kg (256,290 lb)

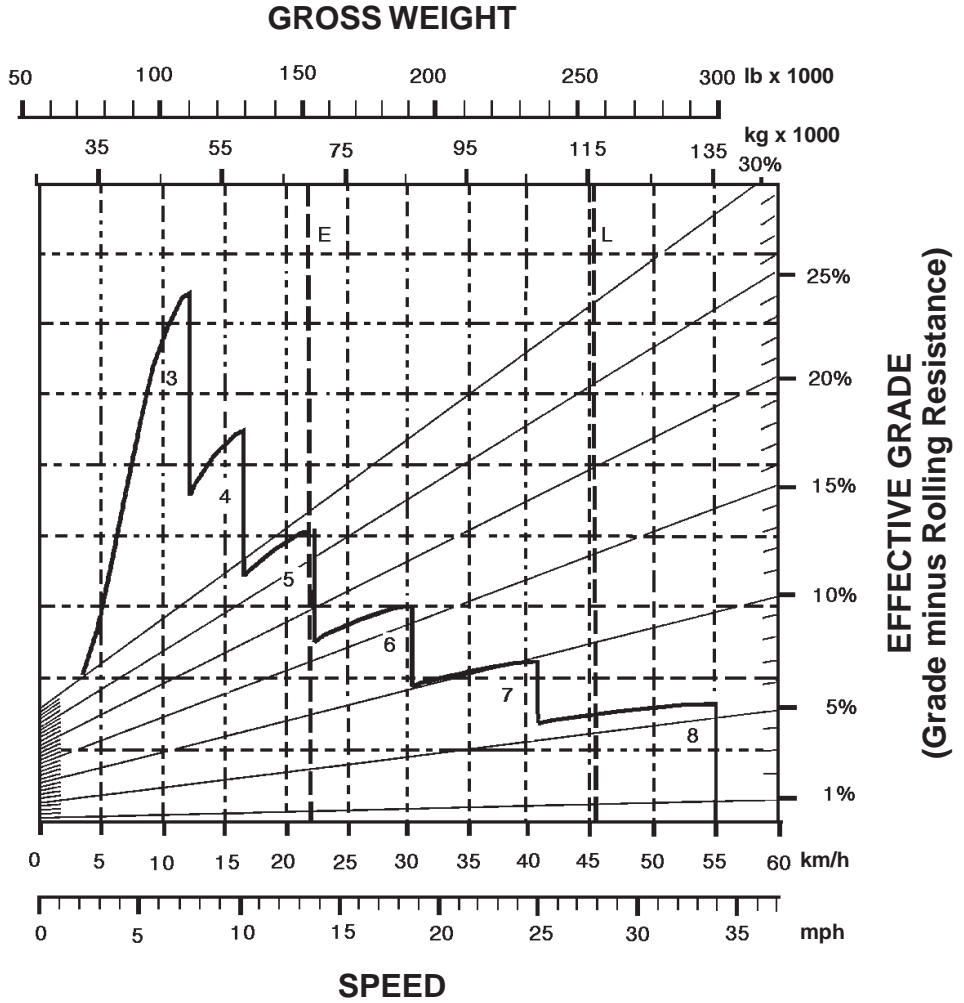

**KEY**

- 3 — 3rd Gear Direct Drive
- 4 — 4th Gear Direct Drive
- 5 — 5th Gear Direct Drive
- 6 — 6th Gear Direct Drive
- 7 — 7th Gear Direct Drive
- 8 — 8th Gear Direct Drive

**KEY**



- E — Empty 69 080 kg (152,290 lb)
- L — Loaded 116 255 kg (256,290 lb)

# Wheel Tractor-Scrapers

657E Travel Time — Loaded

- 40.5/75R39 Tires
- Standard and Push-Pull

## LOADED

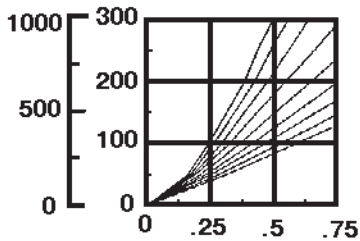
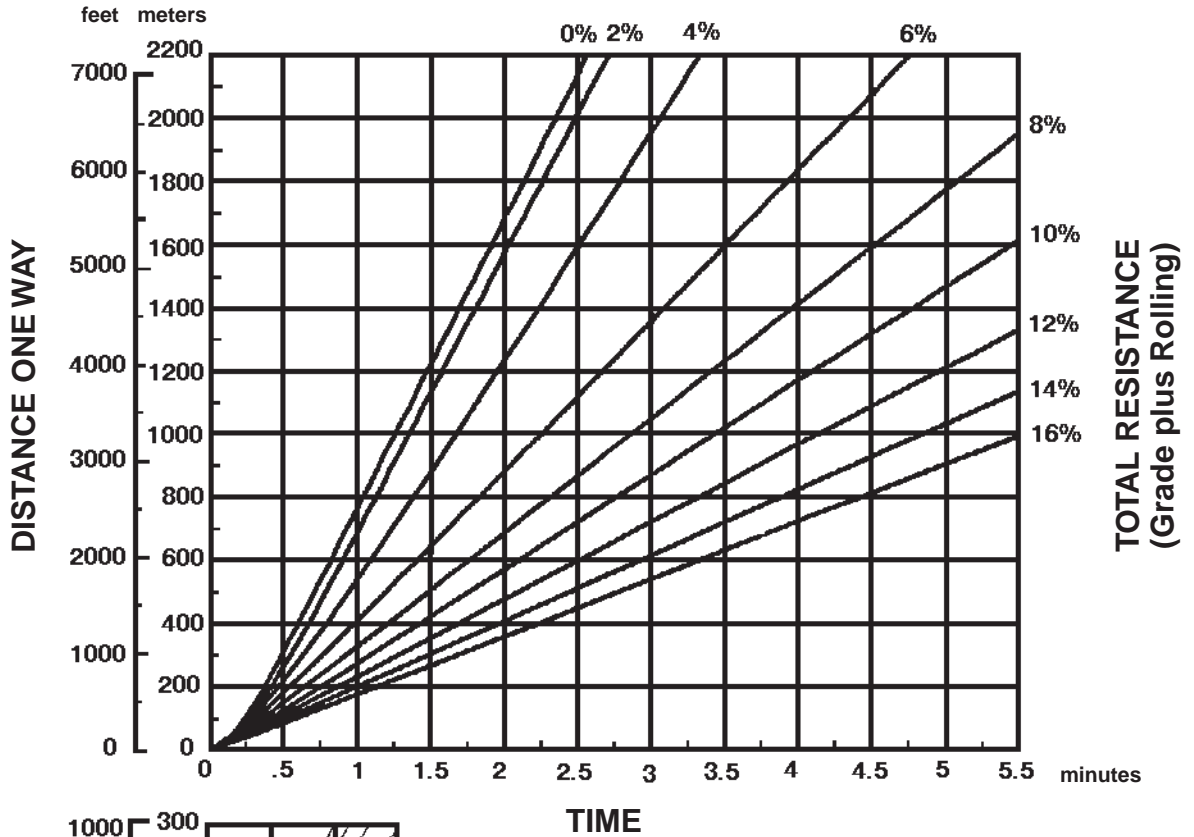


Empty weight: 69 080 kg (152,290 lb)  
 Payload: 47 175 kg (104,000 lb)

657E Travel Time — Empty  
 • 40.5/75R39 Tires  
 • Standard and Push-Pull

Wheel Tractor-Scrapers



EMPTY

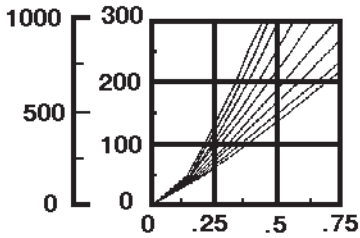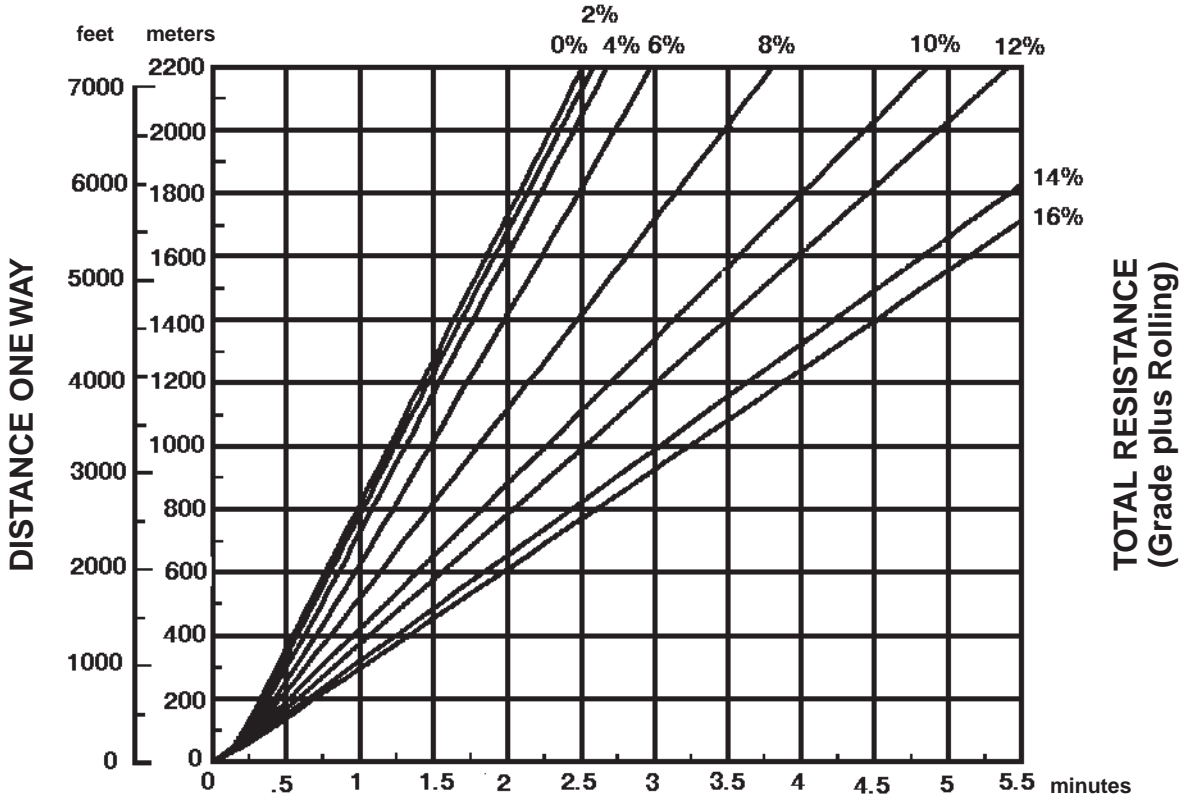

TIME



Empty weight: 69 080 kg (152,290 lb)

**LOADED**

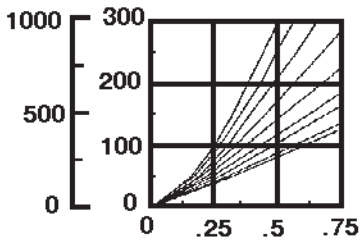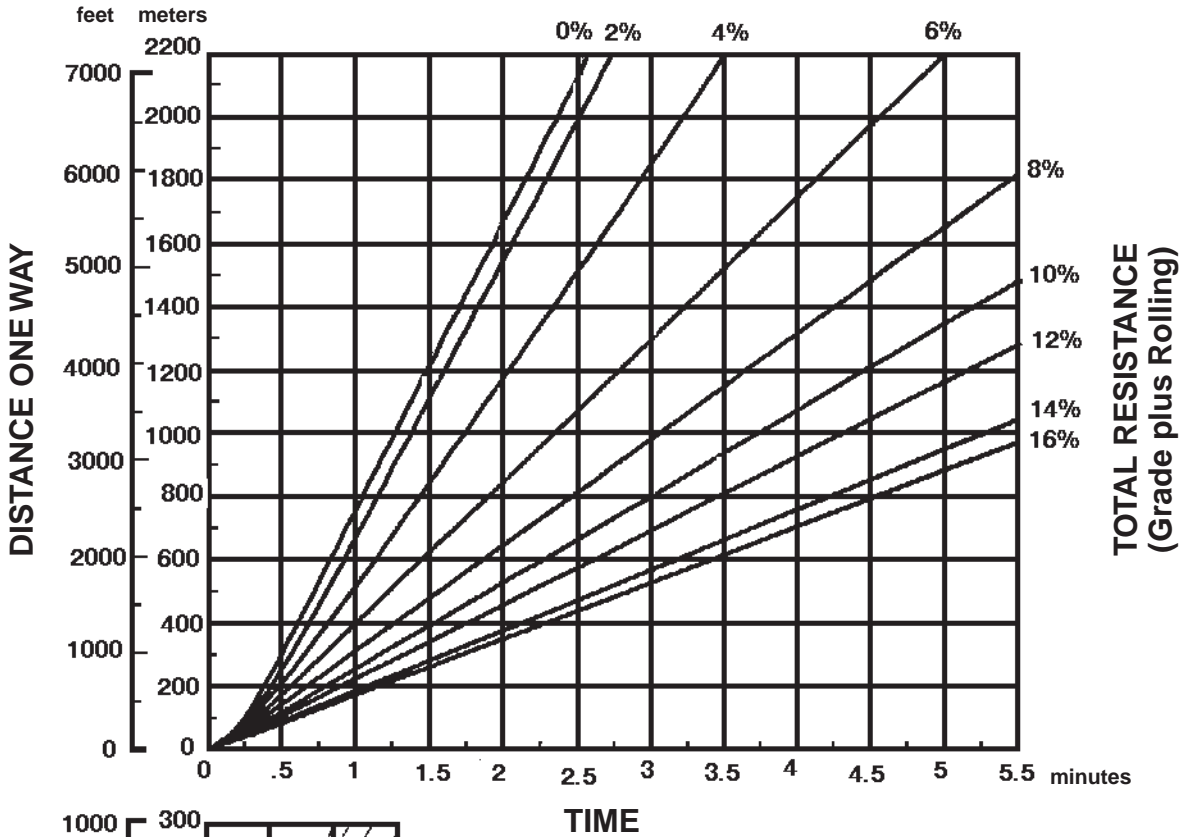

Empty weight: 75 875 kg (167,270 lb)  
 Payload: 47 175 kg (104,000 lb)

**EMPTY**

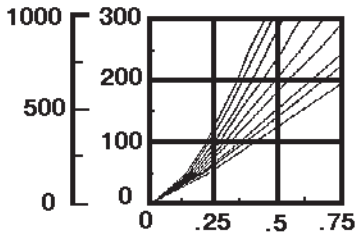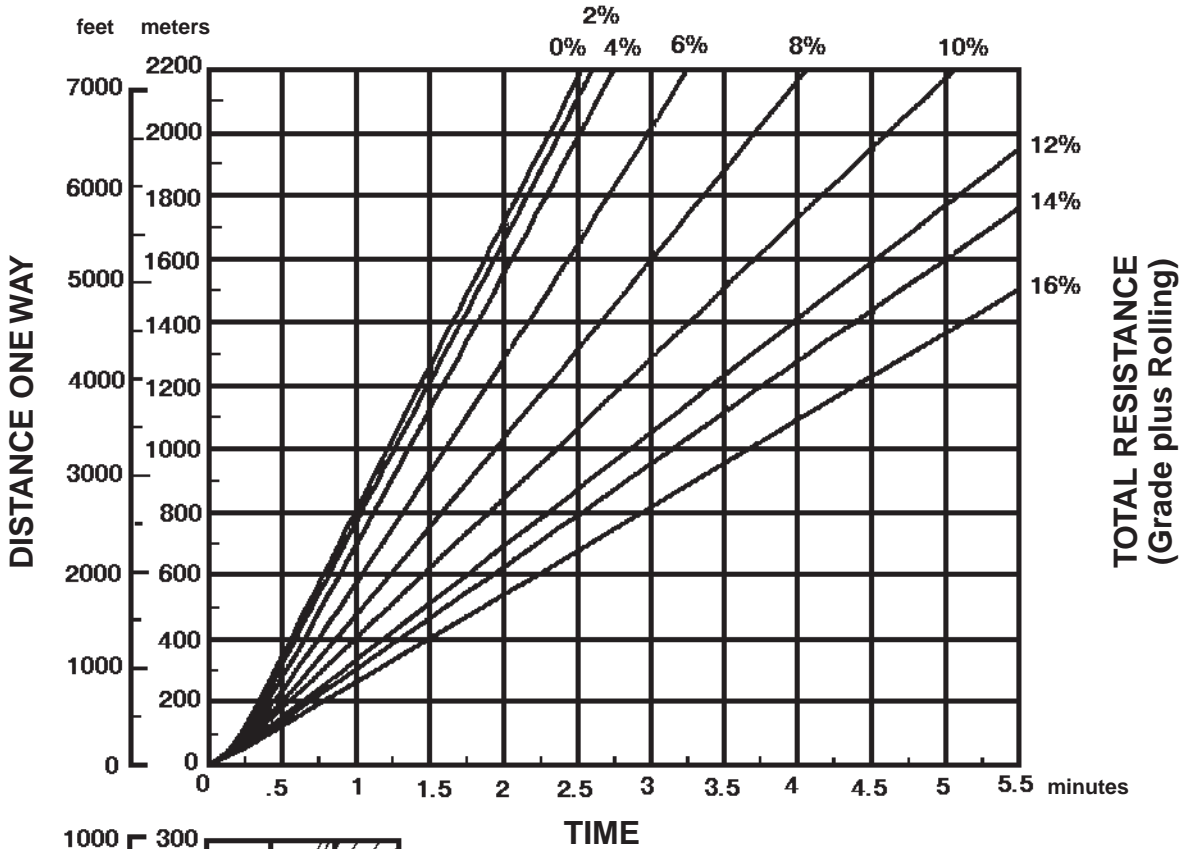


Empty weight: 75 875 kg (167,270 lb)



**DISTANCE vs. PRODUCTION**

CONDITIONS: Flat haul. Percentages shown are rolling resistance only. 100% efficiency (60 min hour).


- Material: 1780 kg/m<sup>3</sup> (3000 lb/yd<sup>3</sup>).
- Payload: 16 344 kg, 8.8 Bm<sup>3</sup> (36,000 lb, 12 BCY).
- Empty weight: 23 900 kg (52,640 lb).
- Fixed time: 1.2 min.

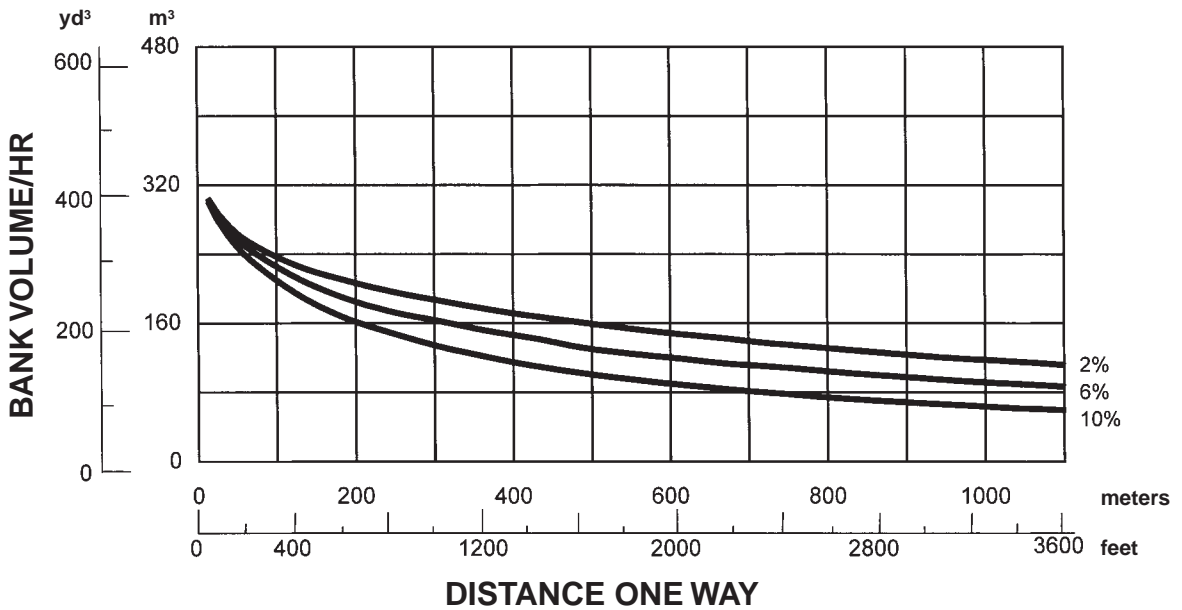

**DISTANCE vs. PRODUCTION**

CONDITIONS: Flat haul. Percentages shown are rolling resistance only. 100% efficiency (60 min hour).


- Material: 1780 kg/m<sup>3</sup> (3000 lb/yd<sup>3</sup>).
- Payload: 11 975 kg, 6.7 Bm<sup>3</sup> (26,400 lb, 8.8 BCY).
- Empty weight: 14 970 kg (33,000 lb).
- Fixed time: 1.6 min.

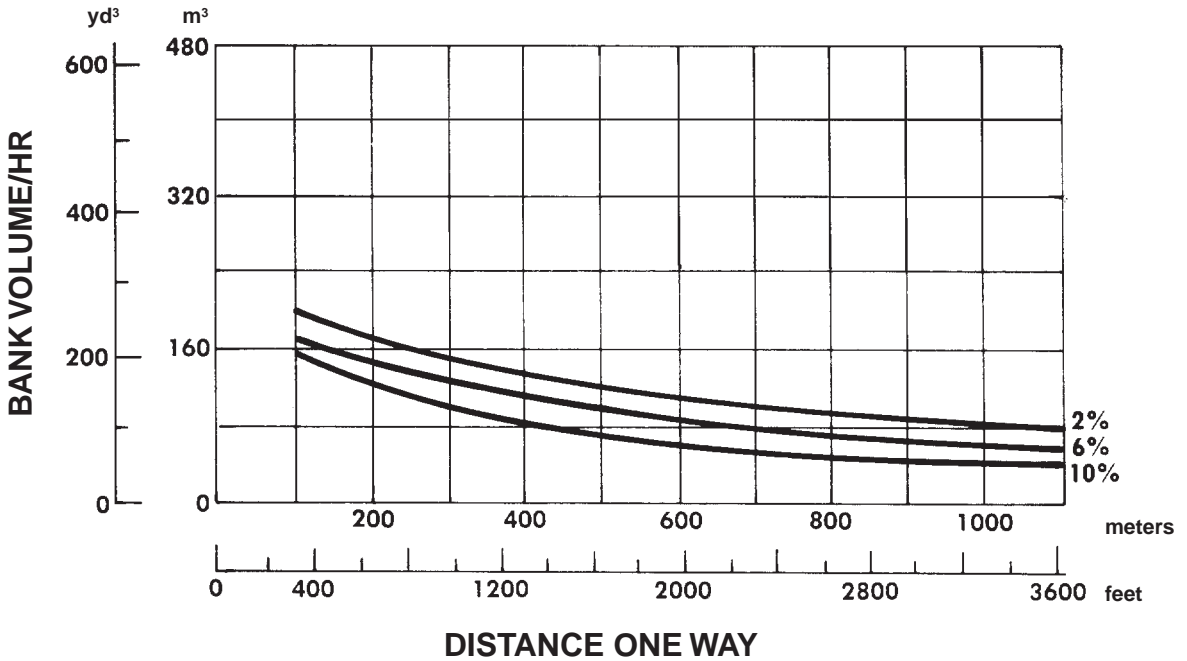

**DISTANCE vs. PRODUCTION**

CONDITIONS: Flat haul. Percentages shown are rolling resistance only. 100% efficiency (60 min hour).


- Material: 1780 kg/m<sup>3</sup> (3000 lb/yd<sup>3</sup>).
- Payload: 18 506 kg, 10.4 Bm<sup>3</sup> (40,800 lb, 13.6 BCY).
- Empty weight: 25 600 kg (56,450 lb).
- Fixed time: 1.6 min.

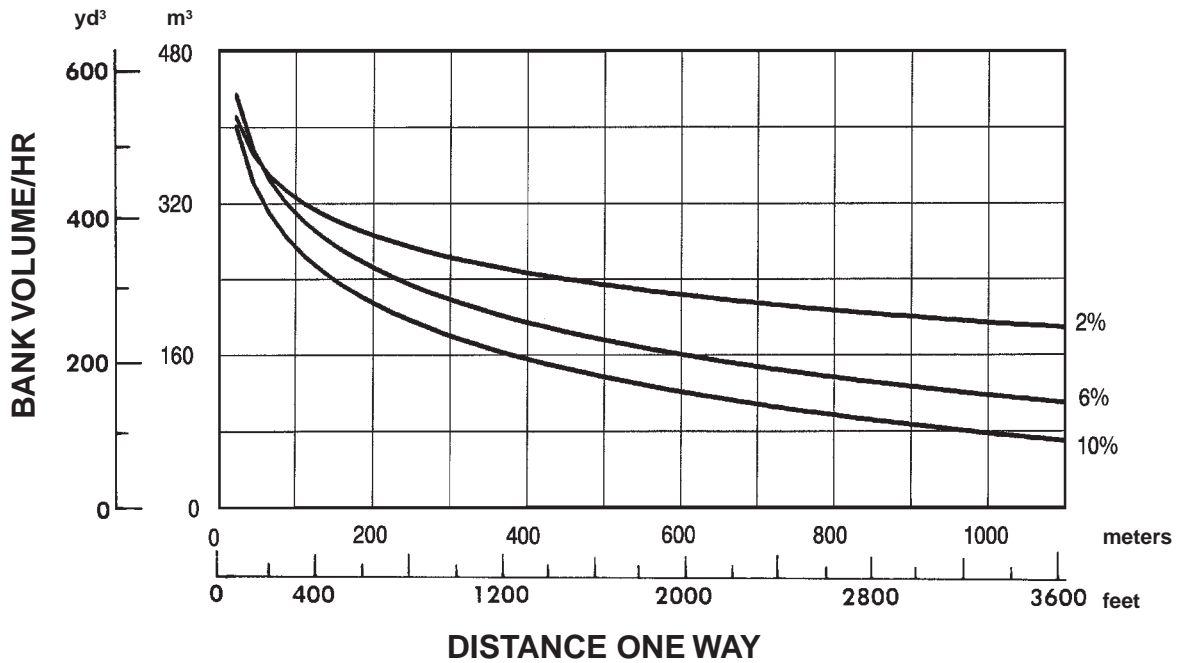

**DISTANCE vs. PRODUCTION**

CONDITIONS: Flat haul. Percentages shown are rolling resistance only. 100% efficiency (60 min hour).


- Material: 1780 kg/m<sup>3</sup> (3000 lb/yd<sup>3</sup>).
- Payload: 21 770 kg, 12.2 Bm<sup>3</sup> (48,000 lb, 16 BCY).
- Empty weight: 32 250 kg (71,090 lb).
- Fixed time: 1.2 min.

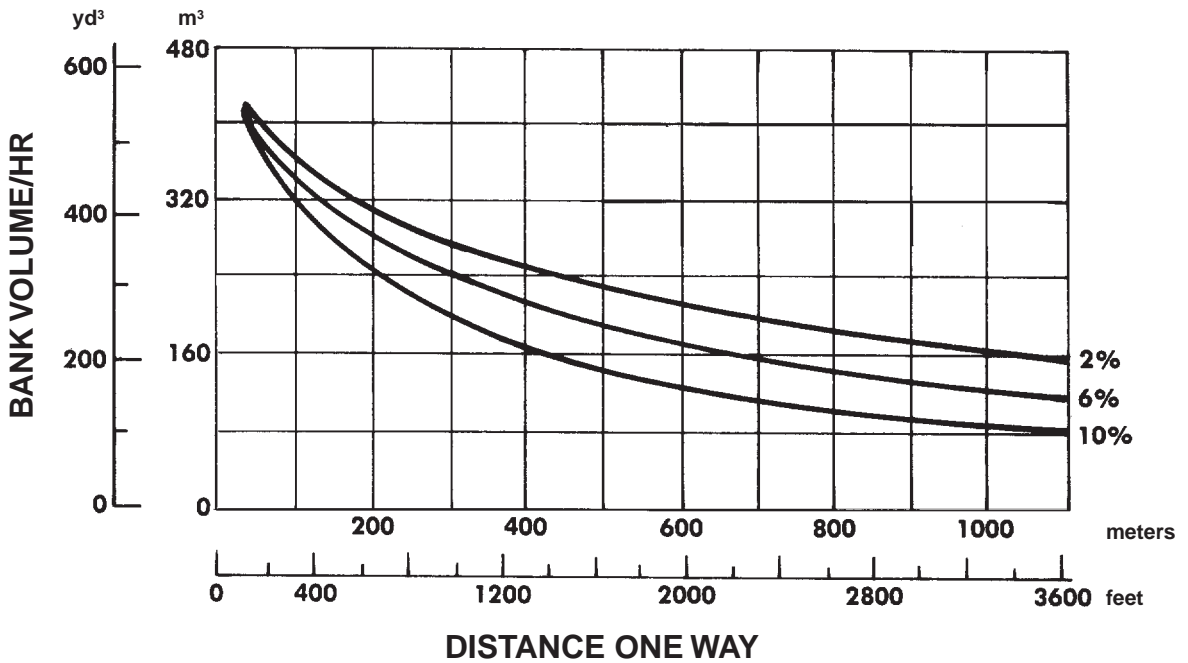

**DISTANCE vs. PRODUCTION**

CONDITIONS: Flat haul. Percentages shown are rolling resistance only. 100% efficiency (60 min hour).


- Material: 1780 kg/m<sup>3</sup> (3000 lb/yd<sup>3</sup>).
- Payload: 25 040 kg, 12.2 Bm<sup>3</sup> (55,200 lb, 16 BCY).
- Empty weight: 37 120 kg (81,840 lb).
- Fixed time: 1.6 min.

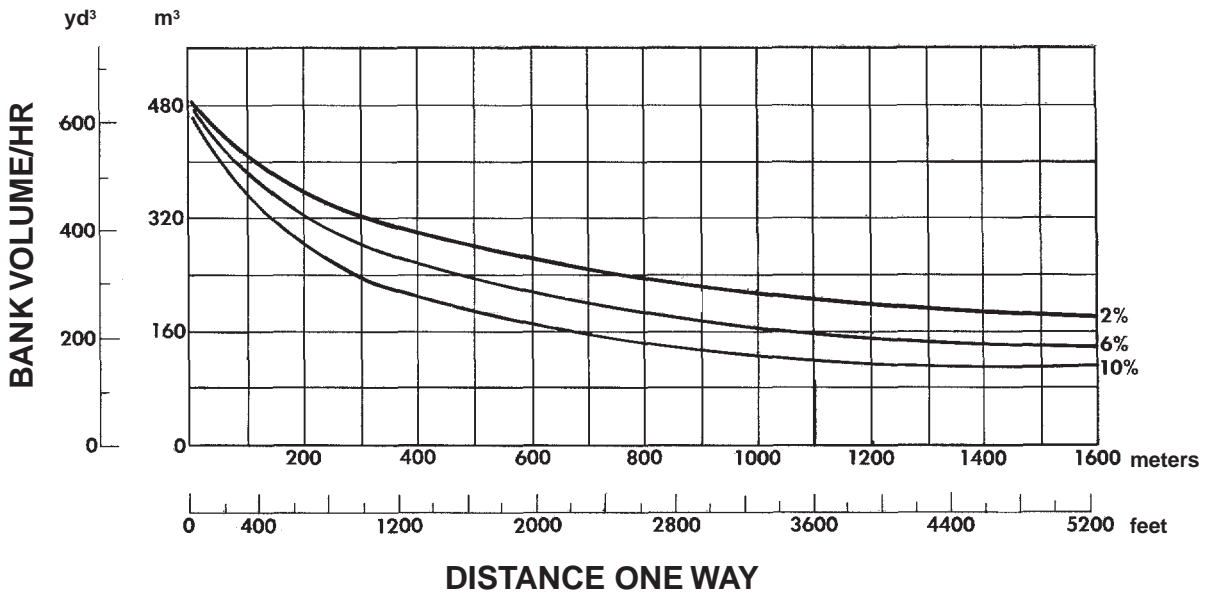

**DISTANCE vs. PRODUCTION**

CONDITIONS: Flat haul. Percentages shown are rolling resistance only. 100% efficiency (60 min hour).

- Material: 1780 kg/m<sup>3</sup> (3000 lb/yd<sup>3</sup>).
- Payload: 21 770 kg, 12.2 Bm<sup>3</sup> (48,000 lb, 16 BCY).
- Empty weight: 37 100 kg (81,790 lb).
- Fixed time: 1.2 min.

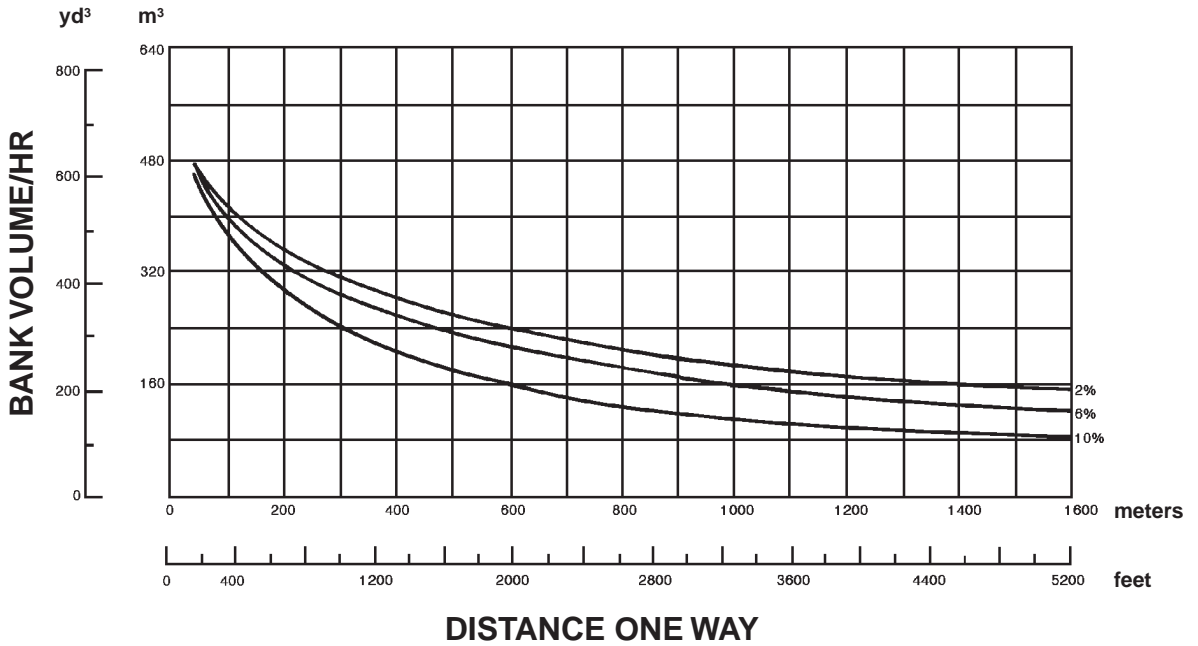


**DISTANCE vs. PRODUCTION**

CONDITIONS: Flat haul. Percentages shown are rolling resistance only. 100% efficiency (60 min hour).

- Material: 1780 kg/m<sup>3</sup> (3000 lb/yd<sup>3</sup>).
- Payload: 21 770 kg, 12.2 Bm<sup>3</sup> (48,000 lb, 16 BCY).
- Empty weight: 38 140 kg (84,075 lb).
- Fixed time: 1.5 min. (includes loading both units and transfer time).


**NOTE:** Production estimates apply to one unit. Double these figures for a push-pull pair.

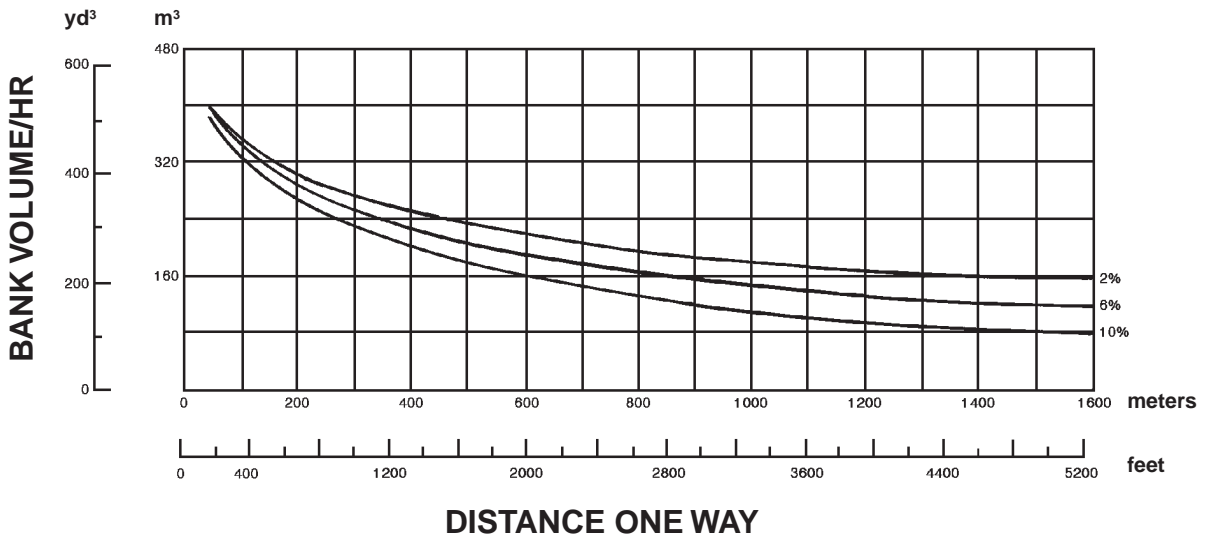

**DISTANCE vs. PRODUCTION**

CONDITIONS: Flat haul. Percentages shown are rolling resistance only. 100% efficiency (60 min hour).

- Material: 1780 kg/m<sup>3</sup> (3000 lb/yd<sup>3</sup>).
- Payload: 34 020 kg, 19.1 Bm<sup>3</sup> (75,000 lb, 25 BCY).
- Empty weight: 44 210 kg (97,460 lb).
- Fixed time: 1.3 min.

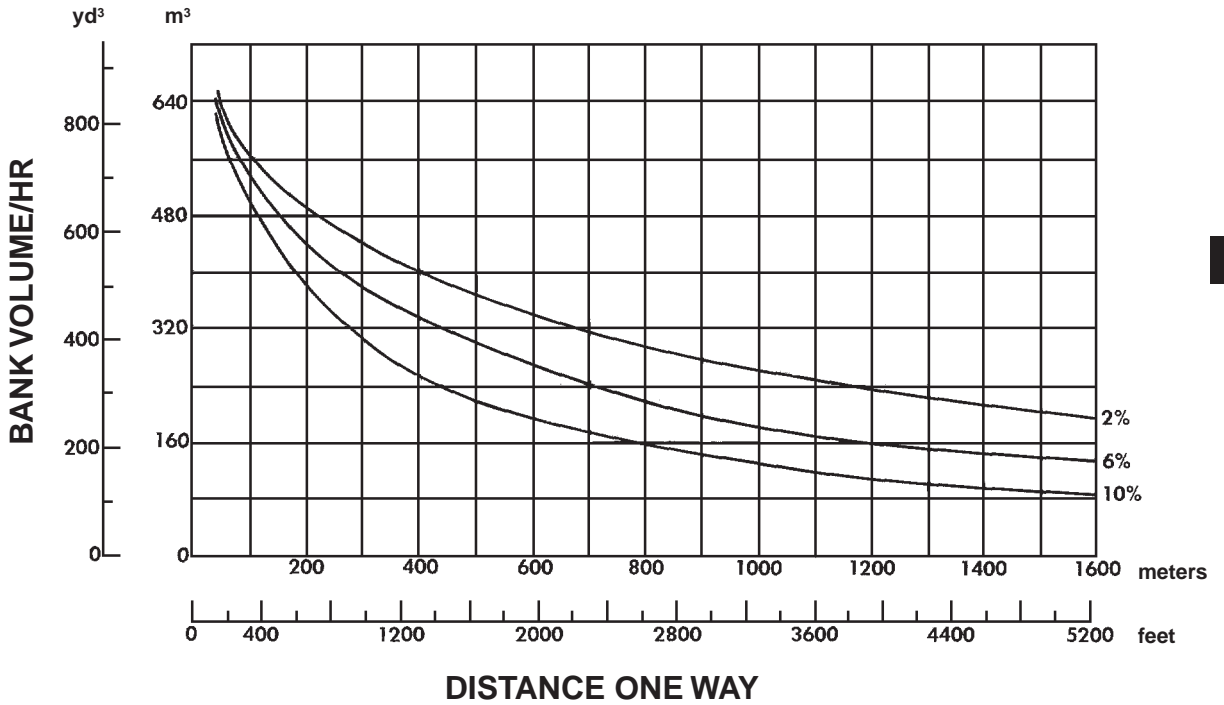




**DISTANCE vs. PRODUCTION**

CONDITIONS: Flat haul. Percentages shown are rolling resistance only. 100% efficiency (60 min hour).

- Material: 1780 kg/m<sup>3</sup> (3000 lb/yd<sup>3</sup>).
- Payload: 34 020 kg, 19.1 Bm<sup>3</sup> (75,000 lb, 25 BCY).
- Empty weight: 51 110 kg (112,670 lb).
- Fixed time: 1.1 min.

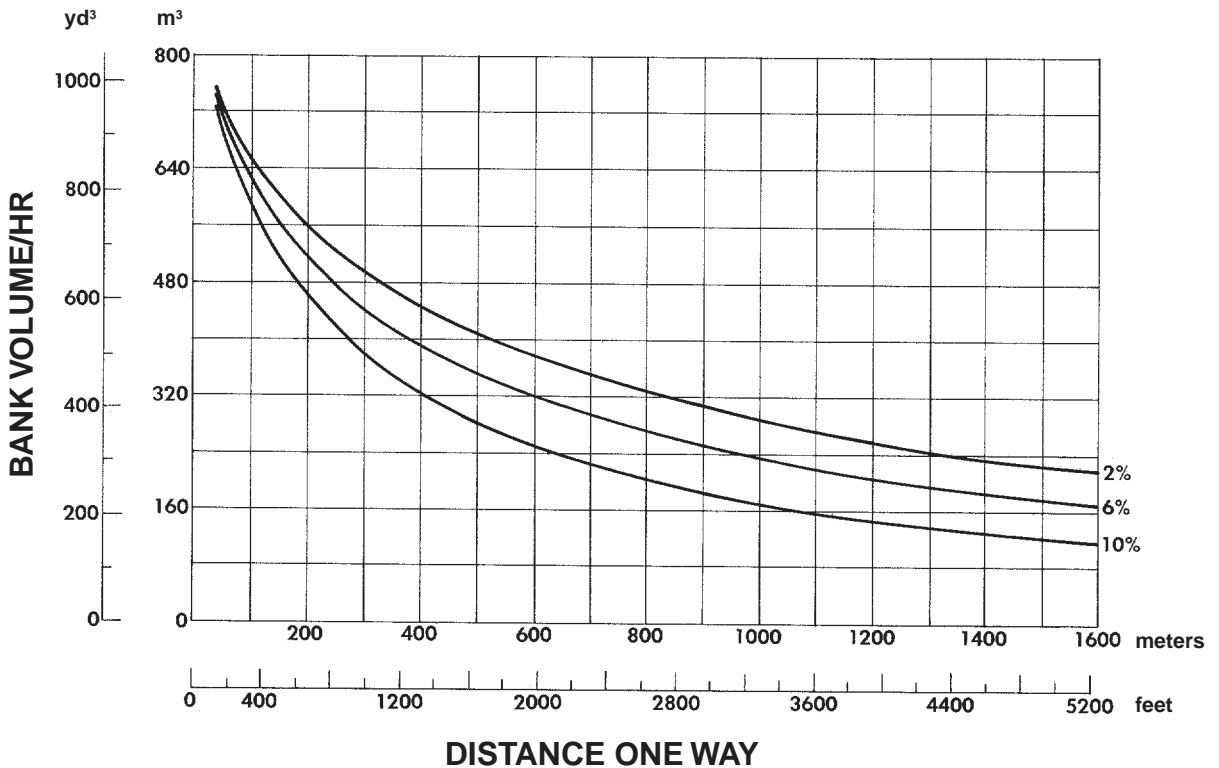


**DISTANCE vs. PRODUCTION**

CONDITIONS: Flat haul. Percentages shown are rolling resistance only. 100% efficiency (60 min hour).

- Material: 1780 kg/m<sup>3</sup> (3000 lb/yd<sup>3</sup>).
- Payload: 34 020 kg, 19.1 Bm<sup>3</sup> (75,000 lb, 25 BCY).
- Empty weight: 52 650 kg (116,070 lb).
- Fixed time: 1.6 min. (includes loading both units and transfer time).


**NOTE:** Production estimates apply to one unit. Double these figures for a push-pull pair.

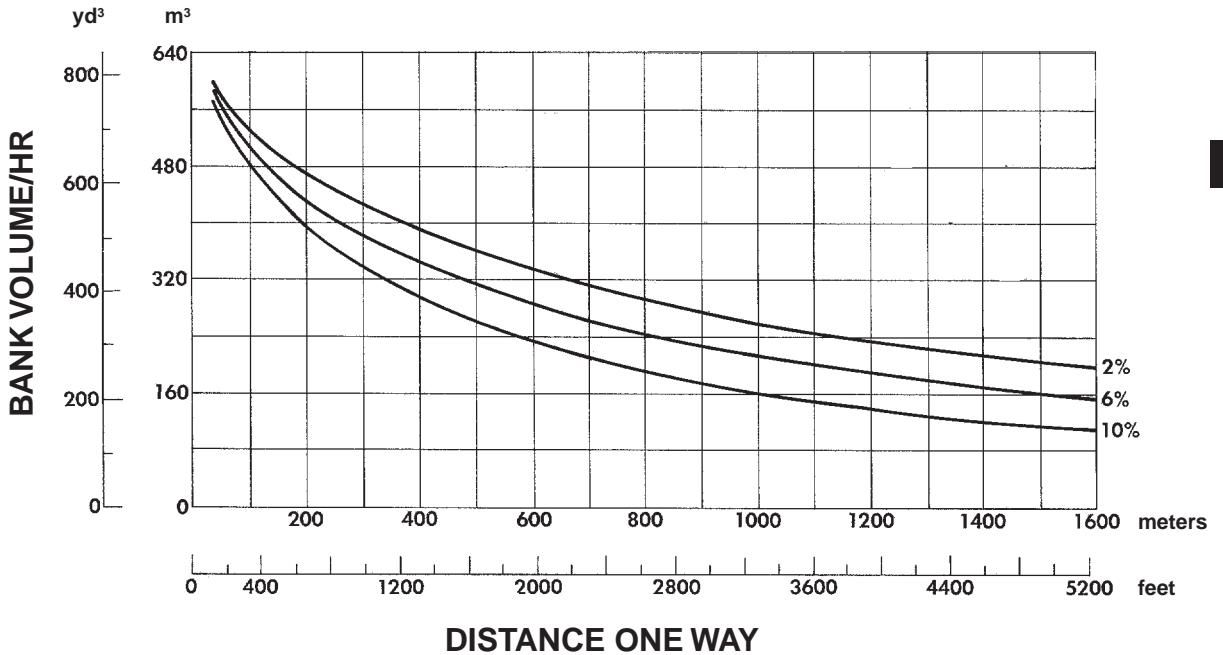

**DISTANCE vs. PRODUCTION**

CONDITIONS: Flat haul. Percentages shown are rolling resistance only. 100% efficiency (60 min hour).


- Material: 1780 kg/m<sup>3</sup> (3000 lb/yd<sup>3</sup>).
- Payload: 47 175 kg, 26.5 Bm<sup>3</sup> (104,000 lb, 34.6 BCY).
- Empty weight: 61 130 kg (134,760 lb).
- Fixed time: 1.3 min.

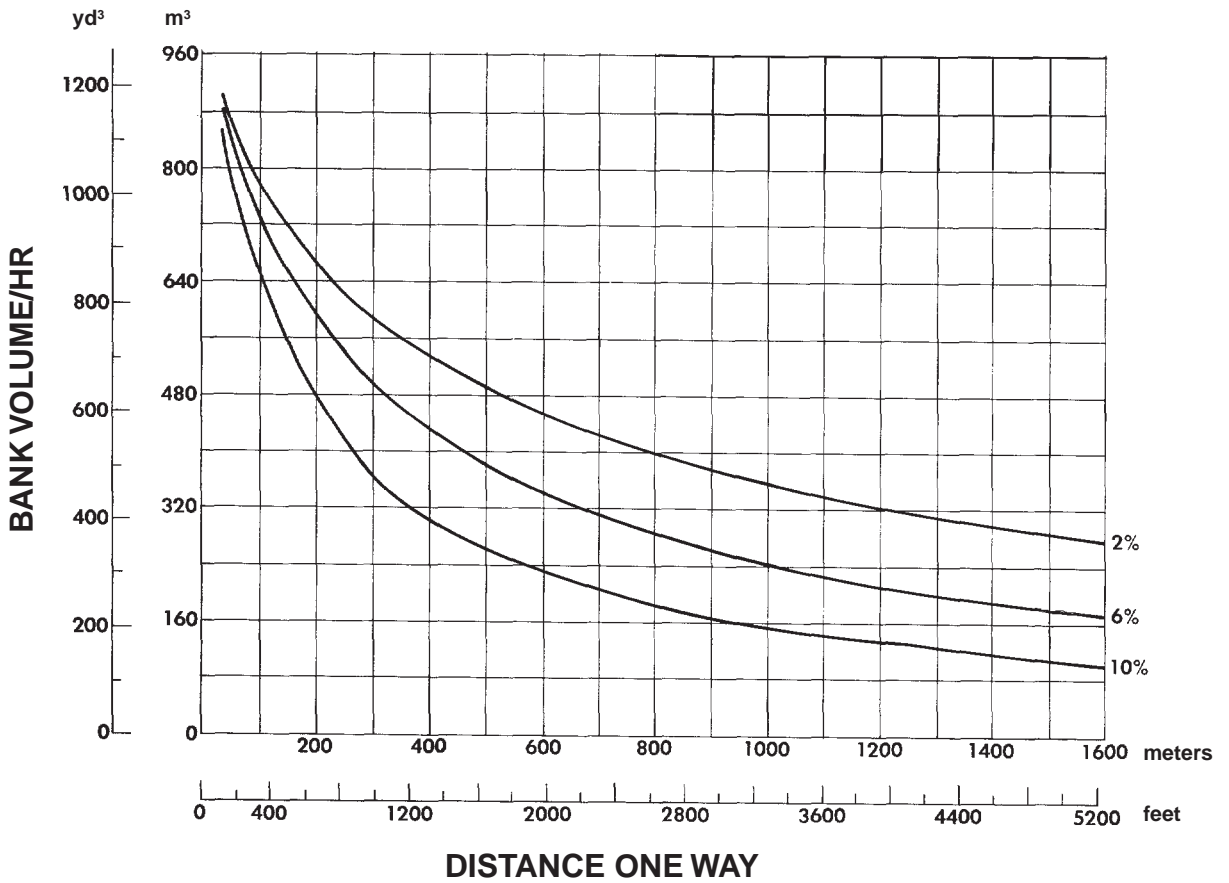

**DISTANCE vs. PRODUCTION**

CONDITIONS: Flat haul. Percentages shown are rolling resistance only. 100% efficiency (60 min hour).

- Material: 1780 kg/m<sup>3</sup> (3000 lb/yd<sup>3</sup>).
- Payload: 47 175 kg, 26.5 Bm<sup>3</sup> (104,000 lb, 34.6 BCY).
- Empty weight: 69 080 kg (152,290 lb).
- Fixed time: 1 min.

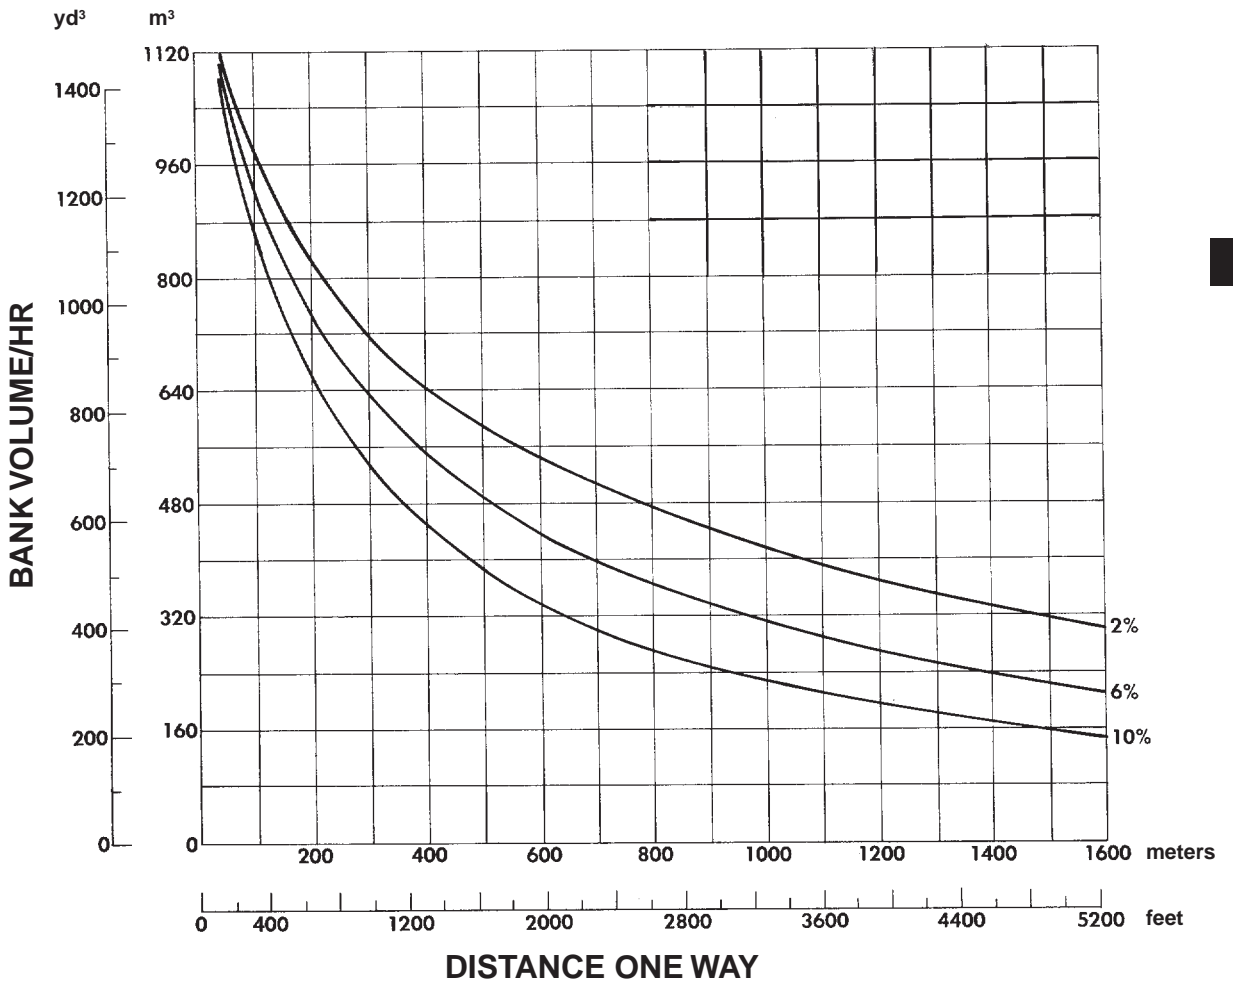


**DISTANCE vs. PRODUCTION**

CONDITIONS: Flat haul. Percentages shown are rolling resistance only. 100% efficiency (60 min hour).

- Material: 1780 kg/m<sup>3</sup> (3000 lb/yd<sup>3</sup>).
- Payload: 47 175 kg, 26.5 Bm<sup>3</sup> (104,000 lb, 34.6 BCY).
- Empty weight: 72 860 kg (160,620 lb).
- Fixed time: 1.7 min. (includes loading both units and transfer time).

**NOTE:** Production estimates apply to one unit. Double these figures for a push-pull pair.

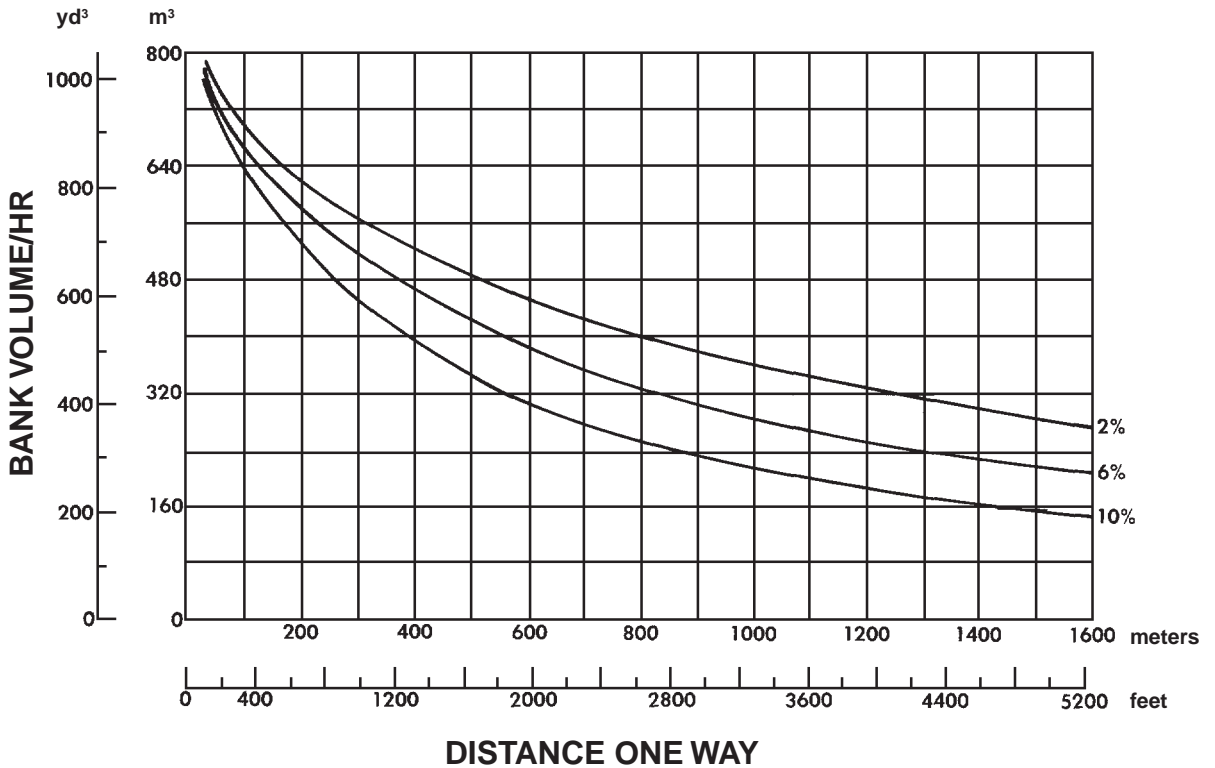


- Bm<sup>3</sup> (BCY)/hr
- All Models
- 100% Efficiency

**HOURLY PRODUCTION vs. CYCLE TIME**

VEHICLE CAPACITY:

- 611 @ 8.8 Bm<sup>3</sup>/trip (12 BCY)
- 613C Series II @ 6.7 Bm<sup>3</sup>/trip (8.8 BCY)
- 615C Series II @ 9.7 Bm<sup>3</sup>/trip (12.8 BCY)
- 621G, 623G, 627G @ 12.2 Bm<sup>3</sup>/trip (16 BCY)
- 631E Series II, 637E Series II @ 19.1 Bm<sup>3</sup>/trip (25 BCY)
- 651E, 657E @ 26.5 Bm<sup>3</sup>/trip (34.6 BCY)

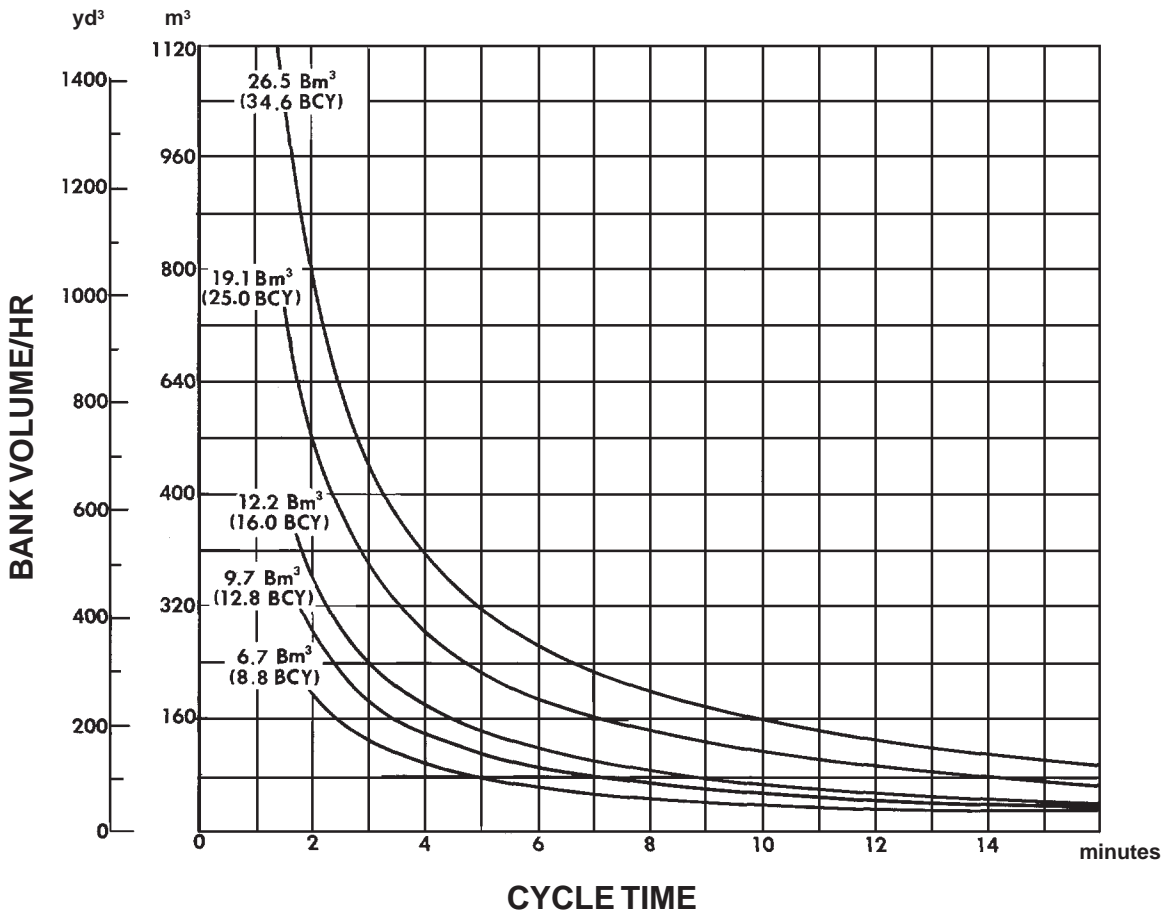



# CONSTRUCTION & MINING TRUCKS CONSTRUCTION & MINING TRACTORS

## CONTENTS

Features .....	10-1
Truck Specifications .....	10-2
Tractor Specifications .....	10-6
Tire Specifications .....	10-7
Use of Brake Performance curves .....	10-8
Fixed times for hauling units .....	10-8
Mechanical Power Train Efficiencies .....	10-9
Curves:	
769D Rimpull-Speed-Gradeability, Brake Performance, Travel Time .....	10-10
771D Rimpull-Speed-Gradeability, Brake Performance, Travel Time .....	10-14
773D Rimpull-Speed-Gradeability, Brake Performance, Travel Time .....	10-18
775D Rimpull-Speed-Gradeability, Brake Performance, Travel Time .....	10-23
776D, 777D Rimpull-Speed-Gradeability, Brake Performance, Travel Time .....	10-27
784C, 785C Rimpull-Speed-Gradeability, Brake Performance, Travel Time .....	10-31
789C Rimpull-Speed-Gradeability, Brake Performance, Travel Time .....	10-36
793C Rimpull-Speed-Gradeability, Brake Performance, Travel Time .....	10-40
797 Rimpull-Speed-Gradeability, Brake Performance, Travel Time .....	10-44

## Features:

- **Caterpillar four-stroke-cycle diesels** ... turbo-charged, aftercooled, adjustment-free fuel system (direct injection).
- **Electronically-controlled automatic transmission** ... speed sensing device automatically shifts transmission between 1st and gear selected by operator.
- **Truck Production Management System (TPMS)** utilizes strut pressure sensors and an on-board microprocessor to determine payload weight, cycle segment times, delay times, actual clock time and date of each cycle.
- **Vital Information Management System (VIMS)** Monitors all vital machine functions. Keeps operator informed of current machine operating conditions, helps reduce downtime and allows service personnel easy access to data for fast accurate diagnosis. VIMS includes Production Management System.

- **Electronic Unit Injection (EUI)** in the 776D-793C and **Hydraulic Electronic Unit Injection (HEUI)** on 769D-775D electronically maintains fuel settings, provides automatic altitude and air filter restriction compensation, automatic variable timing, improved diagnostics and increased fuel efficiency.
- **Oil cooled disc brakes** provide retarding, service, parking, and secondary braking in one sealed, fade-resistant, maintenance-free unit. 769D-777D front brakes are caliper disc, can be switched out of the service system when not needed but activate as part of the secondary system. (Front oil-cooled brakes optional on 777D.) 784C-793C front brakes are oil-cooled disc.
- **Automatic Retarder Control (ARC)** electronically controls braking on grade to maintain faster downhill speeds.
- **Full hydraulic steering**, with front suspension cylinders serving as kingpins.
- **Four independent**, self-contained, oil-pneumatic suspension cylinders absorb loading and road shocks. Wide spacing for stability.
- **A variety of truck bodies** is available to meet your specific needs. Dual slope, flat floor and Mine Specific Design (MSD) for selected models.
- **Quarry trucks** have single-slope flat floor for smooth, metered dumping into crushers or hoppers.
- **Integral Roll Over Protective Structure (ROPS)** cab standard on all models.
- **Separate hydraulic systems** prevents cross contamination.

## Tractor Features:

- **Yoke type hitch** oscillates four ways to reduce frame stresses. Rugged turn stops prevent excessive wagon rotation either direction.
- **Rear platform** functions as a power train guard and provides safe, stable work area. Fenders and mud flaps protect from material thrown by tires.

**NOTE:** Listed features may be standard on some models. Optional on others. Contact your Caterpillar Dealer for specific information.





MODEL	769D		769D		771D	
	Flat Floor		Dual Slope		Quarry	
Body Type						
Gross Vehicle Weight	68 180 kg	<b>150,000 lb</b>	68 180 kg	<b>150,000 lb</b>	73 970 kg	<b>163,100 lb</b>
Chassis Weight*	22 950 kg	<b>50,600 lb</b>	22 950 kg	<b>50,600 lb</b>	22 950 kg	<b>50,600 lb</b>
Body Weight	7800 kg	<b>17,200 lb</b>	7330 kg	<b>16,170 lb</b>	10 350 kg	<b>22,820 lb</b>
Maximum Payload**	37 430 kg	<b>82,530 lb</b>	37 900 kg	<b>83,570 lb</b>	40 670 kg	<b>89,680 lb</b>
Standard Liner Weight	3300 kg	<b>7280 lb</b>	3160 kg	<b>6970 lb</b>		—
Payload with Standard Liner	34 130 kg	<b>75,250 lb</b>	34 740 kg	<b>76,600 lb</b>		—
Capacity:						
Struck (SAE)	16.5 m <sup>3</sup>	<b>21.6 yd<sup>3</sup></b>	17 m <sup>3</sup>	<b>22.2 yd<sup>3</sup></b>	20.2 m <sup>3</sup>	<b>26.4 yd<sup>3</sup></b>
Heaped (2:1) (SAE)	24.2 m <sup>3</sup>	<b>31.7 yd<sup>3</sup></b>	24.2 m <sup>3</sup>	<b>31.7 yd<sup>3</sup></b>	27.5 m <sup>3</sup>	<b>36 yd<sup>3</sup></b>
Distribution Empty:						
Front		<b>49.7%</b>		<b>49.8%</b>		<b>46.3%</b>
Rear		<b>50.3%</b>		<b>50.2%</b>		<b>53.7%</b>
Distribution Loaded:						
Front		<b>33.2%</b>		<b>33.3%</b>		<b>32.9%</b>
Rear		<b>66.8%</b>		<b>66.7%</b>		<b>67.1%</b>
Engine Model	<b>3408E TA</b>		<b>3408E TA</b>		<b>3408E TA</b>	
Number of Cylinders	<b>8</b>		<b>8</b>		<b>8</b>	
Bore	137 mm	<b>5.4"</b>	137 mm	<b>5.4"</b>	137 mm	<b>5.4"</b>
Stroke	152 mm	<b>6"</b>	152 mm	<b>6"</b>	152 mm	<b>6"</b>
Displacement	18 L	<b>1099 in<sup>3</sup></b>	18 L	<b>1099 in<sup>3</sup></b>	18 L	<b>1099 in<sup>3</sup></b>
Flywheel Power	362 kW	<b>485 hp</b>	362 kW	<b>485 hp</b>	362 kW	<b>485 hp</b>
Gross Power	380 kW	<b>510 hp</b>	380 kW	<b>510 hp</b>	380 kW	<b>510 hp</b>
Standard Tires	<b>18.00R33 (E-4)</b>		<b>18.00R33 (E-4)</b>		<b>18.00R33 (E-4)</b>	
Machine Clearance Turning Circle	19.8 m	<b>65'0"</b>	19.8 m	<b>65'0"</b>	19.8 m	<b>65'0"</b>
Fuel Tank Refill Capacity	530 L	<b>140 U.S. gal</b>	530 L	<b>140 U.S. gal</b>	530 L	<b>140 U.S. gal</b>
Top Speed (Loaded)	75 km/h	<b>47 mph</b>	75 km/h	<b>47 mph</b>	56 km/h	<b>35 mph</b>
<b>GENERAL DIMENSIONS</b>						
<b>(Empty):</b>						
Height to Canopy Rock Guard Rail	4.00 m	<b>13'1"</b>	4.00 m	<b>13'1"</b>	3.80 m	<b>12'6"</b>
Wheelbase	3.70 m	<b>12'2"</b>	3.70 m	<b>12'2"</b>	3.70 m	<b>12'2"</b>
Overall Length	7.60 m	<b>25'0"</b>	7.40 m	<b>24'5"</b>	7.60 m	<b>25'0"</b>
Loading Height (Empty)	3.20 m	<b>10'6"</b>	3.10 m	<b>10'4"</b>	3.40 m	<b>11'2"</b>
Height at Full Dump	7.80 m	<b>25'7"</b>	7.70 m	<b>25'4"</b>	7.70 m	<b>25'3"</b>
Body Length (Target Length)	5.40 m	<b>17'10"</b>	5.24 m	<b>17'2"</b>	5.41 m	<b>17'9"</b>
Width (Operating)	5.01 m	<b>16'5"</b>	5.01 m	<b>16'5"</b>	5.01 m	<b>16'5"</b>
Width (Shipping)***	3.99 m	<b>13'1"</b>	3.91 m	<b>12'10"</b>	3.99 m	<b>13'1"</b>
Front Tire Tread	3.10 m	<b>10'2"</b>	3.10 m	<b>10'2"</b>	3.10 m	<b>10'2"</b>

\*Weights include lubricants, coolants, and 10% fuel.

\*\*Maximum rating requires selection of proper tires and is dependent on selection of optional equipment. Gross vehicle weight should not be exceeded.

\*\*\*Disassembled.



MODEL	773D		773D		775D		775D	
	Flat Floor		Dual Slope		Quarry		Lined Quarry	
Body Type								
Gross Vehicle Weight	92 530 kg	<b>204,000 lb</b>	92 530 kg	<b>204,000 lb</b>	106 590 kg	<b>235,000 lb</b>	106 590 kg	<b>235,000 lb</b>
Chassis Weight*	30 165 kg	<b>66,500 lb</b>	30 165 kg	<b>66,500 lb</b>	30 390 kg	<b>67,000 lb</b>	30 390 kg	<b>67,000 lb</b>
Body Weight	9375 kg	<b>20,670 lb</b>	9030 kg	<b>19,910 lb</b>	12 830 kg	<b>28,230 lb</b>	14 140 kg	<b>31,170 lb</b>
Maximum Payload**	52 990 kg	<b>116,840 lb</b>	53 340 kg	<b>117,610 lb</b>	63 370 kg	<b>139,730 lb</b>	62 070 kg	<b>136,860 lb</b>
Standard Liner Weight	3981 kg	<b>8778 lb</b>	3920 kg	<b>8640 lb</b>	—	—	—	—
Payload with Standard Liner	49 010 kg	<b>108,065 lb</b>	49 420 kg	<b>108,970 lb</b>	—	—	62 070 kg	<b>136,860 lb</b>
Capacity:								
Struck (SAE)	26.6 m <sup>3</sup>	<b>34.8 yd<sup>3</sup></b>	26.6 m <sup>3</sup>	<b>34.8 yd<sup>3</sup></b>	31.4 m <sup>3</sup>	<b>41.1 yd<sup>3</sup></b>	31.2 m <sup>3</sup>	<b>40.8 yd<sup>3</sup></b>
Heaped (2:1) (SAE)	35.3 m <sup>3</sup>	<b>46.4 yd<sup>3</sup></b>	35.2 m <sup>3</sup>	<b>46 yd<sup>3</sup></b>	41.5 m <sup>3</sup>	<b>54.3 yd<sup>3</sup></b>	41.2 m <sup>3</sup>	<b>53.9 yd<sup>3</sup></b>
Distribution Empty:								
Front	<b>47.3%</b>		<b>47.3%</b>		<b>44.3%</b>		<b>44.3%</b>	
Rear	<b>52.7%</b>		<b>52.7%</b>		<b>55.7%</b>		<b>55.7%</b>	
Distribution Loaded:								
Front	<b>33.3%</b>		<b>33.3%</b>		<b>31.2%</b>		<b>31.2%</b>	
Rear	<b>66.7%</b>		<b>66.7%</b>		<b>68.8%</b>		<b>68.8%</b>	
Engine Model	<b>3412E TA</b>		<b>3412E TA</b>		<b>3412E TA</b>		<b>3412E TA</b>	
Number of Cylinders	<b>12</b>		<b>12</b>		<b>12</b>		<b>12</b>	
Bore	137 mm	<b>5.4"</b>	137 mm	<b>5.4"</b>	137 mm	<b>5.4"</b>	137 mm	<b>5.4"</b>
Stroke	152 mm	<b>6"</b>	152 mm	<b>6"</b>	152 mm	<b>6"</b>	152 mm	<b>6"</b>
Displacement	27 L	<b>1649 in<sup>3</sup></b>	27 L	<b>1649 in<sup>3</sup></b>	27 L	<b>1649 in<sup>3</sup></b>	27 L	<b>1649 in<sup>3</sup></b>
Flywheel Power	485 kW	<b>650 hp</b>	485 kW	<b>650 hp</b>	517 kW	<b>693 hp</b>	517 kW	<b>693 hp</b>
Gross Power	509 kW	<b>682 hp</b>	509 kW	<b>682 hp</b>	541 kW	<b>725 hp</b>	541 kW	<b>725 hp</b>
Standard Tires	<b>24.00R35 (E-4)</b>		<b>24.00R35 (E-4)</b>		<b>24.00R35 (E-4)</b>		<b>24.00R35 (E-4)</b>	
Machine Clearance								
Turning Circle	24 m	<b>78'9"</b>	24 m	<b>78'9"</b>	24 m	<b>78'9"</b>	24 m	<b>78'9"</b>
Fuel Tank Refill Capacity	700 L	<b>185 U.S. gal</b>	700 L	<b>185 U.S. gal</b>	700 L	<b>185 U.S. gal</b>	700 L	<b>185 U.S. gal</b>
Top Speed (Loaded)	66 km/h	<b>41 mph</b>	66 km/h	<b>41 mph</b>	66 km/h	<b>41 mph</b>	66 km/h	<b>41 mph</b>
<b>GENERAL DIMENSIONS</b> (Empty):								
Height to Canopy Rock Guard Rail	4.20 m	<b>13'9"</b>	4.20 m	<b>13'9"</b>	4.41 m	<b>14'5"</b>	4.41 m	<b>14'5"</b>
Wheelbase	4.19 m	<b>13'9"</b>	4.19 m	<b>13'9"</b>	4.19 m	<b>13'9"</b>	4.19 m	<b>13'9"</b>
Overall Length	8.60 m	<b>28'2"</b>	8.60 m	<b>28'2"</b>	9.70 m	<b>31'10"</b>	9.70 m	<b>31'10"</b>
Loading Height (Empty)	3.80 m	<b>12'6"</b>	3.80 m	<b>12'6"</b>	3.91 m	<b>12'10"</b>	3.91 m	<b>12'10"</b>
Height at Full Dump	8.80 m	<b>28'10"</b>	8.80 m	<b>28'10"</b>	8.80 m	<b>28'10"</b>	8.80 m	<b>28'10"</b>
Body Length (Target Length)	6.50 m	<b>21'4"</b>	6.50 m	<b>21'4"</b>	6.54 m	<b>21'5"</b>	6.51 m	<b>21'4"</b>
Width (Operating)	5.08 m	<b>16'8"</b>	5.08 m	<b>16'8"</b>	5.21 m	<b>17'1"</b>	5.21 m	<b>17'1"</b>
Width (Shipping)***	3.99 m	<b>13'1"</b>	3.99 m	<b>13'1"</b>	3.97 m	<b>13'0"</b>	3.97 m	<b>13'0"</b>
Front Tire Tread	3.28 m	<b>10'9"</b>	3.28 m	<b>10'9"</b>	3.28 m	<b>10'9"</b>	3.28 m	<b>10'9"</b>

\*Weights include lubricants, coolants, and 10% fuel.

\*\*Maximum rating requires selection of proper tires and is dependent on selection of optional equipment. Gross vehicle weight should not be exceeded.

\*\*\*Disassembled.



MODEL	777D		777D		785C	
	Flat Floor		Dual Slope		Dual Slope*	
Body Type						
Gross Vehicle Weight	161 030 kg	<b>355,000 lb</b>	161 030 kg	<b>355,000 lb</b>	249 480 kg	<b>550,000 lb</b>
Chassis Weight**	48 580 kg	<b>107,100 lb</b>	48 580 kg	<b>107,100 lb</b>	74 470 kg	<b>164,170 lb</b>
Body Weight	16 430 kg	<b>36,185 lb</b>	15 780 kg	<b>34,785 lb</b>	21 255 kg	<b>46,860 lb</b>
Maximum Payload	96 020 kg	<b>211,710 lb</b>	96 670 kg	<b>213,110 lb</b>	153 760 kg	<b>338,970 lb</b>
Standard Liner Weight	5675 kg	<b>12,500 lb</b>	5460 kg	<b>12,040 lb</b>	7630 kg	<b>16,830 lb</b>
Payload with Standard Liner	90 340 kg	<b>199,210 lb</b>	91 210 kg	<b>201,070 lb</b>	146 120 kg	<b>322,140 lb</b>
Capacity:						
Struck (SAE)	42 m <sup>3</sup>	<b>54.6 yd<sup>3</sup></b>	42.1 m <sup>3</sup>	<b>55 yd<sup>3</sup></b>	56.9 m <sup>3</sup>	<b>74.4 yd<sup>3</sup></b>
Heaped (2:1) (SAE)	60.5 m <sup>3</sup>	<b>79.1 yd<sup>3</sup></b>	60.1 m <sup>3</sup>	<b>78.6 yd<sup>3</sup></b>	78.2 m <sup>3</sup>	<b>102.3 yd<sup>3</sup></b>
Distribution Empty:						
Front		<b>45.4%</b>		<b>45.4%</b>		<b>46.9%</b>
Rear		<b>54.6%</b>		<b>54.6%</b>		<b>53.1%</b>
Distribution Loaded:						
Front		<b>33.3%</b>		<b>33.3%</b>		<b>33.3%</b>
Rear		<b>66.7%</b>		<b>66.7%</b>		<b>66.7%</b>
Engine Model	<b>3508B TA</b>		<b>3508B TA</b>		<b>3512B/3512B HD</b>	
Number of Cylinders	<b>8</b>		<b>8</b>		<b>12</b>	
Bore	170 mm	<b>6.7"</b>	170 mm	<b>6.7"</b>	170 mm	<b>6.7"</b>
Stroke	190 mm	<b>7.5"</b>	190 mm	<b>7.5"</b>	190/215 mm	<b>7.5/8.5"</b>
Displacement	34.5 L	<b>2105 in<sup>3</sup></b>	34.5 L	<b>2105 in<sup>3</sup></b>	51.8/58.5 L	<b>3158/3572 in<sup>3</sup></b>
Flywheel Power	699 kW	<b>938 hp</b>	699 kW	<b>938 hp</b>	1005 kW	<b>1348 hp</b>
Gross Power	746 kW	<b>1000 hp</b>	746 kW	<b>1000 hp</b>	1082 kW	<b>1450 hp</b>
Standard Tires	<b>27.00R49</b>		<b>27.00R49</b>		<b>33.00R51</b>	
Machine Clearance Turning Circle	28.4 m	<b>93'2"</b>	28.4 m	<b>93'2"</b>	30.2 m	<b>99'2"</b>
Fuel Tank Refill Capacity	1137 L	<b>300 U.S. gal</b>	1137 L	<b>300 U.S. gal</b>	1893 L	<b>500 U.S. gal</b>
Top Speed (Loaded)	60 km/h	<b>38 mph</b>	60 km/h	<b>38 mph</b>	54.8 km/h	<b>34 mph</b>
<b>GENERAL DIMENSIONS</b>						
<b>(Empty):</b>						
Height to Canopy Rock Guard Rail	5.00 m	<b>16'5"</b>	4.95 m	<b>16'3"</b>	5.77 m	<b>18'11"</b>
Wheelbase	4.57 m	<b>15'0"</b>	4.57 m	<b>15'0"</b>	5.18 m	<b>17'0"</b>
Overall Length	9.78 m	<b>32'1"</b>	9.78 m	<b>32'1"</b>	11.02 m	<b>36'2"</b>
Loading Height (Empty)	4.34 m	<b>14'3"</b>	4.29 m	<b>14'1"</b>	4.97 m	<b>16'4"</b>
Height at Full Dump	9.97 m	<b>32'9"</b>	9.95 m	<b>32'8"</b>	11.21 m	<b>36'9"</b>
Body Length (Target Length)	6.95 m	<b>22'10"</b>	6.95 m	<b>22'10"</b>	7.65 m	<b>25'1"</b>
Width (Operating)	6.10 m	<b>20'0"</b>	6.10 m	<b>20'0"</b>	6.64 m	<b>21'4"</b>
Width (Shipping)***	3.51 m	<b>11'5"</b>	3.51 m	<b>11'6"</b>	3.91 m	<b>12'10"</b>
Front Tire Tread	4.17 m	<b>13'8"</b>	4.17 m	<b>13'8"</b>	4.85 m	<b>15'11"</b>

\*Data provided is for a representative dual slope body and liner package. Several dual slope, flat floor, and mine specific design (MSD) bodies and liner packages are available. All weights, capacities, and dimensions are dependent on body type, tires, and optional equipment selected. Gross machine weight must not be exceeded.

\*\*Chassis weight includes lubricants, coolants, and 10% fuel.

\*\*\*Disassembled.



## MODEL

789C

793C

797

	Dual Slope*		Dual Slope*		Flat Floor	
Body Type						
Gross Vehicle Weight	317 520 kg	<b>700,000 lb</b>	383 750 kg	<b>846,000 lb</b>	590 000 kg	<b>1,300,000 lb</b>
Chassis Weight**	95 220 kg	<b>209,930 lb</b>	114 420 kg	<b>252,250 lb</b>	210 880 kg	<b>465,000 lb</b>
Body Weight	26 280 kg	<b>57,940 lb</b>	24 950 kg	<b>55,000 lb</b>	52 150 kg	<b>115,000 lb</b>
Maximum Payload	196 010 kg	<b>432,130 lb</b>	244 370 kg	<b>538,750 lb</b>	326 530 kg	<b>720,000 lb</b>
Standard Liner Weight	9430 kg	<b>20,790 lb</b>	8055 kg	<b>17,760 lb</b>	—	—
Payload with Standard Liner	186 580 kg	<b>411,340 lb</b>	236 580 kg	<b>520,990 lb</b>	—	—
Capacity:						
Struck (SAE)	73.4 m <sup>3</sup>	<b>96 yd<sup>3</sup></b>	96 m <sup>3</sup>	<b>126 yd<sup>3</sup></b>	173 m <sup>3</sup>	<b>228 yd<sup>3</sup></b>
Heaped (2:1) (SAE)	105 m <sup>3</sup>	<b>137 yd<sup>3</sup></b>	129 m <sup>3</sup>	<b>169 yd<sup>3</sup></b>	220 m <sup>3</sup>	<b>290 yd<sup>3</sup></b>
Distribution Empty:						
Front		<b>46.9%</b>		<b>46.9%</b>		<b>43.5%</b>
Rear		<b>53.1%</b>		<b>53.1%</b>		<b>56.5%</b>
Distribution Loaded:						
Front		<b>33.6%</b>		<b>33.3%</b>		<b>33%</b>
Rear		<b>66.4%</b>		<b>66.7%</b>		<b>67%</b>
Engine Model	<b>3516B/3516B HD</b>		<b>3516B/3516B HD</b>		<b>3524B TA HD</b>	
Number of Cylinders	<b>16</b>		<b>16</b>		<b>24</b>	
Bore	170 mm	<b>6.7"</b>	170 mm	<b>6.7"</b>	170 mm	<b>6.7"</b>
Stroke	190/215 mm	<b>7.5/8.5"</b>	190/215 mm	<b>7.5/8.5"</b>	215 mm	<b>8.5"</b>
Displacement	69/78 L	<b>4211/4763 in<sup>3</sup></b>	69/78 L	<b>4211/4763 in<sup>3</sup></b>	117 L	<b>7140 in<sup>3</sup></b>
Flywheel Power	1335 kW	<b>1791 hp</b>	1615 kW	<b>2166 hp</b>	2406 kW	<b>3227 hp</b>
Gross Power	1417 kW	<b>1900 hp</b>	1715 kW	<b>2300 hp</b>	2535 kW	<b>3400 hp</b>
Standard Tires	<b>37.00R51</b>		<b>40.00R57</b>		<b>55/80R63</b>	
Machine Clearance Turning Circle	30.2 m	<b>99'2"</b>	32.4 m	<b>106'4"</b>	31.9 m	<b>104'8"</b>
Fuel Tank Refill Capacity	3218 L	<b>850 U.S. gal</b>	3790 L	<b>1000 U.S. gal</b>	6813 L	<b>1800 U.S. gal</b>
Top Speed (Loaded)	54.4 km/h	<b>33.8 mph</b>	54.3 km/h	<b>33.7 mph</b>	64 km/h	<b>40 mph</b>
<b>GENERAL DIMENSIONS</b>						
<b>(Empty):</b>						
Height to Canopy Rock Guard Rail	6.15 m	<b>20'2"</b>	6.43 m	<b>21'1"</b>	7.24 m	<b>23'9"</b>
Wheelbase	5.70 m	<b>18'8"</b>	5.90 m	<b>19'4"</b>	7.20 m	<b>23'7"</b>
Overall Length	12.18 m	<b>39'11"</b>	12.87 m	<b>42'3"</b>	14.53 m	<b>47'8"</b>
Loading Height (Empty)	5.21 m	<b>17'1"</b>	5.86 m	<b>19'3"</b>	7.05 m	<b>23'1"</b>
Height at Full Dump	11.90 m	<b>39'1"</b>	13.21 m	<b>43'4"</b>	15.00 m	<b>49'3"</b>
Body Length (Target Length)	8.15 m	<b>26'9"</b>	8.94 m	<b>29'4"</b>	14.46 m	<b>47'5"</b>
Width (Operating)	7.67 m	<b>25'2"</b>	7.41 m	<b>24'4"</b>	9.15 m	<b>30'0"</b>
Width (Shipping)***	3.84 m	<b>12'7"</b>	3.91 m	<b>12'10"</b>	4.02 m	<b>13'2"</b>
Front Tire Tread	5.43 m	<b>17'10"</b>	5.61 m	<b>18'5"</b>	6.60 m	<b>21'8"</b>

\*Data provided is for a representative dual slope body and liner package. Several dual slope, flat floor, and mine specific design (MSD) bodies and liner packages are available. All weights, capacities, and dimensions are dependent on body type, tires, and optional equipment selected. Gross machine weight must not be exceeded.

\*\*Chassis weight includes lubricants, coolants, and 10% fuel.

\*\*\*Disassembled.



MODEL	776D		784C	
Flywheel Power	699 kW	<b>938 hp</b>	1005 kW	<b>1348 hp</b>
Gross Power	746 kW	<b>1000 hp</b>	1082 kW	<b>1450 hp</b>
Operating Weight*	55 480 kg	<b>122,311 lb</b>	89 280 kg	<b>196,825 lb</b>
Engine Model	<b>3508B (EUI)</b>		<b>3512B/3512B HD</b>	
No. Cylinders	<b>8</b>		<b>12</b>	
Bore	170 mm	<b>6.7"</b>	170 mm	<b>6.7"</b>
Stroke	190 mm	<b>7.5"</b>	190/215 mm	<b>7.5/8.5"</b>
Displacement	34.5 L	<b>2105 in<sup>3</sup></b>	51.8/58.5 L	<b>3158/3572 in<sup>3</sup></b>
Standard Tires, Front & Dual Rear	<b>27.00R49 (E-4)</b>		<b>36.00R51 (E-3)</b>	
Machine Clearance Turning Circle	26.1 m	<b>85'6"</b>	33.5 m	<b>109'10"</b>
Fuel Tank Refill Capacity	1137 L	<b>300 U.S. gal</b>	3222 L	<b>851 U.S. gal</b>
<b>GENERAL DIMENSIONS (Empty):</b>				
Height to Top of Cab	4.57 m	<b>15'0"</b>	5468 mm	<b>17'1"</b>
Wheelbase	4.57 m	<b>15'0"</b>	5180 mm	<b>17'</b>
Overall Length	8.06 m	<b>26'5.5"</b>	9343 mm	<b>30'8"</b>
Ground Clearance	710 mm	<b>2'4"</b>	1027 mm	<b>3'4"</b>
Width, shipping (Disassembled)	3.51 m	<b>11'6"</b>	3810 mm	<b>12'6"</b>
Height to Yoke Seat	3.40 m	<b>11'2"</b>	4048 mm	<b>13'4"</b>
Rear axle to Hitch Pin	762 mm	<b>2'6"</b>	850 mm	<b>2'9"</b>
Front Tire Tread	4.17 m	<b>13'8"</b>	4935 mm	<b>16'2"</b>

\*Operating weights include coolant, lubricants, hitch, full fuel tank and operator.

MODEL TIRE SIZE	PLY RATING/ STAR RATING*	TYPE	MODEL TIRE SIZE	PLY RATING/ STAR RATING*	TYPE
<b>769D</b>			<b>789C</b>		
18.00-33	32	E-4	37.00R51	★★	E-4
18.00R33	★★	E-3	<b>793C</b>		
18.00R33◀	★★	E-4	40.00R57◀	★★	E-4
<b>771D</b>			44/80R57**	★★	E-4
18.00R33◀	★★	E-4	44/90R57**	★★	E-4
<b>773D</b>			46/90R57	★★	E-4
24.00-35	36	E-4	<b>797</b>		
24.00-35	42	E-4	55/80R63	★★	E-4
24.00R35	★★	E-3	<b>776D</b>		
24.00R35◀	★★	E-4	27.00R49	★★	E-3
<b>775D</b>			27.00R49◀	★★	E-4
24.00R35◀	★★	E-4	<b>784C</b>		
24.00R35	★★	E-3	36.00R51	★★	E-3
24.00-35	42	E-4			
<b>777D</b>					
27.00R49	★★	E-3			
27.00R49◀	★★	E-4			
<b>785C</b>					
33.00R51	★★	E-3			
33.00R51	★★	E-4			

\*Manufacturer uses star (★) rating system instead of ply rating.

\*\*Requires rear axle wide tire kit (no additional weight).

◀Standard Tire.

**USE OF BRAKE PERFORMANCE CURVES**

The speed that can be maintained when the machine is descending a grade with retarder applied can be determined from the retarder curves in this section when gross machine weight and total effective grade are known.

Select appropriate grade distance chart that covers total downhill haul; don't break haul into individual segments.

To determine brake performance: Read from gross weight down to the percent effective grade. (Effective grade equals actual % grade *minus* 1% for each 10 kg/metric ton (20 lb./U.S. ton) of rolling resistance.) From this weight-effective grade point, read horizontally to the curve with the highest obtainable speed range, then down to maximum descent speed brakes can safely handle without exceeding cooling capacity. When braking, engine RPM should be maintained at the highest possible level without overspeeding. If cooling oil overheats, reduce ground speed to allow transmission to shift to next lower speed range.

**USE OF RIMPULL-SPEED-GRADEABILITY CURVES**

(See Wheel Tractor Scraper Section)

**Total Effective Grade** (or Total Resistance) is grade assistance *minus* rolling resistance.

10 kg/metric ton (20 lb/U.S. ton) = 1% adverse grade.

*Example —*

With a favorable grade of 20% and rolling resistance of 50 kg/metric ton (100 lb/U.S. ton), find Total Effective Grade.

$$\begin{aligned}
 (50 \text{ kg/metric ton}) &= 50 \div 10 = 5\% \text{ Effective Grade} \\
 &\text{(from Rolling Resistance)} \\
 100 \text{ lb/ton} &= 100 \div 20 = 5\% \text{ Effective Grade} \\
 20\% \text{ (grade)} - 5\% \text{ (resistance)} &= \\
 15\% \text{ Total Effective Grade} &
 \end{aligned}$$

**TYPICAL FIXED TIMES FOR HAULING UNITS**

Wait time, delays and operator efficiency all impact cycle time. Minimizing truck exchange time can have a significant effect on productivity.

Fixed time for hauling units include:

1. Truck load time (various with loading tool)
2. Truck maneuver in load area (Truck exchange) (Typically 0.6-0.8 min.)
3. Maneuver and dump time at dump point (Typically 1.0-1.2 min.)

Total cycle time is the combination of:

1. The above fixed time
2. Hauling time (Loaded)
3. Return time (Empty)

*Example — assume load tool spots hauler with full bucket*

	<b>988F</b>	<b>5130B</b>
cycle times	.60	.45
First pass (dump time)	.10 min.	.05 min.
2 passes (full cycle)	.70	.50
3 passes	1.30	.95
4 passes	1.90	1.40
5 passes	2.50	1.85
6 passes	3.10	2.30
7 passes	3.70	2.75
8 passes	4.30	3.20
9 passes	4.90	3.65
10 passes	5.40	4.10

**NOTE:** Other sizes of loading tools will have different cycle times. See Wheel Loader section for **average** cycle times for truck loading.

## MECHANICAL POWER TRAIN EFFICIENCIES

In selling against electric drive trucks, power train efficiency is an important consideration. To better illustrate the advantages of mechanical drive performance, grade horsepower, power train efficiency, and retarding horsepower should be compared to electric drive trucks.

Grade horsepower can be calculated by the following formula:

### Metric

$$\text{grade HP} = \frac{\text{GMW (kg)} \times \text{TR} \times \text{Speed (km/h)}}{273.75}$$

### English

$$= \frac{\text{GMW (lb)} \times \text{TR} \times \text{Speed (mph)}}{375}$$

where TR  
(total  
resistance) = Rolling resistance + Grade resistance  
(expressed as a decimal)

### English example

700,000 lb GMW, 2% rolling resistance, +8% actual grade at 8.2 mph would require 1530 HP

$$\frac{700,000 \times (.02 + .08) \times 8.2}{375} = 1530 \text{ HP}$$

### Metric example

317 520 kg GMW, 2% rolling resistance, +8% actual grade at 13.2 km/h would require 1530 HP

$$\frac{317\,520 \times (.02 + .08) \times 13.2}{273.75} = 1530 \text{ HP}$$

We then calculate power train efficiency by dividing grade horsepower by the gross horsepower produced by the engine. Most electric drive trucks run at constant maximum horsepower while under load. Mechanical drive trucks, however, lug the engine and may produce somewhat less than maximum horsepower. Engine power curves must be utilized to determine exact horsepower produced.

### Example

$$\frac{1530 \text{ grade horsepower}}{1800 \text{ gross engine HP}} \times 100 = 85\% \text{ power train efficiency}$$

This exercise illustrates the effect of an efficient mechanical drive power train and should yield results in the 80-85% efficiency range. The same calculation for electric drive trucks would be lower (70-78% range) with a maximum efficiency of about 78% for the most common systems.

Likewise, retarding horsepower being consumed by the retarding system can be calculated by the following formula:

### Metric

$$\text{retarding HP} = \frac{\text{GMW (kg)} \times \text{TR} \times \text{Speed (km/h)}}{273.75}$$

### English

$$= \frac{\text{GMW (lb)} \times \text{TR} \times \text{Speed (mph)}}{375}$$

where TR  
(total  
resistance) = Rolling resistance + Grade resistance  
(expressed as a decimal)

### English example

700,000 lb GMW, 2% rolling resistance, -8% actual grade at 14.7 mph would equate to -1646 HP

$$\frac{700,000 \times (.02 - .08) \times 14.7}{375} = 1646 \text{ HP}$$


### Metric example

317 520 kg GMW, 2% rolling resistance, -8% actual grade at 23.6 km/h would equate to -1646 HP

$$\frac{317\,520 \times (.02 - .08) \times 23.6}{273.75} = 1646 \text{ HP}$$


This formula is intended for use in determining horsepower being consumed in the field based on field measurements. It is not intended to indicate how fast trucks should be operated on grade. Only job conditions, proper operating procedure, and good judgement should determine safe operating speeds during retarder use.



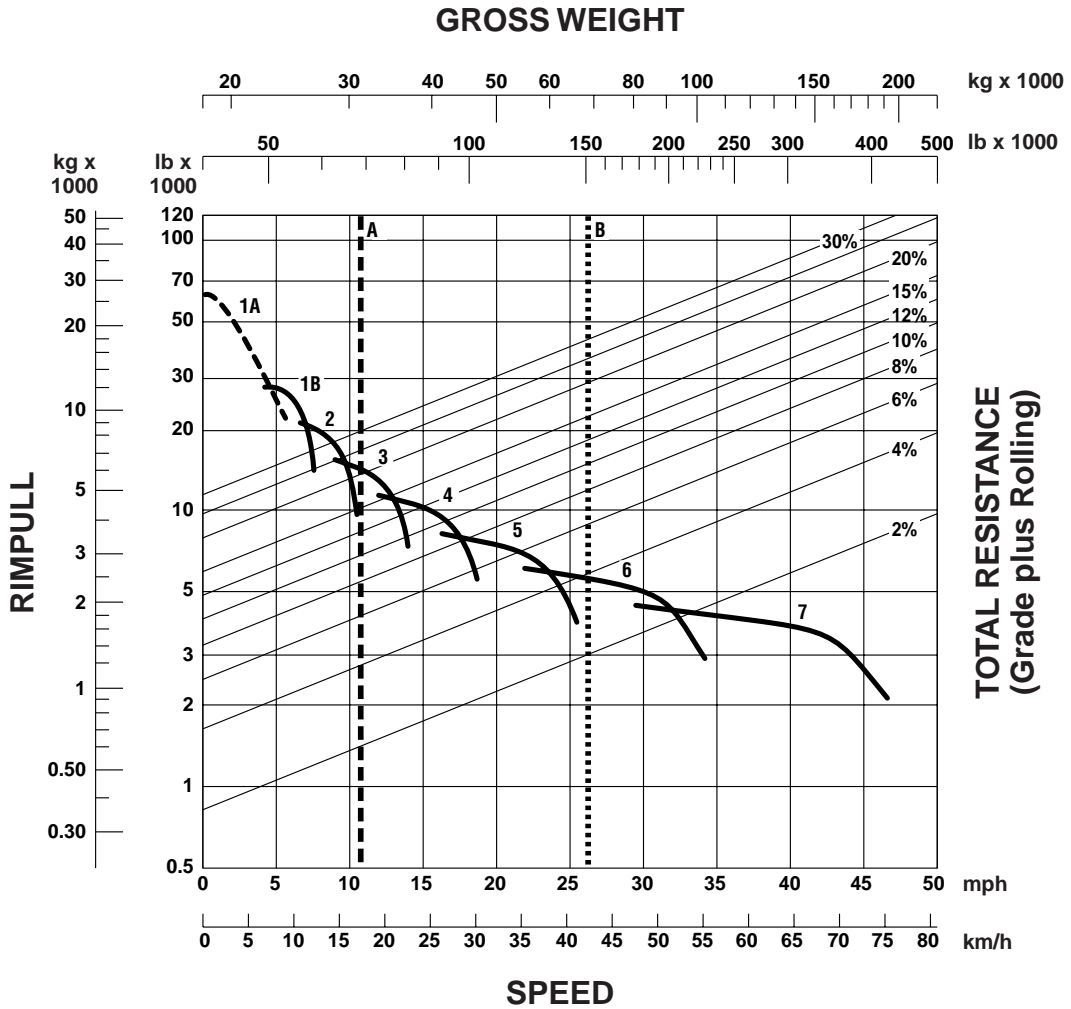

- KEY**
- 1A — 1st Gear (Torque Converter)
  - 1B — 1st Gear
  - 2 — 2nd Gear
  - 3 — 3rd Gear
  - 4 — 4th Gear
  - 5 — 5th Gear
  - 6 — 6th Gear
  - 7 — 7th Gear

- KEY**
- A — Empty 31 250 kg (68,900 lb)
  - B — Max GMW 68 182 kg (150,000 lb)

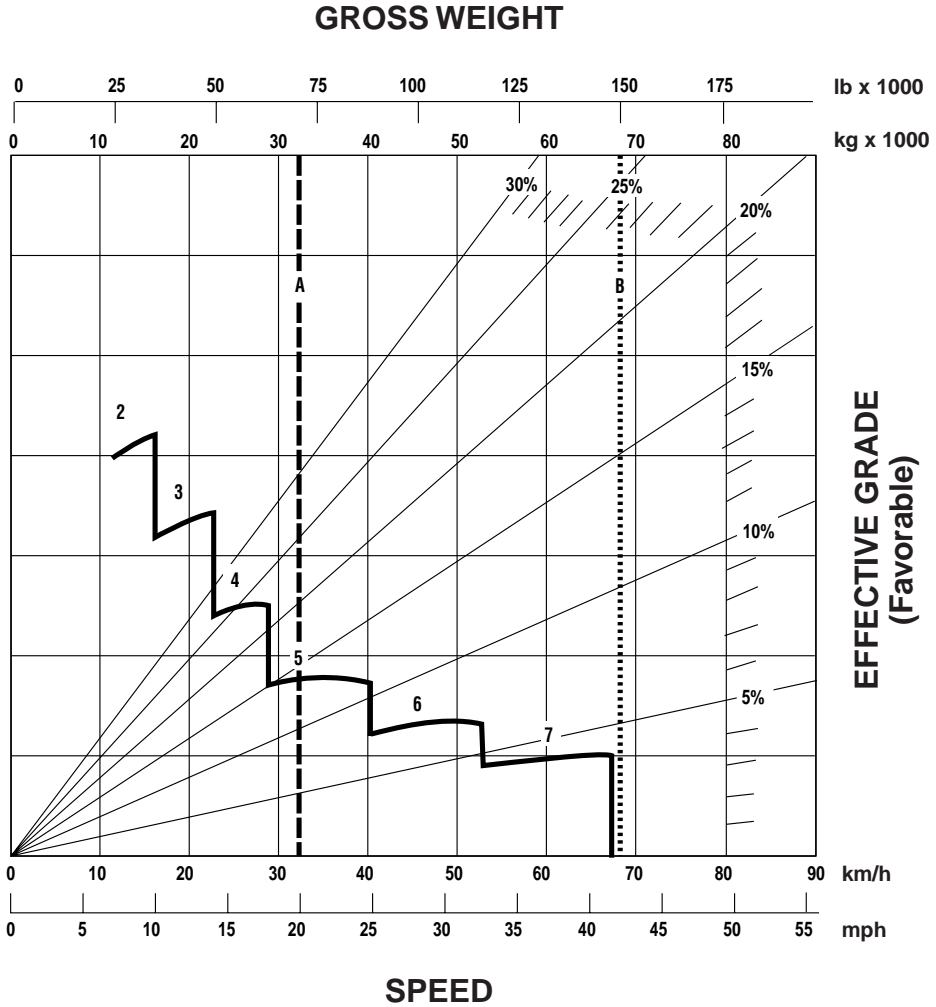

EFFECTIVE GRADE  
(Favorable)

### CONTINUOUS GRADE LENGTH

**KEY**

- 2 — 2nd Gear
- 3 — 3rd Gear
- 4 — 4th Gear
- 5 — 5th Gear
- 6 — 6th Gear
- 7 — 7th Gear





**KEY**

- A — Empty 31 250 kg (68,900 lb)
- B — Max GMW 68 182 kg (150,000 lb)

# Construction & Mining Trucks

## 769D Brake Performance

- 450 m (1500 ft)
- 600 m (2000 ft)
- 900 m (3000 ft)
- 1500 m (5000 ft)

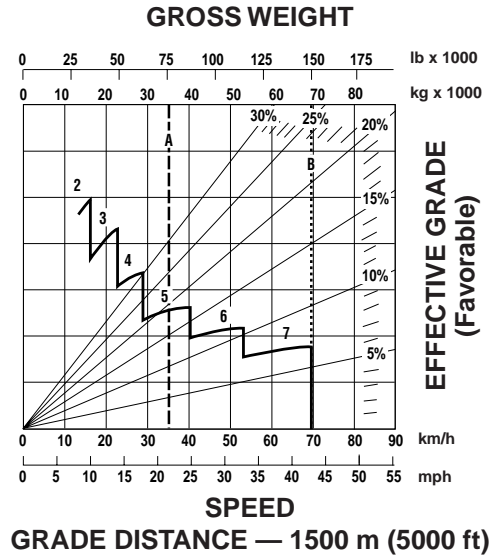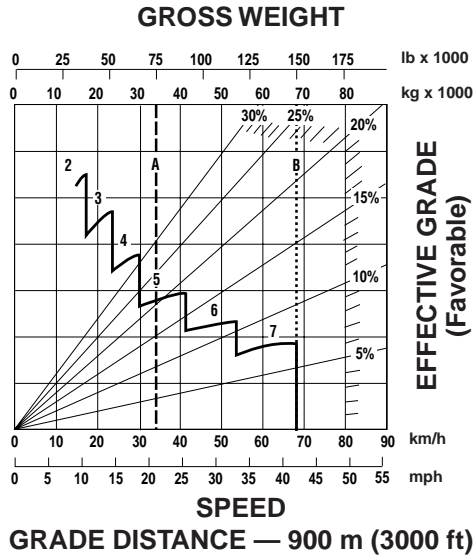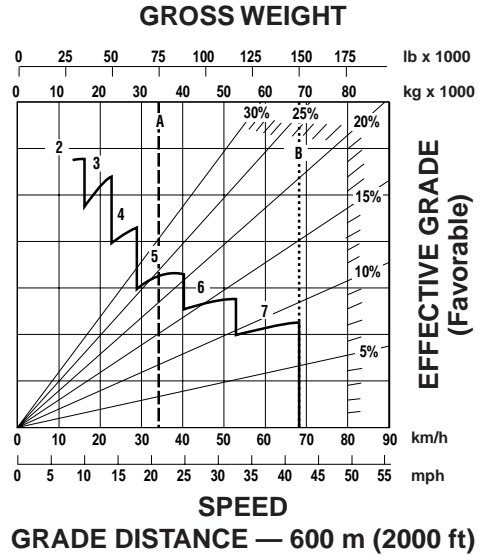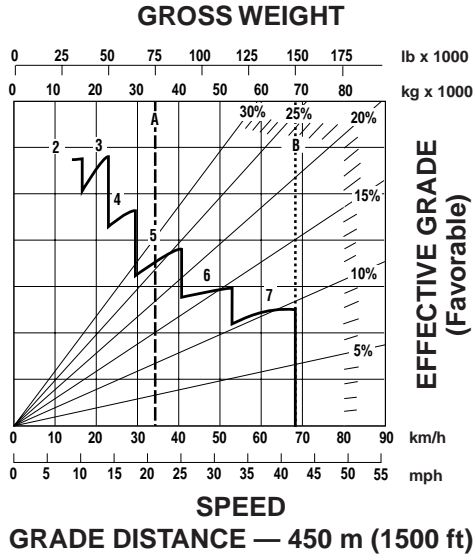


**KEY**

- 2 — 2nd Gear
- 3 — 3rd Gear
- 4 — 4th Gear
- 5 — 5th Gear
- 6 — 6th Gear
- 7 — 7th Gear


**KEY**


- A — Empty 31 250 kg (68,900 lb)
- B — Max GMW 68 182 kg (150,000 lb)

**LOADED**

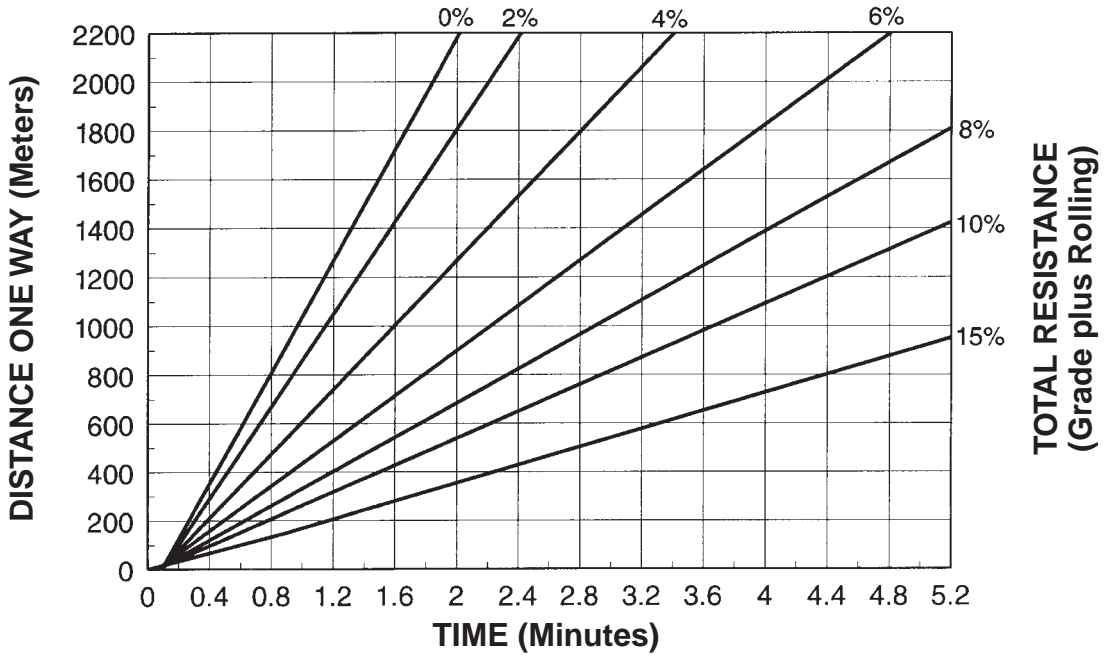


**EMPTY**

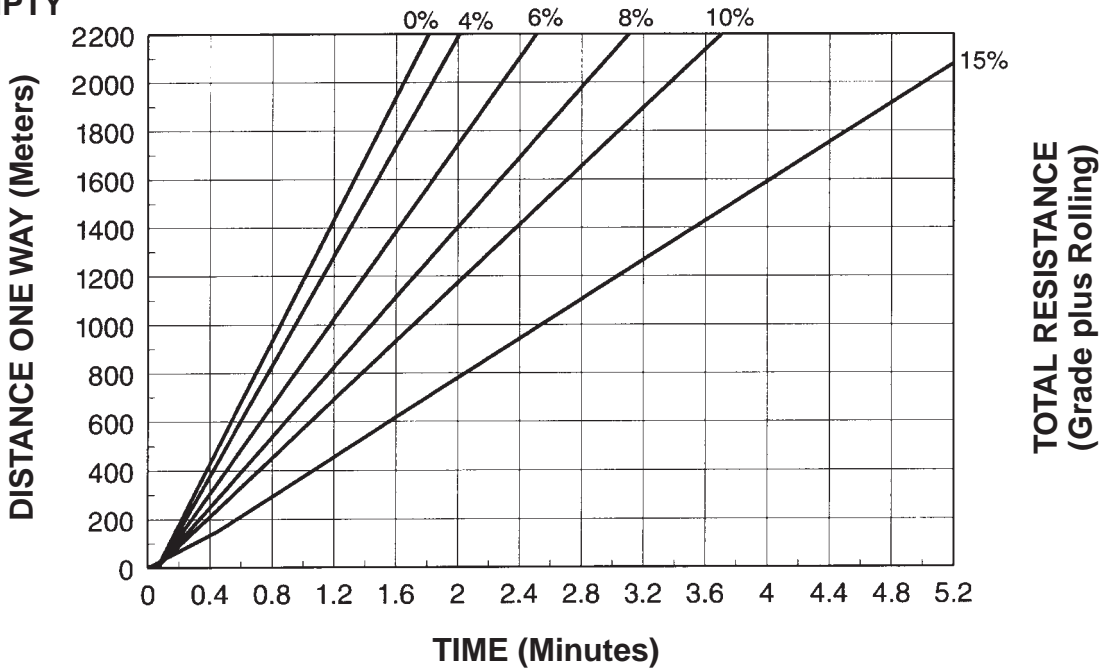

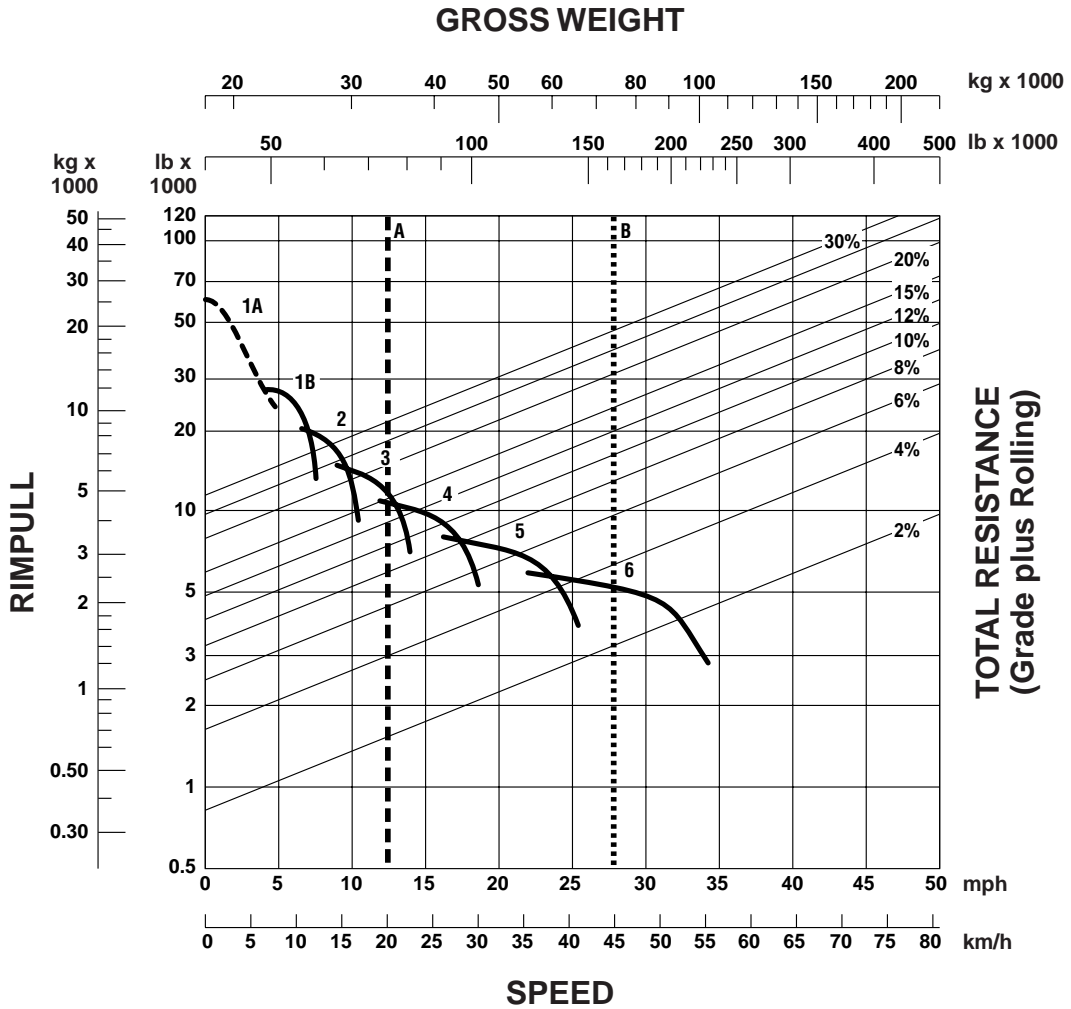

- KEY**
- 1A — 1st Gear (Torque Converter)
  - 1B — 1st Gear
  - 2 — 2nd Gear
  - 3 — 3rd Gear
  - 4 — 4th Gear
  - 5 — 5th Gear
  - 6 — 6th Gear

- KEY**
- A — Empty 33 975 kg (74,900 lb)
  - B — Max GMW 73 970 kg (163,100 lb)

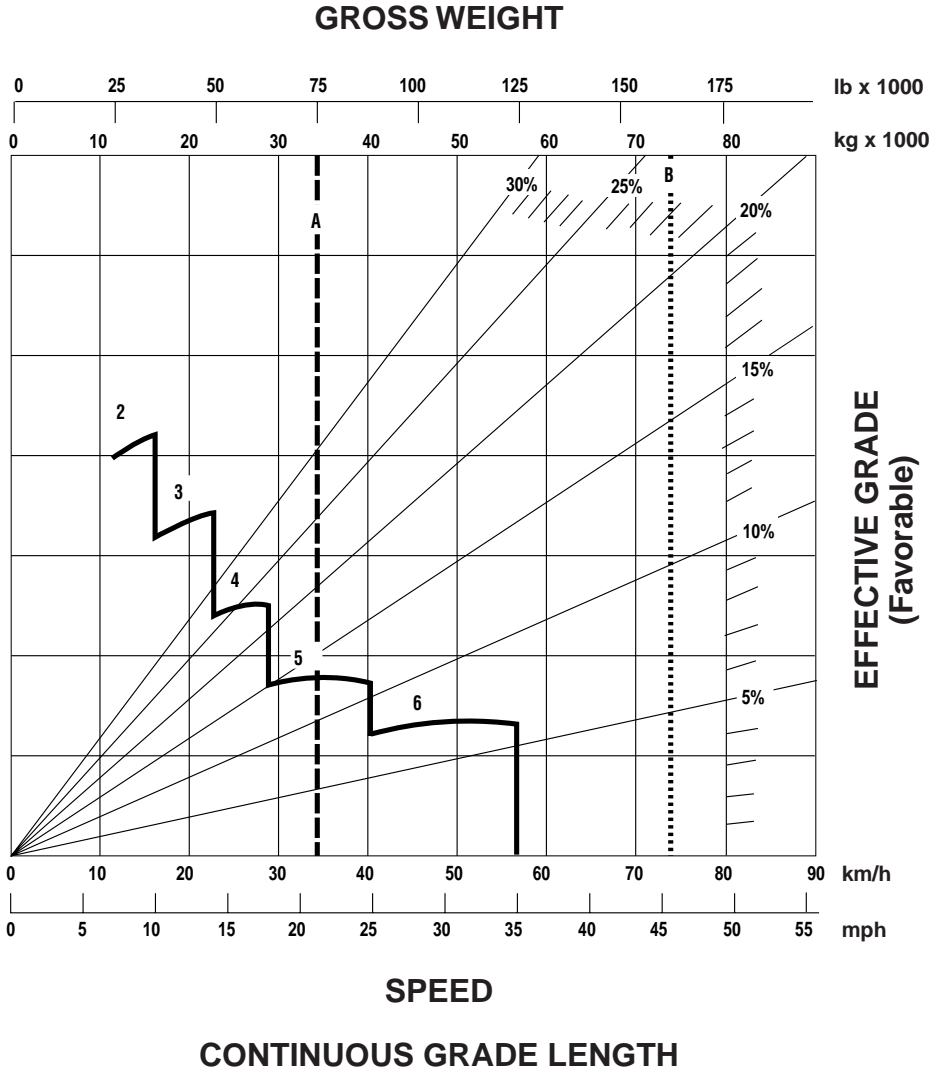

**KEY**

2 — 2nd Gear  
 3 — 3rd Gear  
 4 — 4th Gear  
 5 — 5th Gear  
 6 — 6th Gear





**KEY**

A — Empty 33 975 kg (74,900 lb)  
 B — Max GMW 73 970 kg (163,100 lb)

# Construction & Mining Trucks

## 771D Brake Performance

- 450 m (1500 ft)
- 600 m (2000 ft)
- 900 m (3000 ft)
- 1500 m (5000 ft)

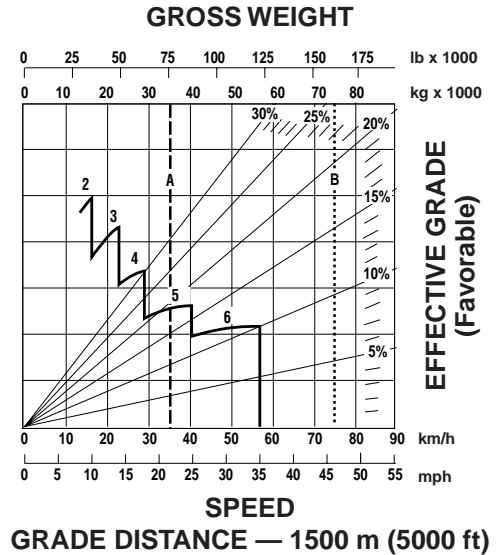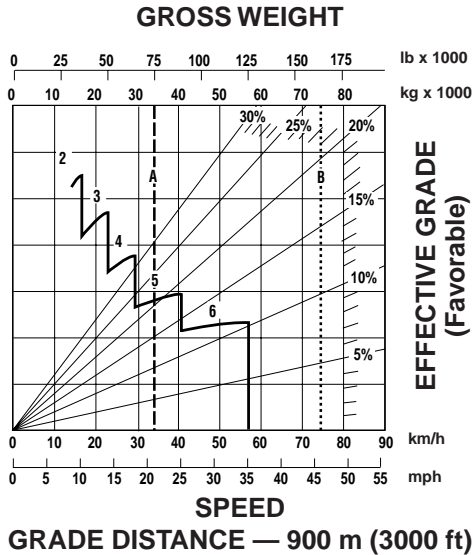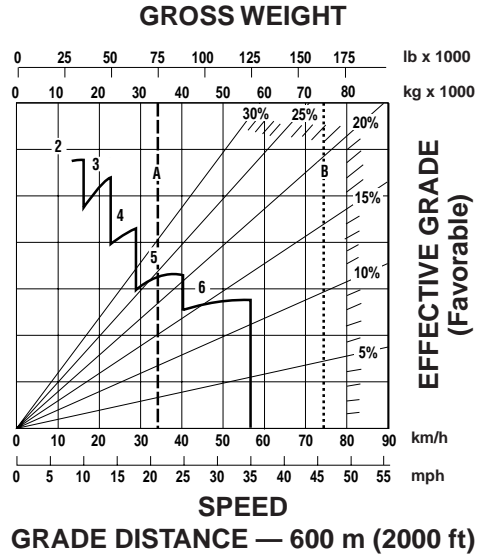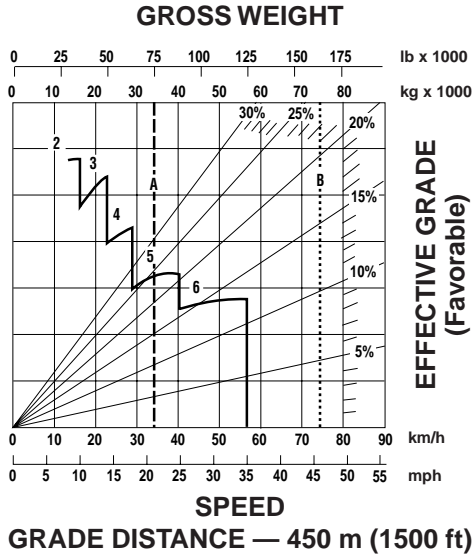


**KEY**

- 2 — 2nd Gear
- 3 — 3rd Gear
- 4 — 4th Gear
- 5 — 5th Gear
- 6 — 6th Gear


**KEY**

- A — Empty 33 975 kg (74,900 lb)
- B — Max GMW 73 970 kg (163,100 lb)


**LOADED**

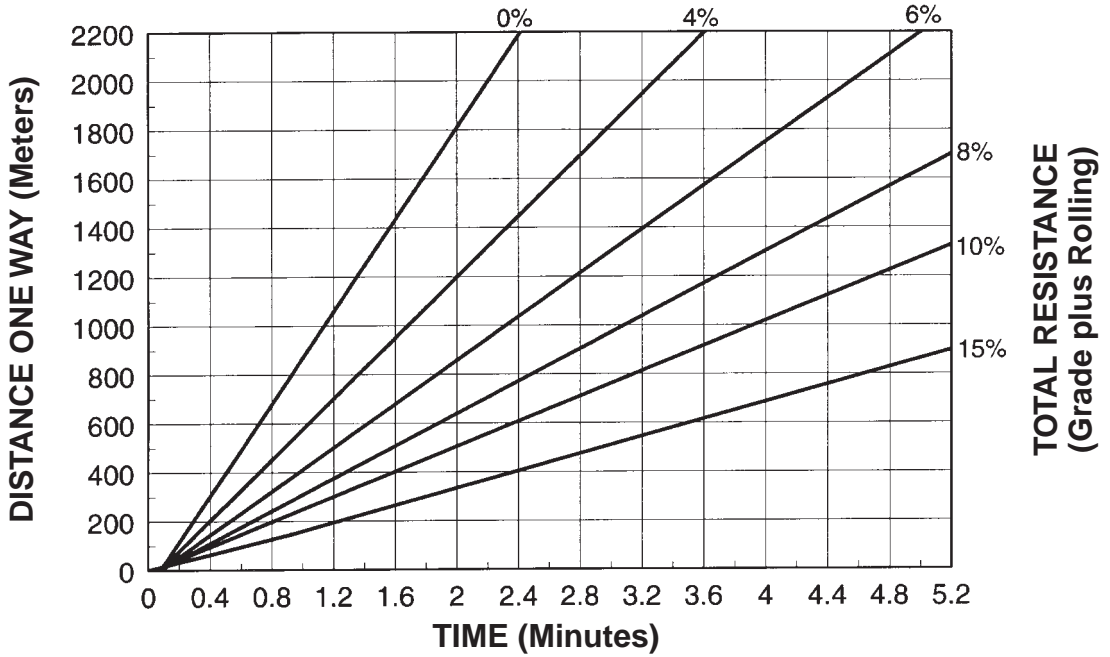

**EMPTY**

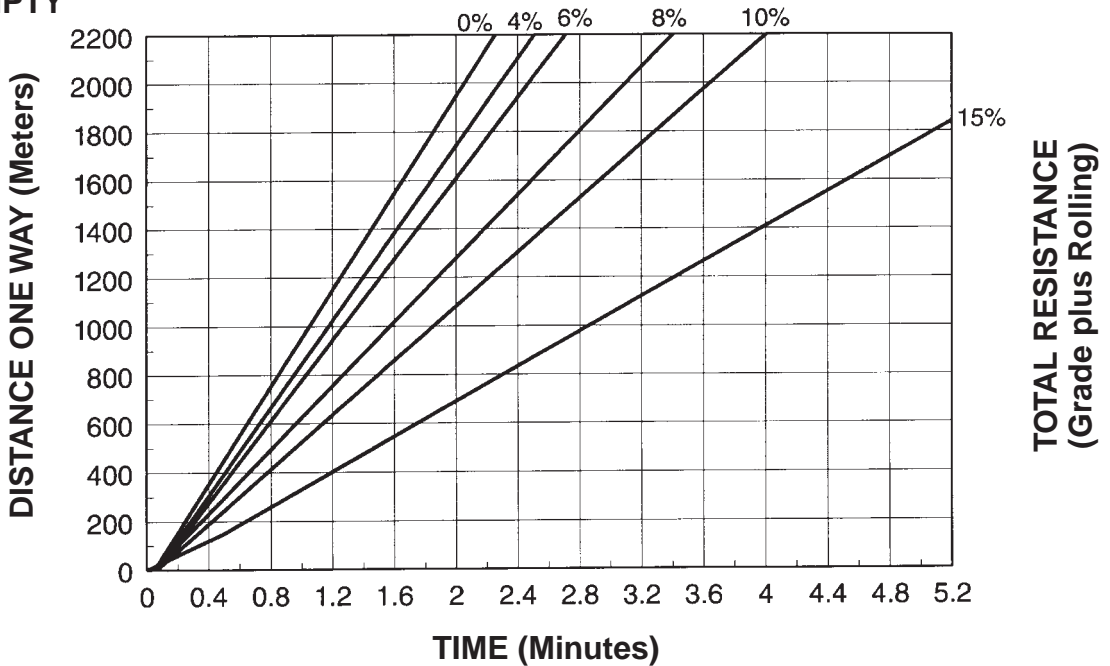



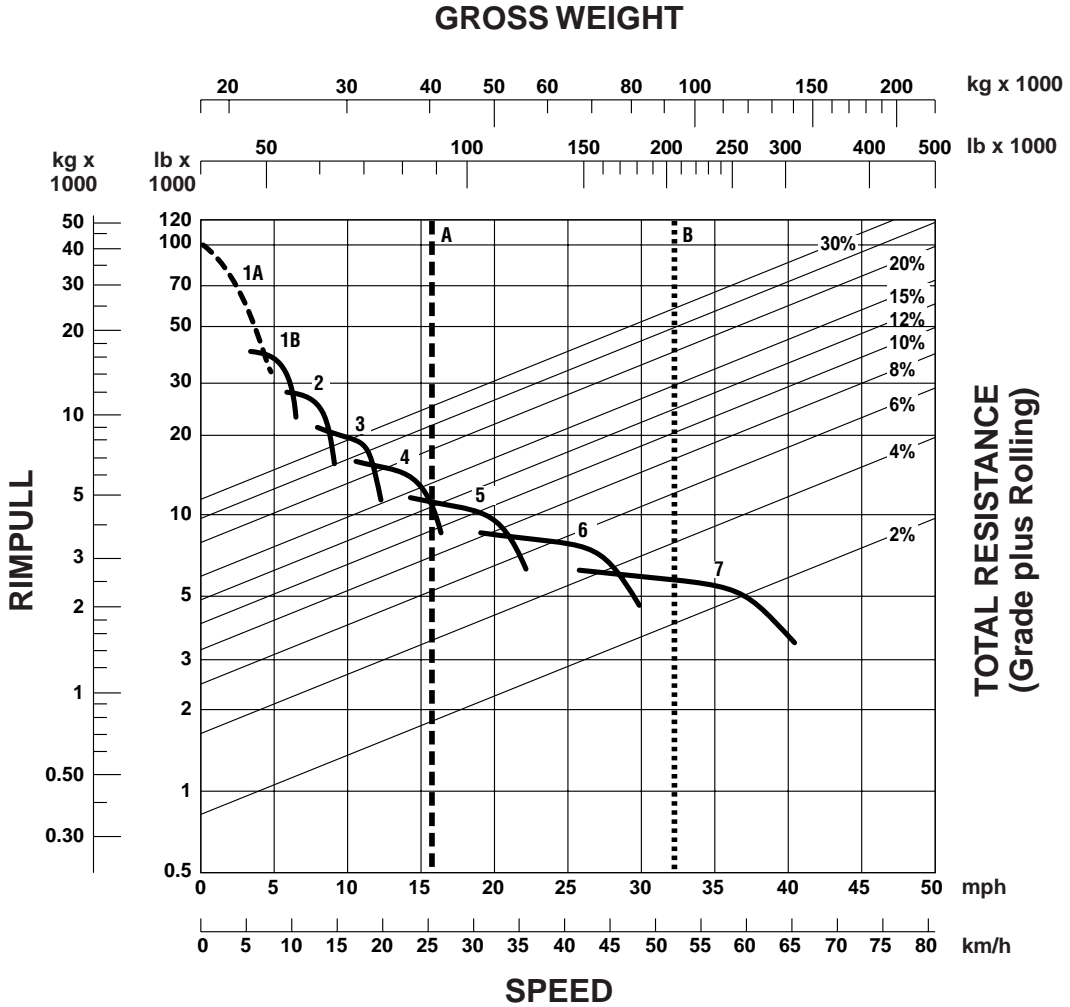


**KEY**

- 1A — 1st Gear (Torque Converter)
- 1B — 1st Gear
- 2 — 2nd Gear
- 3 — 3rd Gear
- 4 — 4th Gear
- 5 — 5th Gear
- 6 — 6th Gear
- 7 — 7th Gear


**KEY**

- A — Empty 40 188 kg (88,600 lb)
- B — Max GMW 92 534 kg (204,000 lb)

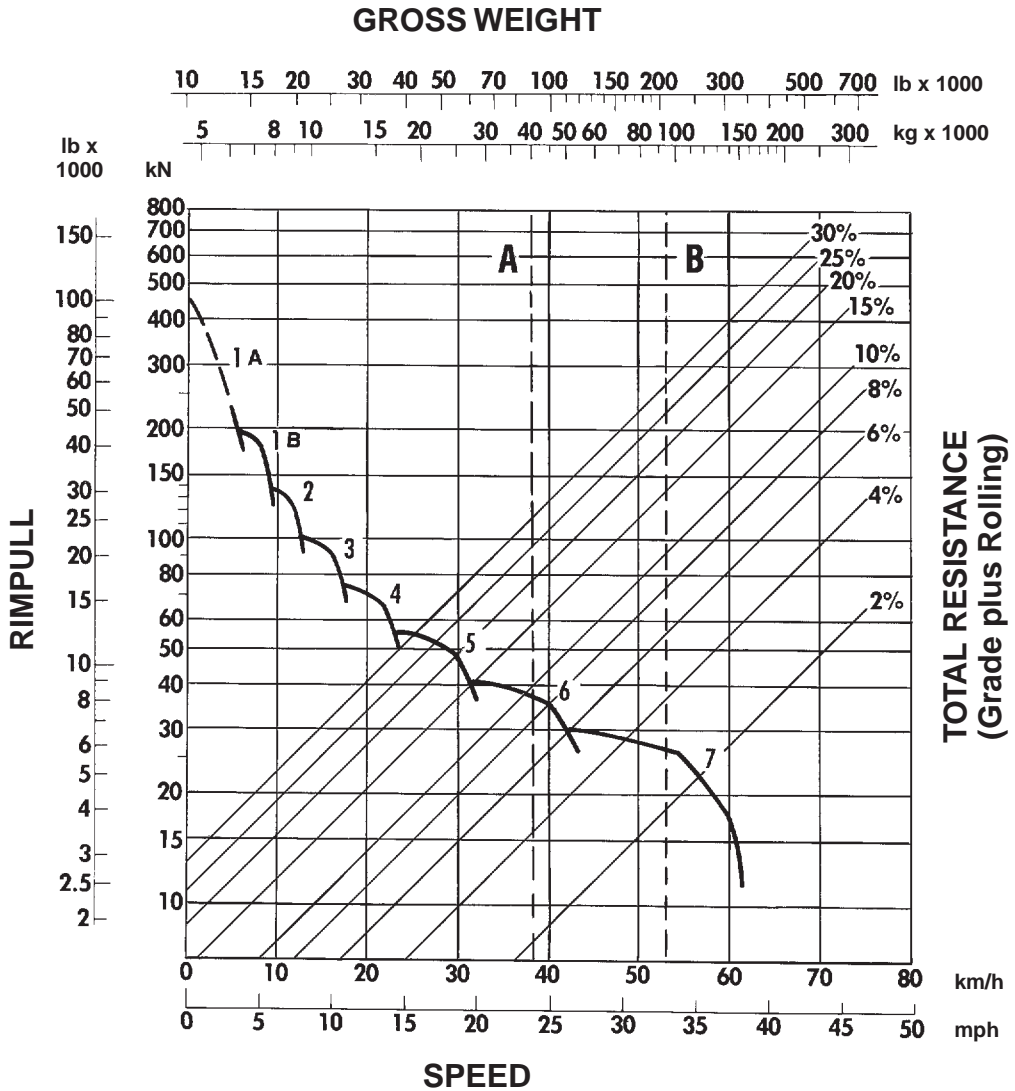

- KEY**
- 1A — 1st Gear (Torque Converter)
  - 1B — 1st Gear
  - 2 — 2nd Gear
  - 3 — 3rd Gear
  - 4 — 4th Gear
  - 5 — 5th Gear
  - 6 — 6th Gear
  - 7 — 7th Gear

- KEY**
- A — Empty 40 188 kg (88,600 lb)
  - B — Max GMW 92 534 kg (204,000 lb)

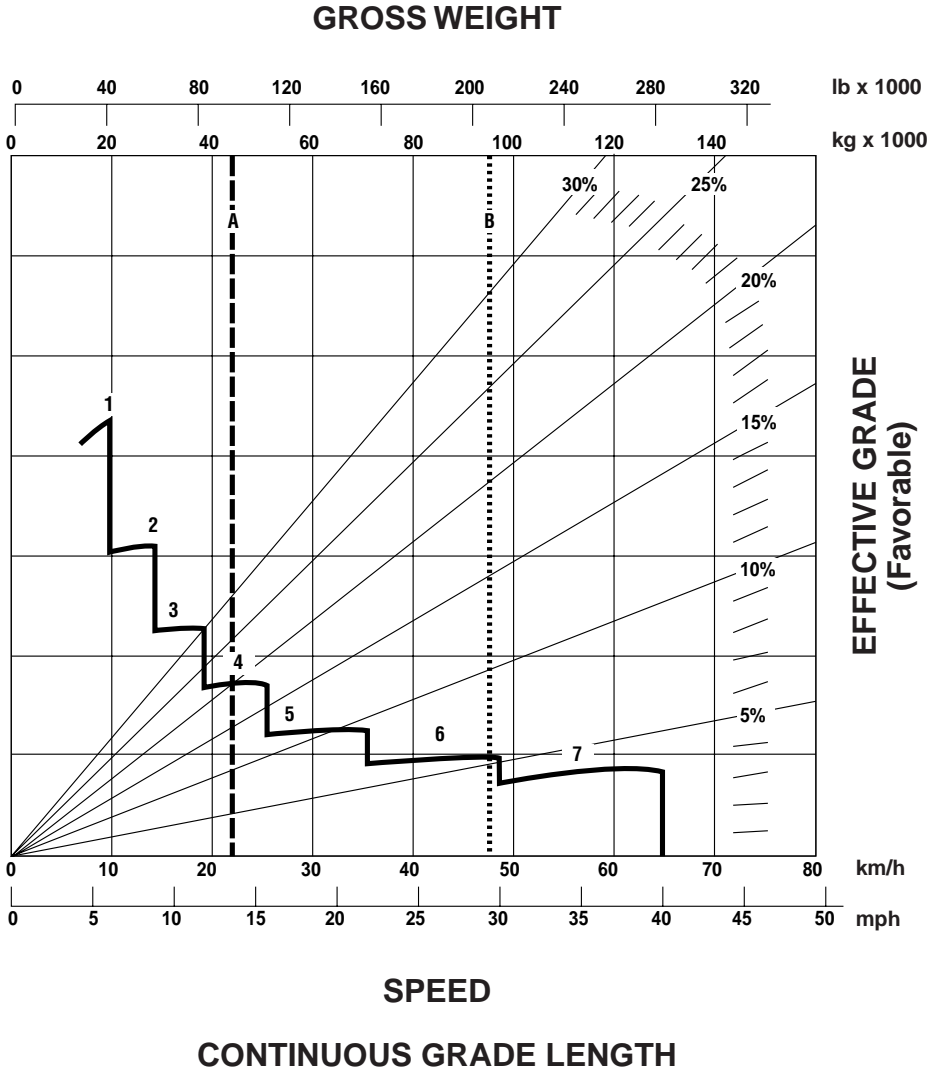

**KEY**

- 1 — 1st Gear
- 2 — 2nd Gear
- 3 — 3rd Gear
- 4 — 4th Gear
- 5 — 5th Gear
- 6 — 6th Gear
- 7 — 7th Gear





**KEY**

- A — Empty 40 188 kg (88,600 lb)
- B — Max GMW 92 534 kg (204,000 lb)

### 773D Brake Performance

- 450 m (1500 ft)
- 600 m (2000 ft)
- 900 m (3000 ft)
- 1500 m (5000 ft)

### Construction & Mining Trucks

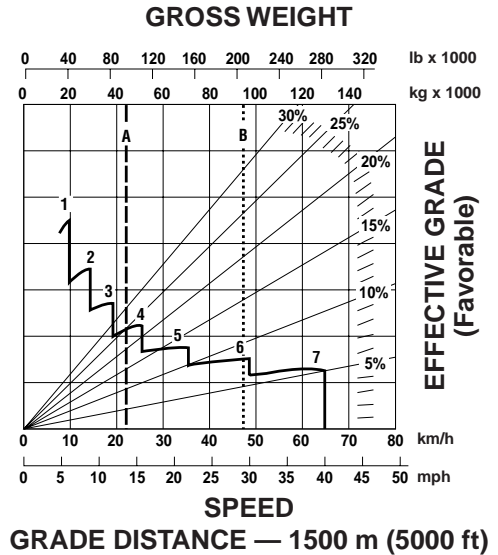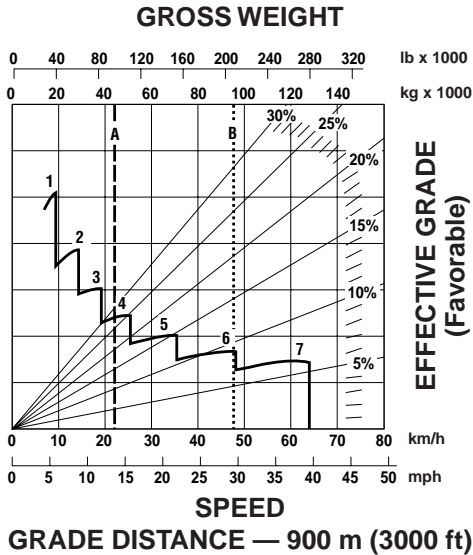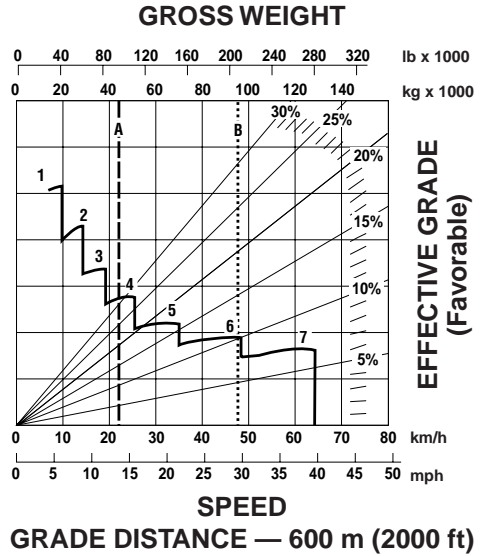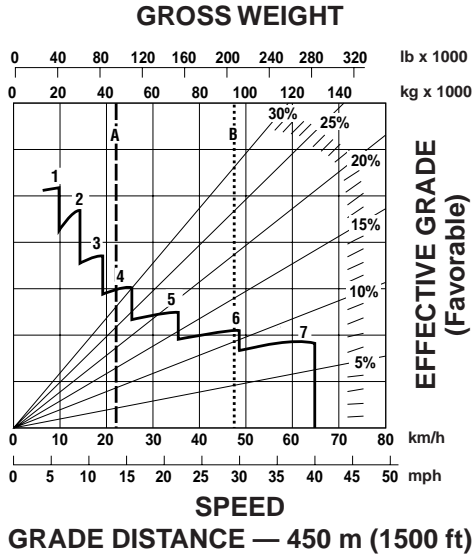


**KEY**

- 1 — 1st Gear
- 2 — 2nd Gear
- 3 — 3rd Gear
- 4 — 4th Gear
- 5 — 5th Gear
- 6 — 6th Gear
- 7 — 7th Gear


**KEY**


- A — Empty 40 188 kg (88,600 lb)
- B — Max GMW 92 534 kg (204,000 lb)

**LOADED**

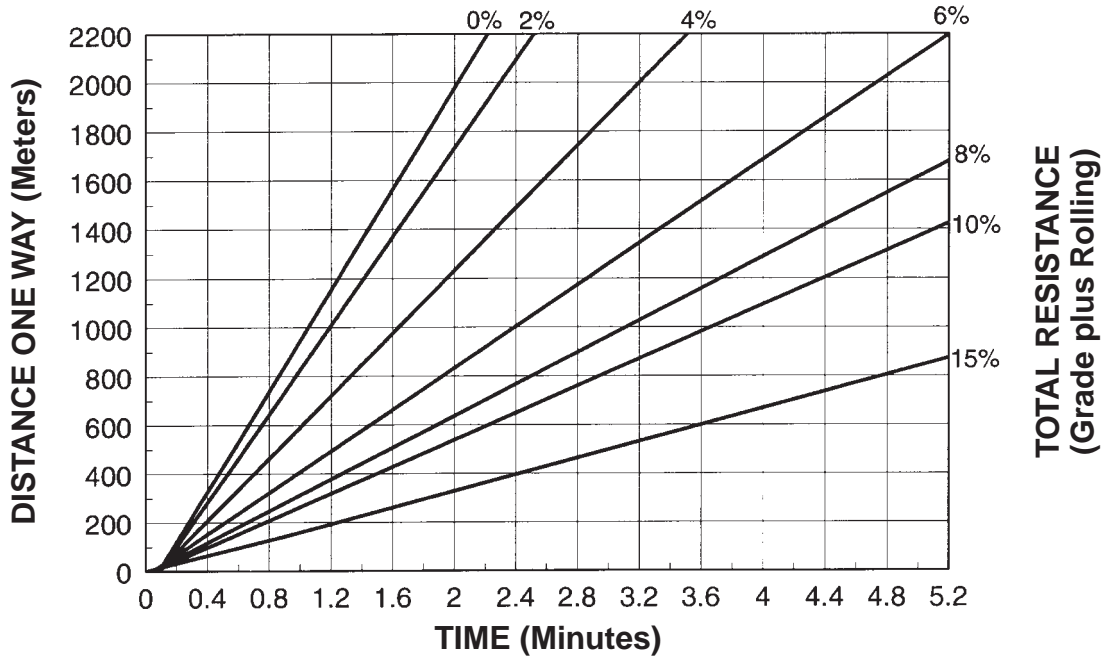


**EMPTY**

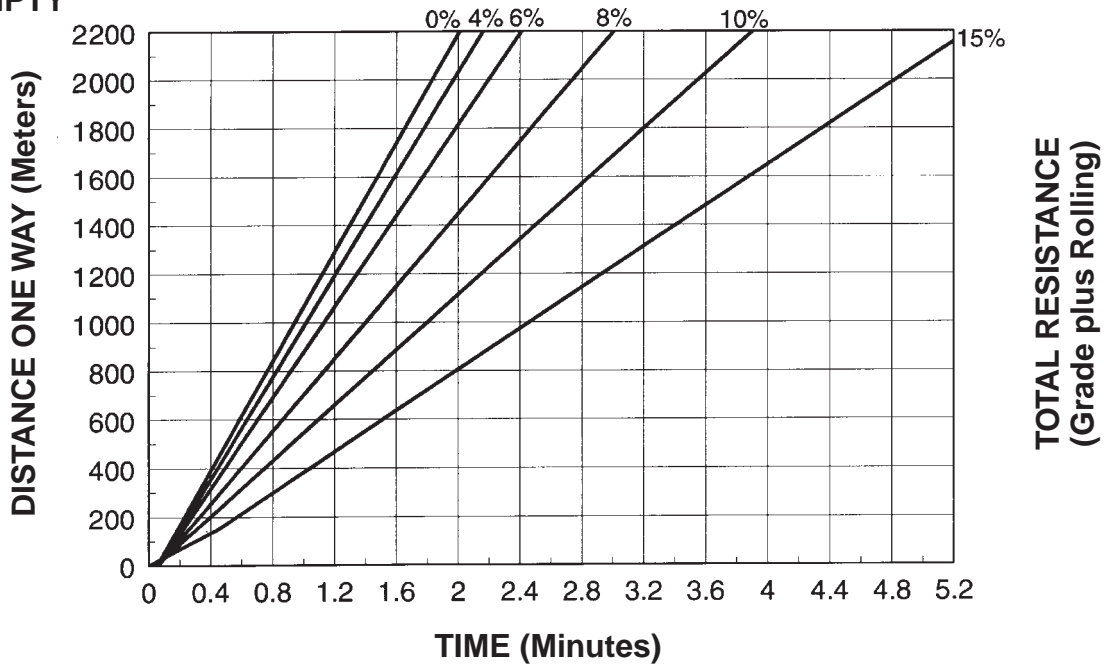

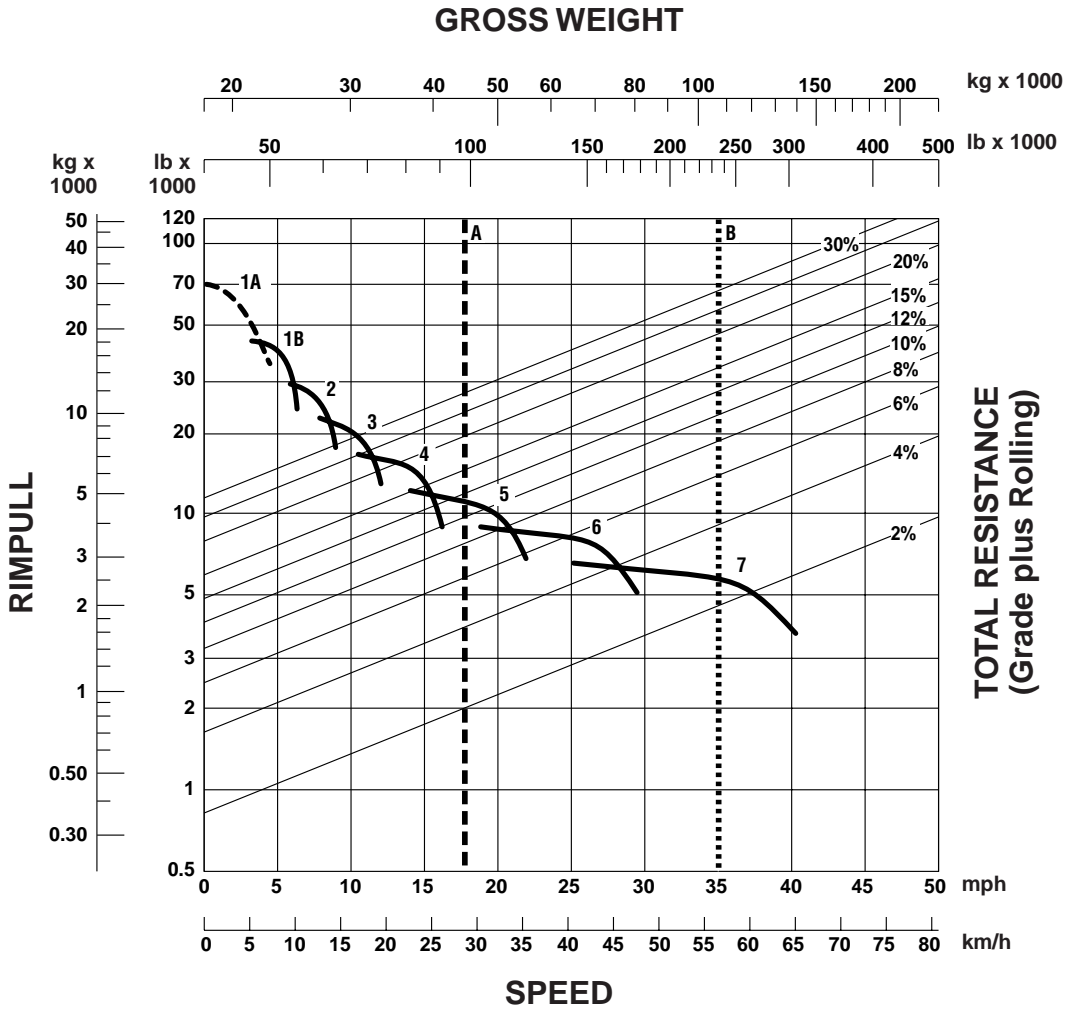

- KEY**
- 1A — 1st Gear (Torque Converter)
  - 1B — 1st Gear
  - 2 — 2nd Gear
  - 3 — 3rd Gear
  - 4 — 4th Gear
  - 5 — 5th Gear
  - 6 — 6th Gear
  - 7 — 7th Gear

- KEY**
- A — Empty 43 953 kg (96,900 lb)
  - B — Max GMW 106 594 kg (235,000 lb)

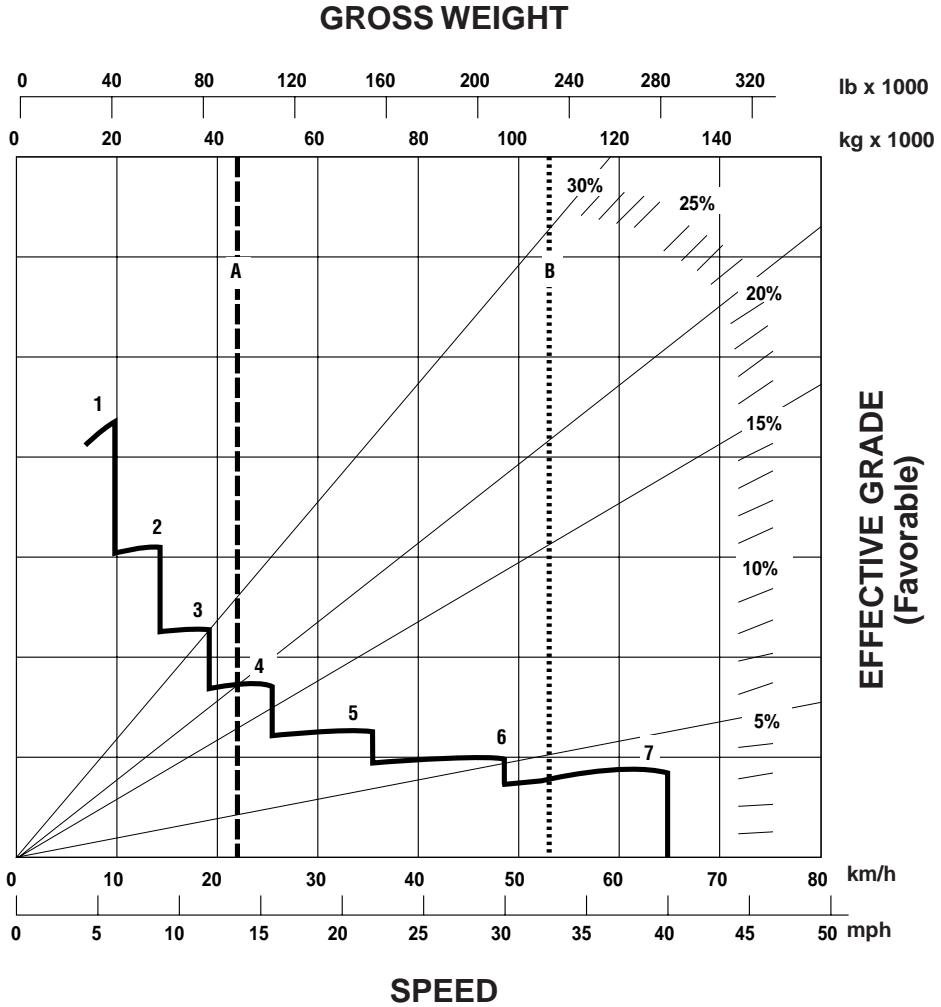

**CONTINUOUS GRADE LENGTH**

**KEY**

- 1 — 1st Gear
- 2 — 2nd Gear
- 3 — 3rd Gear
- 4 — 4th Gear
- 5 — 5th Gear
- 6 — 6th Gear
- 7 — 7th Gear





**KEY**

- A — Empty 43 953 kg (96,900 lb)
- B — Max GMW 106 594 kg (235,000 lb)

### 775D Brake Performance

- 450 m (1500 ft)
- 600 m (2000 ft)
- 900 m (3000 ft)
- 1500 m (5000 ft)

### Construction & Mining Trucks

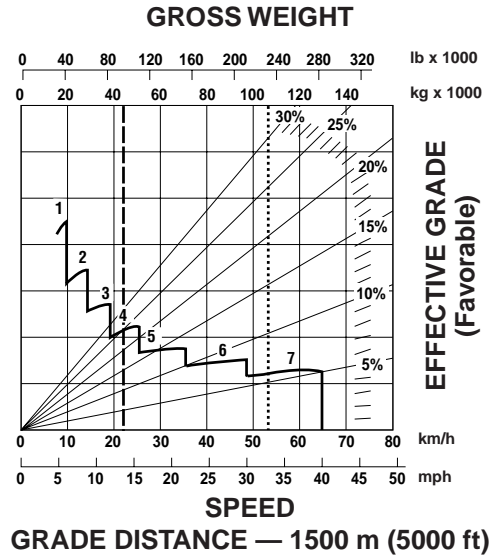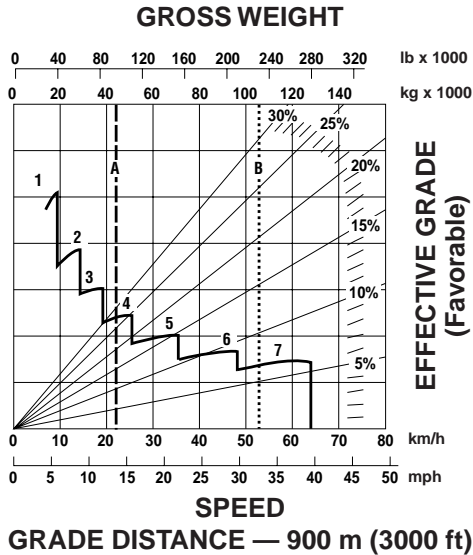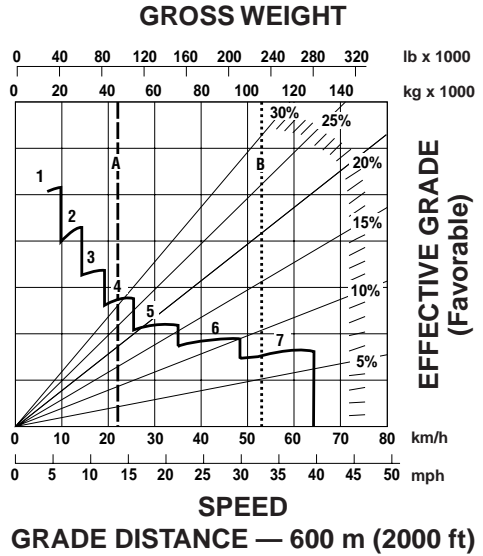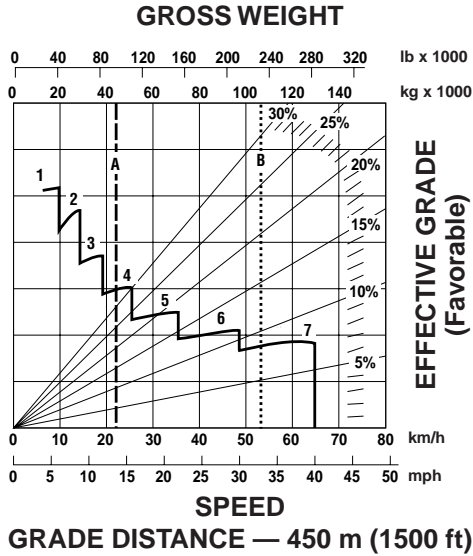

**KEY**


- 1 — 1st Gear
- 2 — 2nd Gear
- 3 — 3rd Gear
- 4 — 4th Gear
- 5 — 5th Gear
- 6 — 6th Gear
- 7 — 7th Gear

**KEY**


- A — Empty 43 953 kg (96,900 lb)
- B — Max GMW 106 594 kg (235,000 lb)




**LOADED**

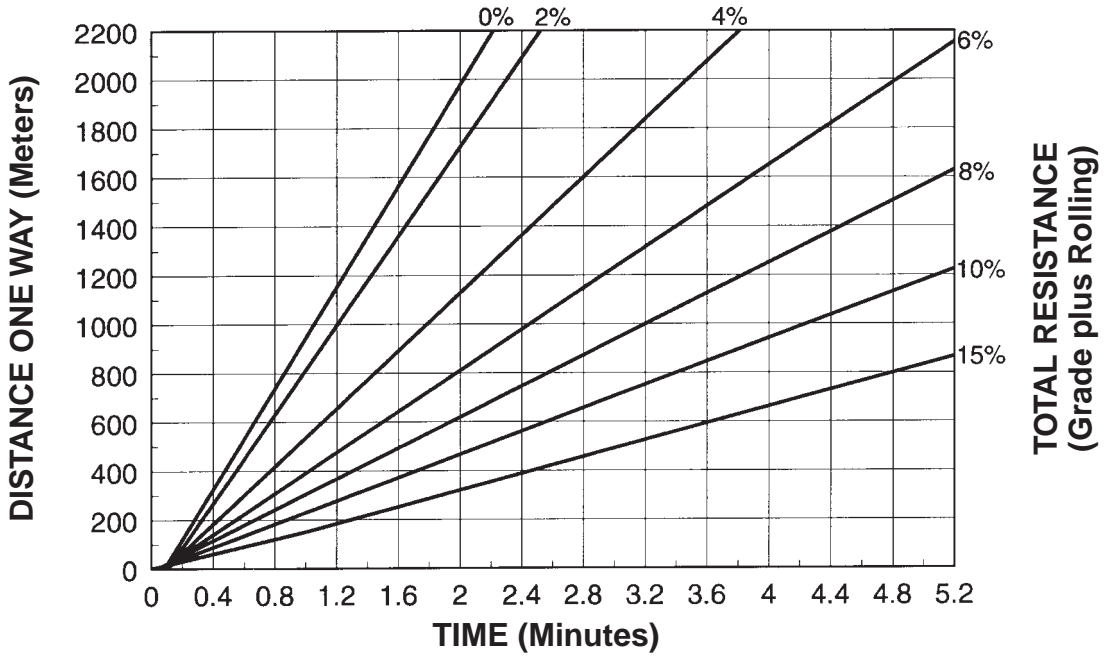


**EMPTY**

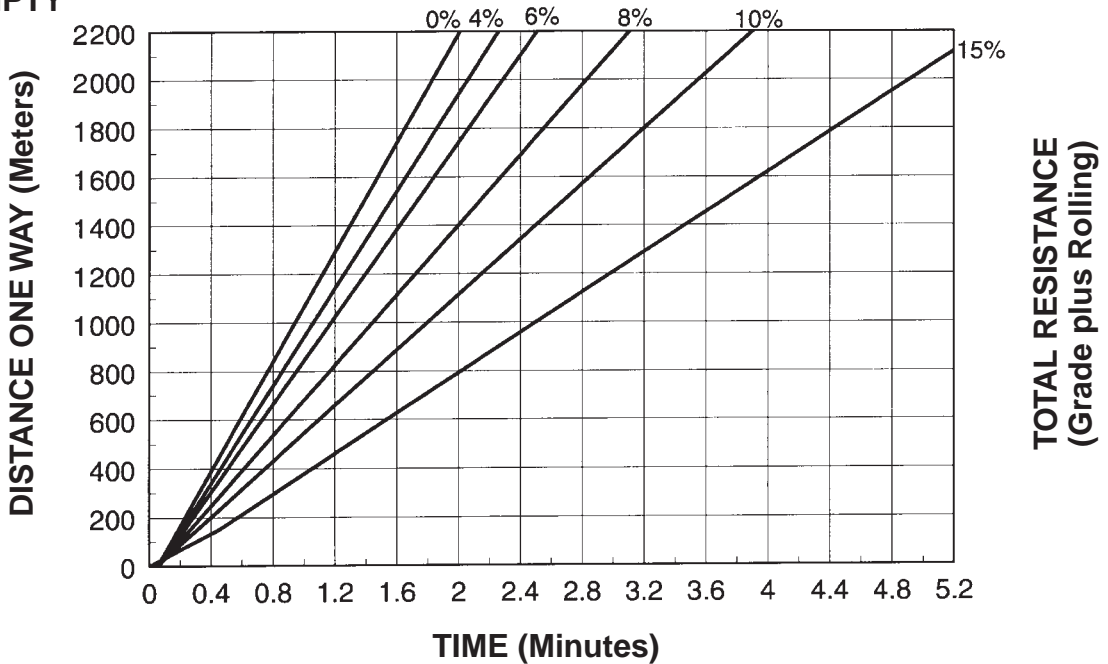

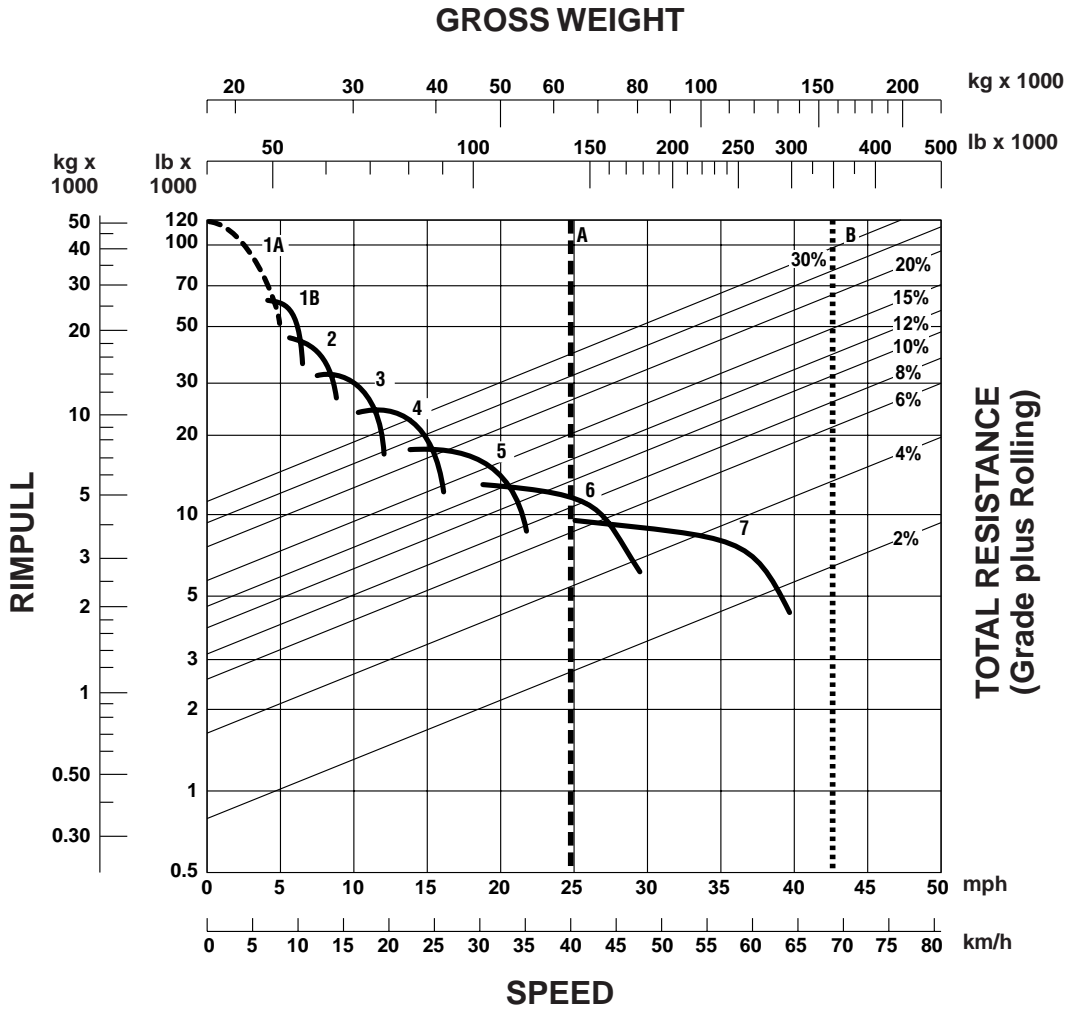

- KEY**
- 1A — 1st Gear (Torque Converter)
  - 1B — 1st Gear
  - 2 — 2nd Gear
  - 3 — 3rd Gear
  - 4 — 4th Gear
  - 5 — 5th Gear
  - 6 — 6th Gear
  - 7 — 7th Gear

- KEY**
- A\* — Empty 64 359 kg (141,889 lb)
  - B\* — Max GMW 161 028 kg (355,000 lb)
- \*These two reference lines (A and B) apply only to 777D.

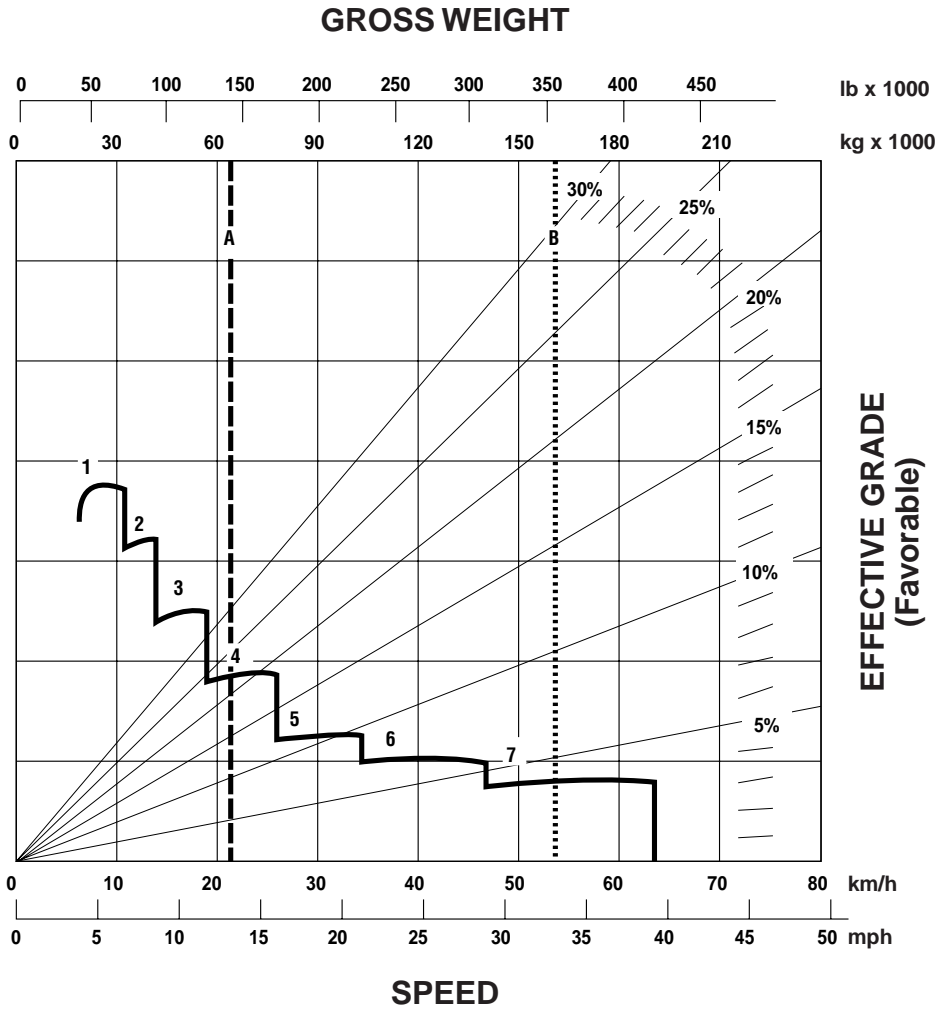

**CONTINUOUS GRADE LENGTH**

**KEY**

- 1 — 1st Gear
- 2 — 2nd Gear
- 3 — 3rd Gear
- 4 — 4th Gear
- 5 — 5th Gear
- 6 — 6th Gear
- 7 — 7th Gear





**KEY**

- A\* — Empty 64 359 kg (141,889 lb)
- B\* — Max GMW 161 028 kg (355,000 lb)

\*These two reference lines (A and B) apply only to 777D. Brake performance for the 776D will vary depending on trailer brake capability.

776D, 777D Brake Performance  
 ● 450 m (1500 ft) ● 600 m (2000 ft)  
 ● 900 m (3000 ft) ● 1500 m (5000 ft)

Construction & Mining Trucks  
 Construction & Mining Tractors

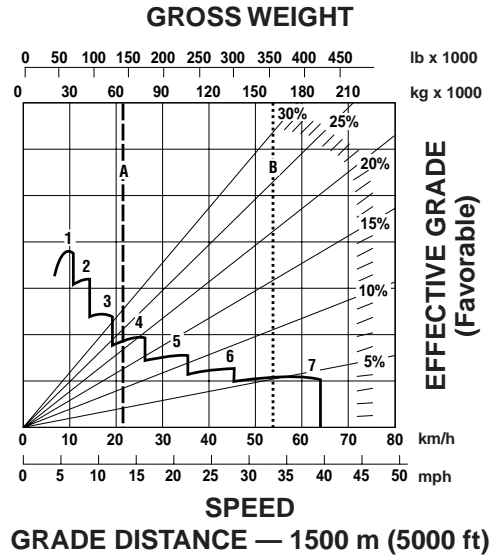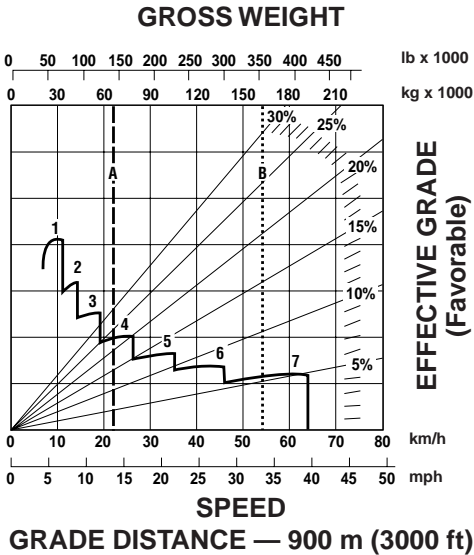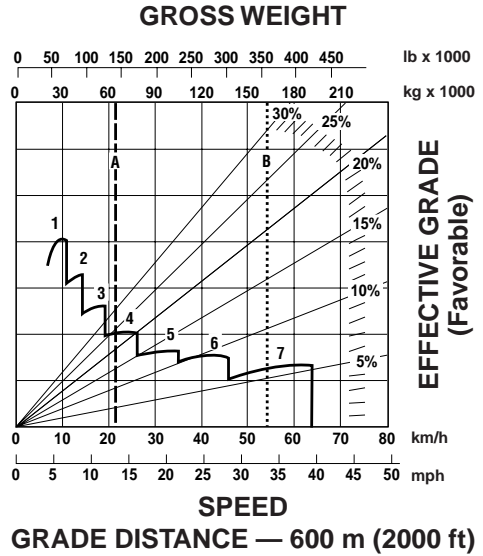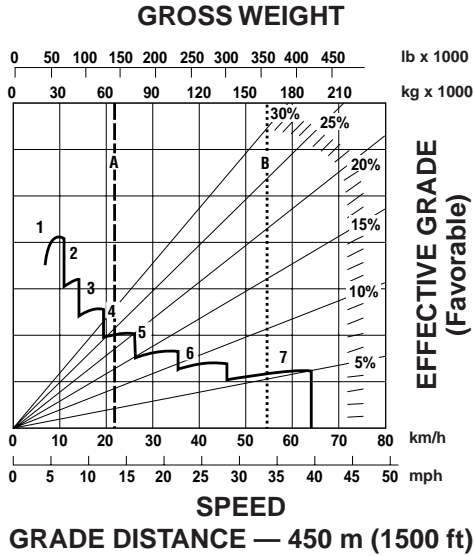

KEY


- 1 — 1st Gear
- 2 — 2nd Gear
- 3 — 3rd Gear
- 4 — 4th Gear
- 5 — 5th Gear
- 6 — 6th Gear
- 7 — 7th Gear

KEY


- A\* — Empty 64 359 kg (141,889 lb)
- B\* — Max GMW 161 028 kg (355,000 lb)

\*These two reference lines (A and B) apply only to 777D. Brake performance for the 776D will vary depending on trailer brake capability.

**LOADED**

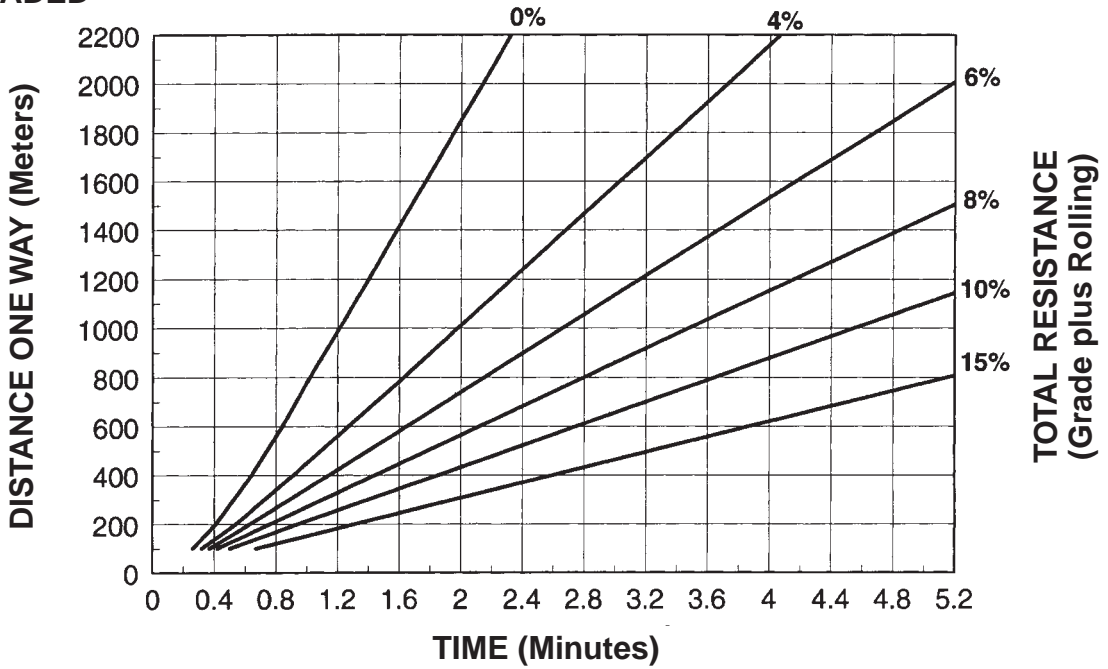


**EMPTY**

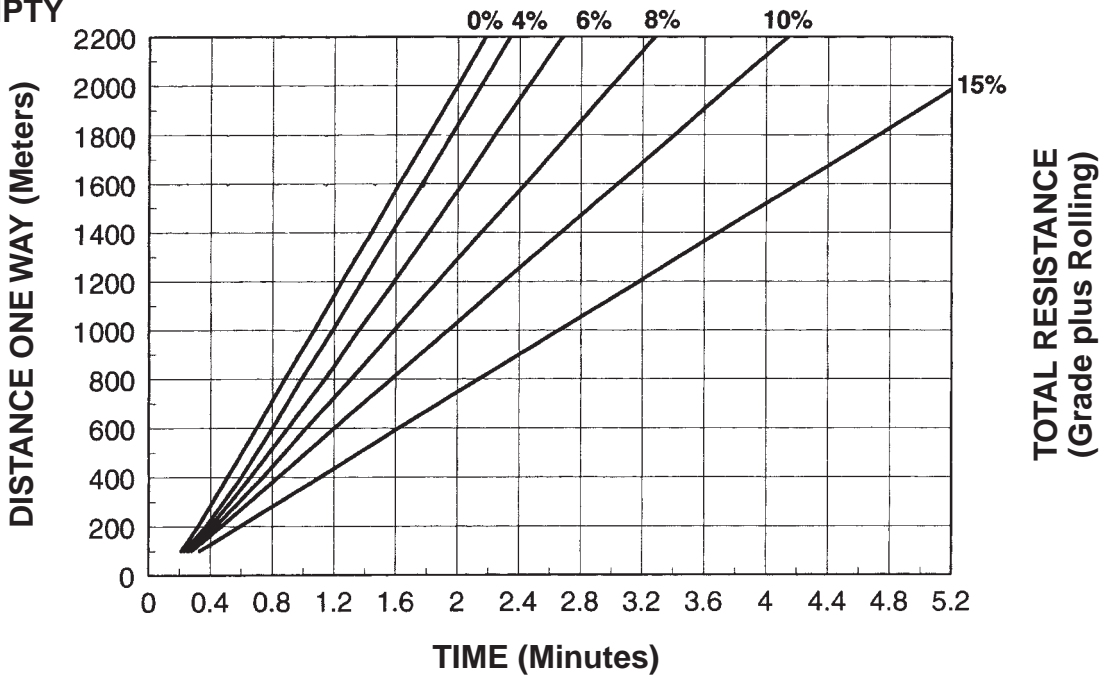

784C, 785C Rimpull-Speed-Gradeability  
 ● 33.00R51 Tires  
 ● 1433 mm (4'8.4") Tire Radius

**Construction & Mining Trucks**  
**Construction & Mining Tractors**

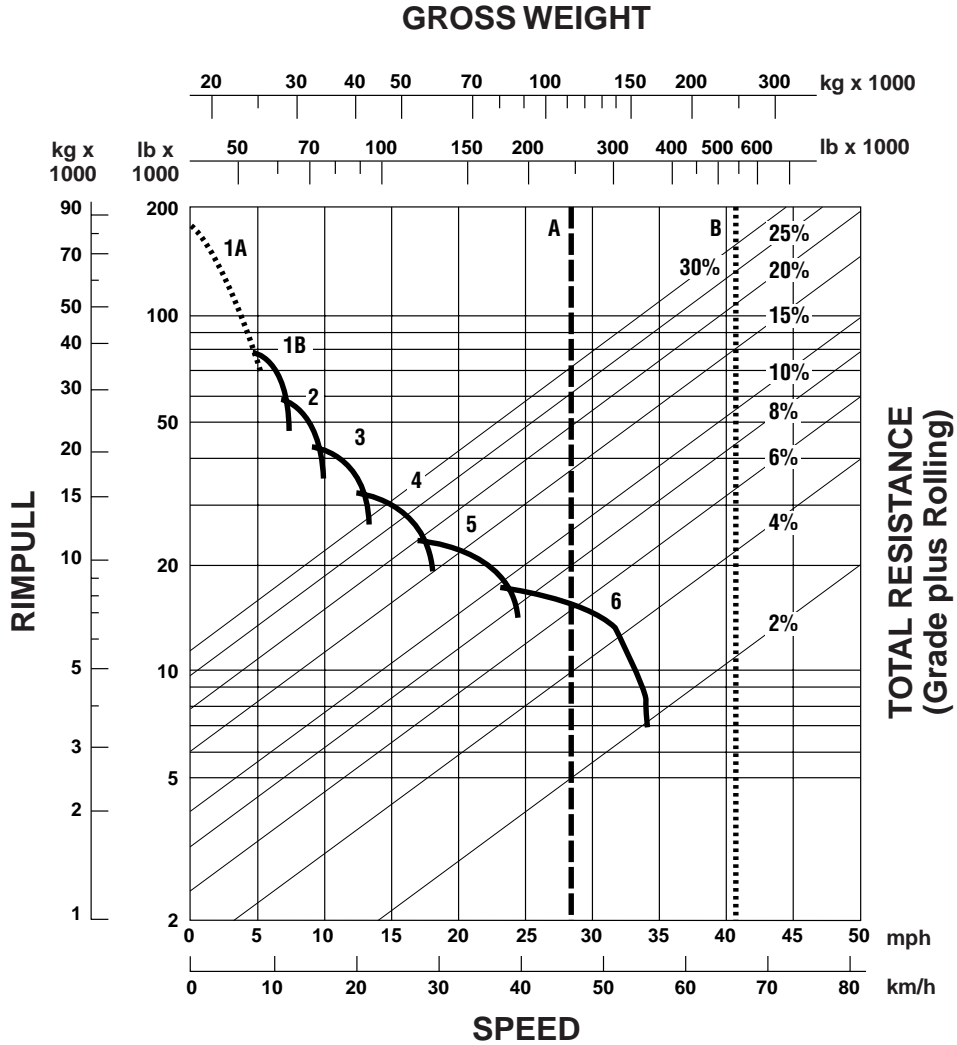

**KEY**

- 1A — 1st Gear (Torque Converter)
- 1B — 1st Gear
- 2 — 2nd Gear
- 3 — 3rd Gear
- 4 — 4th Gear
- 5 — 5th Gear
- 6 — 6th Gear

**Maximum travel speeds**


1900 rpm	Gear	km/h	MPH
Forward	1	12.1	7.5
	2	16.3	10.2
	3	22.2	13.8
	4	29.9	18.6
	5	40.6	25.2
	6	54.8	34.0
Reverse		11.0	6.8

**KEY**

- A\* — Est. Max Field Empty Weight 113 400 kg (250,000 lb)\*\*
- B\* — Max GMW 249 433 kg (550,000 lb)

\*These two reference lines (A and B) apply only to 785C.  
 \*\*Truck equipped with sideboards and liners.

- 36.00R51 Tires
- 1524 mm (5'0") Tire Radius

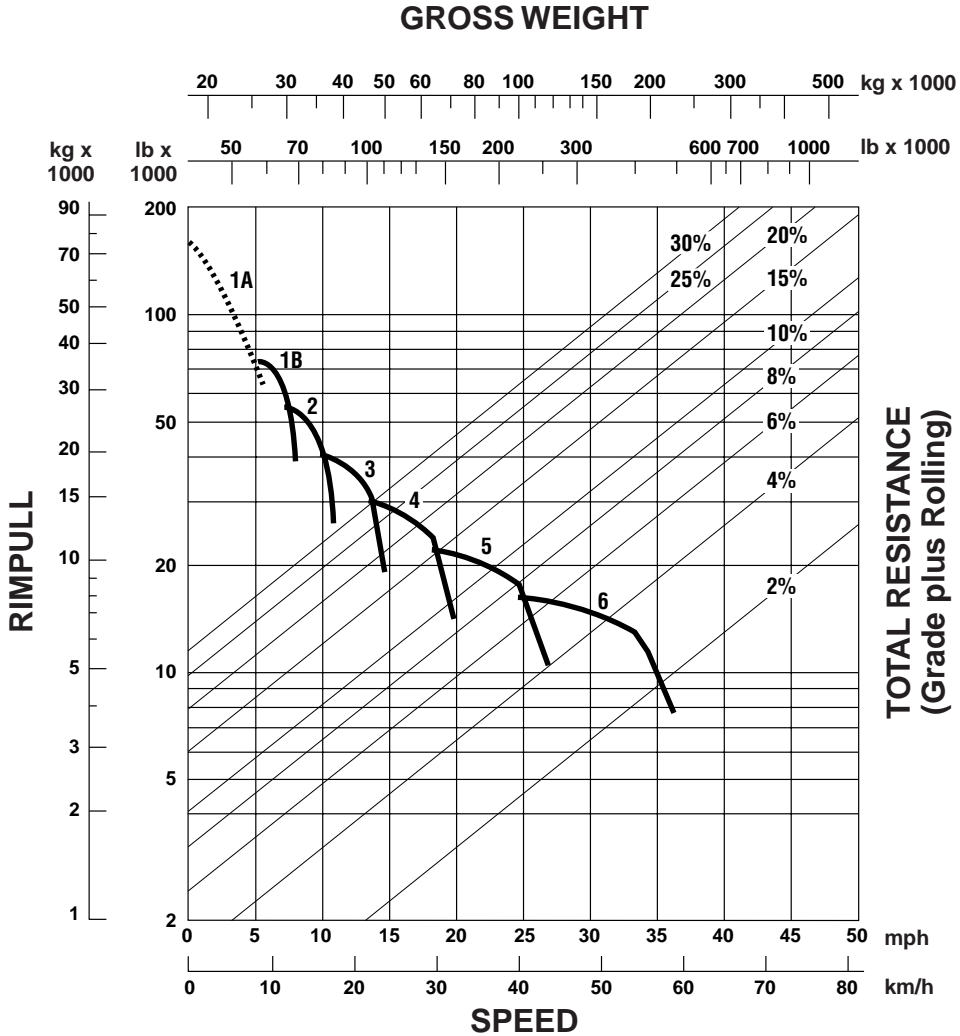


**KEY**

- 1A— 1st Gear (Torque Converter)
- 1B— 1st Gear
- 2 — 2nd Gear
- 3 — 3rd Gear
- 4 — 4th Gear
- 5 — 5th Gear
- 6 — 6th Gear

**Maximum travel speeds**

1900 rpm	Gear	km/h	MPH
Forward	1	12.9	8.0
	2	17.4	10.8
	3	23.5	14.6
	4	31.9	19.8
	5	43.3	26.8
	6	58.4	36.2
Reverse		11.7	7.2

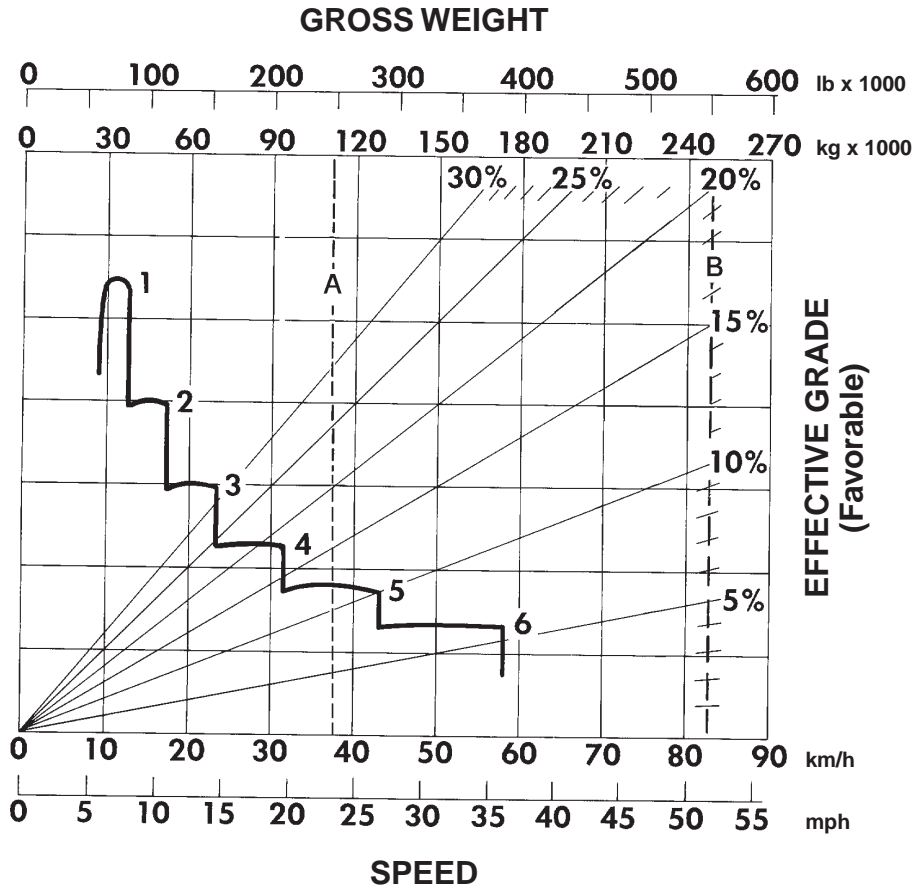

**CONTINUOUS GRADE LENGTH**

**KEY**

- 1 — 1st Gear
- 2 — 2nd Gear
- 3 — 3rd Gear
- 4 — 4th Gear
- 5 — 5th Gear
- 6 — 6th Gear

**KEY**

- A\* — Est. Field Empty Weight 113 400 kg (250,000 lb)\*\*
- B\* — Max GMW 249 433 kg (550,000 lb)





\*These two reference lines (A and B) apply only to 785C. Brake performance for 784C will vary depending on trailer brake capability.  
 \*\*Truck equipped with sideboards and liners.



# Construction & Mining Trucks Construction & Mining Tractors

## 784C, 785C Brake Performance

- 450 m (1500 ft)
- 600 m (2000 ft)
- 900 m (3000 ft)
- 1500 m (5000 ft)

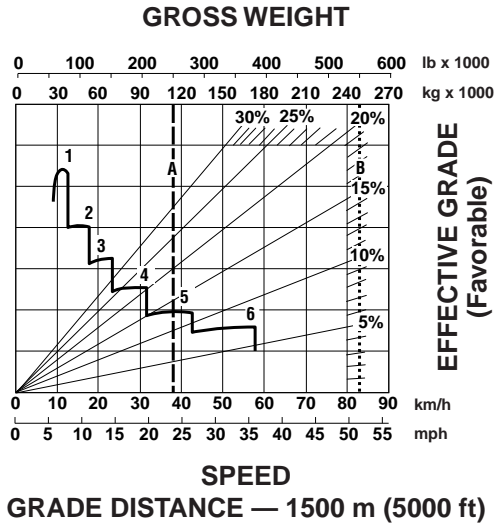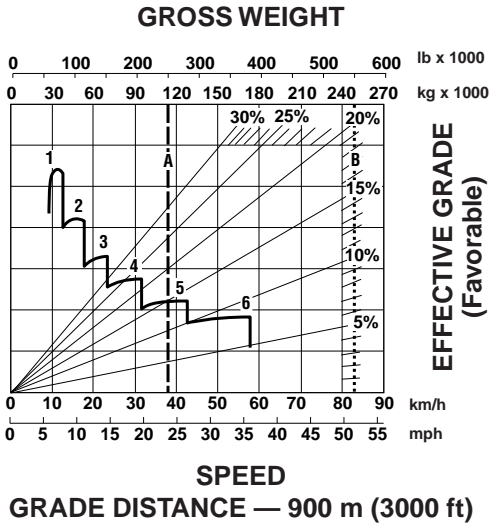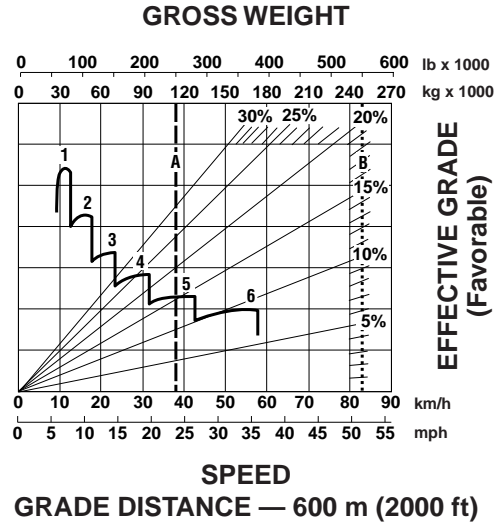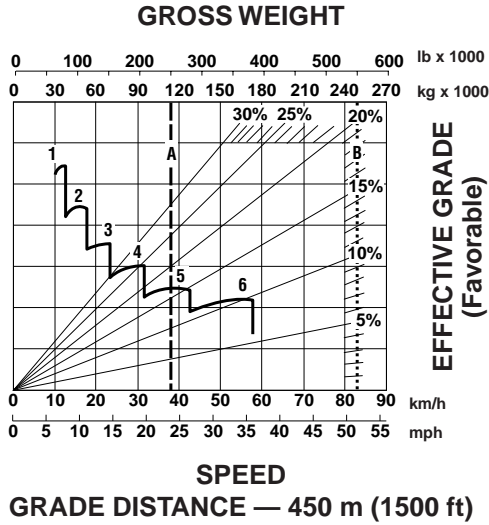

**KEY**


- 1 — 1st Gear
- 2 — 2nd Gear
- 3 — 3rd Gear
- 4 — 4th Gear
- 5 — 5th Gear
- 6 — 6th Gear

**KEY**


- A\* — Est. Field Empty Weight 113 400 kg (250,000 lb)\*\*
- B\* — Max GMW 249 433 kg (550,000 lb)

\*These two reference lines (A and B) apply only to 785C. Brake performance for 784C will vary depending on trailer brake capability.  
\*\*Truck equipped with sideboards and liners.


**LOADED**

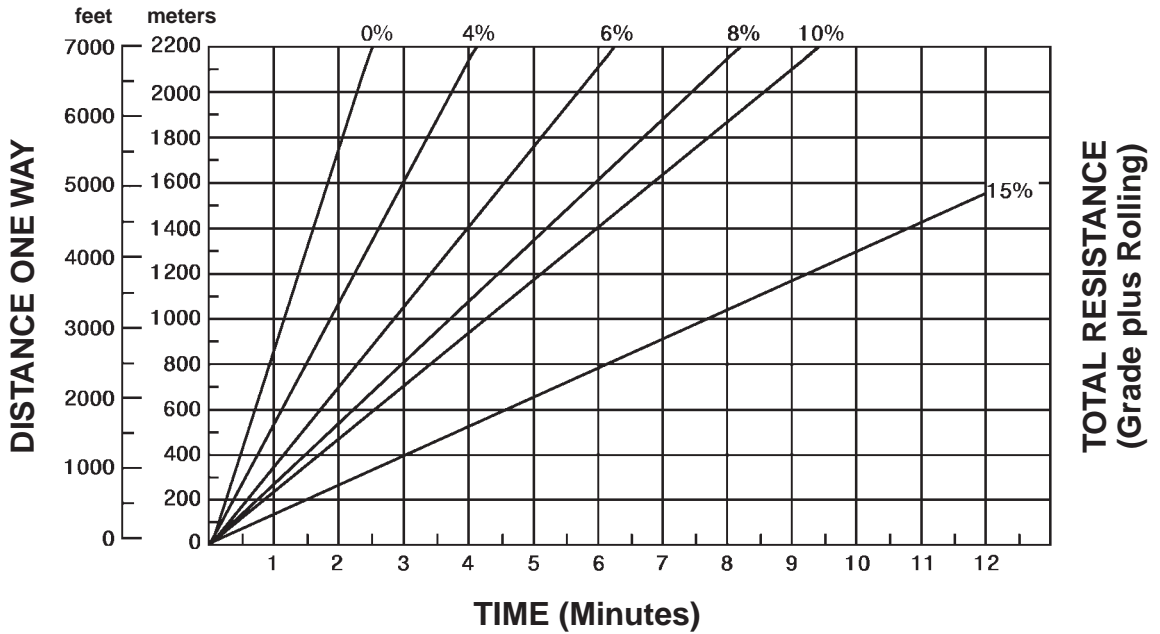

**EMPTY**

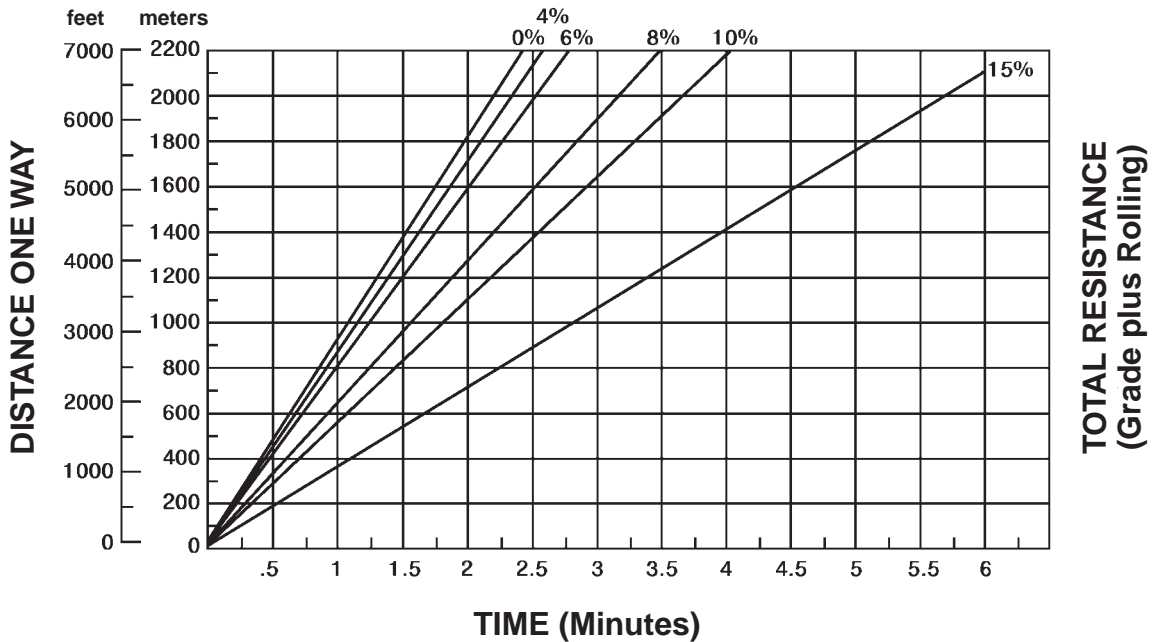

- 37.00R57 Tires
- 1593 mm (5'2.7") Tire Radius

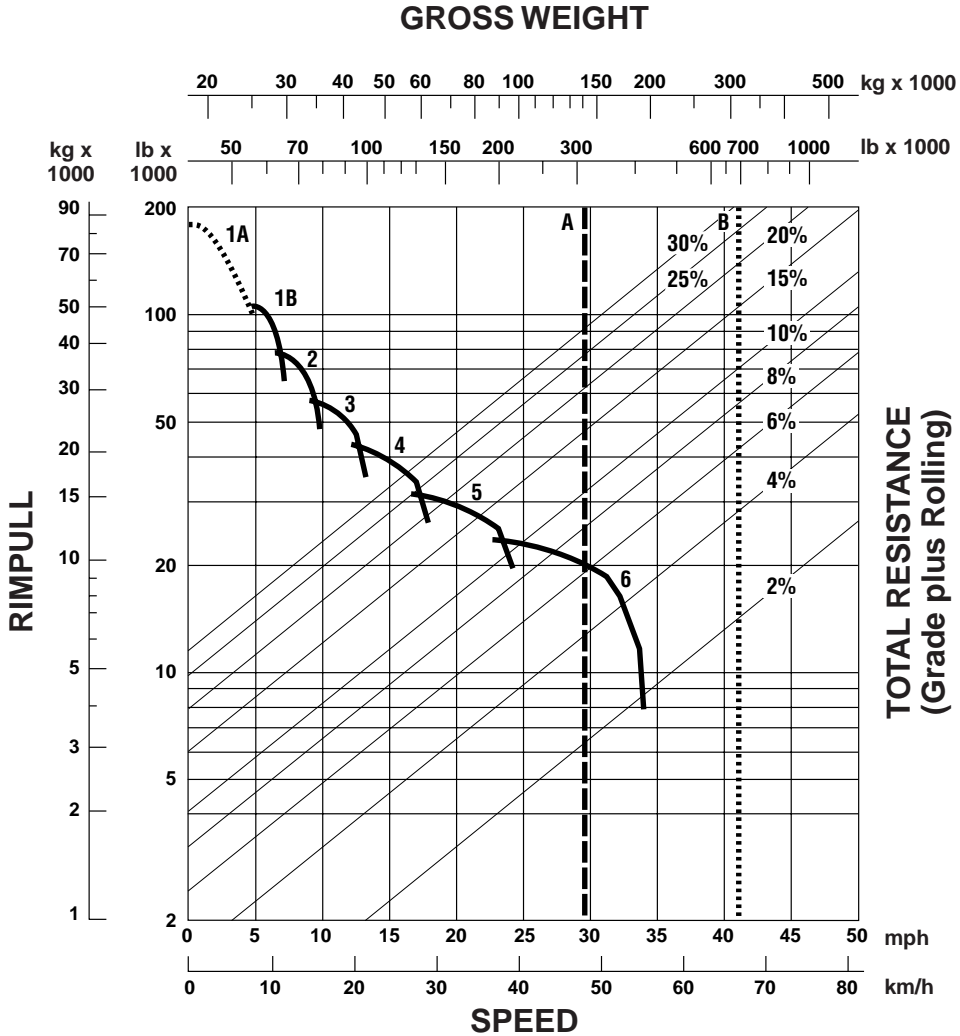

**KEY**

- 1A — 1st Gear (Torque Converter)
- 1B — 1st Gear
- 2 — 2nd Gear
- 3 — 3rd Gear
- 4 — 4th Gear
- 5 — 5th Gear
- 6 — 6th Gear


**Maximum travel speeds**

1900 rpm	Gear	km/h	MPH
Forward	1	12.0	7.5
	2	16.3	10.1
	3	22.0	13.7
	4	29.8	18.5
	5	40.4	25.0
	6	54.5	33.8
Reverse		10.9	6.8

**KEY**

- A — Est. Max Field Empty Weight 140 616 kg (310,000 lb)\*
- B — Max GMW 317 460 kg (700,000 lb)

\*Truck equipped with sideboards and liners.

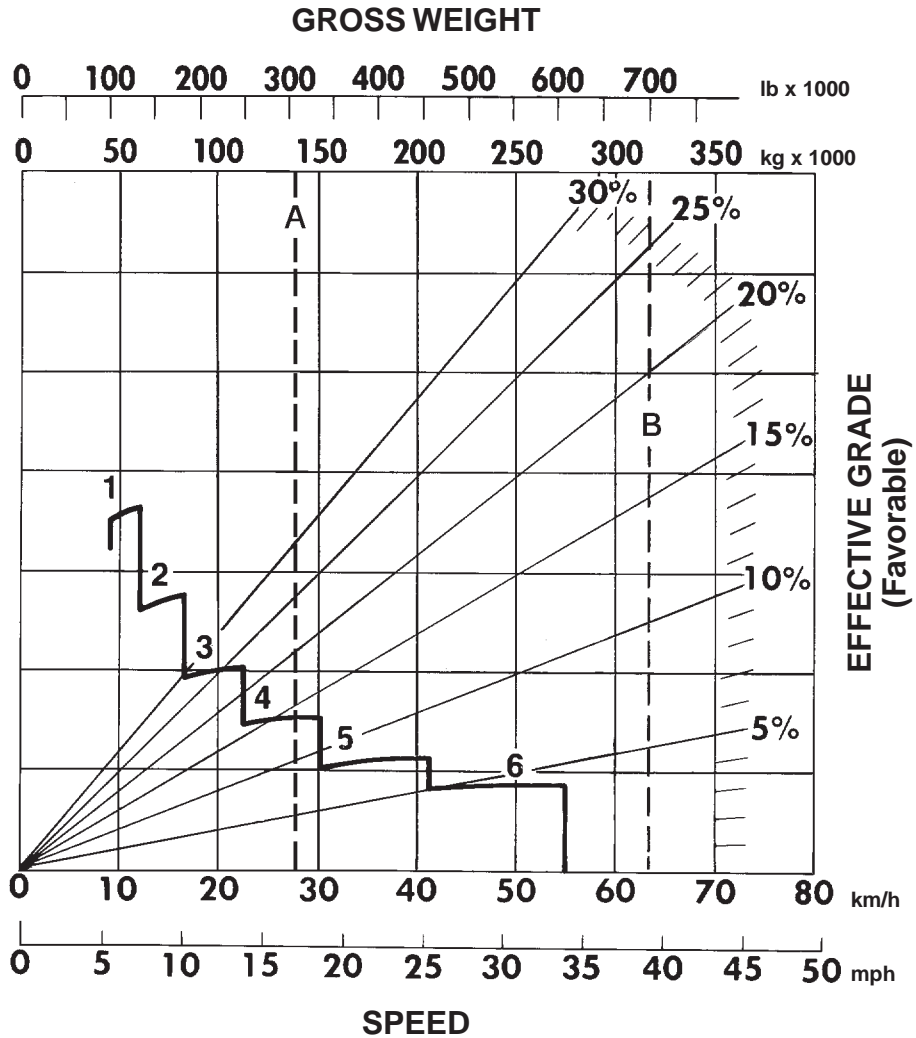

**CONTINUOUS GRADE LENGTH**

**KEY**

- 1 — 1st Gear
- 2 — 2nd Gear
- 3 — 3rd Gear
- 4 — 4th Gear
- 5 — 5th Gear
- 6 — 6th Gear

**KEY**





- A — Est. Field Empty Weight 140 616 kg (310,000 lb)\*
- B — Max GMW 317 460 kg (700,000 lb)

\*Truck equipped with sideboards and liners.

# Construction & Mining Trucks

## 789C Brake Performance

- 450 m (1500 ft)
- 600 m (2000 ft)
- 900 m (3000 ft)
- 1500 m (5000 ft)

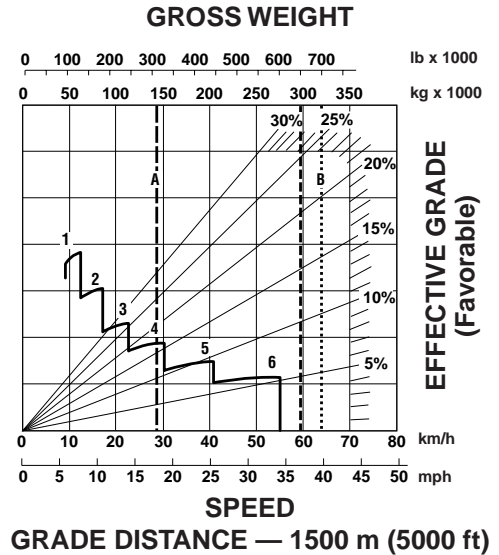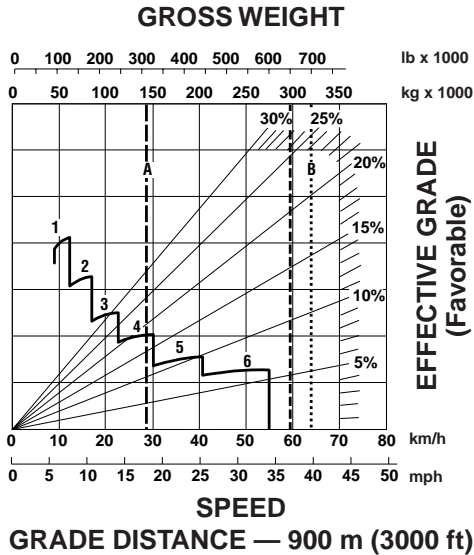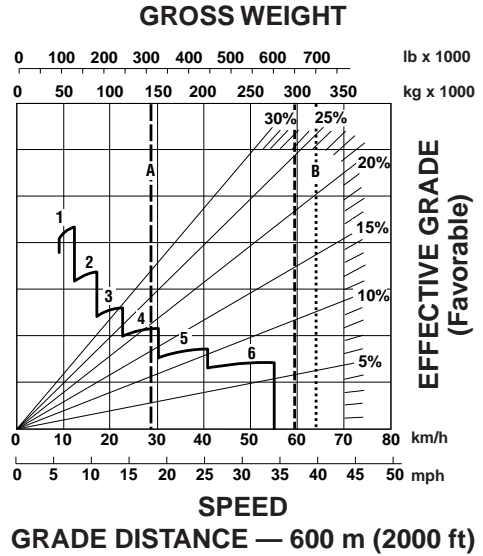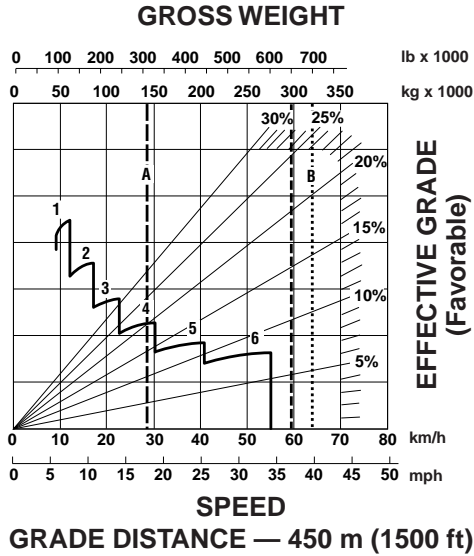

**KEY**


- 1 — 1st Gear
- 2 — 2nd Gear
- 3 — 3rd Gear
- 4 — 4th Gear
- 5 — 5th Gear
- 6 — 6th Gear

**KEY**


- A — Est. Field Empty Weight 140 616 kg (310,000 lb)\*
- B — Max GMW 317 460 kg (700,000 lb)

\*Truck equipped with sideboards and liners.


**LOADED**

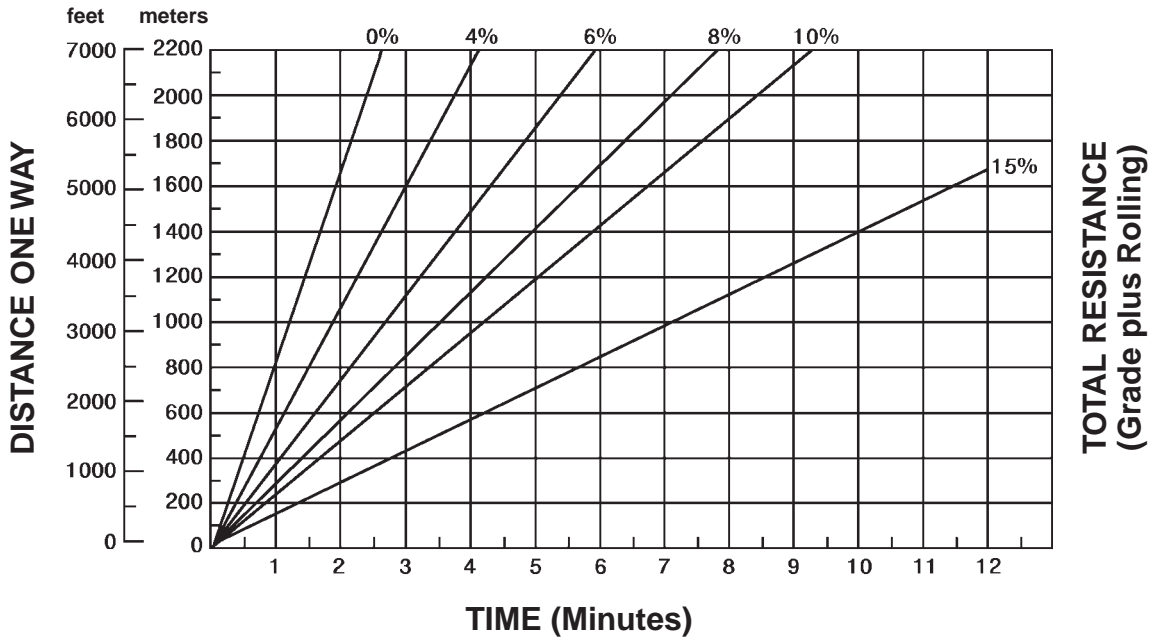

**EMPTY**

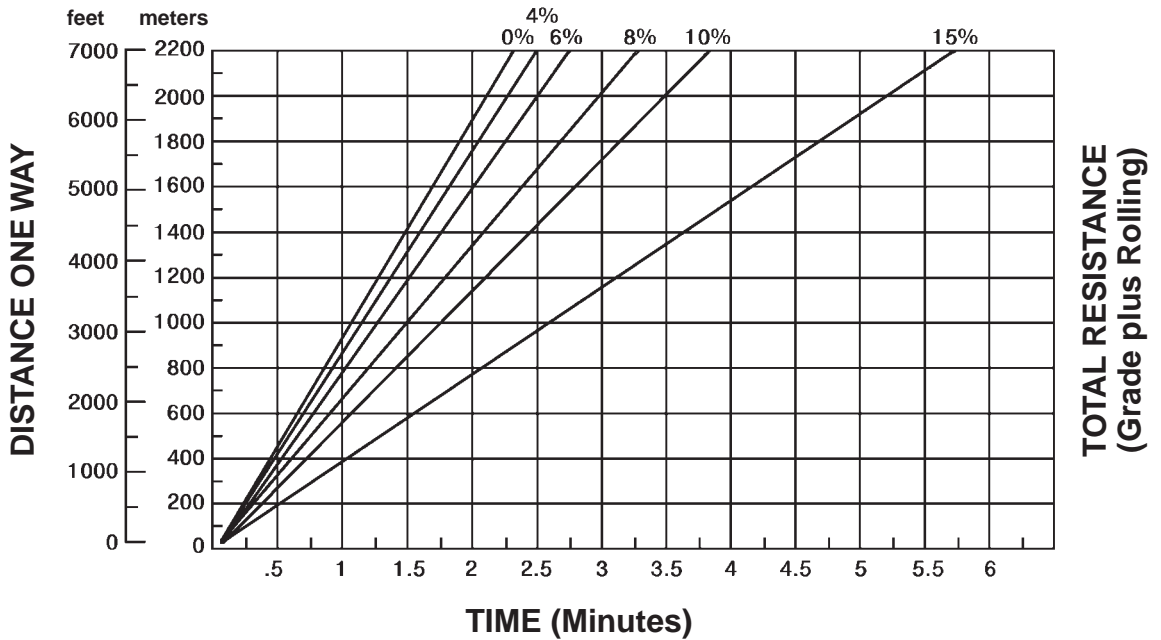

- 40.00R57 Tires
- 1778 mm (5'10") Tire Radius

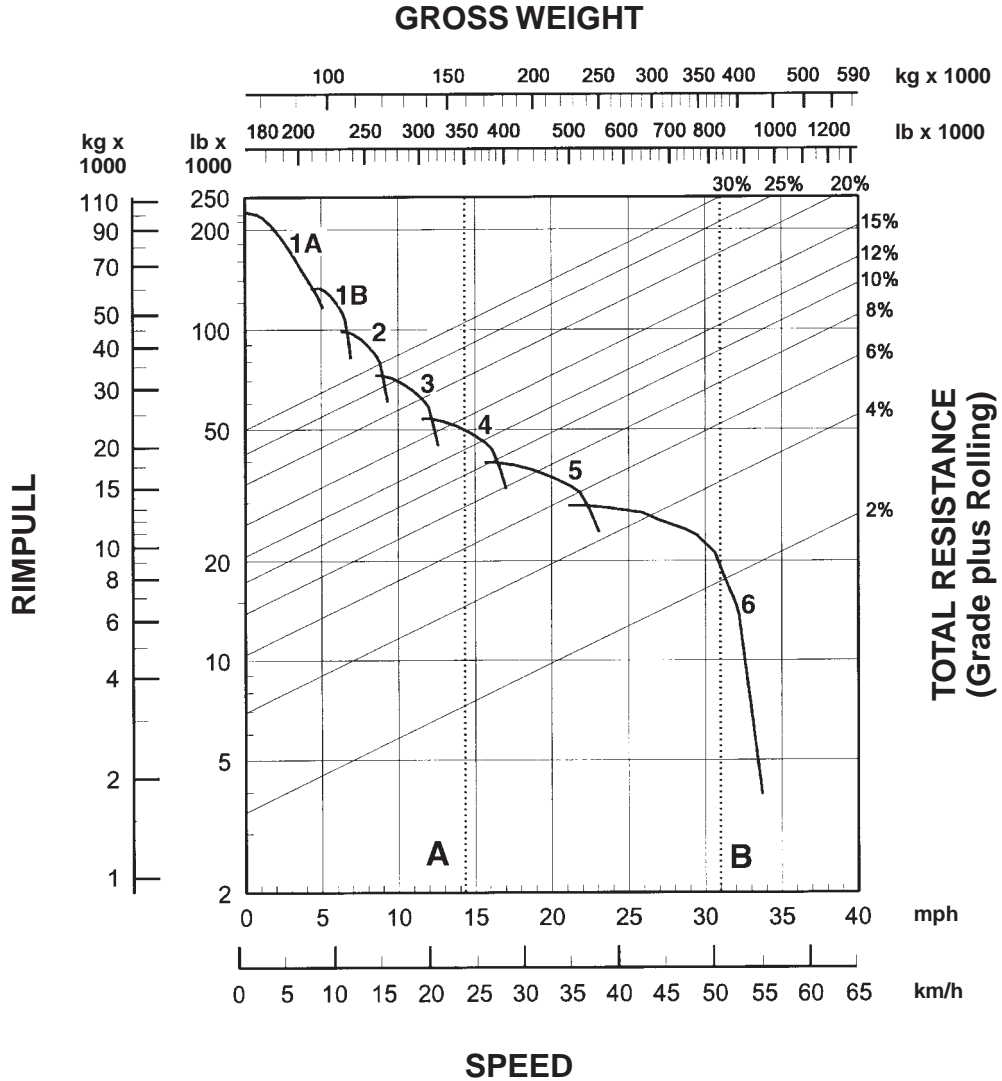


**KEY**

- 1A — 1st Gear (Torque Converter)
- 1B — 1st Gear
- 2 — 2nd Gear
- 3 — 3rd Gear
- 4 — 4th Gear
- 5 — 5th Gear
- 6 — 6th Gear

**KEY**

- A — Est. Max Field Empty Weight 158 760 kg (350,000 lb)\*
- B — Max GMW 376 488 kg (830,000 lb)

\*Truck equipped with sideboards and liners.

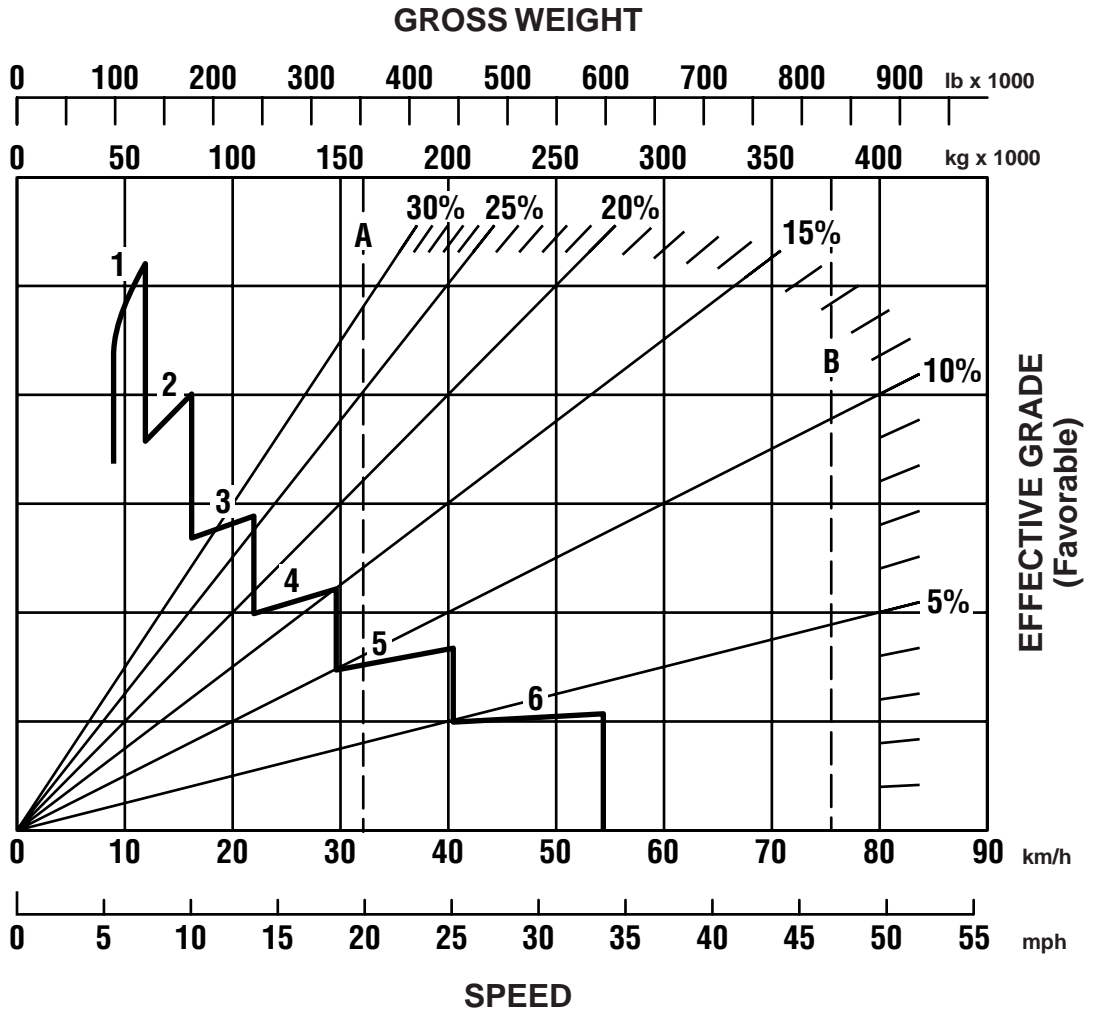

**CONTINUOUS GRADE LENGTH**

**KEY**

- 1 — 1st Gear
- 2 — 2nd Gear
- 3 — 3rd Gear
- 4 — 4th Gear
- 5 — 5th Gear
- 6 — 6th Gear

**KEY**

- A — Est. Field Empty Weight 158 760 kg (350,000 lb)\*
- B — Max GMW 376 488 kg (830,000 lb)


\*Truck equipped with sideboards and liners.




# Construction & Mining Trucks

## 793C Brake Performance


- 450 m (1500 ft)
- 600 m (2000 ft)
- 900 m (3000 ft)
- 1500 m (5000 ft)

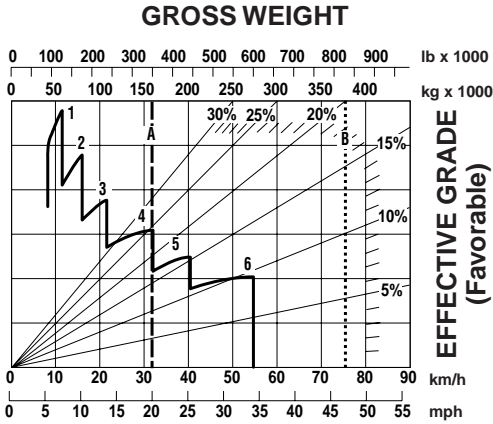


**SPEED**  
GRADE DISTANCE — 450 m (1500 ft)

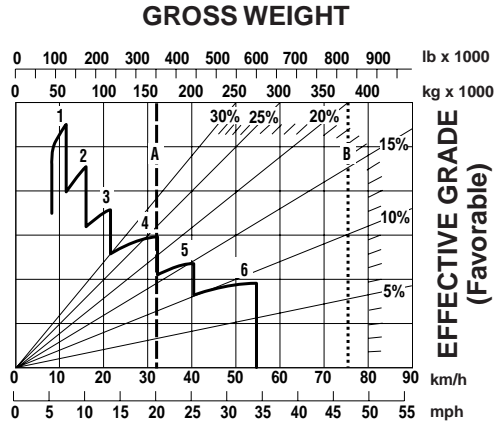

**SPEED**  
GRADE DISTANCE — 600 m (2000 ft)

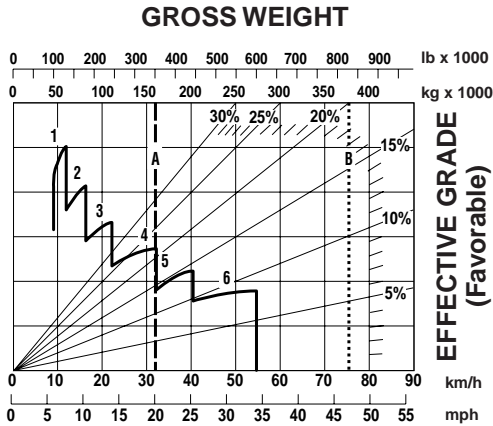

**SPEED**  
GRADE DISTANCE — 900 m (3000 ft)

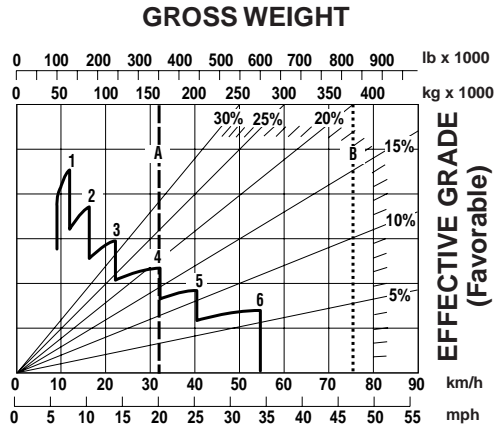

**SPEED**  
GRADE DISTANCE — 1500 m (5000 ft)

### KEY


- 1 — 1st Gear
- 2 — 2nd Gear
- 3 — 3rd Gear
- 4 — 4th Gear
- 5 — 5th Gear
- 6 — 6th Gear

### KEY


- A — Est. Field Empty Weight 158 760 kg (350,000 lb)\*
- B — Max GMW 376 488 kg (830,000 lb)


\*Truck equipped with sideboards and liners.

**LOADED**

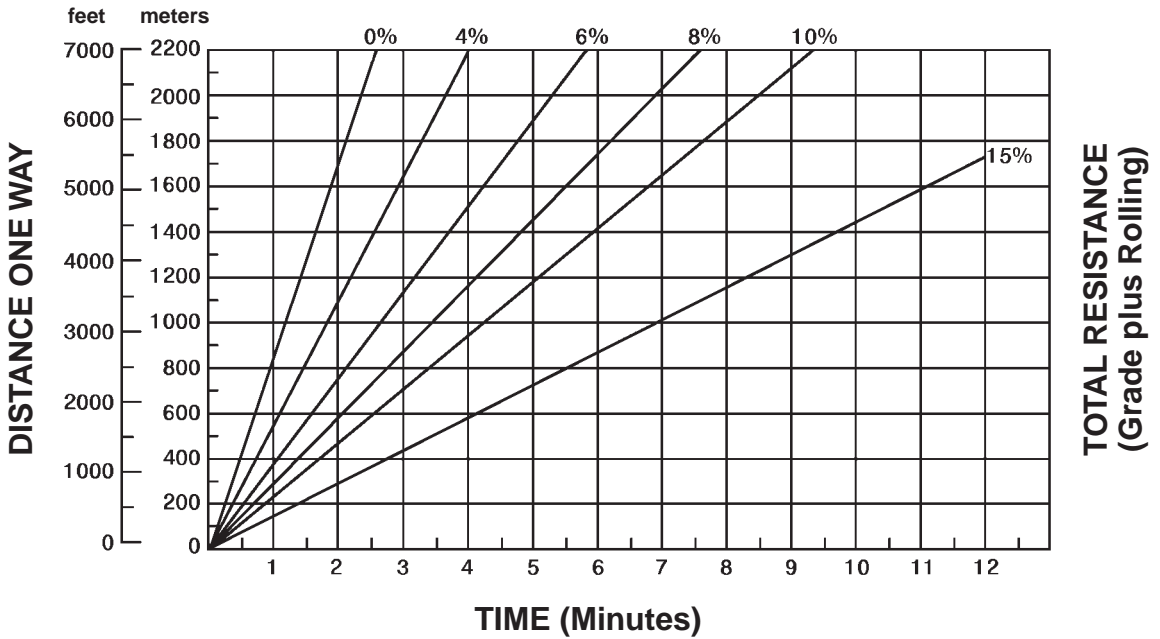

**EMPTY**

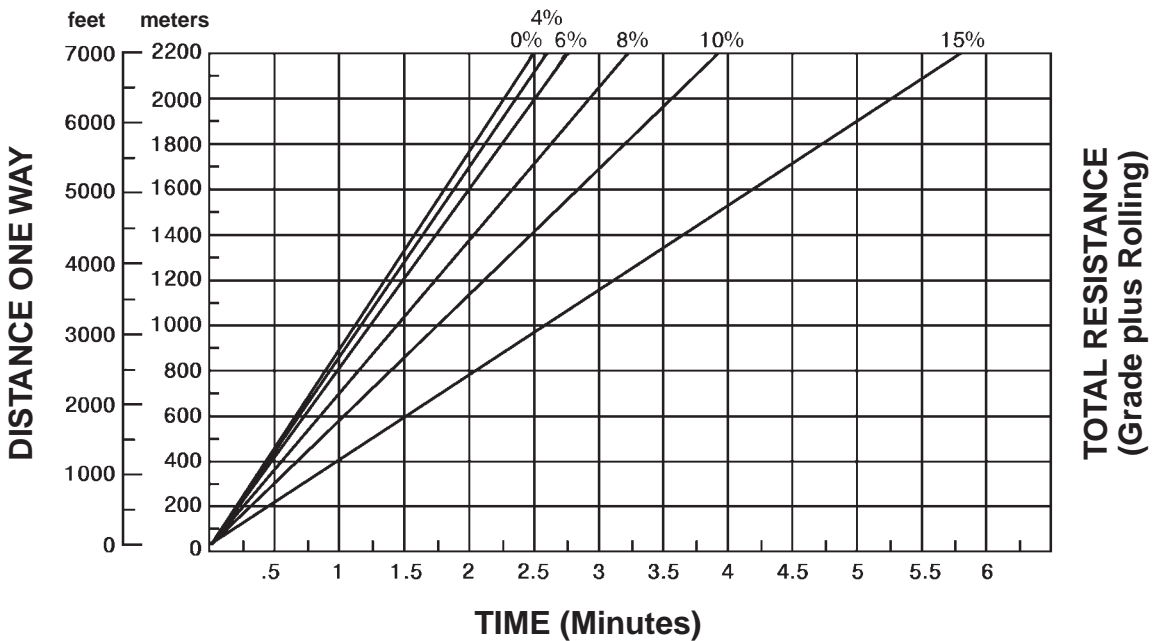

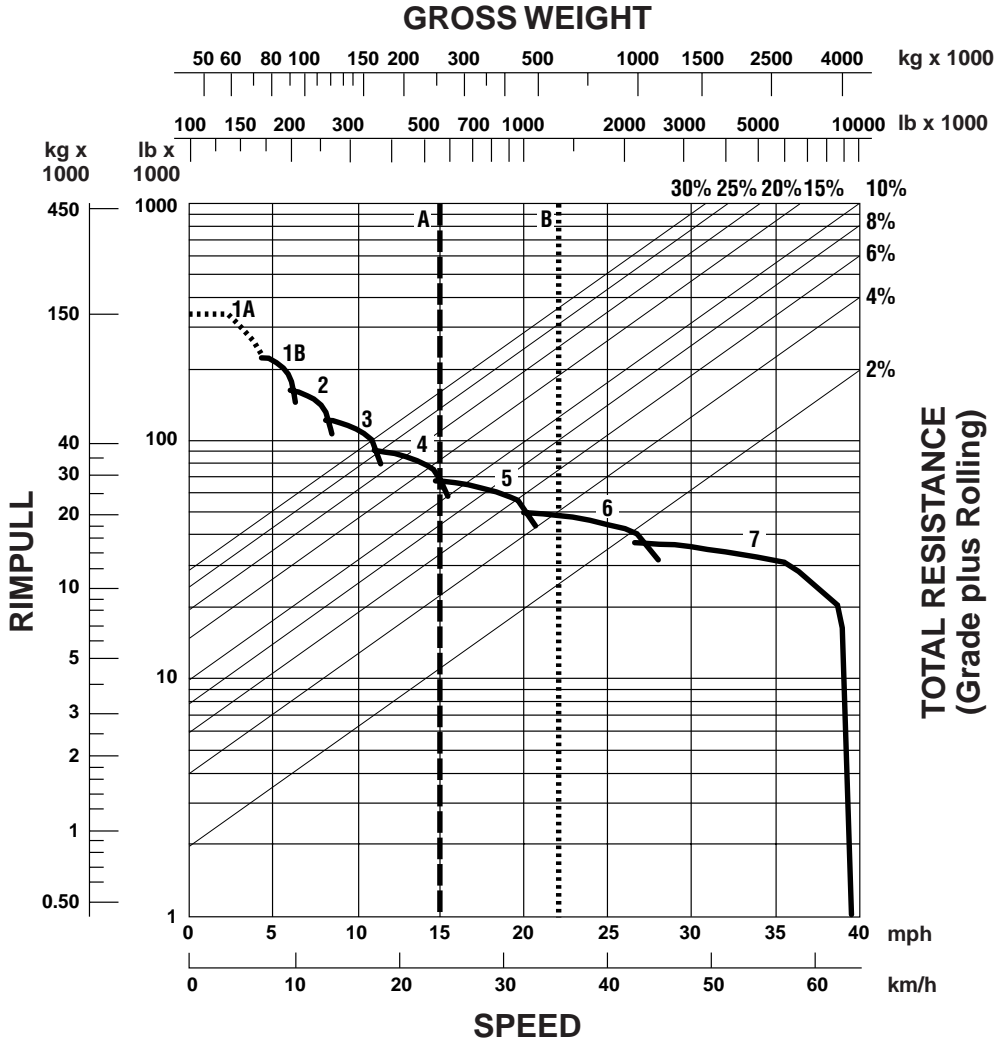

**KEY**

- 1A — 1st Gear (Torque Converter)
- 1B — 1st Gear
- 2 — 2nd Gear
- 3 — 3rd Gear
- 4 — 4th Gear
- 5 — 5th Gear
- 6 — 6th Gear
- 7 — 7th Gear

**KEY**

- A — Est. Field Empty Weight 263 040 kg (580,000 lb)
- B — Max GMW 590 000 kg (1,300,000 lb)



Notes —

# ARTICULATED TRUCKS

## CONTENTS

Features .....	11-1
Specifications .....	11-2
Special Arrangements .....	11-4
Ground Pressure .....	11-5
Curves:	
D25D Brake/Retarder Performance Curve, Rimpull, Travel Time (loaded and empty) .....	11-8
D30D Brake/Retarder Performance Curve, Rimpull, Travel Time (loaded and empty) .....	11-11
725 Brake/Retarder Performance Curve, Rimpull, Travel Time (loaded and empty) .....	11-14
730 Brake/Retarder Performance Curve, Rimpull, Travel Time (loaded and empty) .....	11-17
D350E Series II Retarding Performance Curve, Rimpull, Travel Time (loaded and empty) .....	11-20
D400E Series II Brake/Retarder Performance Curve, Rimpull, Travel Time (loaded and empty) .....	11-23

## Features:

- **Caterpillar four-stroke-cycle diesels** ... turbo-charged and aftercooled, automatic variable timing ... parallel porting ... direct injection, adjustment-free fuel system ... meet all environment regulations effective January 1, 1996.
- **Electronically programmable transmission control on “E” series and 700 series models** ... speed sensing device automatically shifts transmission between 1st and gear selected by operator. Control constantly monitors transmission behavior for quick and efficient troubleshooting.
- **Articulating and fully oscillating hitch** ... links torsion-free front and rear frames for exceptional maneuverability and traction on uneven terrain. Cast hitch head is robotically-welded to steel alloy forged tube for unmatched strength and durability.
- **Superior suspension systems** ... coupled with oscillating hitch, provide smooth ride and excellent traction for prime performance and operator comfort.
- **Wide, long, low dump body design** ... for enhanced loadability, material retention and ejection, with excellent machine stability. Low load-over-height allows versatile loader match.
- **High capacity low pressure tires in single formation** ... for superior traction and flotation on poor underfoot conditions.
- **High power-to-weight ratio and excellent gradeability** ... for high-efficiency and versatile performance.
- **Standard ROPS/FOPS, low sound level cab with tinted safety glass** ... for productive and safe operation.

# Articulated Trucks

## Specifications ● Two-Axle Models



MODEL	D25D		D30D		725	
Flywheel Power	194 kW	<b>260 hp</b>	213 kW	<b>285 hp</b>	209 kW	<b>280 hp</b>
Operating Weight (Empty)*	19 450 kg	<b>42,880 lb</b>	21 690 kg	<b>47,320 lb</b>	21 720 kg	<b>47,880 lb</b>
Top Speed (Loaded)	48 km/h	<b>30 mph</b>	52 km/h	<b>32 mph</b>	51 km/h	<b>32 mph</b>
GMW — Gross Machine Weight	42 250 kg	<b>93,145 lb</b>	49 150 kg	<b>108,360 lb</b>	44 400 kg	<b>97,880 lb</b>
Distribution Empty:						
Front		<b>70%</b>		<b>66%</b>		<b>56.4%</b>
Center		—		—		<b>21.3%</b>
Rear		<b>30%</b>		<b>34%</b>		<b>22.3%</b>
Distribution Loaded:						
Front		<b>48%</b>		<b>44%</b>		<b>31.2%</b>
Center		—		—		<b>33.9%</b>
Rear		<b>52%</b>		<b>56%</b>		<b>34.4%</b>
Max. Capacity**	22.7 t	<b>25 T</b>	27.2 t	<b>30 T</b>	22.7 t	<b>25 T</b>
Struck (SAE)	10 m <sup>3</sup>	<b>13 yd<sup>3</sup></b>	12.5 m <sup>3</sup>	<b>16.4 yd<sup>3</sup></b>	10.4 m <sup>3</sup>	<b>13.6 yd<sup>3</sup></b>
Heaped (2:1) (SAE)	14 m <sup>3</sup>	<b>18 yd<sup>3</sup></b>	16.5 m <sup>3</sup>	<b>21.6 yd<sup>3</sup></b>	13.6 m <sup>3</sup>	<b>17.8 yd<sup>3</sup></b>
Engine Model	<b>3306TA</b>		<b>3306TA</b>		<b>3176C ATAAC</b>	
No. Cylinders	<b>6</b>		<b>6</b>		<b>6</b>	
Bore	121 mm	<b>4.75"</b>	121 mm	<b>4.75"</b>	125 mm	<b>4.9"</b>
Stroke	152 mm	<b>6"</b>	152 mm	<b>6"</b>	140 mm	<b>5.5"</b>
Displacement	10.5 L	<b>638 in<sup>3</sup></b>	10.5 L	<b>638 in<sup>3</sup></b>	10.3 L	<b>629 in<sup>3</sup></b>
Tires, Front & Rear	<b>26.5R25 Radials</b>		<b>29.5R25 Radials</b>		<b>23.5R25 Radials</b>	
Circular Clearance						
Diameter	15.9 m	<b>52'2"</b>	16.4 m	<b>53'9"</b>	15.2 m	<b>49'10"</b>
Fuel Tank Refill Capacity	450 L	<b>120 U.S. gal</b>	450 L	<b>120 U.S. gal</b>	310 L	<b>82 U.S. gal</b>
<b>GENERAL DIMENSIONS</b> <b>(Empty):</b>						
Height to Cab Top	3.34 m	<b>10'11"</b>	3.40 m	<b>11'2"</b>	3.44 m	<b>11'3"</b>
Wheel Base (Front-Center of Bogie)	4.93 m	<b>16'2"</b>	5.04 m	<b>16'6"</b>	4.67 m	<b>15'4"</b>
Overall Length	8.79 m	<b>28'10"</b>	8.89 m	<b>29'2"</b>	9.92 m	<b>32'7"</b>
Loading Height (Empty)	2.63 m	<b>8'8"</b>	2.83 m	<b>9'3"</b>	2.75 m	<b>9'0"</b>
Height at Full Dump	5.19 m	<b>17'0"</b>	5.46 m	<b>17'11"</b>	6.39 m	<b>21'0"</b>
Body Length	4.79 m	<b>15'8"</b>	4.90 m	<b>16'1"</b>	5.79 m	<b>19'0"</b>
Width (Operating)	3.00 m	<b>9'10"</b>	3.30 m	<b>10'10"</b>	2.82 m	<b>9'3"</b>
Front Tire Tread	2.32 m	<b>7'7"</b>	2.55 m	<b>8'4"</b>	2.22 m	<b>7'3"</b>

\*Includes coolant, lubricant and full fuel tank.

\*\*Rating dependent on optional equipment. Maximum gross weight (empty weight plus payload) should not be exceeded.



MODEL	730		D350E Series II		D400E Series II		D400E Series II Ejector	
Flywheel Power	228 kW	<b>305 hp</b>	265 kW	<b>355 hp</b>	302 kW	<b>405 hp</b>	302 kW	<b>405 hp</b>
Operating Weight (Empty)*	22 500 kg	<b>49,600 lb</b>	30 190 kg	<b>66,560 lb</b>	31 650 kg	<b>69,790 lb</b>	32 840 kg	<b>72,380 lb</b>
Top Speed (Loaded)	51 km/h	<b>32 mph</b>	50.7 km/h	<b>31.5 mph</b>	58.6 km/h	<b>36.4 mph</b>	58.6 km/h	<b>36.4 mph</b>
GMW — Gross Machine Weight	49 720 kg	<b>109,600 lb</b>	61 940 kg	<b>136,560 lb</b>	67 950 kg	<b>149,830 lb</b>	69 140 kg	<b>152,380 lb</b>
Distribution Empty:								
Front		<b>54.9%</b>		<b>58%</b>		<b>57%</b>		<b>56.6%</b>
Center		<b>22.2%</b>		<b>22%</b>		<b>22%</b>		<b>24.2%</b>
Rear		<b>22.9%</b>		<b>20%</b>		<b>21%</b>		<b>19.2%</b>
Distribution Loaded:								
Front		<b>30%</b>		<b>35%</b>		<b>33%</b>		<b>30.1%</b>
Center		<b>34.9%</b>		<b>33%</b>		<b>34%</b>		<b>36.1%</b>
Rear		<b>35.1%</b>		<b>32%</b>		<b>33%</b>		<b>33.8%</b>
Max. Capacity**	27.2 t	<b>30 T</b>	31.8 t	<b>35 T</b>	36.3 t	<b>40 T</b>	36.3 t	<b>40 T</b>
Struck (SAE)	12.5 m <sup>3</sup>	<b>16.4 yd<sup>3</sup></b>	14.6 m <sup>3</sup>	<b>19.1 yd<sup>3</sup></b>	16.5 m <sup>3</sup>	<b>21.6 yd<sup>3</sup></b>	16.5 m <sup>3</sup>	<b>21.6 yd<sup>3</sup></b>
Heaped (2:1) (SAE)	16.3 m <sup>3</sup>	<b>21.4 yd<sup>3</sup></b>	19.2 m <sup>3</sup>	<b>25.1 yd<sup>3</sup></b>	22 m <sup>3</sup>	<b>28.6 yd<sup>3</sup></b>	22 m <sup>3</sup>	<b>28.6 yd<sup>3</sup></b>
Engine Model	<b>3196C ATAAC</b>		<b>3406E DITA</b>		<b>3406E DITA</b>		<b>3406E DITA</b>	
No. Cylinders	<b>6</b>		<b>6</b>		<b>6</b>		<b>6</b>	
Bore	130 mm	<b>5.1"</b>	137 mm	<b>5.4"</b>	137 mm	<b>5.4"</b>	137 mm	<b>5.4"</b>
Stroke	150 mm	<b>5.9"</b>	165 mm	<b>6.5"</b>	165 mm	<b>6.5"</b>	165 mm	<b>6.5"</b>
Displacement	12.0 L	<b>732 in<sup>3</sup></b>	14.6 L	<b>893 in<sup>3</sup></b>	14.6 L	<b>893 in<sup>3</sup></b>	14.6 L	<b>893 in<sup>3</sup></b>
Tires, Front, Center & Rear	<b>23.5R25 Radials</b>		<b>26.5R25 Radials</b>		<b>29.5R25 Radials</b>		<b>29.5R25 Radials</b>	
Circle Clearance Diameter	15.2 m	<b>49'10"</b>	16.9 m	<b>55'4"</b>	16.9 m	<b>55'4"</b>	16.9 m	<b>55'4"</b>
Fuel Tank Refill Capacity	310 L	<b>95 U.S. gal</b>	570 L	<b>154 U.S. gal</b>	570 L	<b>154 U.S. gal</b>	570 L	<b>154 U.S. gal</b>
<b>GENERAL DIMENSIONS</b> <b>(Empty):</b>								
Height to Cab Top	3.44 m	<b>11'3"</b>	3.51 m	<b>11'6"</b>	3.58 m	<b>11'9"</b>	3.58 m	<b>11'9"</b>
Wheel Base (Front-Center of Bogie)	4.67 m	<b>15'4"</b>	5.15 m	<b>16'11"</b>	5.15 m	<b>16'11"</b>	5.15 m	<b>16'11"</b>
Overall Length	9.92 m	<b>32'7"</b>	10.65 m	<b>35'1"</b>	10.65 m	<b>35'1"</b>	11.0 m	<b>36'1"</b>
Loading Height (Empty)	2.89 m	<b>9'6"</b>	2.92 m	<b>9'7"</b>	3.1 m	<b>10'2"</b>	3.07 m	<b>10'1"</b>
Height at Full Dump	6.50 m	<b>21'4"</b>	6.83 m	<b>22'5"</b>	6.92 m	<b>23'0"</b>	—	
Body Length	5.86 m	<b>19'3"</b>	6.25 m	<b>20'6"</b>	6.34 m	<b>20'10"</b>	6.80 m	<b>22'8"</b>
Width (Operating)	2.90 m	<b>9'6"</b>	3.26 m	<b>10'8"</b>	3.43 m	<b>11'2"</b>	3.50 m	<b>11'6"</b>
Front Tire Tread	2.28 m	<b>7'6"</b>	2.55 m	<b>8'4"</b>	2.68 m	<b>8'8"</b>	2.68 m	<b>8'8"</b>

\*Includes coolant, lubricant and full fuel tank.

\*\*Rating dependent on optional equipment. Maximum gross weight (empty weight plus payload) should not be exceeded.



A variety of special arrangements are available on a custom product basis. Below is a summary of some of the most popular versions, which are attainable in different model sizes. Please contact your Caterpillar dealer for details and availability.

**Refuse Haulers** — Very large capacity body arrangements for transport of bulk solid waste, normally used between a transfer station and the face of a sanitary landfill. Arrangement includes large capacity body, extended rear frame and scissors tailgate.

**Hydraulically operated steel covers** — Available for certain refuse bodies. The covers improve light material retention during transport.

**Container Carriers** — Allows transport and dump of 6 m (20'0") ISO containers. Usual application is handling containerized waste in landfills. Arrangement includes an extended and reinforced rear frame combined with a special tipping structure.

**Transverse Steering** — Improves maneuverability in areas with limited space, like tunnels, underground mines and industrial sites. This option allows the truck to turn completely around in a space slightly longer than the truck itself. Available for two axle trucks only.

**Heavy Duty Bodies** — More robust bodies made with thicker plates and incorporating rock deflectors for tire protection. Increase the vehicle's material appetite and provide longer life in applications involving highly abrasive materials and high impact loading.

**Extended Chassis/Water Wagons** — Long wheel base chassis, suitable for installation of low center of gravity liquid tanks and other AEM accessories. The extended rear frame permits use of low center of gravity arrangements for added stability. Common applications are haul road dust control and off-road transport of water or fuel. Available for three axle trucks only.

**Coal Haulers** — Machines configured with large capacity body, extended rear frame and scissors tailgate, for transport of coal. The longer frame helps maintain stability and gives loading height accessible to many loading systems.

**Sugar Cane Haulers** — May be manufactured by using extended rear frame chassis, adding a sub frame and special tires.

Model	D25D	D30D	725	730	D350E Series II	D400E Series II
Refuse Haulers			X	X	X	X
Container Carriers			X	X		
Transverse Steer	X	X				
Heavy Duty Bodies	X	X				
Extended Chassis			X	X	X	X
Coal Haulers				X	X	X
Sugar Cane Haulers				X		

### Use of Ground Pressure Charts

Articulated trucks are normally equipped with wide base radial tires, for improved flotation in poor underfoot conditions. Ground pressure is a function of tire deflection and is also affected by tire penetration. The charts in this section provide a means to estimate ground pressure for 0 and 76 mm (3") tire penetration, when gross vehicle weight, axle load distribution and tire inflation pressure are known. The ground pressure charts on the following pages are based on Michelin XADN tire characteristics. Results may differ for other tread patterns.

Tire load can be calculated by the following formula:

$$\text{Tire load} = \frac{\text{Heaviest Axle Load}}{2}$$

#### Example

Find the ground pressure generated by a D250E fully loaded with zero and 76 mm (3") tire penetration. The machine is equipped with standard Michelin 23.5R25 tires, inflated to the recommended pressure.

$$\text{D250E Tire Load} = \frac{43\,680 \text{ kg} \times 0.34}{2} = 7426 \text{ kg}$$

$$\text{D250E Tire Load} = \frac{96,300 \text{ lb} \times 0.34}{2} = 16,371 \text{ lb}$$

From the tire section in this book, inflation pressure for the D250E is 325 kPa = 3.25 bar (47 psi).

From the ground pressure chart for 23.5R25 tires, Ground pressure = 3.1 kg/cm<sup>2</sup> (44 psi) with zero tire penetration.


Ground pressure = 1.4 kg/cm<sup>2</sup> (21 psi) with 76 mm (3") tire penetration.

See the Wheel Tractor Scraper section for explanation on using:


- Rimpull-Speed-Gradeability Curves
- Retarder Curves
- Travel Time Charts

See the Construction and Mining Trucks section for Hauling Unit Fixed Times.

**23.5R25 Tires\***

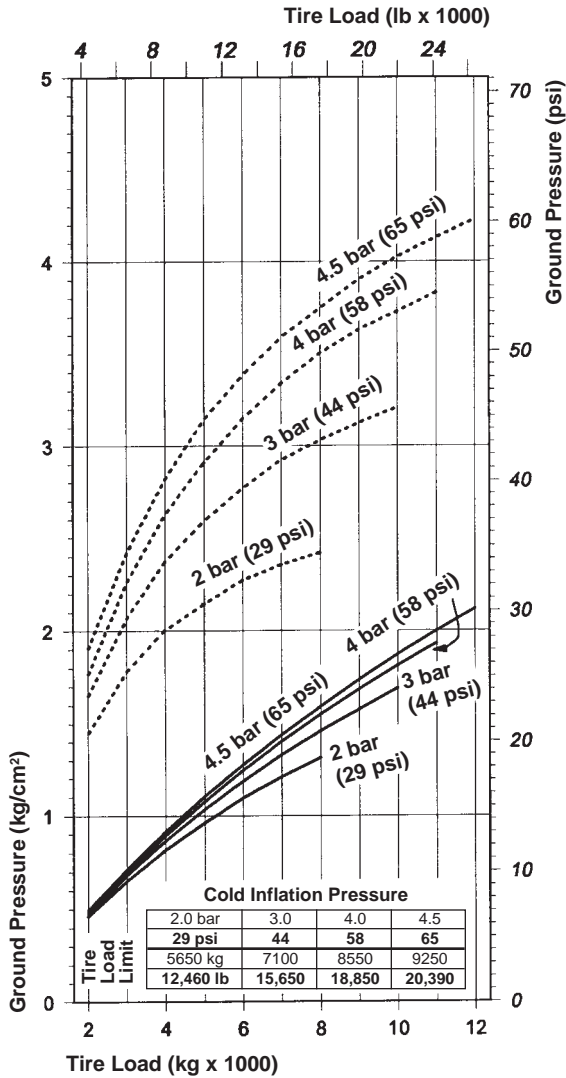

**30/65R25 Tires\***

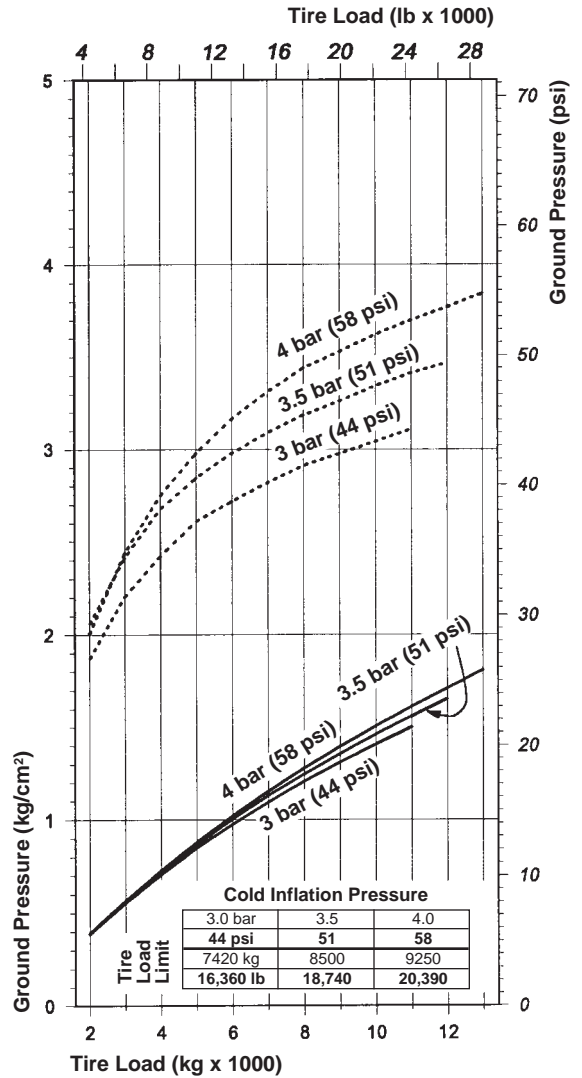


**KEY**


- Zero Penetration (Flat Plate)
- 76 mm (3") Penetration

\*Charts based on Michelin XADN tire characteristics. Results may differ for other tread patterns and/or brands. Charts are to be used to calculate ground pressure. To determine the inflation as a function of load and conditions or when loads exceed tire load limit, contact your tire manufacturer representative.

### 26.5R25 Tires\*

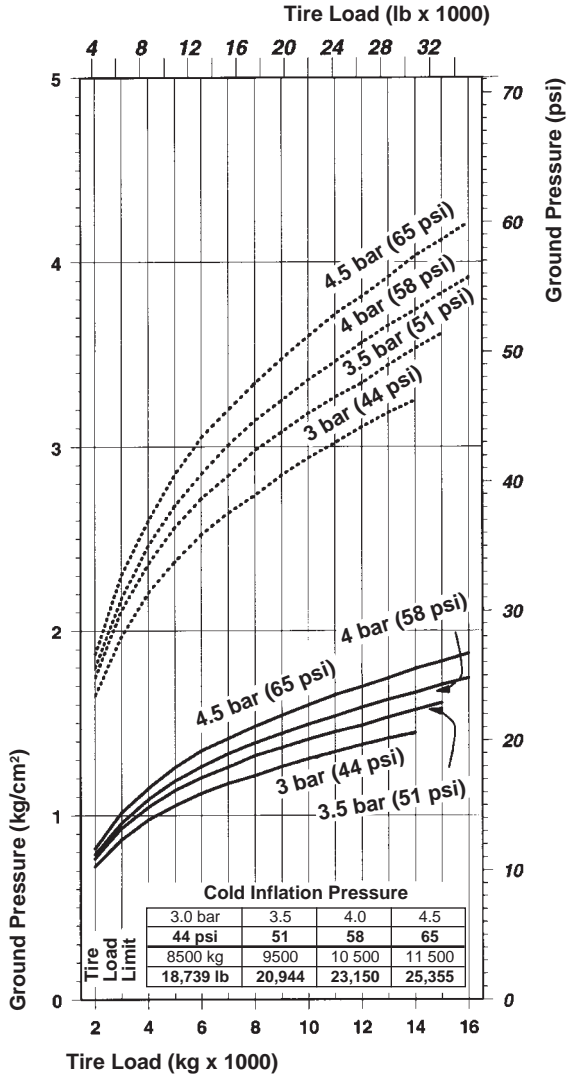


### 29.5R25 Tires\*

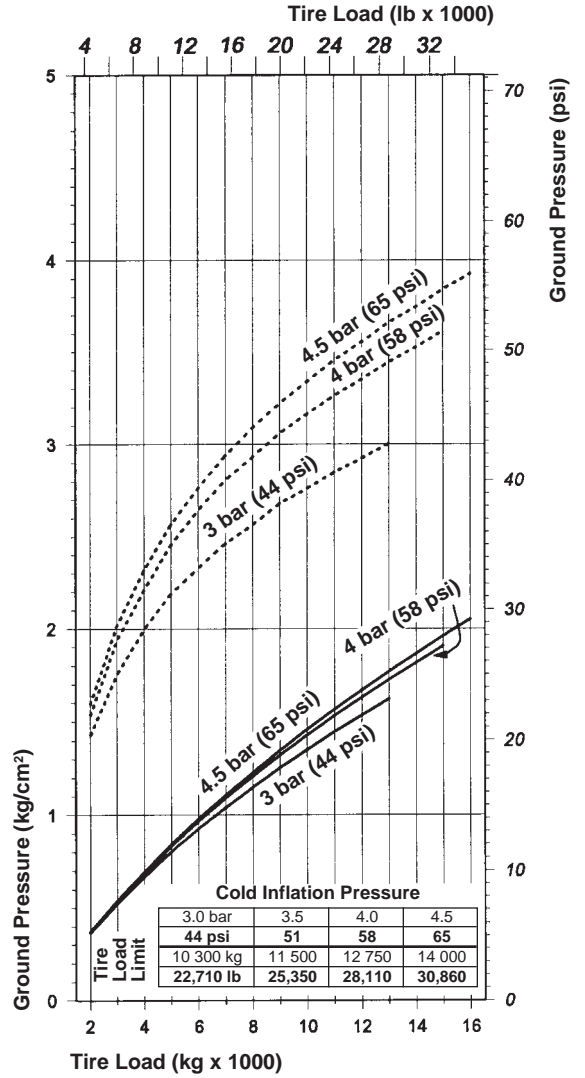

**KEY**

- Zero Penetration (Flat Plate)
- 76 mm (3") Penetration

\*Charts based on Michelin XADN tire characteristics. Results may differ for other tread patterns and/or brands. Charts are to be used to calculate ground pressure. To determine the inflation as a function of load and conditions or when loads exceed tire load limit, contact your tire manufacturer representative.

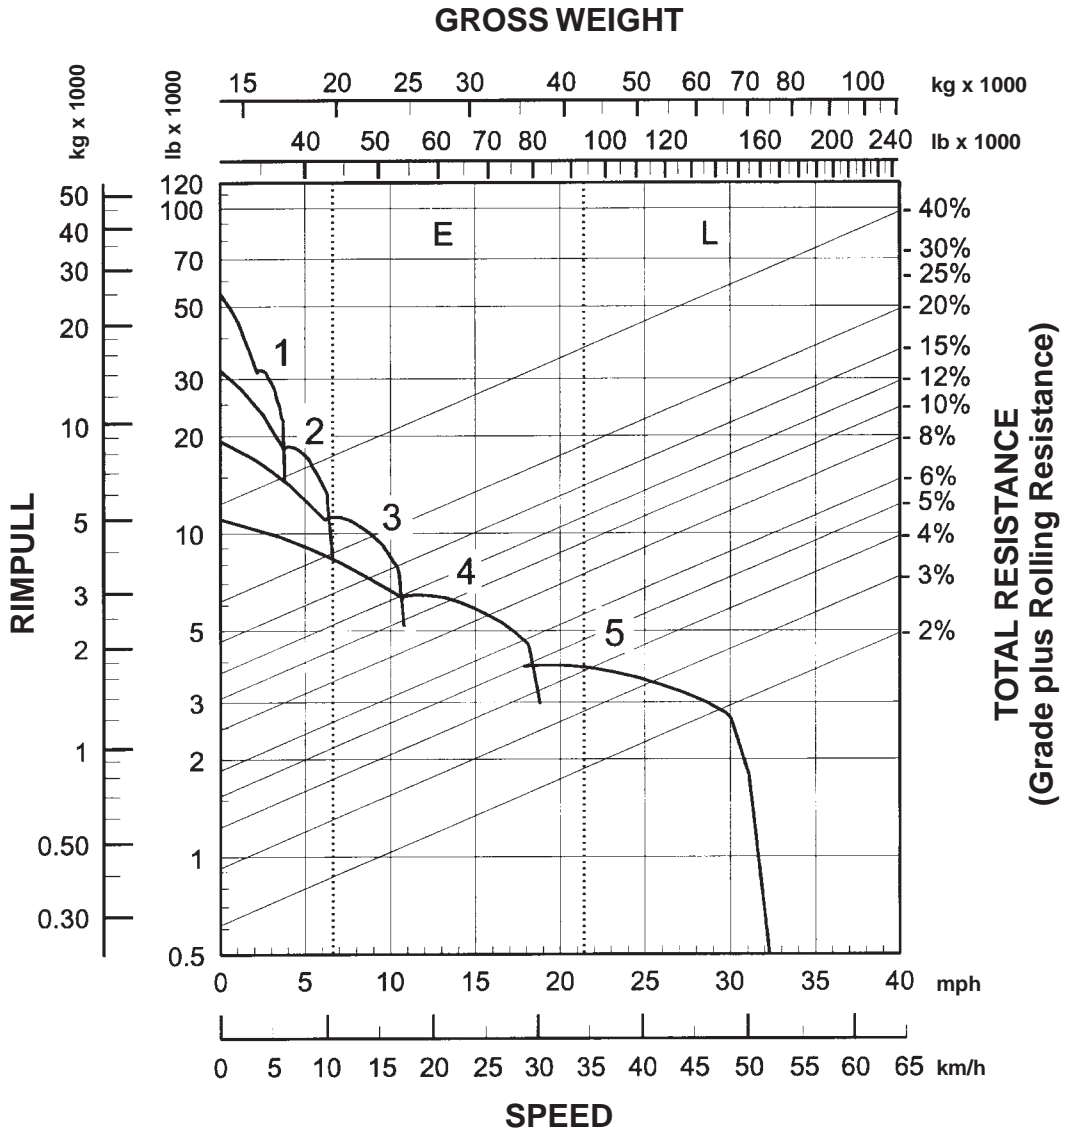


**KEY**

- 1 — 1st Gear
- 2 — 2nd Gear
- 3 — 3rd Gear
- 4 — 4th Gear
- 5 — 5th Gear

**KEY**

- E — Empty 19 700 kg (43,428 lb)
- L — Loaded 42 381 kg (93,428 lb)

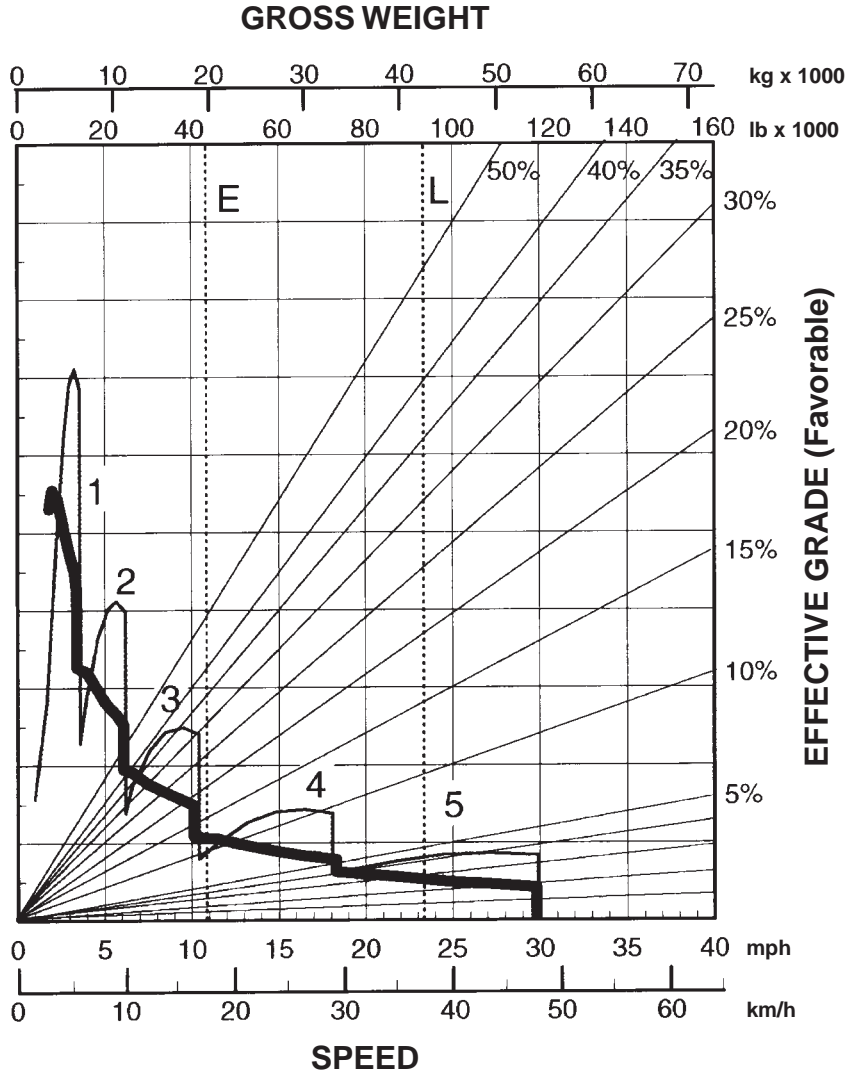

—— 200 m (660 ft) OR LESS GRADE LENGTH  
 ——— CONTINUOUS


**KEY**

- 1 — 1st Gear
- 2 — 2nd Gear
- 3 — 3rd Gear
- 4 — 4th Gear
- 5 — 5th Gear


**KEY**


- E — Empty 19 700 kg (43,428 lb)
- L — Loaded 42 381 kg (93,428 lb)

**LOADED**

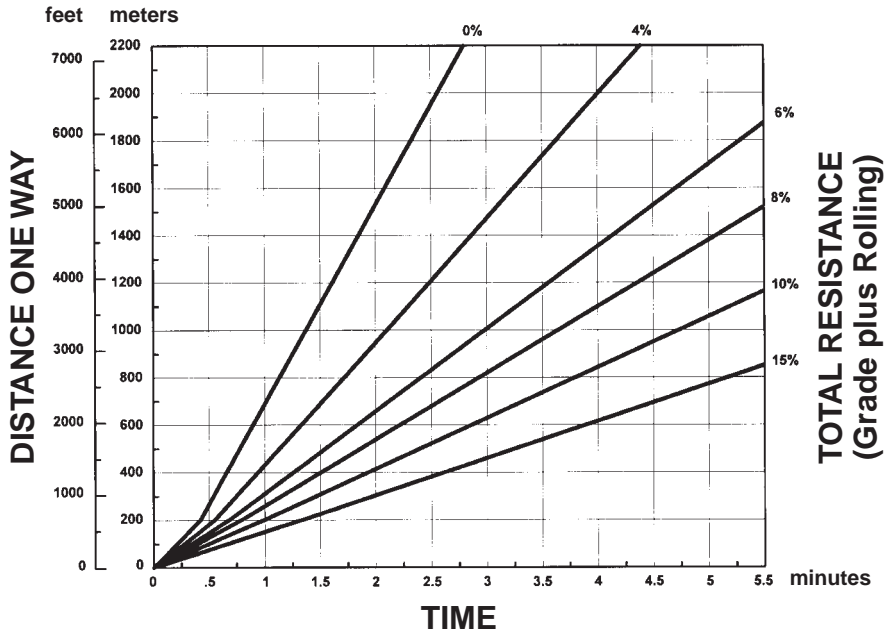

**EMPTY**

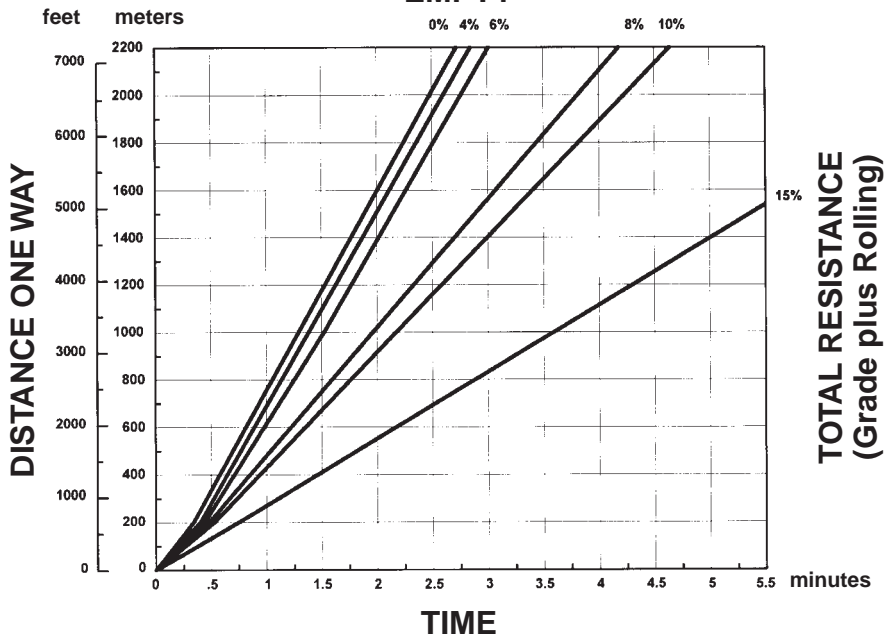

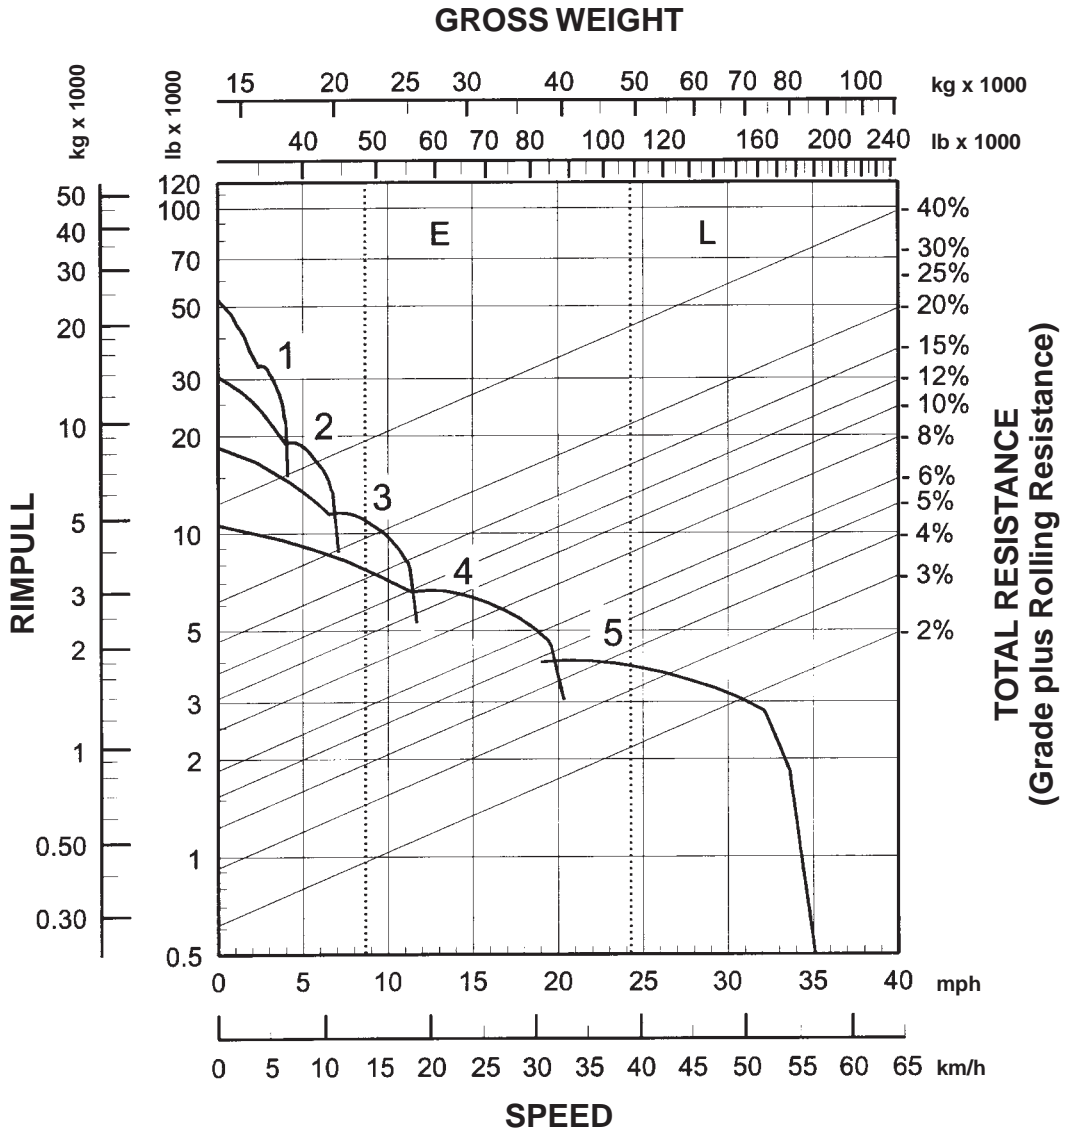


**KEY**

- 1 — 1st Gear
- 2 — 2nd Gear
- 3 — 3rd Gear
- 4 — 4th Gear
- 5 — 5th Gear

**KEY**

- E — Empty 21 900 kg (48,278 lb)
- L — Loaded 49 117 kg (108,278 lb)



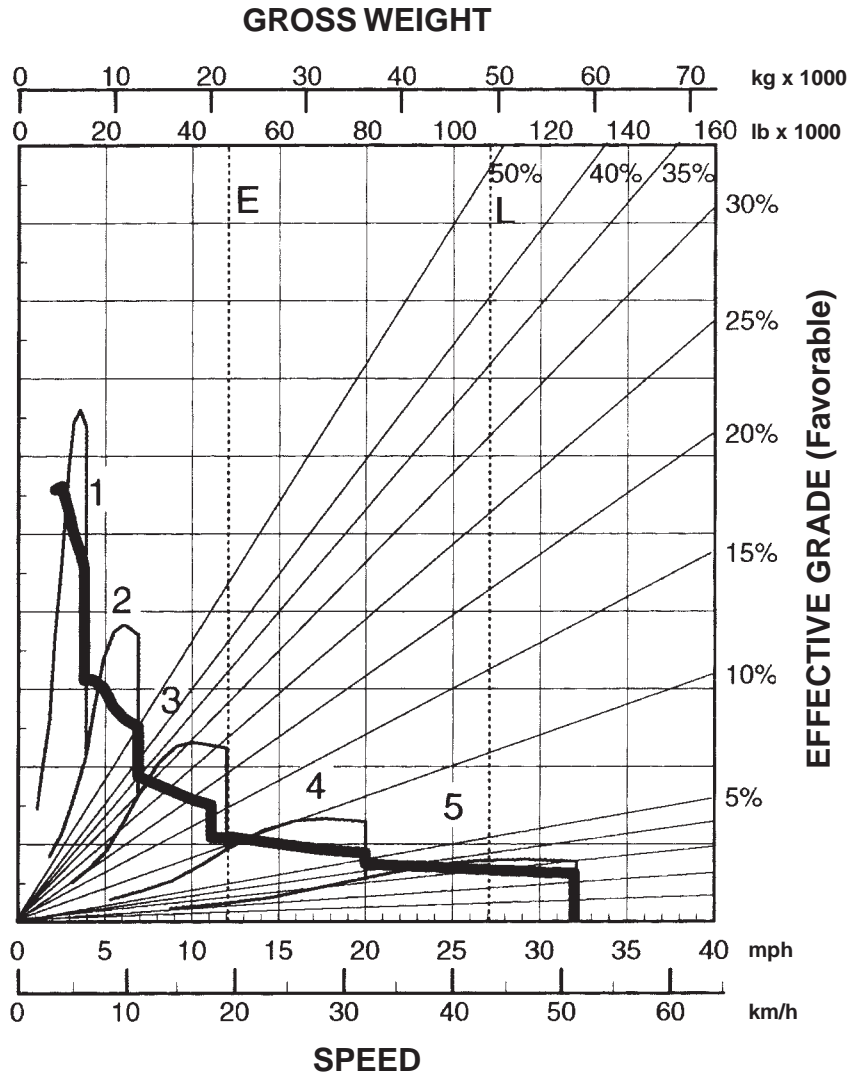



—— 200 m (660 ft) OR LESS GRADE LENGTH  
**—** CONTINUOUS


**KEY**

- 1 — 1st Gear
- 2 — 2nd Gear
- 3 — 3rd Gear
- 4 — 4th Gear
- 5 — 5th Gear

**KEY**

- E — Empty 21 900 kg (48,278 lb)
- L — Loaded 49 117 kg (108,278 lb)

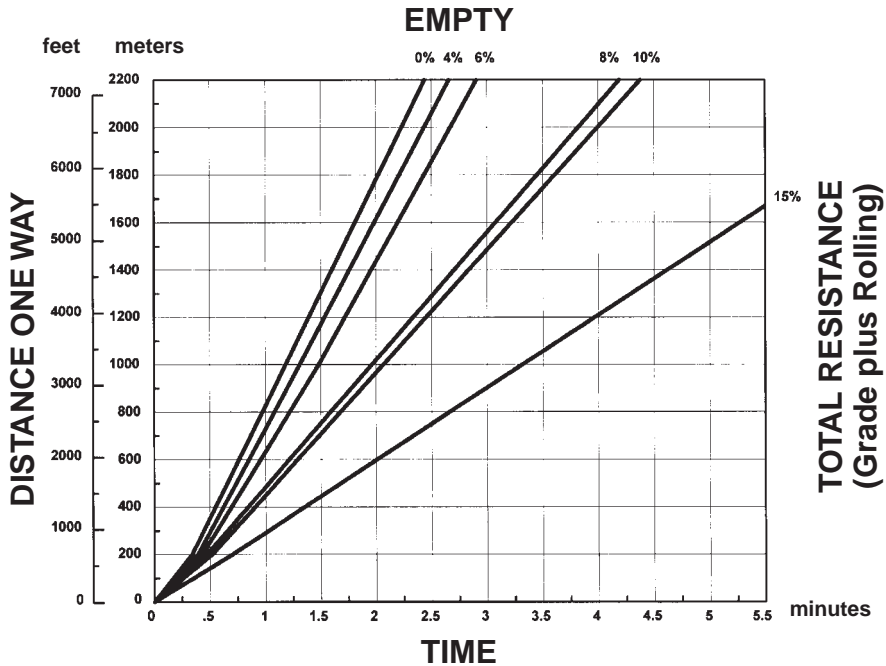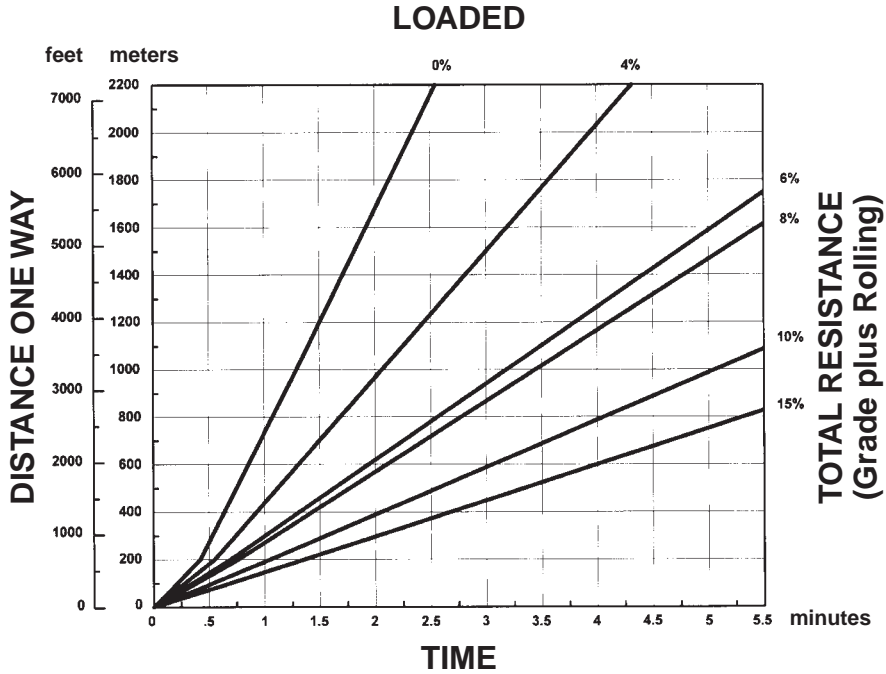

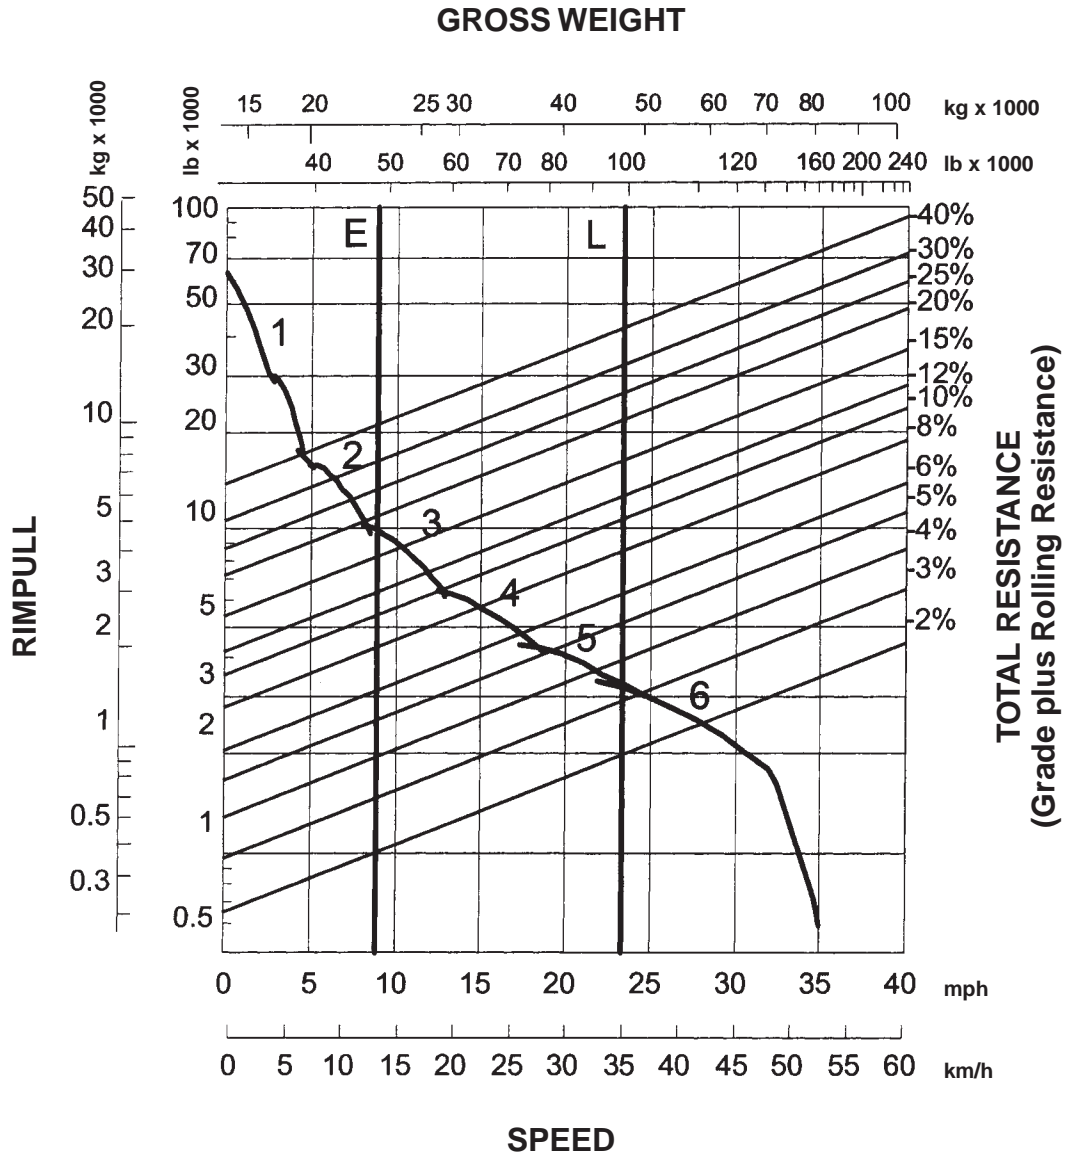

**KEY**

- 1 — 1st Gear
- 2 — 2nd Gear
- 3 — 3rd Gear
- 4 — 4th Gear
- 5 — 5th Gear
- 6 — 6th Gear

**KEY**

- E — Empty 21 720 kg (47,880 lb)
- L — Loaded 44 400 kg (97,880 lb)

**Information unavailable  
at time of printing.**


**KEY**

- 1 — 1st Gear
- 2 — 2nd Gear
- 3 — 3rd Gear
- 4 — 4th Gear
- 5 — 5th Gear
- 6 — 6th Gear


**KEY**


- E — Empty 21 720 kg (47,880 lb)
- L — Loaded 44 400 kg (97,880 lb)

**LOADED**

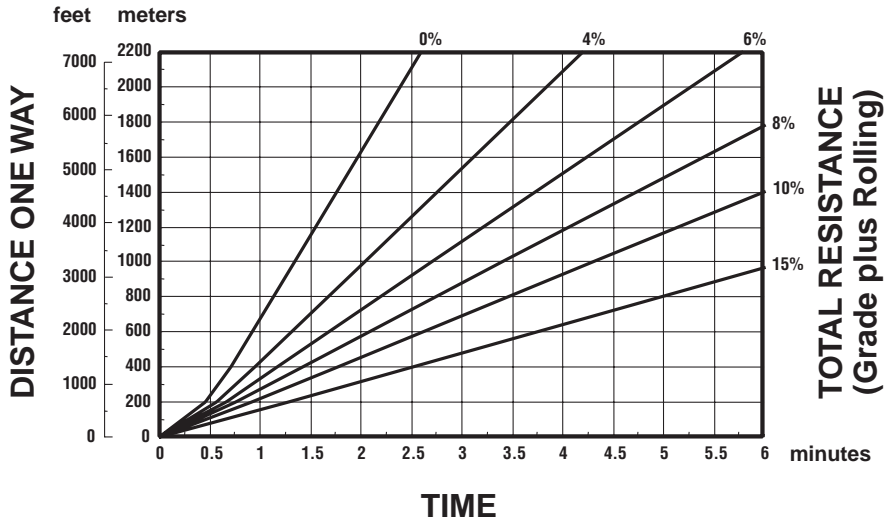

**EMPTY**

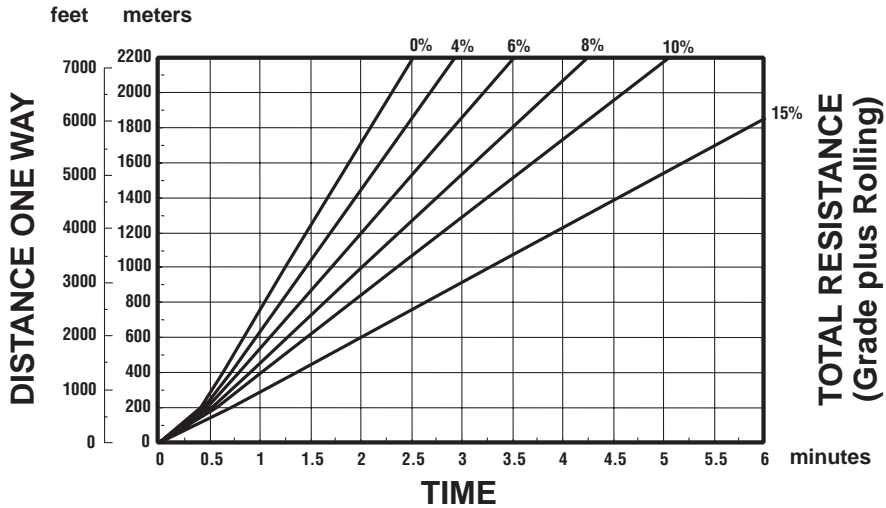

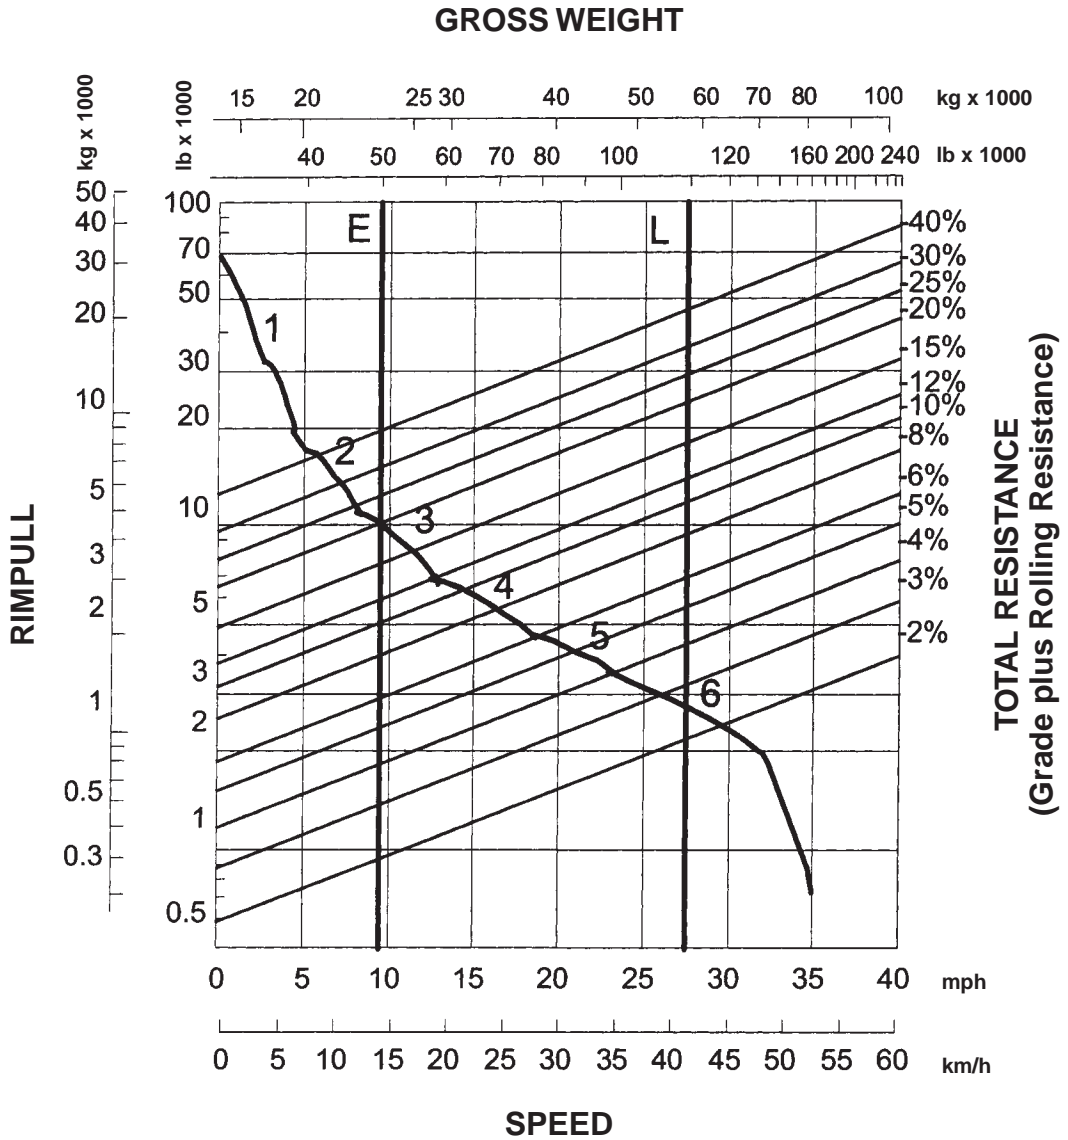

**KEY**

- 1 — 1st Gear
- 2 — 2nd Gear
- 3 — 3rd Gear
- 4 — 4th Gear
- 5 — 5th Gear
- 6 — 6th Gear

**KEY**

- E — Empty 22 500 kg (49,600 lb)
- L — Loaded 49 720 kg (109,600 lb)



**Information unavailable  
at time of printing.**

**KEY**


1 — 1st Gear  
2 — 2nd Gear  
3 — 3rd Gear  
4 — 4th Gear  
5 — 5th Gear  
6 — 6th Gear

**KEY**

E — Empty 22 500 kg (49,600 lb)  
L — Loaded 49 720 kg (109,600 lb)

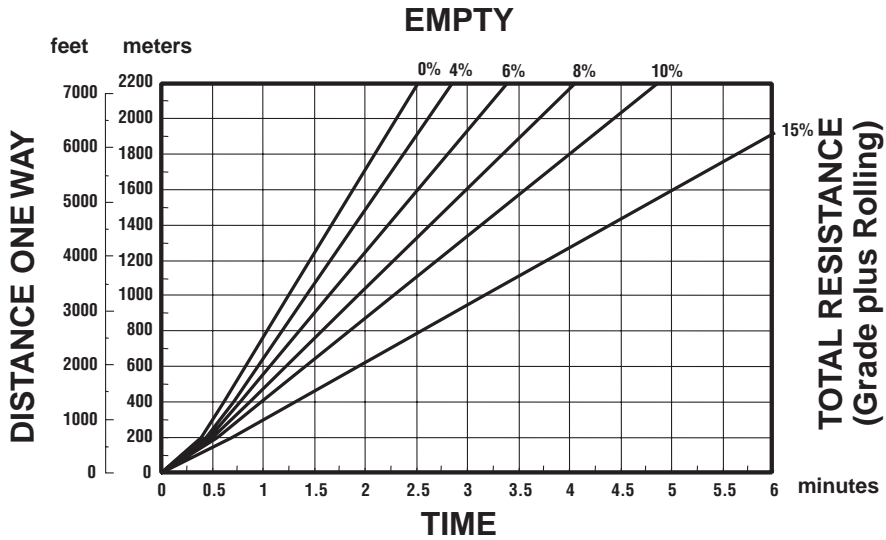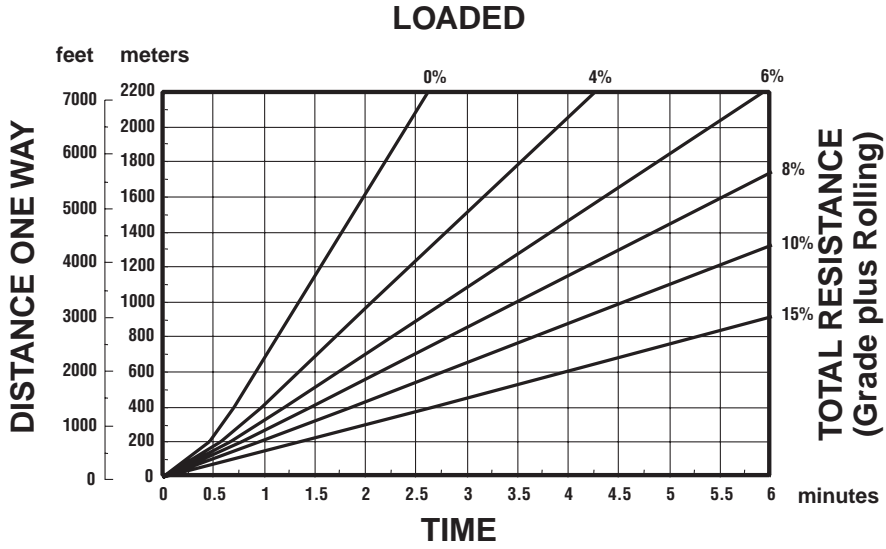



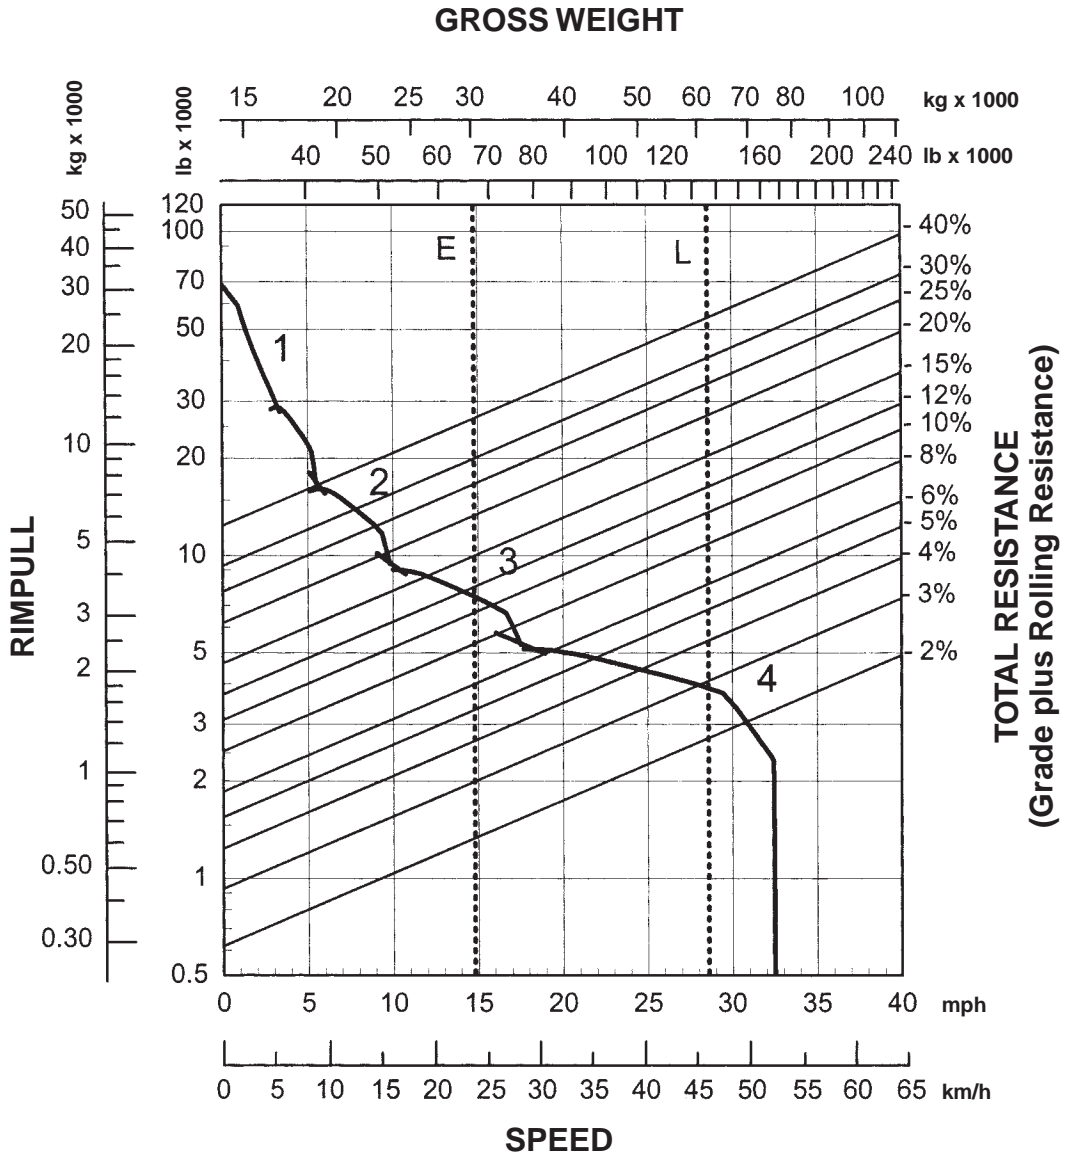


**KEY**

- 1 — 1st Gear
- 2 — 2nd Gear
- 3 — 3rd Gear
- 4 — 4th Gear

**KEY**

- E — Empty 30 190 kg (66,560 lb)
- L — Loaded 61 940 kg (136,560 lb)

**GROSS WEIGHT**

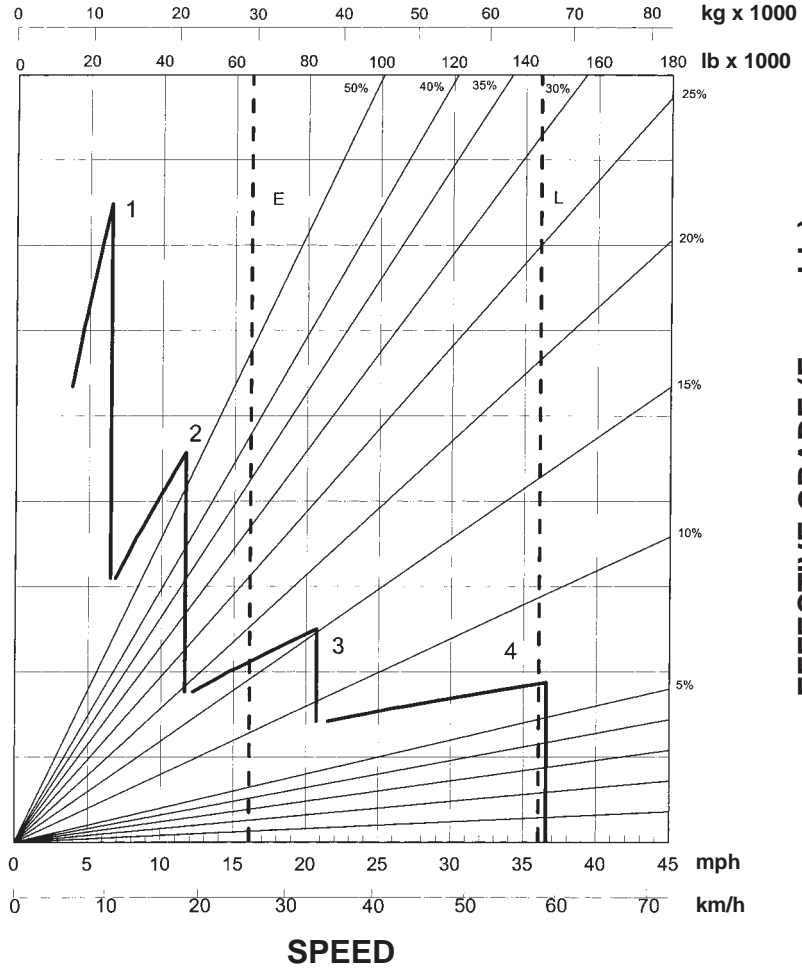

**EFFECTIVE GRADE (Favorable)**


**KEY**

- 1 — 1st Gear
- 2 — 2nd Gear
- 3 — 3rd Gear
- 4 — 4th Gear


**KEY**


- E — Empty 30 190 kg (66,560 lb)
- L — Loaded 61 940 kg (136,560 lb)

**LOADED**

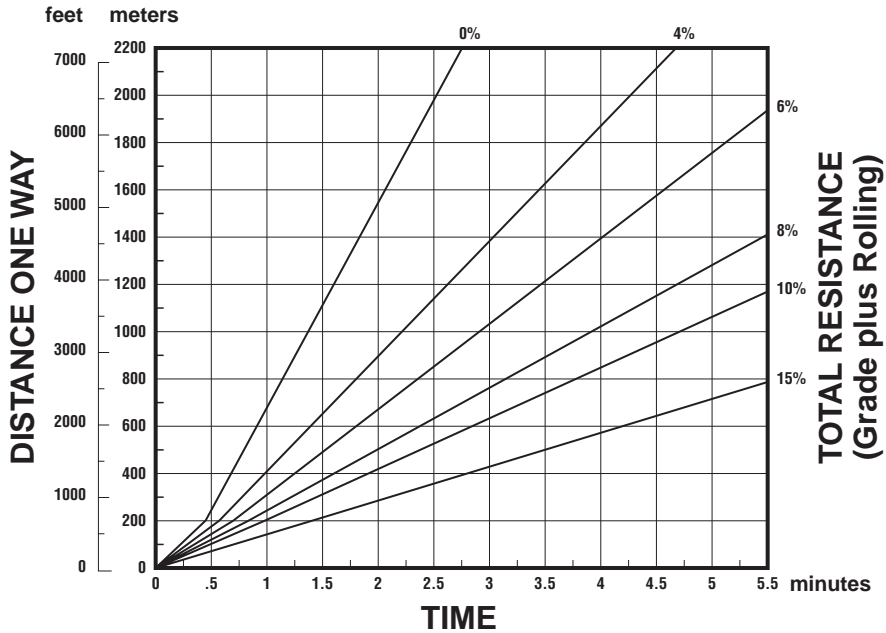

**EMPTY**

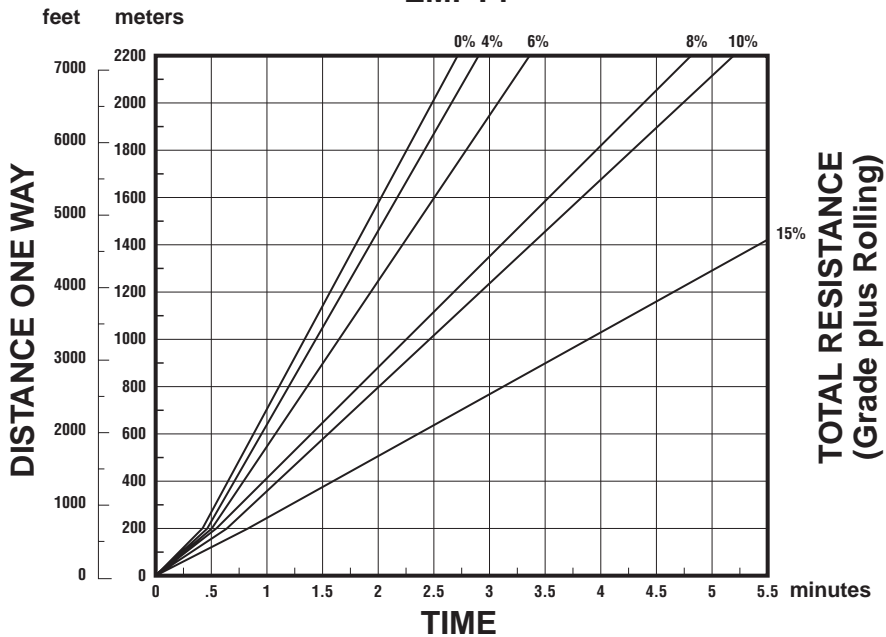

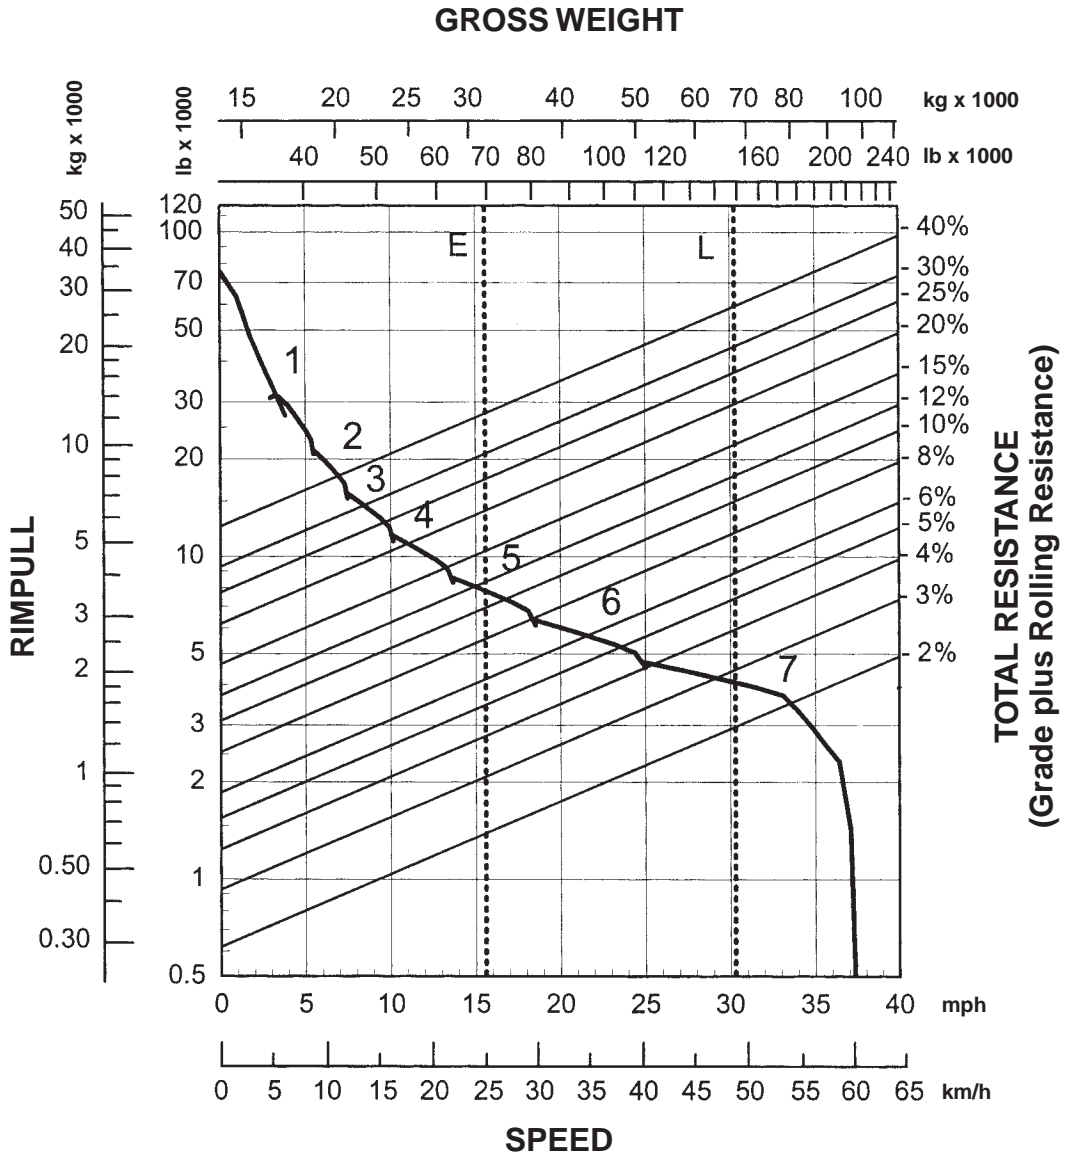


**KEY**

- 1 — 1st Gear
- 2 — 2nd Gear
- 3 — 3rd Gear
- 4 — 4th Gear
- 5 — 5th Gear
- 6 — 6th Gear
- 7 — 7th Gear

**KEY**

- E — Empty 31 650 kg (69,790 lb)
- L — Loaded 67 950 kg (149,830 lb)

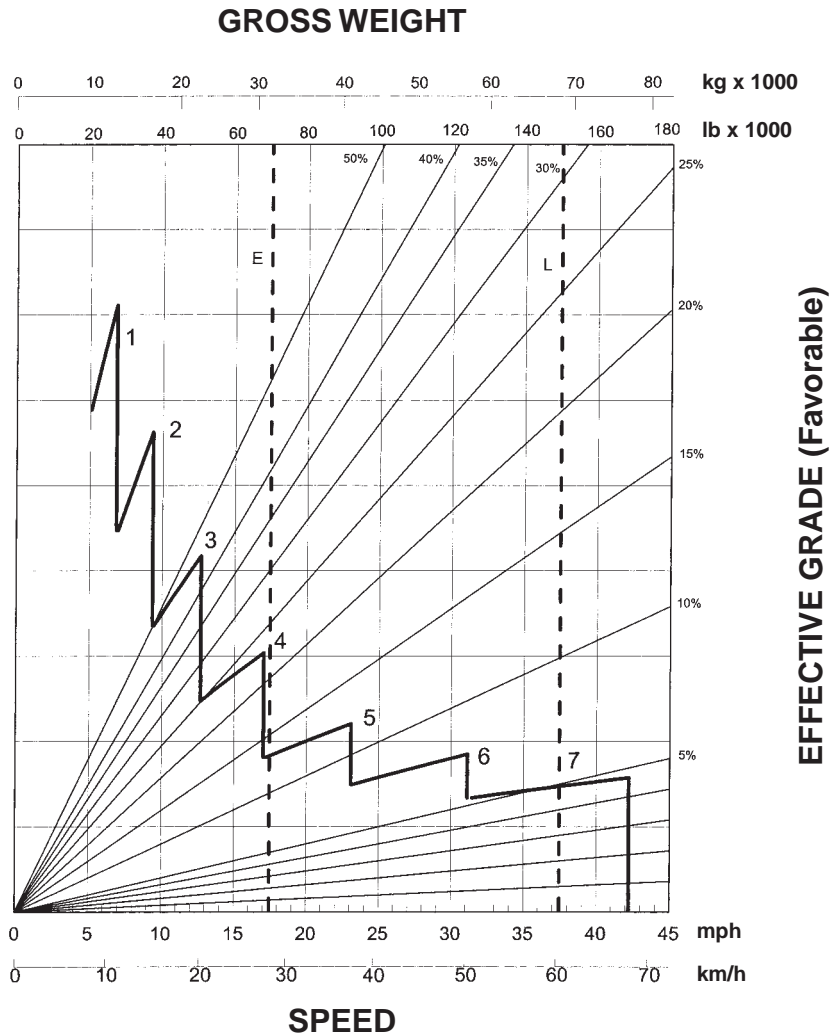


**KEY**

- 1 — 1st Gear
- 2 — 2nd Gear
- 3 — 3rd Gear
- 4 — 4th Gear
- 5 — 5th Gear
- 6 — 6th Gear
- 7 — 7th Gear


**KEY**

- E — Empty 31 650 kg (69,790 lb)
- L — Loaded 67 950 kg (149,830 lb)

**LOADED**

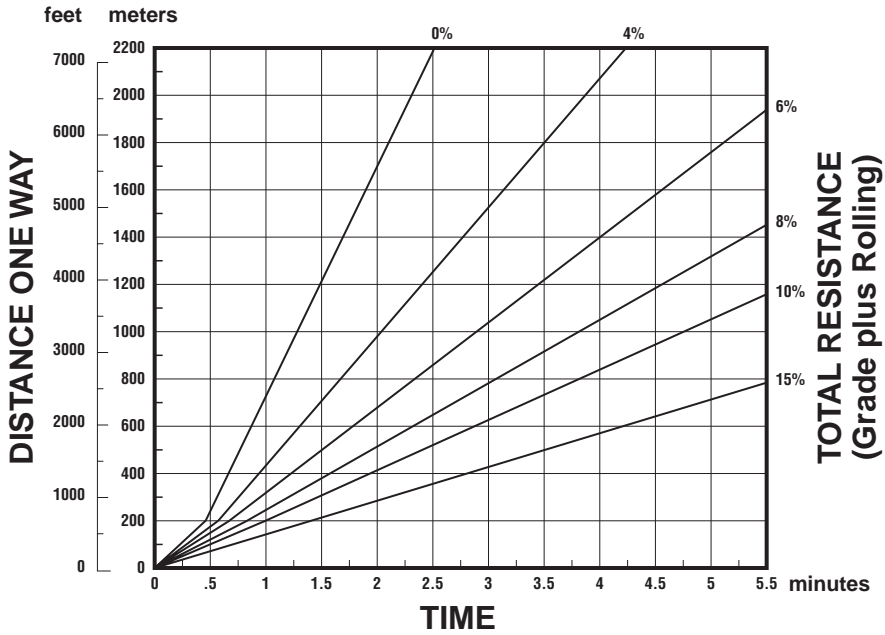

**EMPTY**

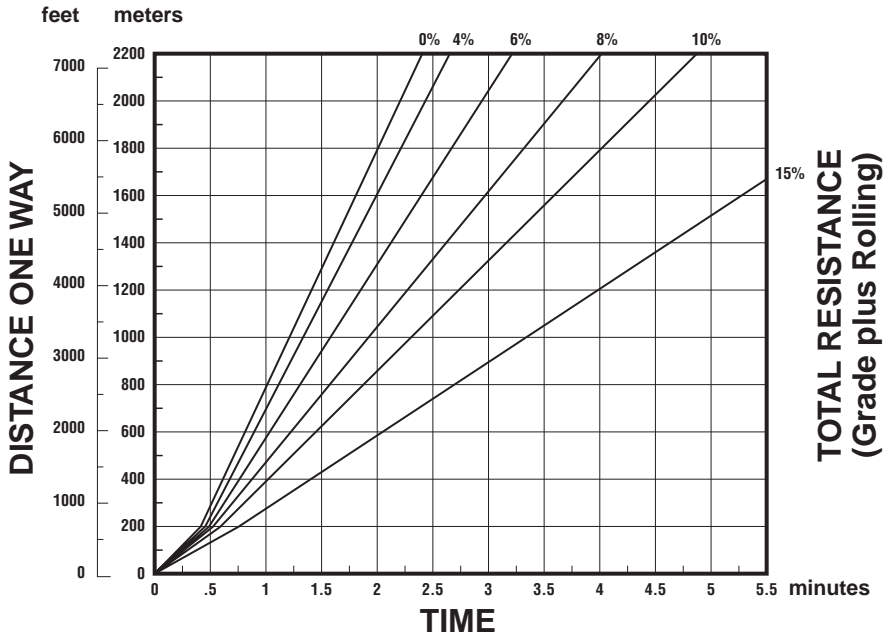

Notes —

# WHEEL TRACTORS SOIL COMPACTORS

## CONTENTS

### WHEEL TRACTORS

Features	12-1
Specifications	12-2
Travel speeds	12-4
Rimpull	12-4
Machine selection	12-6
Counterweights and ballast	12-6
Tire selection and maintenance	12-6
Bulldozer specifications	12-8
Special attachments	12-9

### SOIL COMPACTORS

Features	12-11
Specifications & Rimpull	12-12
Compaction fundamentals	12-13
Compactor types and zones of application	12-14
Estimating production (example problem)	12-15
Production table	12-16
Bulldozer specifications	12-16
Ground contact/pressure	12-17

### LANDFILL COMPACTORS (See Section 27)

## WHEEL TRACTORS

### Features:

- **Reliable Cat power train:** four-stroke-cycle diesel with adjustment-free fuel system ... full power shift with single lever on-the-go shifting.
- **Articulated frame steering** with hinge point midway between front and rear axles ... short turning radius, long wheelbase ... rear and front wheels track at all times.
- **Machine balance** ... equal weight distribution on axles when blading.
- **All dozer functions**, including tip and tilt, hydraulically controlled from operator's seat.





MODEL	814F		824G		834G	
Flywheel Power	164 kW	<b>220 hp</b>	235 kW	<b>315 hp</b>	358 kW	<b>480 hp</b>
Operating Weight*	18 611 kg	<b>40,944 lb</b>	26 620 kg	<b>58,564 lb</b>	46 010 kg	<b>101,430 lb</b>
Engine Model	<b>3306 DITA (EMISSIONS)</b>		<b>3406C DITA (EMISSIONS)</b>		<b>3456 DITA</b>	
Rated Engine RPM	<b>2200</b>		<b>2100</b>		<b>1900</b>	
No. Cylinders	<b>6</b>		<b>6</b>		<b>6</b>	
Displacement	10.5 L	<b>638 in<sup>3</sup></b>	14.6 L	<b>893 in<sup>3</sup></b>	15.8 L	<b>964 in<sup>3</sup></b>
Speeds:						
Forward	<b>4</b>		<b>4</b>		<b>4</b>	
Reverse	<b>4</b>		<b>4</b>		<b>3</b>	
Top Speed Forward	29.9 km/h	<b>18.6 mph</b>	33 km/h	<b>20.4 mph</b>	38.6 km/h	<b>24 mph</b>
Turning Circle with Blade	12.5 m	<b>41'0"</b>	14.6 m	<b>40'0"</b>	17.6 m	<b>57'9"</b>
Standard Tire Size	<b>23.5-25, 12 PR (L-2)</b>		<b>29.5-25, 16 PR (L-3)</b>		<b>35/65-R33, 24 PR (L-4)</b>	
Fuel Tank Refill Capacity	462 L	<b>122 U.S. gal</b>	630 L	<b>166.5 U.S. gal</b>	795 L	<b>210 U.S. gal</b>
GENERAL DIMENSIONS:						
Height (to top of ROPS)	3.368 m	<b>11'1"</b>	3.764 m	<b>12'4"</b>	4.08 m	<b>13'5"</b>
Height (stripped top)**	2.418 m	<b>7'11"</b>	2.676 m	<b>8'9"</b>	3.11 m	<b>10'2"</b>
Wheel Base	3.35 m	<b>11'0"</b>	3.7 m	<b>12'2"</b>	4.55 m	<b>14'11"</b>
Overall Length with Dozer	6.844 m	<b>22'5"</b>	8.02 m	<b>26'4"</b>	10.42 m	<b>34'2"</b>
Width (over standard tires)	2.865 m	<b>9'5"</b>	3.28 m	<b>10'9"</b>	3.54 m	<b>11'7"</b>
Ground Clearance	448 mm	<b>17.6"</b>	383 mm	<b>15.1"</b>	508 mm	<b>20"</b>
STRAIGHT BULLDOZER:						
Width	3.65 m	<b>12'0"</b>	4.51 m	<b>14'9"</b>	5.07 m	<b>16'8"</b>
Height	1.004 m	<b>3'4"</b>	1.23 m	<b>4'0"</b>	1.46 m	<b>4'9"</b>
Capacity	2.91 LCM	<b>3.8 LCY</b>	4.67 LCM	<b>6.11 LCY</b>	7.87 LCM	<b>10.3 LCY***</b>
Ground Clearance Below Skid Shoe	940 mm	<b>3'1"</b>	955 mm	<b>3'1.6"</b>	1390 mm	<b>4'7"</b>
Depth of Cut	460 mm	<b>18.1"</b>	430 mm	<b>16.9"</b>	455 mm	<b>17.9"</b>
Tilt Adjustment	747 mm	<b>2'5.4"</b>	1.18 m	<b>3'11"</b>	1.48 m	<b>4'10"</b>
Tip Adjustment	<b>18°</b>		<b>23°</b>		<b>21°</b>	
Lift Speed	0.4 m/sec	<b>1.3 ft/sec</b>	0.46 m/sec	<b>1.5 ft/sec</b>	0.81 m/sec	<b>2.66 ft/sec</b>

\*Operating Weight includes straight dozer, (U-blade on 834G) 75% CaCl<sub>2</sub> in all tires, lubricants, coolant, ROPS cab, full fuel tank and operator. 75% CaCl<sub>2</sub> in all tires adds the following weight to each model: 814F — 1996 kg (**4400 lb**), 824G — 3881 kg (**8556 lb**), 834G — 5360 kg (**11,816 lb**).

\*\*Height (stripped top) — without ROPS, exhaust, seat back or easily removed encumbrances.

\*\*\*Capacity of 834G U-Blade is 11.16 LCM (**14.6 LCY**).



MODEL	844		854G	
Flywheel Power	466 kW	625 hp	597 kW	800 hp
Operating Weight*	73 830 kg	162,410 lb	96 470 kg	212,230 lb
Engine Model	3412E HEUI		3508B EUI	
Rated Engine RPM	2000		1750	
No. Cylinders	12		8	
Displacement	27 L	1649 in <sup>3</sup>	34.5 L	2105 in <sup>3</sup>
Speeds:				
Forward	3		3	
Reverse	3		3	
Top Speed Forward	22.5 km/h	14 mph	20.5 km/h	12.7 mph
Turning Circle with Blade				
Standard Tire Size	45/65R39, PR (L-4)		45/65R45, L-4	
Fuel Tank Refill Capacity	930 L	245 U.S. gal	1345 L	355 U.S. gal
GENERAL DIMENSIONS:				
Height (to top of ROPS)	5.142 m	16'9"	5.5 m	18'3"
Height (stripped top)**	3.469 m	11'4"	3.984 m	13'1"
Wheel Base	4.6 m	15'1"	5.89 m	19'3"
Overall Length with Dozer	10.94 m	35'9"	13.405 m	44'0"
Width (over standard tires)				
Ground Clearance	1197 mm	3'9"	1314 mm	4'3"
SEMI-U DOZER:				
Width	5.278 m	17'4"	6.604 m	20'8"
Height	1.877 m	6'2"	2.124 m	6'11"
Capacity	16.1 m <sup>3</sup>	21.1 yd <sup>3</sup>	25.4 m <sup>3</sup>	33.1 yd <sup>3</sup>
Ground Clearance Below				
Skid Shoe	1372 mm	4'5"	1539 mm	5'1"
Depth of Cut	466 mm	18"	398 mm	16"
Tilt Adjustment	830 mm	2'7"	1165 mm	3'8"
Tip Adjustment		13°		15°
Lift Speed	0.353 m/sec	1.2 ft/sec	0.385 m/sec	1.3 ft/sec



\*Operating Weight includes straight dozer, 75% CaCl<sub>2</sub> in all tires, lubricants, coolant, ROPS cab, full fuel tank and operator.

\*\*Height (stripped top) — without ROPS, exhaust, seat back or easily removed encumbrances.

MODEL	814F		824G		834G		844		854G	
FORWARD										
GEAR	km/h	mph	km/h	mph	km/h	mph	km/h	mph	km/h	mph
1	5.6	3.5	5.9	3.6	6.9	4.3	7.2	4.5	6.9	4.3
2	9.8	6.1	10.5	6.5	12.4	7.7	12.9	8.0	12.0	7.4
3	17.2	10.7	18.6	11.5	22	13.7	22.5	14.0	20.5	12.7
4	29.9	18.6	33.0	20.4	38.6	24	—	—	—	—
REVERSE										
GEAR										
1	6.3	3.9	6.8	4.2	7.2	4.5	8.2	5.0	7.7	4.8
2	11.3	7.0	12.0	7.4	13	8.1	14.2	8.8	13.3	8.3
3	19.6	12.2	21.3	13.2	23	14.3	25.0	15.5	22.7	14.1
4	34.1	21.1	37.8	23.5	—	—	—	—	—	—

814F


824G

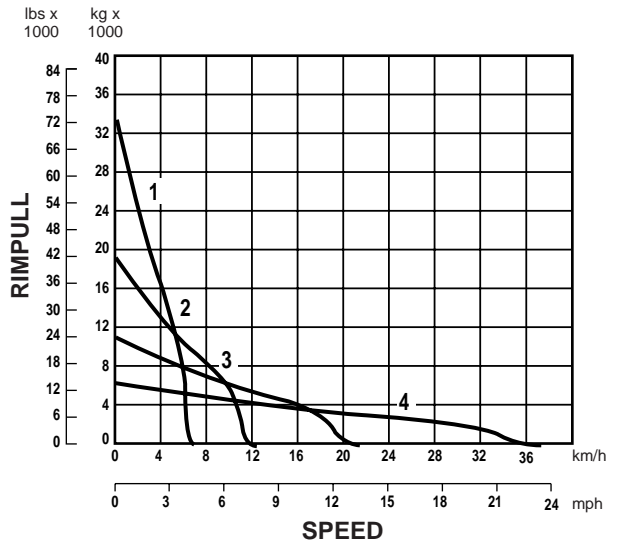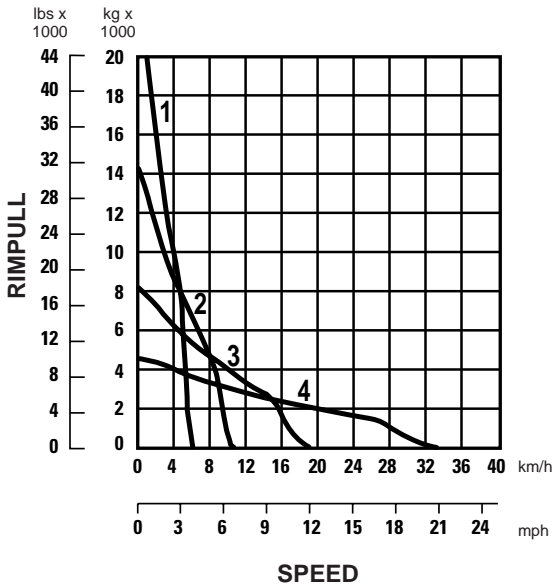

Usable rimpull depends upon traction and weight of tractor.

KEY  
 1 - 1st Gear  
 2 - 2nd Gear  
 3 - 3rd Gear  
 4 - 4th Gear

834G

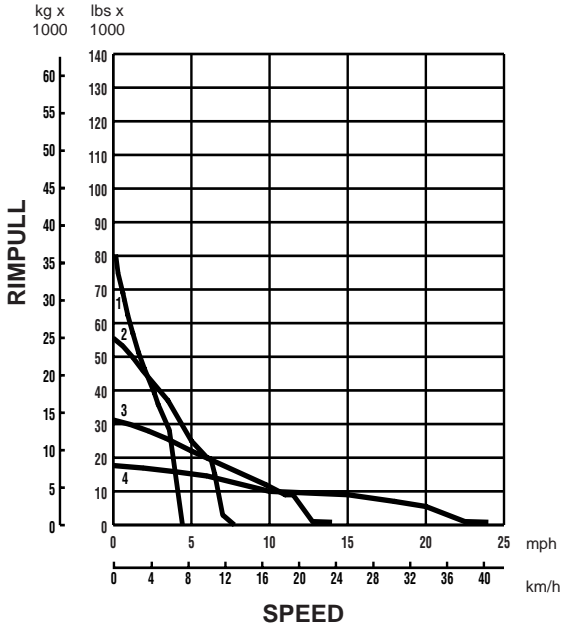

KEY

1 - 1st Gear  
2 - 2nd Gear  
3 - 3rd Gear  
4 - 4th Gear

---


Torque Converter

---


Direct Drive

Usable rimpull depends upon traction and weight of tractor.

844

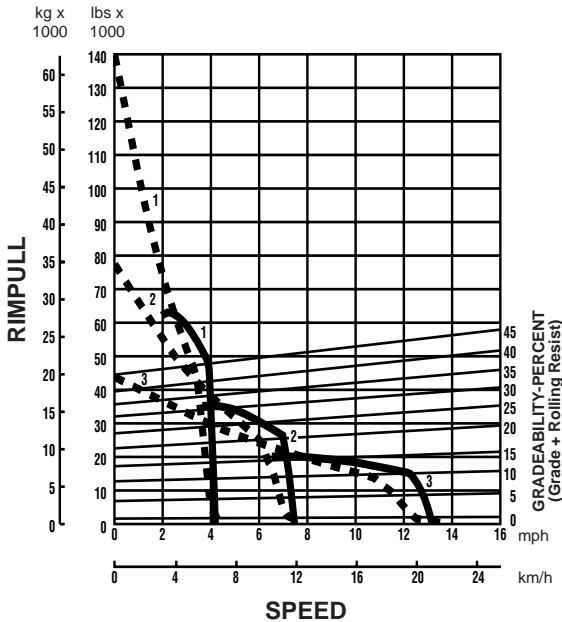

854G

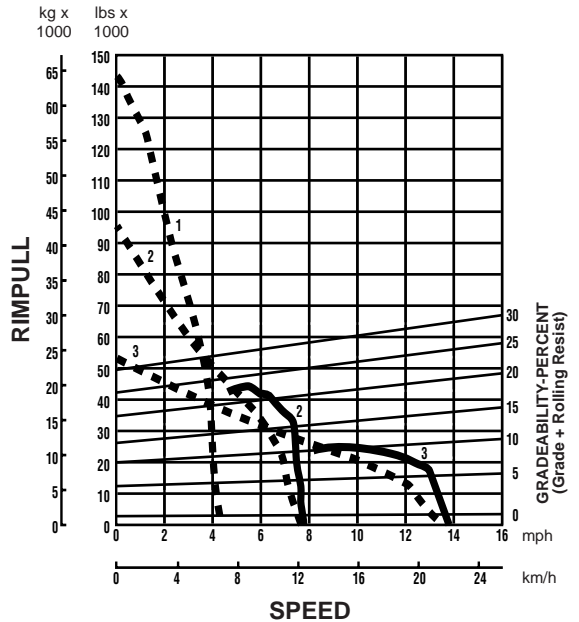

**CONSIDERATIONS IN MACHINE SELECTION**

The following factors should be considered when comparing wheels vs. tracks:

**Traction**

You can figure coefficient of traction, depending on underfoot conditions, from the Table Section in this book.

Wheels — up to 0.65 (in quarry pit with good floor)

Track — up to 0.90 (in soils permitting grouser penetration)

Usable Rimpull = Machine Weight × Coefficient of Traction

**Speed**

Wheels — travel speeds up to three times higher than track.

**Maneuverability**

Articulated steering and good visibility give wheel tractors high maneuverability.

**Cost**

See Owning and Operating Costs section. Tire vs undercarriage costs can often be the deciding factor in selecting wheels or tracks.

**Compaction**

Ground Pressure:

Wheels — from 241 kPa (35 psi) to 310 kPa (45 psi)

Tracks — from 82 kPa (12 psi) to 97 kPa (14 psi)

**Application**

*Utility ...* mobility, maneuverability and good speed suit wheel tractors for yard and stockpile work and for clean-up around shovels. Lower maintenance costs may be realized in certain soils that can be highly abrasive to track-type undercarriages.

*Coal pile ...* recommend wheel tractors in this application when following conditions are present:

- Long push distances
- Need for good material spread
- High degree of compaction desired

*Production Dozing ...* a wheel tractor should be considered in the following conditions:

- Long push distances
- Loose soils, little or no rock
- Level or downhill work
- Good underfoot conditions

*Pushloading Scrapers ...* a wheel tractor should be considered in the following conditions:

- Thin scraper cut
- Good underfoot conditions — no rock
- Higher push speeds

*Chip and Coal Scoops ...* may adversely affect performance and/or reliability, particularly when adverse grades are encountered.

**COUNTERWEIGHTS AND BALLAST**

For each specific application, there is a correct machine weight for proper balancing of traction, flotation, mobility and response.

- Low machine weight may increase tire slipping and wear, but improves flotation, mobility and machine response.
- High machine weight increases traction, but decreases mobility and response.

The machine weight is optimum for the operating conditions when wheel slipping barely occurs in the gear being used. Weight distribution under operating conditions should then be approximately equal between the wheels to balance power to each axle.

**Application**

Lower machine weight is usually required for typical second gear applications, such as fill spreading, stockpiling, road maintenance, towing compactors and shovel cleanup.

Higher machine weight is usually required for such typical first gear applications as heavy dozing and pushloading.

**Tire Ballast**

A solution of calcium chloride and water is recommended for tire ballast. It has the advantage of low cost with simple quick adjustment to suit working conditions.

**TIRE SELECTION & MAINTENANCE**

Requirements of traction, flotation and tire life are met by a choice of tire size, tread design and inflation pressure.

**Tire Width**

For good conditions with little rolling resistance on surfaces where flotation is no problem, a narrower tire may be most economical. It may also be considered in muddy conditions in which the mud can be penetrated to reach firm earth underneath.

Where flotation problems and increased rolling resistance are encountered, wider tires are recommended. The greater contact area and shallower penetration increases flotation.

### Tire Size

Larger optional tires will also improve flotation in soft conditions. With larger diameter, rimpull will be reduced which may be desirable to help control wheel spin.

**Traction Tread (L-2)** tire's penetration ability provides improved traction under some soil conditions.

**Rock Tread (L-3)** offers improved traction and a more cut resistant rubber compound than the L-2. It provides more rubber at the ground with the same footprint and reduces tire penetration under abrasive conditions. Recommended on any hard smooth surface such as rock, concrete or compacted earth.

**Rock — Deep Tread (L-4)** provides 50% more tread depth, thicker undertread and sidewall with increased tire life when compared to the L-3 tire. Recommended in rock conditions where sharp fragments cause high tire wear or sudden failures.

**Rock — Extra Deep Tread (L-5)** provides 150% more tread depth when compared to the L-3 tire. Intended for severe rock conditions with extreme penetration hazards.

**Chains** should be considered in severe applications where extra tread tires still give unsatisfactory life. Operating costs vary greatly depending on application, underfoot conditions, wheel spin and chain maintenance. Under normal rock operating conditions (short cycle, low average speed and minimum wheel spin) the maximum estimated chain life is about 2000 hours. Before installing chains, carefully weigh their overall economics against known tire costs. Chains are not recommended with new rock extra tread tires but can extend the life of a used tire. Always check clearance around tires before using chains.

Major applications where chains can be considered include:

- stripping rock or rocky soils
- clean-up work around rock loading shovels
- any application where underfoot conditions cause excessive tire wear.

### Inflation Pressure

In average operating conditions the recommended inflation pressure prevents excessive deflection and minimizes tire rollover on side slopes.

### Over-inflation

Reduces amount of tread contact with ground and provides less flotation. Over-inflation causes center of tread to wear faster and increases the chance of cuts and impact breaks.

### Under-inflation

Can cause permanent tire damage in the form of flex breaks, radial cracks, and tread or ply separation. On jobs where wrinkling and bead rollover *are not* apparent, inflation pressure may be reduced to a minimum of:

*Bias Ply* — 170 kPa (25 psi) on 35/65-33  
 170 kPa (25 psi) on 29.5-25  
 170 kPa (25 psi) on 26.5-25  
 170 kPa (25 psi) on 23.5-25

*Radial* — 310 kPa (45 psi) on 35/65R 33  
 310 kPa (45 psi) on 29.5R 25  
 205 kPa (30 psi) on 26.5R 25  
 240 kPa (35 psi) on 23.5R 25

Reduced pressure will:

- Increase flotation and traction in sand.
- Improve envelopment characteristics to reduce sudden death failure on rock jobs.
- Provide better tread wear by reducing contact pressure between tire and ground.

MODEL	814F		824G		834G	
Type	Straight		Straight		Straight	
Capacity**	2.89 m <sup>3</sup>	<b>3.77 yd<sup>3</sup></b>	5.12 m <sup>3</sup>	<b>6.7 yd<sup>3</sup></b>	7.87 m <sup>3</sup>	<b>10.3 yd<sup>3</sup></b>
Weight, Dozer*	3740 kg	<b>8245 lb</b>	5136 kg	<b>11,323 lb</b>	6880 kg	<b>15,170 lb</b>
General Dimensions (Tractor & Dozer)						
Length	6.82 m	<b>22'5"</b>	8.29 m	<b>27'2"</b>	10.42 m	<b>34'2"</b>
Width	3.65 m	<b>12'0"</b>	4.51 m	<b>14'9"</b>	5.07 m	<b>16'7"</b>
Blade:						
Width (including std. end bits)	3.65 m	<b>12'0"</b>	4.51 m	<b>14'9"</b>	5.07 m	<b>16'7"</b>
Height	1004 mm	<b>3'3.5"</b>	1220 mm	<b>4'0"</b>	1.46 mm	<b>4'9"</b>
Max. Digging Depth	460 mm	<b>18.1"</b>	430 mm	<b>16.9"</b>	455 mm	<b>17.9"</b>
Ground Clearance @ Full Lift Under Skid Plate	940 mm	<b>3'1"</b>	955 mm	<b>3'1.6"</b>	139 mm	<b>4'7"</b>
Tilt Adjust. from Horizontal	747 mm	<b>2'5.4"</b>	1184 mm	<b>3'10.6"</b>	1278 mm	<b>4'2"</b>
Total Tip Adjustment		<b>18°</b>		<b>22.4°</b>		<b>20.5°</b>

MODEL	834G		844		854G	
Type	U-Blade		Semi-U		Semi-U	
Capacity**	11.2 m <sup>3</sup>	<b>14.6 yd<sup>3</sup></b>	15.9 m <sup>3</sup>	<b>20.7 yd<sup>3</sup></b>	25.4 m <sup>3</sup>	<b>33.1 yd<sup>3</sup></b>
Weight, Dozer*	8470 kg	<b>18,670 lb</b>	15 670 kg	<b>34,520 lb</b>	21 910 kg	<b>48,270 lb</b>
General Dimensions (Tractor & Dozer)						
Length	10.42 m	<b>34'2"</b>	10.94 m	<b>35'9"</b>	13.405 m	<b>44'0"</b>
Width	5.15 m	<b>16'11"</b>	5.42 m	<b>17'8"</b>	6.321 m	<b>20'7"</b>
Blade:						
Width (including std. end bits)	5.15 m	<b>16'11"</b>	5.42 m	<b>17'8"</b>	6.321 m	<b>20'7"</b>
Height	1.46 mm	<b>4'9"</b>	1813 mm	<b>5'9"</b>	2179 mm	<b>7'1"</b>
Max. Digging Depth	442 mm	<b>17.4"</b>	466 mm	<b>18.3"</b>	398 mm	<b>15.7"</b>
Ground Clearance @ Full Lift Under Skid Plate	1118 mm	<b>3'8"</b>	1372 mm	<b>4'6"</b>	1539 mm	<b>5'0.6"</b>
Tilt Adjust. from Horizontal	1340 mm	<b>4'5"</b>	830 mm	<b>2'8.7"</b>	1165 mm	<b>3'9.9"</b>
Total Tip Adjustment		<b>22°</b>		<b>13°</b>		<b>15°</b>

\*Total Bulldozer Arrangement.

\*\*Blade capacities determined by SAE J1265.

**COAL U-BLADE**

	<b>814F</b>		<b>824G</b>		<b>834G</b>	
<b>Model:</b>	<b>BD814U-14</b>		<b>BD824U-15'9"</b>		<b>168-8799</b>	
Replaces "S" Blade						
<b>Blade:</b>						
Capacity	10.55 m <sup>3</sup>	<b>13.8 yd<sup>3</sup></b>	16.1 m <sup>3</sup>	<b>21 yd<sup>3</sup></b>	22.3 m <sup>3</sup>	<b>29 yd<sup>3</sup></b>
Length (Cutting Width)	4318 mm	<b>14'2"</b>	4788 mm	<b>15'8.5"</b>	5.68 mm	<b>18'10"</b>
Height, wing section (tapered down)	1473 mm	<b>4'10"</b>	1783 mm	<b>5'10"</b>	1.96 mm	<b>6'5"</b>
Wing Angle	<b>25°</b>		<b>30°</b>		<b>30°</b>	
Weight, Installed (Without Hydraulics)	1810 kg	<b>3985 lb</b>	3200 kg	<b>7050 lb</b>	5020 kg	<b>11,300 lb</b>

**WOODCHIP U-BLADE**

	<b>814F</b>		<b>824G</b>		<b>834G</b>	
<b>Model:</b>	<b>BD814US-14</b>		<b>BD824US-15'9"</b>		<b>168-880</b>	
Replaces "S" Blade						
<b>Blade:</b>						
Capacity	16.7 m <sup>3</sup>	<b>21.9 yd<sup>3</sup></b>	23.9 m <sup>3</sup>	<b>31.4 yd<sup>3</sup></b>	30.1 m <sup>3</sup>	<b>40 yd<sup>3</sup></b>
Length (Cutting Width)	4318 mm	<b>14'2"</b>	4775 mm	<b>15'8"</b>	5.7 mm	<b>18'10"</b>
Height, wing section	1880 mm	<b>6'2"</b>	2253 mm	<b>7'4.7"</b>	2.35 mm	<b>7'8"</b>
Wing Angle	<b>30°</b>		<b>30°</b>		<b>30°</b>	
Weight	1975 kg	<b>4350 lb</b>	3515 kg	<b>7750 lb</b>	5155 kg	<b>11,600 lb</b>

**COAL SCOOP WITH TILT**

	<b>814F</b>		<b>824G</b>	
<b>Model:</b>	<b>B14-15</b>		<b>B24-17</b>	
Replaces "S" Blade				
<b>Scoop:</b>				
Lift and Carrying Capacity	11.5 m <sup>3</sup>	<b>15 yd<sup>3</sup></b>	12.9 m <sup>3</sup>	<b>17 yd<sup>3</sup></b>
Dozing Capacity	19.1 m <sup>3</sup>	<b>25 yd<sup>3</sup></b>	25.8 m <sup>3</sup>	<b>34 yd<sup>3</sup></b>
Width	3734 mm	<b>12'3"</b>	4013 mm	<b>13'2"</b>
Height	1626 mm	<b>5'4"</b>	2489 mm	<b>8'2"</b>
Depth	2083 mm	<b>6'10"</b>	2997 mm	<b>9'8"</b>
Overall length	7.3 m	<b>24'0"</b>	—	—
Weight	5216 kg	<b>11,500 lb</b>	8400 kg	<b>18,500 lb</b>
Dump Clearance	1041 mm	<b>3'5"</b>	—	—

**CHIP SCOOP WITH TILT**

	<b>814F</b>		<b>824G</b>	
<b>Model:</b>	<b>B14-20S</b>		<b>B24-27S</b>	
Replaces "S" Blade				
<b>Scoop:</b>				
Capacity/Lift & Carry	15.3 m <sup>3</sup>	<b>20 yd<sup>3</sup></b>	20.6 m <sup>3</sup>	<b>27 yd<sup>3</sup></b>
Capacity/Dozing	30.6 m <sup>3</sup>	<b>40 yd<sup>3</sup></b>	41.3 m <sup>3</sup>	<b>54 yd<sup>3</sup></b>
Width	3734 mm	<b>12'3"</b>	4026 mm	<b>13'2.5"</b>
Height	2286 mm	<b>7'6"</b>	2794 mm	<b>9'2"</b>
Depth	2464 mm	<b>8'1"</b>	2946 mm	<b>9'8"</b>
Weight	5390 kg	<b>11,880 lb</b>	11 420 kg	<b>19,125 lb</b>



Notes —

# SOIL COMPACTORS

## CONTENTS

Features	12-11
Specifications & Rimpull	12-12
Compaction fundamentals	12-13
Compactor types and zones of application	12-14
Estimating production (example problem)	12-15
Production table	12-16
Bulldozer specifications	12-16

## Features:

- **Dozing, filling and compacting versatility.**
- **High speed operation** with responsive Caterpillar diesel Engine, single-lever planetary power shift transmission, and all-wheel drive.
- **Articulated frame** makes maneuvering quick and easy. Long wheel base for stability.
- **Wheels with tamping foot design and chevron pattern** give traction, penetration and compaction needed for high production. Foot pattern reversed on trailing drums to prevent overprinting lead drums.
- **Rear drums track front** for double compactive effort. Drum spacing covers mid-axle strip on return pass.
- **Rear axle oscillation** keeps all drums on ground for traction and stability.
- **Cleaner bars** keep drums free of carry over earth regardless of rolling direction. Adjustable, replaceable.
- **Optional fill spreading dozer** has single lever control for raise, lower, hold and float. (Blade tilt optional.)

# Soil Compactors

## Specifications



### ● Rimpull



MODEL	815F		825G	
Flywheel Power	164 kW	220 hp	235 kW	315 hp
Operating Weight*	20 879 kg	45,934 lb	31 740 kg	69,828 lb
Engine Model	3306 DITA		3406C DITA	
Rated Engine RPM	2200		2100	
No. Cylinders	6		6	
Displacement	10.5 L	638 in <sup>3</sup>	14.6 L	893 in <sup>3</sup>
Speeds:				
Forward	4		3	
Reverse	4		3	
Turning Circle with Blade	12.6 m	41'5"	14.6 m	48'0"
Fuel Tank Refill Capacity	464 L	122.6 U.S. gal	630 L	166.5 U.S. gal
TAMPING FOOT WHEELS:				
Each Drum Width	978 mm	3'2.5"	1125 mm	3'8.3"
Diameters, over feet	1.42 m	4'7.9"	1.68 m	5'6"
over drum	1.03 m	3'4.5"	1.29 m	4'3"
Feet per Wheel	60		65	
Feet per Row	12		13	
Rows of Feet	5		5	
Foot Length	198 mm	7.8"	203 mm	8"
End Area Per Foot	116 cm <sup>2</sup>	18 in <sup>2</sup>	183 cm <sup>2</sup>	28.4 in <sup>2</sup>
Width of Two Pass Coverage	4.35 m	14'3"	4.88 m	16'0"
GENERAL DIMENSIONS:				
Height (top of ROPS)	3.34 m	11'0"	3.74 m	12'3"
Height (stripped top)**	2.39 m	7'10"	2.65 m	8'8"
Wheel Base	3.35 m	11'0"	3.7 m	12'2"
Overall Length with Dozer	6.82 m	22'5"	8.24 m	27'1"
Width over Drums	3.24 m	10'8"	3.65 m	12'0"
Ground Clearance	423 mm	17"	355 mm	14"
STRAIGHT BULLDOZER:				
Width	3.76 m	12'4"	4.41 m	14'5"
Height	860 mm	2'10"	1.03 m	3'5"

\*Operating Weight includes coolant, lubricants, bulldozer, hydraulics, ROPS canopy, full fuel tank and operator.

\*\*Height (stripped top) — without ROPS, exhaust, seat back or other easily removed encumbrances.

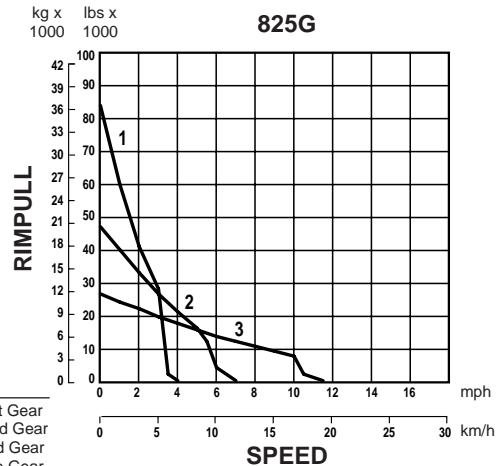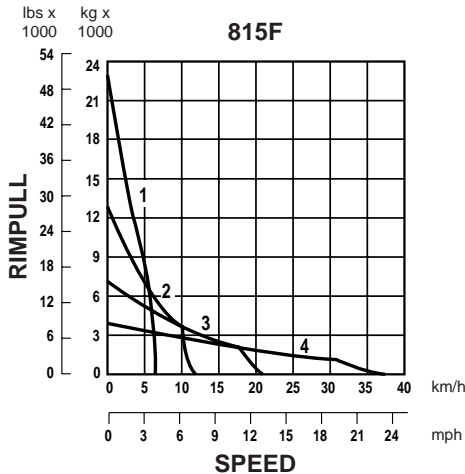

**COMPACTION FUNDAMENTALS**

The following discussion applies to soil compaction only. For information on refuse compaction, see Waste Disposal section of this book.

**Definition**

Compaction is the process of physically densifying or packing the soil ... resulting in increased weight per unit volume. It is generally accepted that the strength of a soil can be increased by densification. Three important factors affect compaction.


- Material gradation
- Moisture content
- Compactive effort

*Material Gradation* — refers to the distribution (% by weight) of the different particle sizes within a given soil sample. A sample is *well-graded* if it contains a good, even distribution of particle sizes. A sample composed of predominantly one size particle, is said to be *poorly-graded*. In terms of compaction, a well-graded soil will compact more easily than one that is poorly-graded. In well-graded material the smaller particles tend to fill the empty spaces between the larger particles, leaving fewer voids after compaction.

**MATERIAL GRADATION**



Poorly-graded




Well-graded

*Moisture Content* — or the amount of water present in a soil, is very important to compaction. Water lubricates soil particles thus helping them slide into the most dense position. Water also creates clay particle bonding, giving cohesive materials their sticky qualities.

**OPTIMUM MOISTURE**

Heavy clay	17.5%
Silty clay	15.0%
Sandy clay	13.0%
Sand	10.0%
Gravel, sand, clay mix (pit run)	7.0%

Experience has shown that it is very difficult, if not impossible, to achieve proper compaction in materials that are too dry or too wet. Soil experts have determined that in practically every soil there is an amount of water, called optimum moisture content, at which it is possible to obtain maximum density with a given amount of compactive effort. The curve below shows this relationship between dry density and moisture content. It is called a compaction curve, moisture-density curve or Proctor curve.

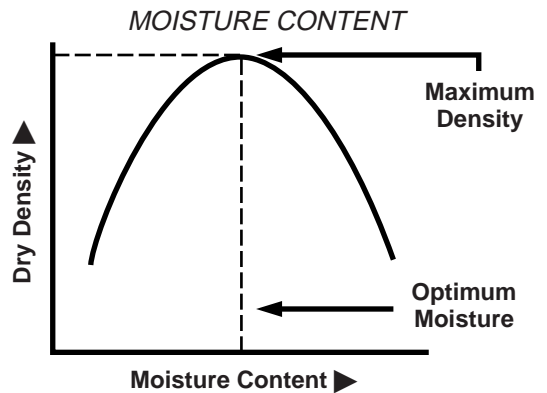

*Compactive Effort* — refers to the method employed by a compactor to impart energy into the soil to achieve compaction. Compactors are designed to use one or a combination of the following types of compactive effort.

- Static weight (or pressure)
- Kneading action (or manipulation)
- Impact (or sharp blow)
- Vibration (or shaking)

**COMPACTOR TYPES**


Compaction equipment can be grouped generally into the following classifications:

- sheepsfoot
- vibratory
- pneumatic
- high speed tamping foot
- chopper wheels (see Landfill Compactor section)

Combinations of these types are also available, such as a vibrating smooth steel drum.

For ease of comparison, the compactors have been placed on the Zones of Application Chart shown below. This chart contains a range of material moistures from 100% clay to 100% sand, plus a rock zone. Each type has been positioned in what is considered to be its most effective and economical zone of application. However, it is not uncommon to find them working out of their zones. Exact positioning of the zones can vary with differing material conditions.

**RANGES OF SOIL TYPES FOR SOIL COMPACTION EQUIPMENT**

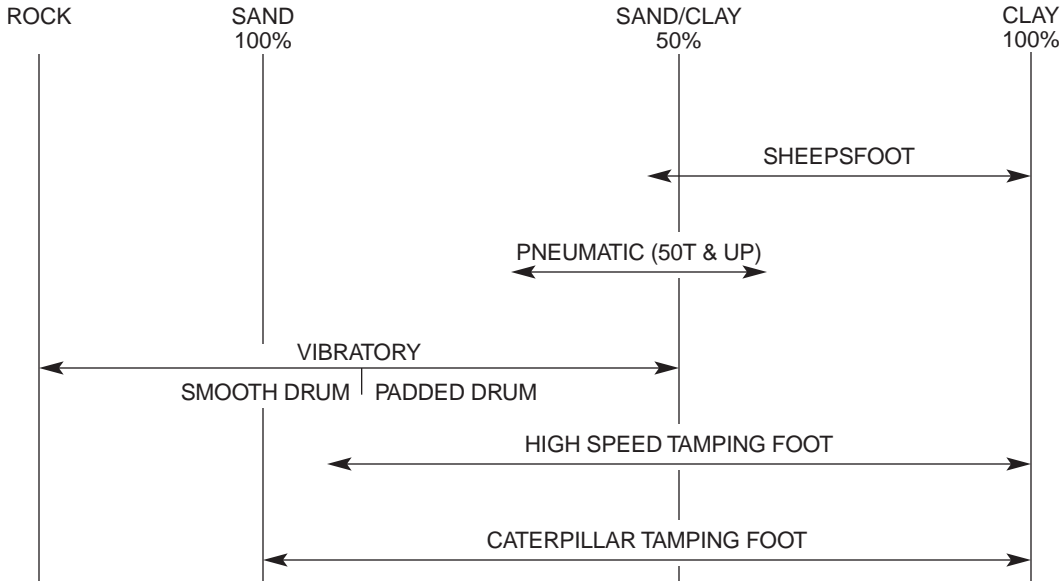

## COMPACTOR PRODUCTION

Compactor production is expressed in compacted cubic meters (Cm<sup>3</sup>) or compacted cubic yards (CCY) per hour. Material in its natural or bank state is measured in bank cubic meters or yards (Bm<sup>3</sup> or BCY). When it is removed or placed in a fill, it is measured in loose cubic meters or yards (Lm<sup>3</sup> or LCY).

When the loose material is worked into a compacted state, the relationship of *compacted material to bank material* is shown as the shrinkage factor (SF).

$$SF = \frac{\text{Compacted cubic meters (Cm}^3\text{)}}{\text{Bank cubic meters (Bm}^3\text{)}}$$

$$SF = \frac{\text{Compacted cubic yards (CCY)}}{\text{Bank cubic yards (BCY)}}$$

The construction industry has developed the following formula for use in estimating compactor production. This formula gives the material volume a given machine can compact in a 60-minute hour.

### Metric Method

$$\text{Cm}^3 = \frac{W \times S \times L}{P}$$

W = Compacted width per pass, in meters. (For Caterpillar Compactors it is recommended that W = Twice the width of one wheel.)

S = Average speed, in kilometers per hour.

L = Compacted thickness of lift, in millimeters.

P = Number of machine passes to achieve compaction (**can only be determined by testing the compacted material density on-the-job**).

### English Method

$$\text{CCY/Hr} = \frac{W \times S \times L \times 16.3}{P}$$

W = Compacted width per pass, in feet. (For Caterpillar Compactors it is recommended that W = Twice the width of one wheel.)

S = Average speed, in miles per hour.

L = Compacted thickness of lift, in inches.

16.3 = Conversion constant, equals 5280 feet ÷ 12 inches ÷ 27 cubic feet

P = Number of machine passes to achieve compaction (**can only be determined by testing the compacted material density on-the-job**).

### Example problem (Metric)

Determine production for an 815F operating under the following conditions:

$$P = 5, S = 10 \text{ km/h}, L = 100 \text{ mm}$$

Refer to 815F in the production table on the next page. Read down the first column until reaching section for 5 passes. Within this section in the second column, find the speed closest to 10 km/h. Read across this line to the 100 mm compacted lift. Read the production figure given.

**Answer:** 377 Cm<sup>3</sup>/h. (Since the machine's speed of 10 km/h is slightly faster than the 9.5 of the table, production may be interpolated slightly higher — say 395 Cm<sup>3</sup>/h.)

### Example problem (English)

Determine production for an 825G operating under the following conditions:

$$P = 4, S = 8 \text{ mph}, L = 6 \text{ inches}$$

Refer to the production estimating table on the next page. This table contains estimates for the 815F and 825G Compactors using various speeds, lift thicknesses and number of passes. These figures were calculated using the formula discussed on this page. The figures represent 100% efficiency. W = Twice the width of one wheel.

In the 825 portion of this table, read down the first column until reaching the section for four passes. Within this section in the second column, find the line for 8 mph. Read across this line to the lift thickness column for 6 inches. Read the production figure given.

**Answer:** 1444 CCY/hr.



**PRODUCTION TABLE**

MODEL AND MACHINE PASSES*	AVERAGE SPEED		COMPACTED LIFT THICKNESS								
	km/h	mph	100 mm m³/h	4 in yd³/hr	150 mm m³/h	6 in yd³/hr	200 mm m³/h	8 in yd³/hr	250 mm m³/h	10 in yd³/hr	
<b>815F</b> 3	6.5	4	419	548	628	822	837	1095	—	—	
	9.5	6	628	822	942	1232	1256	1643	—	—	
	13.0	8	837	1095	1256	1643	1675	2191	—	—	
	4	6.5	4	314	411	471	616	628	822	—	—
		9.5	6	471	616	706	924	942	1232	—	—
		13.0	8	628	822	942	1232	1256	1643	—	—
	5	6.5	4	251	329	377	493	502	657	—	—
		9.5	6	377	493	565	739	754	986	—	—
		13.0	8	502	657	754	986	1005	1314	—	—
	6	6.5	4	286	274	314	411	419	548	—	—
		9.5	6	314	411	471	616	628	822	—	—
		13.0	8	419	548	628	822	837	1095	—	—
<b>825G</b> 3	6.5	4	488	642	731	962	975	1283	1219	1604	
	9.5	6	713	962	1069	1444	1425	1925	1781	2406	
	13.0	8	975	1283	1463	1925	1950	2566	2438	3208	
	4	6.5	4	366	481	534	722	731	962	914	1203
		9.5	6	534	722	802	1083	1069	1444	1336	1804
	5	13.0	8	731	962	1097	1444	1463	1925	1828	2406
		6.5	4	293	385	439	577	585	770	731	962
		9.5	6	428	577	641	866	855	1155	1069	1444
	6	13.0	8	585	770	878	1155	1170	1540	1463	1925
		6.5	4	244	321	366	481	488	642	609	802
		9.5	6	356	481	534	722	713	962	891	1203
		13.0	8	488	642	731	962	975	1283	1219	1604

\*The number of machine passes required is dependent on soil type, moisture content, desired compaction and machine weight.

MODEL	815F		825G	
Type	Fill Spreading		Fill Spreading	
Capacity**				
Earth	2.16 m³	2.82 yd³	3.79 m³	4.95 yd³
Refuse	—	—	—	—
Weight, Dozer*	1460 kg	3220 lb	2831 kg	6241 lb
General Dimensions: (Tractor & Dozer)				
Length	6.82 m	22'5"	8.37 m	27'6"
Width	3.76 m	12'4"	4.61 m	15'2"
Blade Dimensions:				
Width, End Bits	3.76 m	12'4"	4.41 m	14'5"
Height, Moldboard	860 mm	2'10"	1.03 m	3'4"
Height, Trash Rack	—	—	—	—
Max. Digging Depth	407 mm	16"	312 mm	12.3"
Ground Clearance				
@ Full Lift	628 mm	2'0.7"	932 mm	3'0.7"
Tilt Adjust. from Horizontal	328 mm	12.9"	801 mm	2'7.5"

\*Total Bulldozer Arrangement.

\*\*Blade capacities determined by SAE recommended practice J1265.

**815F and 825G Soil Compactors  
Ground Contact Pressure**

<b>MODEL</b>		<b>815F</b>		<b>825G</b>	
Weight		45,930 lbs		69,830 lbs	
Contact Area		Min	Max	Min	Max
Tip Penetration	0.5 in	<b>65 in<sup>2</sup></b>	<b>67 in<sup>2</sup></b>	<b>71.5 in<sup>2</sup></b>	<b>75.5 in<sup>2</sup></b>
	1.0 in	<b>213 in<sup>2</sup></b>	<b>235 in<sup>2</sup></b>	<b>215.2 in<sup>2</sup></b>	<b>225.8 in<sup>2</sup></b>
	1.5 in	<b>293 in<sup>2</sup></b>	<b>351 in<sup>2</sup></b>	<b>443.3 in<sup>2</sup></b>	<b>450.9 in<sup>2</sup></b>
	2.0 in	<b>470 in<sup>2</sup></b>	<b>481 in<sup>2</sup></b>	<b>588.1 in<sup>2</sup></b>	<b>638.5 in<sup>2</sup></b>
Contact Pressure		Min	Max	Min	Max
Tip Penetration	0.5 in	<b>685.6 psi</b>	<b>706.7 psi</b>	<b>924.9 psi</b>	<b>976.6 psi</b>
	1.0 in	<b>195.5 psi</b>	<b>215.7 psi</b>	<b>309.2 psi</b>	<b>324.5 psi</b>
	1.5 in	<b>130.9 psi</b>	<b>156.8 psi</b>	<b>154.9 psi</b>	<b>157.5 psi</b>
	2.0 in	<b>95.5 psi</b>	<b>97.7 psi</b>	<b>109.4 psi</b>	<b>118.7 psi</b>





# WHEEL LOADERS

## CONTENTS

### WHEEL LOADERS

Features	13-1
Specifications	13-2
Performance data	13-7
Machine dimensions	13-37
SAE loader ratings	13-43
Machine selection:	
Cycle time factors	13-45
Truck loading	13-46
Bucket fill factors	13-46
Example problem	13-47
Alternative method of selection	13-48
Nomographs	13-49
Bucket selection	13-51
Estimated haul or return time charts	13-55
Travel time charts	13-56
Production estimating tables:	
Cubic meters and cubic yards	13-78
Metric tons and U.S. tons in shot rock	13-79
Work tools	13-81
Waste handling wheel loaders	27-17

## WHEEL LOADERS

### Features:

- Caterpillar large displacement, heavy duty diesel engine.
- Productive operator environment. Excellent visibility.
- Automatic lift and bucket controls.
- Adjustable suspension seat and steering column.
- Four wheel enclosed wet disc brakes.
- Automatic power shift transmissions. Allows operator to select automatic or manual mode.
- Hydrostatic drive on 902, 906 and 914G.
- Transmission neutralizer switch (938G-980G).
- Centerpoint articulated frame steering.
- Computerized machine function monitoring.
- Command control steering with integrated transmission controls and electro-hydraulic controls ... 950G-980G.
- Lock up clutch on 990 and 994D (optional on 988G).
- Impeller clutch on 988G, 990, 992G and 994D.
- Tilting hood ... 938G-980G.
- Brake wear indicator.
- Limited slip differentials.
- Traction control system ... 938G.
- Automatic Ride Control suspension system. Operator select “on”, “off” or “automatic”.
- Payload control system.

Listed features may be standard on some models, optional or unavailable on others. Contact your Caterpillar Dealer for specific information.



MODEL	902		906		908		914G	
Flywheel Power: Net	34 kW	45 hp	45 kW	60 hp	61 kW	81 hp	67 kW	90 hp
Gross	36 kW	48 hp	47 kW	63 hp	64 kW	86 hp	—	—
Engine Model	3024		3034		3054T		3054T	
Rated Engine RPM	2600		2600		2200		2200	
Bore	84 mm	3.31"	97 mm	3.82"	100 mm	3.94"	100 mm	3.94"
Stroke	100 mm	3.94"	100 mm	3.94"	127 mm	5"	127 mm	5"
No. Cylinders	4		4		4		4	
Displacement	2.2 L	135 in <sup>3</sup>	2.95 L	180 in <sup>3</sup>	4 L	243 in <sup>3</sup>	4 L	243 in <sup>3</sup>
Speeds Forward	km/h mph		km/h mph		km/h mph		km/h mph	
1st	7	Lo 4	8	Lo 5	7	Lo 4	9	Hi 5.6
2nd	20	Hi 12	20	Hi 12	20	Hi 12	35	Hi 21.7
3rd	—		—		—		—	
4th	—		—		—		—	
Speeds Reverse	km/h mph		km/h mph		km/h mph		km/h mph	
1st	7	Lo 4	8	Lo 5	7	Lo 4	9	Hi 5.6
2nd	20	Hi 12	20	Hi 12	20	Hi 12	35	Hi 21.7
3rd	—		—		—		—	
4th	—		—		—		—	
Hydraulic Cycle Time, Rated Load in Bucket:	Seconds		Seconds		Seconds		Seconds	
Raise	4.5		4.5		5.4		5.6	
Dump	1.5		1.5		1.6		2.1	
Lower (Empty, Float Down)	3.0		3.0		3.6		3.2	
Total	8.9		8.9		10.6		10.9	
Tread Width	1.39 m	4'5"	1.50 m	4'9"	1.57 m	5'1"	1.80 m	5'11"
Width Over Tires	1.73 m	5'7"	1.84 m	6'0"	1.97 m	6'4"	2.26 m	7'5"
Ground Clearance	385 mm	15"	420 mm	17"	490 mm	19.2"	456 mm	18"
Fuel Tank Capacity	74 L	19.6 U.S. gal	74 L	19.6 U.S. gal	80 L	21.1 U.S. gal	150 L	39.6 U.S. gal
Hydraulic Tank Capacity	49 L	13 U.S. gal	49 L	13 U.S. gal	49 L	13 U.S. gal	70 L	18.5 U.S. gal
Hydraulic System Capacity (includes tank)	66 L	17.5 U.S. gal	66 L	17.5 U.S. gal	66 L	17.5 U.S. gal	100 L	26.4 U.S. gal



MODEL	924Gz		924G Pin On		928G		938G	
Flywheel Power: Net Max.	82 kW	110 hp	82 kW	110 hp	93 kW	125 hp	119 kW	160 hp
Engine Model	3056T		3056T		3116T		3126DITA	
Rated Engine RPM	2300		2300		2300		2200	
Bore	100 mm	3.94"	100 mm	3.94"	105 mm	4.13"	110 mm	4.3"
Stroke	127 mm	5"	127 mm	5"	127 mm	5"	127 mm	5"
No. Cylinders	6		6		6		6	
Displacement	6 L	366 in <sup>3</sup>	6 L	366 in <sup>3</sup>	6.6 L	403 in <sup>3</sup>	7.2 L	439 in <sup>3</sup>
Speeds Forward	km/h	mph	km/h	mph	km/h	mph	km/h	mph
1st	6.7	4.2	6.7	4.2	7.6	4.7	7.6	4.7
2nd	12.2	7.6	12.2	7.6	12.0	7.5	13.9	8.6
3rd	21.8	13.5	21.8	13.5	24.6	15.3	23.9	14.8
4th	38.5	23.9	38.5	23.9	36.7	22.8	39.2	24.3
Speeds Reverse								
1st	6.5	4.0	6.5	4.0	7.6	4.7	7.6	4.7
2nd	11.9	7.4	11.9	7.4	12.0	7.5	13.9	8.6
3rd	21.6	13.4	21.6	13.4	24.6	15.3	39.2	24.3
4th	—		—		—		—	
Hydraulic Cycle Time, Rated Load in Bucket:	Seconds		Seconds		Seconds		Seconds	
Raise	5.5		5.1		6.1		6.0	
Dump	1.2		1.4		1.2		1.4	
Lower (Empty, Float Down)	2.7		2.4		2.8		2.8	
Total	9.4		8.9		10.1		10.2	
Tread Width	1.88 m	6'0"	1.88 m	6'0"	1.95 m	6'5"	2.02 m	6'8"
Width Over Tires	2.356 m	7'7"	2.356 m	7'7"	2.44 m	8'0"	2.6 m	8'6"
Ground Clearance	368 mm	14.5"	368 mm	14.5"	408 mm	16"	400 mm	16"
Fuel Tank Capacity	198 L	51.5 U.S. gal	198 L	51.5 U.S. gal	230 L	60.8 U.S. gal	254 L	67 U.S. gal
Hydraulic Tank Capacity	73 L	19 U.S. gal	73 L	19 U.S. gal	70 L	18.5 U.S. gal	76 L	20.1 U.S. gal
Hydraulic System Capacity (includes tank)	133 L	35 U.S. gal	150 L	39 U.S. gal	125 L	33 U.S. gal	90 L	23.8 U.S. gal



MODEL	950G		962G		966G		972G	
Flywheel Power: Net	134 kW	<b>180 hp</b>	149 kW	<b>200 hp</b>	175 kW	<b>235 hp</b>	198 kW	<b>265 hp</b>
Max.	147 kW	<b>197 hp</b>	154 kW	<b>207 hp</b>	189 kW	<b>253 hp</b>	205 kW	<b>275 hp</b>
Engine Model	<b>3126DITA</b>		<b>3126DITA</b>		<b>3306DITA</b>		<b>3306DITA</b>	
Rated Engine RPM	<b>2200</b>		<b>2200</b>		<b>2200</b>		<b>2200</b>	
Bore	110 mm	<b>4.3"</b>	110 mm	<b>4.3"</b>	121 mm	<b>4.75"</b>	121 mm	<b>4.75"</b>
Stroke	127 mm	<b>5"</b>	127 mm	<b>5"</b>	152 mm	<b>6"</b>	152 mm	<b>6"</b>
No. Cylinders	<b>6</b>		<b>6</b>		<b>6</b>		<b>6</b>	
Displacement	7.2 L	<b>439 in<sup>3</sup></b>	7.2 L	<b>439 in<sup>3</sup></b>	10.5 L	<b>638 in<sup>3</sup></b>	10.5 L	<b>638 in<sup>3</sup></b>
Speeds Forward	km/h	<b>mph</b>	km/h	<b>mph</b>	km/h	<b>mph</b>	km/h	<b>mph</b>
1st	6.9	<b>4.3</b>	6.9	<b>4.3</b>	7.2	<b>4.5</b>	7.2	<b>4.5</b>
2nd	12.7	<b>7.9</b>	12.7	<b>7.9</b>	12.6	<b>7.8</b>	12.5	<b>7.8</b>
3rd	22.3	<b>13.9</b>	22.3	<b>13.9</b>	21.7	<b>13.5</b>	21.5	<b>13.3</b>
4th	37.0	<b>23.0</b>	37.0	<b>23.0</b>	37.3	<b>23.1</b>	37.0	<b>22.9</b>
Speeds Reverse								
1st	7.6	<b>4.7</b>	7.6	<b>4.7</b>	8.2	<b>5.1</b>	8.2	<b>5.1</b>
2nd	13.9	<b>8.7</b>	13.9	<b>8.7</b>	14.3	<b>8.9</b>	14.2	<b>8.8</b>
3rd	24.5	<b>15.3</b>	24.5	<b>15.3</b>	24.6	<b>15.3</b>	24.4	<b>15.1</b>
4th	40.5	<b>25.3</b>	40.5	<b>25.3</b>	42.3	<b>26.2</b>	41.9	<b>26.0</b>
Hydraulic Cycle Time, Rated Load in Bucket:	<b>Seconds</b>		<b>Seconds</b>		<b>Seconds</b>		<b>Seconds</b>	
Raise	<b>6.3</b>		<b>6.3</b>		<b>6.6</b>		<b>6.6</b>	
Dump	<b>2.2</b>		<b>2.2</b>		<b>1.3</b>		<b>1.6</b>	
Lower (Empty, Float Down)	<b>2.2</b>		<b>2.2</b>		<b>1.8</b>		<b>1.8</b>	
Total	<b>10.7</b>		<b>10.7</b>		<b>9.7</b>		<b>10.0</b>	
Tread Width	2.14 m	<b>7'0"</b>	2.14 m	<b>7'0"</b>	2.23 m	<b>7'4"</b>	2.23 m	<b>7'4"</b>
Width Over Tires	2.89 m	<b>9'6"</b>	2.89 m	<b>9'6"</b>	2.96 m	<b>9'9"</b>	2.96 m	<b>9'9"</b>
Ground Clearance	400 mm	<b>16"</b>	400 mm	<b>16"</b>	430 mm	<b>17"</b>	430 mm	<b>17"</b>
Fuel Tank Capacity	295 L	<b>78 U.S. gal</b>	295 L	<b>78 U.S. gal</b>	410 L	<b>108 U.S. gal</b>	410 L	<b>108 U.S. gal</b>
Hydraulic Tank Capacity	88 L	<b>23.2 U.S. gal</b>	88 L	<b>23.2 U.S. gal</b>	140 L	<b>37 U.S. gal</b>	140 L	<b>37 U.S. gal</b>
Hydraulic System Capacity (includes tank)	153 L	<b>40.4 U.S. gal</b>	153 L	<b>40.4 U.S. gal</b>	207 L	<b>54.7 U.S. gal</b>	207 L	<b>54.7 U.S. gal</b>



MODEL	980G		988G		990 Series II	
Flywheel Power: Net	224 kW	<b>300 hp</b>	354 kW	<b>475 hp</b>	466 kW	<b>625 hp</b>
Max.	236 kW	<b>316 hp</b>	388 kW	<b>520 hp</b>		
Engine Model	<b>3406DITA</b>		<b>3456DITA ATAAC</b>		<b>3412E TA</b>	
Rated Engine RPM	<b>2100</b>		<b>1900</b>		<b>2000</b>	
Bore	137 mm	<b>5.4"</b>	140 mm	<b>5.5"</b>	137 mm	<b>5.4"</b>
Stroke	165 mm	<b>6.5"</b>	171 mm	<b>6.75"</b>	152 mm	<b>6"</b>
No. Cylinders	<b>6</b>		<b>6</b>		<b>12</b>	
Displacement	14.6 L	<b>893 in<sup>3</sup></b>	15.8 L	<b>966 in<sup>3</sup></b>	27 L	<b>1649 in<sup>3</sup></b>
Speeds Forward	km/h	<b>mph</b>	km/h	<b>mph</b>	km/h	<b>mph</b>
1st	7.0	<b>4.3</b>	6.9	<b>4.3</b>	7.2	<b>4.5</b>
2nd	12.3	<b>7.7</b>	12.3	<b>7.6</b>	12.9	<b>8.0</b>
3rd	21.6	<b>13.4</b>	21.8	<b>13.5</b>	22.5	<b>14.0</b>
4th	37.4	<b>23.2</b>	38.7	<b>24.0</b>	—	
Speeds Reverse						
1st	8.0	<b>5.0</b>	7.1	<b>4.4</b>	8.0	<b>5.0</b>
2nd	14.0	<b>8.8</b>	12.6	<b>7.8</b>	14.2	<b>8.8</b>
3rd	24.6	<b>15.3</b>	22.3	<b>13.8</b>	25.0	<b>15.5</b>
4th	42.8	<b>26.6</b>	—		—	
Hydraulic Cycle Time, Rated Load in Bucket:	<b>Seconds</b>		<b>Seconds</b>		<b>Seconds</b>	
Raise	<b>6.8</b>		<b>9.4</b>		<b>9.2</b>	
Dump	<b>2.0</b>		<b>2.4</b>		<b>2.9</b>	
Lower (Empty, Float Down)	<b>3.4</b>		<b>3.8</b>		<b>3.8</b>	
Total	<b>12.2</b>		<b>15.6</b>		<b>15.9</b>	
Tread Width	2.44 m	<b>8'0"</b>	2.59 m	<b>8'6"</b>	3.1 m	<b>10'0"</b>
Width Over Tires	3.25 m	<b>10'8"</b>	3.54 m	<b>11'7"</b>	4.1 m	<b>13'6"</b>
Ground Clearance	467 mm	<b>18.4"</b>	583 mm	<b>23"</b>	507 mm	<b>20"</b>
Fuel Tank Capacity	470 L	<b>124 U.S. gal</b>	679 L	<b>179 U.S. gal</b>	970 L	<b>252 U.S. gal</b>
Hydraulic Tank Capacity	125 L	<b>33 U.S. gal</b>	470 L	<b>124 U.S. gal</b>	174 L*	<b>45 U.S. gal</b>
Hydraulic System Capacity (includes tank)	208 L	<b>55 U.S. gal</b>	257 L	<b>68 U.S. gal</b>	435 L*	<b>113 U.S. gal</b>

\*Also contains separate systems for steering and engine cooling fan 193 L (51 U.S. gal), tank only 129 L (34 U.S. gal).



MODEL	992G		994D	
Flywheel Power	597 kW	800 hp	933 kW	1250 hp
Engine Model	3508B TA		3516B TA	
Rated Engine RPM	1750		1600	
Bore	170 mm	6.7"	170 mm	6.69"
Stroke	190 mm	7.5"	190 mm	7.48"
No. Cylinders	8		16	
Displacement	34.5 L	2105 in <sup>3</sup>	69 L	4221 in <sup>3</sup>
Speeds Forward	km/h	mph	km/h	mph
1st	6.7	4.2	7.4	4.6
2nd	11.9	7.3	13.2	8.2
3rd	20.2	12.5	23.4	14.5
Speeds Reverse				
1st	7.4	4.6	8.2	5.1
2nd	12.6	7.8	14.6	9.1
3rd	22.7	14.1	25.8	16.0
Hydraulic Cycle Time, Rated Load in Bucket:	Seconds		Seconds	
Raise	9.12		12.5	
Dump	3.26		3.4	
Lower (Empty, Float Down)	3.47		4.0	
Total	15.85		19.9	
Tread Width	3.3 m	10'10"	3.9 m	12'10"
Width Over Tires	4.5 m	14'9"	5.45 m	17'10"
Ground Clearance	691 mm	27"	825 mm	32"
Fuel Tank Capacity	1563 L	413 U.S. gal	4540 L	1200 U.S. gal
Hydraulic Tank Capacity	326 L <sup>†</sup>	84.8 U.S. gal	623 L*	165 U.S. gal
Hydraulic System Capacity (includes tank)	646 L <sup>†</sup>	168 U.S. gal	895 L*	233 U.S. gal

\*Separate steering system 250 L (65 U.S. gal). Brakes 22 L (6 U.S. gal).

†Separate steering and fan system 227 L (60 U.S. gal). Tank only 156 L (41.3 U.S. gal).

Bucket Type		General Purpose					Multi-Purpose			
		Bare	Bolt-on Edges	Bolt-on Teeth	Weld-on Edges	Pin-on Tips	Bare	Bolt-on Edges	Bolt-on Teeth	Weld-on Edges
Ground Engaging Type										
Rated bucket capacity (\$)	m <sup>3</sup> yd <sup>3</sup>	0.6 <b>0.78</b>	0.6 <b>0.78</b>	0.6 <b>0.78</b>	0.7 <b>0.78</b>	0.6 <b>0.78</b>	0.6 <b>0.78</b>	0.6 <b>0.78</b>	0.6 <b>0.78</b>	0.7 <b>0.78</b>
Struck capacity (\$)	m <sup>3</sup> yd <sup>3</sup>	0.5 <b>0.65</b>	0.5 <b>0.65</b>	0.5 <b>0.65</b>	0.5 <b>0.65</b>	0.5 <b>0.65</b>	0.5 <b>0.65</b>	0.5 <b>0.65</b>	0.5 <b>0.65</b>	0.5 <b>0.65</b>
Width	mm ft/in	1780 <b>5'10"</b>	1790 <b>5'10"</b>	1780 <b>5'10"</b>	1790 <b>5'10"</b>	1780 <b>5'10"</b>	1790 <b>5'10"</b>	1790 <b>5'10"</b>	1790 <b>5'10"</b>	1790 <b>5'10"</b>
Dump clearance at full lift and 43° discharge (\$)	mm ft/in	2341 <b>7'8"</b>	2307 <b>7'7"</b>	2341 <b>7'8"</b>	2273 <b>7'5"</b>	2341 <b>7'8"</b>	2341 <b>7'8"</b>	2307 <b>7'7"</b>	2341 <b>7'8"</b>	2273 <b>7'5"</b>
Reach at full lift and 43° discharge (\$)	mm ft/in	751 <b>2'6"</b>	764 <b>2'6"</b>	751 <b>2'6"</b>	801 <b>2'7"</b>	751 <b>2'6"</b>	751 <b>2'6"</b>	764 <b>2'6"</b>	751 <b>2'6"</b>	801 <b>2'7"</b>
Reach at 45° discharge and 2130 mm (7'0") clearance (\$)	mm ft/in	920 <b>3'0"</b>	902 <b>3'0"</b>	856 <b>2'10"</b>	905 <b>3'0"</b>	839 <b>2'9"</b>	920 <b>3'0"</b>	902 <b>3'0"</b>	856 <b>2'10"</b>	905 <b>3'0"</b>
Reach with lift arms horizontal and bucket level	mm ft/in	1779 <b>5'10"</b>	1811 <b>5'11"</b>	1779 <b>5'10"</b>	1862 <b>6'1"</b>	1779 <b>5'10"</b>	1779 <b>5'10"</b>	1811 <b>5'11"</b>	1779 <b>5'10"</b>	1882 <b>6'2"</b>
Digging depth (\$)	mm in	52 <b>2</b>	68 <b>2.7</b>	52 <b>2</b>	68 <b>2.7</b>	52 <b>2</b>	52 <b>2</b>	68 <b>2.7</b>	52 <b>2</b>	68 <b>2.7</b>
Overall length	mm ft/in	5155 <b>16'11"</b>	5200 <b>17'1"</b>	5155 <b>16'11"</b>	5251 <b>17'3"</b>	5155 <b>16'11"</b>	5155 <b>16'11"</b>	5200 <b>17'1"</b>	5155 <b>16'11"</b>	5251 <b>17'3"</b>
Overall height with bucket at full raise (\$)	mm ft/in	3967 <b>13'0"</b>	3967 <b>13'0"</b>	3967 <b>13'0"</b>	3967 <b>13'0"</b>	3967 <b>13'0"</b>	3944 <b>12'11"</b>	3944 <b>12'11"</b>	3944 <b>12'11"</b>	3944 <b>12'11"</b>
Loader clearance circle with bucket in carry position	m ft/in	7.72 <b>25'4"</b>	7.76 <b>25'6"</b>	7.72 <b>25'4"</b>	7.79 <b>25'7"</b>	7.72 <b>25'4"</b>	7.73 <b>25'4"</b>	7.79 <b>25'7"</b>	7.73 <b>25'4"</b>	7.80 <b>25'7"</b>
Static tipping load, straight* (\$)	kg lb	3040 <b>6700</b>	2983 <b>6570</b>	3022 <b>6660</b>	2955 <b>6510</b>	3012 <b>6640</b>	2788 <b>6140</b>	2732 <b>6020</b>	2771 <b>6110</b>	2706 <b>5960</b>
Static tipping load, full 43° turn* (\$)	kg lb	2551 <b>5620</b>	2496 <b>5500</b>	2533 <b>5580</b>	2472 <b>5450</b>	2523 <b>5560</b>	2308 <b>5080</b>	2254 <b>4970</b>	2289 <b>5040</b>	2231 <b>4910</b>
Breakout force (\$)	kN lb	36.4 <b>8190</b>	34.7 <b>7800</b>	36.3 <b>8160</b>	32.1 <b>7220</b>	36.2 <b>8140</b>	35.6 <b>8010</b>	33.6 <b>7560</b>	35.4 <b>7960</b>	31.4 <b>7060</b>
Operating weight*	kg lb	4452 <b>9820</b>	4487 <b>9890</b>	4467 <b>9850</b>	4492 <b>9900</b>	4475 <b>9870</b>	4685 <b>10,330</b>	4720 <b>10,410</b>	4700 <b>10,360</b>	4721 <b>10,410</b>

\*Static tipping load and operating weights shown are with implements, ROPS cab, 12.5-18 tires, full fuel tank and operator.

NOTE: Specifications and ratings conform to all applicable standards recommended by the Society of Automotive Engineers (SAE). SAE Standards J732 JUN92 and J742 FEB85 govern loader rating, denoted in the text by (\$).

	Change in Operating Weight		Change in Articulated Static Tipping Load	
	kg	lb	kg	lb
	Limited slip rear axle	0	0	0
Enclosed ROPS (Comfort)	+ 2	+ 4	+ 1	+ 2
Enclosed ROPS (Deluxe)	+ 5	+ 11	+ 4	+ 9
Boom with load check valves	+ 12	+ 26	+ 2	+ 4
Third valve hydraulics	+ 11	+ 24	- 1	- 2
Counterweight	+110	+243	+113	+249
Wheel chock	+ 5	+ 11	+ 2	+ 4
Tool roll	+ 4	+ 9	+ 4	+ 9



Bucket Type	Multi-Purpose	High Dump			Light Material		Stone Sieve			
		Pin-on Tips	Bare	Bolt-on Edges	Bolt-on Teeth	Bare	Bolt-on Edges	Bare	Bolt-on Edges	Bolt-on Teeth
<b>Ground Engaging Type</b>										
Rated bucket capacity (§)	m <sup>3</sup> yd <sup>3</sup>	0.6 <b>0.78</b>	0.6 <b>0.78</b>	0.6 <b>0.78</b>	0.6 <b>0.78</b>	1.0 <b>1.3</b>	1.0 <b>1.3</b>	0.6 <b>0.78</b>	0.6 <b>0.78</b>	0.6 <b>0.78</b>
Struck capacity (§)	m <sup>3</sup> yd <sup>3</sup>	0.5 <b>0.65</b>	0.5 <b>0.65</b>	0.5 <b>0.65</b>	0.5 <b>0.65</b>	0.8 <b>1.05</b>	0.8 <b>1.05</b>	0.5 <b>0.65</b>	0.5 <b>0.65</b>	0.5 <b>0.65</b>
Width	mm ft/in	1790 <b>5'10"</b>	1887 <b>6'2"</b>	1787 <b>5'10"</b>	1787 <b>5'10"</b>	1880 <b>6'2"</b>	1890 <b>6'2"</b>	1780 <b>5'10"</b>	1780 <b>5'10"</b>	1780 <b>5'10"</b>
Dump clearance at full lift and 43° discharge (§)	mm ft/in	2341 <b>7'8"</b>	2341 <b>7'8"</b>	2307 <b>7'7"</b>	2341 <b>7'8"</b>	2204 <b>7'3"</b>	2170 <b>7'1"</b>	2341 <b>7'8"</b>	2307 <b>7'7"</b>	2341 <b>7'8"</b>
Reach at full lift and 43° discharge (§)	mm ft/in	844 <b>2'9"</b>	717 <b>2'4"</b>	728 <b>2'5"</b>	788 <b>2'7"</b>	856 <b>2'10"</b>	867 <b>2'10"</b>	717 <b>2'4"</b>	728 <b>2'5"</b>	788 <b>2'7"</b>
Reach at 43° discharge and 2130 mm (7'0") clearance (§)	mm ft/in	929 <b>3'1"</b>	920 <b>3'0"</b>	902 <b>3'0"</b>	928 <b>3'1"</b>	929 <b>3'1"</b>	904 <b>3'0"</b>	920 <b>3'0"</b>	902 <b>3'0"</b>	928 <b>3'1"</b>
Reach with lift arms horizontal and bucket level	mm ft/in	1906 <b>6'3"</b>	1779 <b>5'10"</b>	1811 <b>5'11"</b>	1881 <b>5'11"</b>	1979 <b>6'6"</b>	2011 <b>6'7"</b>	1779 <b>5'10"</b>	1811 <b>5'11"</b>	1881 <b>6'2"</b>
Digging depth (§)	mm in	52 <b>2</b>	52 <b>2</b>	68 <b>2.7</b>	52 <b>2</b>	52 <b>2</b>	69 <b>2.7</b>	52 <b>2</b>	68 <b>2.7</b>	52 <b>2</b>
Overall length	mm ft/in	5282 <b>17'4"</b>	5155 <b>16'11"</b>	5200 <b>17'1"</b>	5257 <b>17'3"</b>	5355 <b>17'7"</b>	5400 <b>17'9"</b>	5155 <b>16'11"</b>	5200 <b>17'1"</b>	5257 <b>17'3"</b>
Overall height with bucket at full raise (§)	mm ft/in	3944 <b>12'11"</b>	3967 <b>13'0"</b>	3967 <b>13'0"</b>	3967 <b>13'0"</b>	3944 <b>12'11"</b>	3944 <b>12'11"</b>	3816 <b>12'6"</b>	3816 <b>12'6"</b>	3816 <b>12'6"</b>
Loader clearance circle with bucket in carry position	m ft/in	7.75 <b>25'5"</b>	7.72 <b>25'4"</b>	7.76 <b>25'6"</b>	7.72 <b>25'4"</b>	7.93 <b>26'0"</b>	7.97 <b>26'2"</b>	7.72 <b>25'4"</b>	7.76 <b>25'6"</b>	7.72 <b>25'4"</b>
Static tipping load, straight* (§)	kg lb	2763 <b>6090</b>	2788 <b>6140</b>	2818 <b>6210</b>	2859 <b>6300</b>	2962 <b>6530</b>	2900 <b>6390</b>	2985 <b>6580</b>	2924 <b>6440</b>	2940 <b>6480</b>
Static tipping load, full turn* (§)	kg lb	2282 <b>5030</b>	2386 <b>5260</b>	2329 <b>5130</b>	2368 <b>5220</b>	2473 <b>5450</b>	2414 <b>5320</b>	2498 <b>5500</b>	2439 <b>5370</b>	2452 <b>5400</b>
Breakout force (§)	kN lb	35.3 <b>7940</b>	35.3 <b>7940</b>	33.3 <b>7490</b>	35.1 <b>7890</b>	27.5 <b>6180</b>	23.6 <b>5310</b>	36.3 <b>8160</b>	34.3 <b>7710</b>	35.8 <b>8050</b>
Operating weight*	kg lb	4704 <b>10,370</b>	4639 <b>10,230</b>	4674 <b>10,310</b>	4654 <b>10,260</b>	4531 <b>9990</b>	4568 <b>10,070</b>	4509 <b>9940</b>	4544 <b>10,020</b>	4552 <b>10,040</b>

\*Static tipping load and operating weights shown are with implements, ROPS cab, 12.5-18 tires, full fuel tank and operator.

**NOTE:** Specifications and ratings conform to all applicable standards recommended by the Society of Automotive Engineers (SAE). SAE Standards J732 JUN92 and J742 FEB85 govern loader rating, denoted in the text by (§).

	Change in Operating Weight		Change in Articulated Static Tipping Load	
	kg	lb	kg	lb
Limited slip rear axle	0	0	0	0
Enclosed ROPS (Comfort)	+ 2	+ 4	+ 1	+ 2
Enclosed ROPS (Deluxe)	+ 5	+ 11	+ 4	+ 9
Boom with load check valves	+ 12	+ 26	+ 2	+ 4
Third valve hydraulics	+ 11	+ 24	- 1	- 2
Counterweight	+110	+243	+113	+249
Wheel chock	+ 5	+ 11	+ 2	+ 4
Tool roll	+ 4	+ 9	+ 4	+ 9

Bucket Type		General Purpose					Multi-Purpose		
		Bare	Bolt-on Edges	Bolt-on Teeth	Weld-on Edges	Pin-on Tips	Bare	Bolt-on Edges	Bolt-on Teeth
Ground Engaging Type	Rated bucket capacity (\$)	m <sup>3</sup> yd <sup>3</sup>	0.8 1.05	0.8 1.05	0.8 1.05	0.9 1.18	0.8 1.05	0.8 1.05	0.8 1.05
	Struck capacity (\$)	m <sup>3</sup> yd <sup>3</sup>	0.6 0.78	0.7 0.92	0.6 0.78	0.7 0.92	0.6 0.78	0.6 0.78	0.6 0.78
Width		mm ft/in	1880 6'2"	1890 6'2"	1880 6'2"	1890 6'2"	1880 6'2"	1890 6'2"	1890 6'2"
Dump clearance at full lift and 43° discharge (\$)		mm ft/in	2425 7'11"	2391 7'11"	2425 7'11"	2356 7'9"	2425 7'11"	2391 7'10"	2425 7'11"
Reach at full lift and 43° discharge (\$)		mm ft/in	829 2'9"	842 2'9"	901 2'11"	879 2'11"	922 3'0"	829 2'9"	842 2'9"
Reach at 43° discharge and 2130 mm (7'0") clearance (\$)		mm ft/in	1070 3'6"	982 3'3"	1142 3'9"	1118 3'8"	1160 3'10"	1071 3'7"	1045 3'5"
Reach with lift arms horizontal and bucket level		mm ft/in	1912 6'3"	1945 6'5"	2014 6'7"	1995 6'6"	2040 6'8"	1912 6'3"	1945 6'5"
Digging depth (\$)		mm in	84 3.31	100 3.94	84 3.31	100 3.94	84 3.31	99 3.90	84 3.31
Overall length		mm ft/in	5310 17'5"	5355 17'7"	5412 17'9"	5405 17'9"	5437 17'10"	5309 17'5"	5354 17'7"
Overall height with bucket at full raise (\$)		mm ft/in	4170 13'8"	4170 13'8"	4170 13'8"	4170 13'8"	4170 13'8"	4205 13'10"	4205 13'10"
Loader clearance circle with bucket in carry position		m ft/in	8.33 27'4"	8.37 27'5"	8.33 27'4"	8.39 27'6"	8.33 27'4"	8.36 27'5"	8.33 27'4"
Static tipping load, straight* (\$)		kg lb	3427 7550	3382 7450	3410 7510	3374 7430	3399 7490	3234 7130	3169 6980
Static tipping load, full turn* (\$)		kg lb	2962 6530	2917 6430	2944 6490	2909 6410	2934 6460	2765 6090	2702 5950
Breakout force (\$)		kN lb	45.4 10,210	43.2 9720	45.3 10,190	40.4 9090	45.2 10,170	44.5 10,010	42.3 9510
Operating weight*		kg lb	5096 11,240	5131 11,310	5110 11,270	5138 11,330	5118 11,290	5343 11,780	5379 11,860

\*Static tipping load and operating weights shown are with implements, ROPS cab, 12.5-20 tires, full fuel tank, operator and 80 kg (176 lb) counterweight.

NOTE: Specifications and ratings conform to all applicable standards recommended by the Society of Automotive Engineers (SAE). SAE Standards J732 JUN92 and J742 FEB85 govern loader rating, denoted in the text by (\$).

	Change in Operating Weight		Change in Articulated Static Tipping Load	
	kg	lb	kg	lb
Limited slip rear axle	0	0	0	0
Enclosed ROPS (Comfort)	+ 2	+ 4	+ 1	+ 2
Enclosed ROPS (Deluxe)	+ 5	+ 11	+ 4	+ 9
Boom with load check valves	+ 12	+ 26	+ 2	+ 4
Third valve hydraulics	+ 11	+ 24	- 1	- 2
Counterweight (standard) removed	- 80	-176	-112	-247
Counterweight 150 kg (330 lb)	+150	+331	+151	+333
Wheel chock	+ 5	+ 11	+ 2	+ 4
Tool roll	+ 4	+ 9	+ 4	+ 9

Bucket Type	Ground Engaging Type	Multi-Purpose		High Dump			Side Dump		
		Weld-on Edges	Pin-on Tips	Bare	Bolt-on Edges	Bolt-on Teeth	Bare	Bolt-on Edges	Bolt-on Teeth
Rated bucket capacity (\$)	m <sup>3</sup> yd <sup>3</sup>	0.8 1.05	0.8 1.05	0.7 0.92	0.7 0.92	0.7 0.92	0.7 0.92	0.7 0.92	0.7 0.92
Struck capacity (\$)	m <sup>3</sup> yd <sup>3</sup>	0.7 0.92	0.6 0.78	0.6 0.78	0.6 0.78	0.6 0.78	0.5 0.65	0.6 0.78	0.5 0.65
Width	mm ft/in	1890 6'2"	1890 6'2"	1887 6'2"	1887 6'2"	1887 6'2"	1880 6'2"	1880 6'2"	1880 6'2"
Dump clearance at full lift and 43° discharge (\$)	mm ft/in	2357 7'9"	2425 7'11"	2425 7'11"	2391 7'11"	2425 7'11"	2322 7'7"	2288 7'6"	2322 7'7"
Reach at full lift and 43° discharge (\$)	mm ft/in	879 2'11"	923 3'0"	829 2'9"	842 2'9"	904 3'0"	938 3'1"	951 3'1"	1013 3'4"
Reach at 43° discharge and 2130 mm (7'0") clearance (\$)	mm ft/in	1061 3'6"	1161 3'10"	1070 3'6"	1039 3'5"	1082 3'7"	1087 3'7"	1067 3'6"	1091 3'7"
Reach with lift arms horizontal and bucket level	mm ft/in	1995 6'7"	2040 6'8"	1912 6'3"	1945 6'4"	2015 6'7"	2062 6'9"	2095 6'10"	2165 7'1"
Digging depth (\$)	mm in	99 3.90	84 3.31	84 3.31	100 3.94	84 3.31	84 3.31	100 3.94	84 3.31
Overall length	mm ft/in	5405 17'9"	5437 17'10"	5310 17'5"	5355 17'7"	5412 17'9"	5461 17'11"	5505 18'1"	5562 18'3"
Overall height with bucket at full raise (\$)	mm ft/in	4205 13'10"	4205 13'10"	4212 13'10"	4212 13'10"	4212 13'10"	4211 13'10"	4211 13'10"	4211 13'10"
Loader clearance circle with bucket in carry position	m ft/in	8.39 27'6"	8.33 27'4"	8.37 27'5"	8.40 27'7"	8.37 27'5"	8.41 27'7"	8.44 27'8"	8.41 27'7"
Static tipping load, straight* (\$)	kg lb	3147 6930	3205 7060	3252 7170	3188 7020	3234 7130	3038 6690	2979 6560	3020 6650
Static tipping load, full turn* (\$)	kg lb	2684 5910	2736 6030	2787 6140	2725 6000	2768 6100	2598 5720	2540 5600	2580 5680
Breakout force (\$)	kN lb	39.5 8880	44.2 9940	44.3 9960	42 9450	44.1 9920	36.3 8160	34.6 7780	36.1 8120
Operating weight*	kg lb	5380 11,860	5365 11,830	5279 11,640	5316 11,720	5294 11,670	5318 11,730	5355 11,810	5332 11,760

\*Static tipping load and operating weights shown are with implements, ROPS cab, 12.5-20 tires, full fuel tank, operator and 80 kg (176 lb) counterweight.

**NOTE:** Specifications and ratings conform to all applicable standards recommended by the Society of Automotive Engineers (SAE). SAE Standards J732 JUN92 and J742 FEB85 govern loader rating, denoted in the text by (\$).

	Change in Operating Weight		Change in Articulated Static Tipping Load	
	kg	lb	kg	lb
Limited slip rear axle	0	0	0	0
Enclosed ROPS (Comfort)	+ 2	+ 4	+ 1	+ 2
Enclosed ROPS (Deluxe)	+ 5	+ 11	+ 4	+ 9
Boom with load check valves	+ 12	+ 26	+ 2	+ 4
Third valve hydraulics	+ 11	+ 24	- 1	- 2
Counterweight (standard) removed	- 80	-176	-112	-247
Counterweight 150 kg (330 lb)	+ 150	+331	+ 151	+ 333
Wheel chock	+ 5	+ 11	+ 2	+ 4
Tool roll	+ 4	+ 9	+ 4	+ 9

Bucket Type	Light Material		Stone Sieve			
		Bare	Bolt-on Edges	Bare	Bolt-on Edges	Bolt-on Teeth
Ground Engaging Type						
	Rated bucket capacity (\$)	m <sup>3</sup> yd <sup>3</sup>	1.2 1.57	1.2 1.57	0.7 0.92	0.7 0.92
Struck capacity (\$)						
		m <sup>3</sup> yd <sup>3</sup>	1.0 1.31	1.0 1.31	0.5 0.65	0.6 0.78
Width						
		mm ft/in	1950 6'5"	1970 6'6"	1880 6'2"	1880 6'2"
Dump clearance at full lift and 43° discharge (\$)						
		mm ft/in	2281 7'6"	2247 7'4"	2425 7'11"	2391 7'10"
Reach at full lift and 43° discharge (\$)						
		mm ft/in	982 3'3"	995 3'3"	829 2'9"	842 2'9"
Reach at 43° discharge and 2130 mm (7'0") clearance (\$)						
		mm ft/in	1090 3'7"	1068 3'6"	1070 3'6"	1054 3'5"
Reach with lift arms horizontal and bucket level						
		mm ft/in	2122 7'0"	2155 7'1"	1912 6'3"	1945 6'5"
Digging depth (\$)						
		mm in	84 3.31	100 3.94	84 3.31	100 3.94
Overall length						
		mm ft/in	5520 18'1"	5565 18'3"	5310 17'5"	5355 17'7"
Overall height with bucket at full raise (\$)						
		mm ft/in	4314 14'2"	4314 14'2"	4037 13'3"	4037 13'3"
Loader clearance circle with bucket in carry position						
		m ft/in	8.51 27'11"	8.56 28'11"	8.33 27'4"	8.36 27'5"
Static tipping load, straight* (\$)						
		kg lb	3327 7330	3263 7190	3353 7390	3286 7240
Static tipping load, full turn* (\$)						
		kg lb	2864 6310	2802 6170	2892 6370	2828 6230
Breakout force (\$)						
		kN lb	34.5 7760	33 7420	45.3 10,190	43 9670
Operating weight*						
		kg lb	5178 11,420	5216 11,500	5149 11,350	5188 11,440

\*Static tipping load and operating weights shown are with implements, ROPS cab, 12.5-20 tires, full fuel tank, operator and 80 kg (176 lb) counterweight.

NOTE: Specifications and ratings conform to all applicable standards recommended by the Society of Automotive Engineers (SAE). SAE Standards J732 JUN92 and J742 FEB85 govern loader rating, denoted in the text by (\$).

	Change in Operating Weight		Change in Articulated Static Tipping Load	
	kg	lb	kg	lb
Limited slip rear axle	0	0	0	0
Enclosed ROPS (Comfort)	+ 2	+ 4	+ 1	+ 2
Enclosed ROPS (Deluxe)	+ 5	+ 11	+ 4	+ 9
Boom with load check valves	+ 12	+ 26	+ 2	+ 4
Third valve hydraulics	+ 11	+ 24	- 1	- 2
Counterweight (standard) removed	- 80	-176	-112	-247
Counterweight 150 kg (330 lb)	+150	+331	+151	+333
Wheel chock	+ 5	+ 11	+ 2	+ 4
Tool roll	+ 4	+ 9	+ 4	+ 9

Bucket Type	General Purpose					Multi-Purpose			
		Bare	Bolt-on Edges	Bolt-on Teeth	Weld-on Edges	Pin-on Tips	Bare	Bolt-on Edges	Bolt-on Teeth
Ground Engaging Type									
	Rated bucket capacity (\$)	m <sup>3</sup> yd <sup>3</sup>	1.0 1.3	1.0 1.3	1.0 1.3	1.0 1.3	1.0 1.3	0.9 1.2	0.9 1.2
Struck capacity (\$)	m <sup>3</sup> yd <sup>3</sup>	0.805 1.04	0.833 1.083	0.805 1.047	0.877 1.14	0.805 1.047	0.717 0.932	0.741 0.963	0.717 0.932
Heaped capacity	m <sup>3</sup> yd <sup>3</sup>	0.998 1.297	1.034 1.344	0.998 1.297	1.083 1.408	0.998 1.297	0.908 1.18	0.940 1.222	0.908 1.18
Width	mm ft/in	2060 6'9"	2060 6'9"	2060 6'9"	2070 6'9"	2060 6'9"	2060 6'9"	2060 6'9"	2060 6'9"
Dump clearance at full lift and 43° discharge (\$)	mm ft/in	2645 8'8"	2611 8'7"	2645 8'8"	2577 8'5"	2645 8'8"	2655 8'9"	2621 8'7"	2655 8'9"
Reach at full lift and 43° discharge (\$)	mm ft/in	902 3'0"	915 3'0"	902 3'0"	952 3'1"	902 3'0"	916 3'0"	929 3'1"	916 3'0"
Reach at 43° discharge and 2130 mm (7'0") clearance (\$)	mm ft/in	1332 4'4"	1324 4'4"	1288 4'3"	1338 4'5"	1276 4'2"	1354 4'5"	1346 4'5"	1310 4'4"
Reach with lift arms horizontal and bucket level	mm ft/in	2047 6'9"	2080 6'10"	2047 6'9"	2130 7'0"	2047 6'9"	2051 6'9"	2083 6'10"	2051 6'9"
Digging depth (\$)	mm in	88 3.5	104 4	88 3.5	104 4	88 3.5	70 2.8	86 3.4	70 2.8
Overall length	mm ft/in	6012 19'9"	6057 19'10"	6012 19'9"	6108 20'0"	6012 19'9"	6001 19'8"	6047 19'10"	6001 19'8"
Overall height with bucket at full raise (\$)	mm ft/in	4506 14'9"	4506 14'9"	4506 14'9"	4506 14'9"	4506 14'9"	4473 14'8"	4473 14'8"	4473 14'8"
Loader clearance circle with bucket in carry position	m ft/in	8.98 29'6"	9.02 29'7"	8.98 29'6"	9.04 29'8"	8.98 29'6"	8.98 29'5"	9.01 29'7"	8.98 29'5"
Static tipping load, straight* (\$)	kg lb	4376 9627	4307 9475	4357 9585	4278 9412	4348 9567	4226 9297	4158 9148	4207 9255
Static tipping load, full turn* (\$)	kg lb	3759 8270	3692 8122	3740 8228	3666 8065	3730 8206	3603 7927	3538 7784	3584 7885
Breakout force (\$)	kN lb	57.9 13,028	55.2 12,420	57.7 12,983	51.8 11,655	57.6 12,960	56.9 12,803	54.2 12,195	56.7 12,758
Operating weight*	kg lb	6040 13,290	6081 13,380	6056 13,320	6087 13,390	6063 13,050	6255 13,760	6295 13,850	6270 13,790

\*Static tipping load and operating weights shown are with implements, ROPS cab, 14.5-20 tires, full fuel tank, operator and 75 kg (165 lb) counterweight.

**NOTE:** Specifications and ratings conform to all applicable standards recommended by the Society of Automotive Engineers (SAE). SAE Standards J732 JUN92 and J742 FEB85 govern loader rating, denoted in the text by (\$).

	Change in Operating Weight		Change in Articulated Static Tipping Load	
	kg	lb	kg	lb
Limited slip rear axle	0	0	0	0
Enclosed ROPS (Comfort)	+ 2	+ 4	+ 1	+ 2
Enclosed ROPS (Deluxe)	+ 5	+ 11	+ 4	+ 9
Boom with load check valves	+ 12	+ 26	+ 2	+ 4
Third valve hydraulics	+ 11	+ 24	- 1	- 2
Counterweight (standard) removed	- 80	- 176	- 112	- 247
Counterweight 200 kg (440 lb)	+ 200	+ 441	+ 210	+ 463
Wheel chock	+ 5	+ 11	+ 2	+ 4
Tool roll	+ 4	+ 9	+ 4	+ 9

Bucket Type	Ground Engaging Type	Multi-Purpose		High Dump			Side Dump		
		Weld-on Edges	Pin-on Tips	Bare	Bolt-on Edges	Bolt-on Teeth	Bare	Bolt-on Edges	Bolt-on Teeth
Rated bucket capacity (\$)	m <sup>3</sup> yd <sup>3</sup>	0.9 1.2	0.9 1.2	0.9 1.2	0.9 1.2	0.9 1.2	0.9 1.2	0.9 1.2	0.9 1.2
Struck capacity (\$)	m <sup>3</sup> yd <sup>3</sup>	0.787 1.023	0.717 0.932	0.747 0.971	0.775 1.008	0.747 0.971	0.731 0.95	0.756 0.983	0.731 0.95
Heaped capacity	m <sup>3</sup> yd <sup>3</sup>	0.993 1.206	0.908 1.18	0.938 1.219	0.974 1.266	0.938 1.219	0.925 1.203	0.958 1.245	0.925 1.203
Width	mm ft/in	2070 6'9.5"	2060 6'9"	2060 6'9"	2060 6'9"	2060 6'9"	2060 6'9"	2060 6'9"	2060 6'9"
Dump clearance at full lift and 43° discharge (\$)	mm ft/in	2586 8'6"	2655 8'9"	2603 8'6"	2569 8'5"	2603 8'6"	2506 8'3"	2472 8'1"	2506 8'3"
Reach at full lift and 43° discharge (\$)	mm ft/in	969 3'2"	916 3'0"	948 3'1"	961 3'2"	948 3'1"	1053 3'5"	1066 3'6"	1053 3'5"
Reach at 43° discharge and 2130 mm (7'0") clearance (\$)	mm ft/in	1363 4'6"	1310 4'4"	1353 4'5"	1344 4'5"	1307 4'3"	1355 4'5"	1381 4'6"	1341 4'5"
Reach with lift arms horizontal and bucket level	mm ft/in	2137 7'0"	2051 6'9"	2110 6'11"	2142 7'0"	2110 6'11"	2253 7'5"	2286 7'6"	2253 7'5"
Digging depth (\$)	mm in	85 3.3	70 2.8	86 3.4	102 4	86 3.4	85 3.3	101 4	85 3.3
Overall length	mm ft/in	6099 20'0"	6001 19'8"	6073 19'11"	6119 20'1"	6073 19'11"	6216 20'5"	6262 20'7"	6216 20'5"
Overall height with bucket at full raise (\$)	mm ft/in	4473 14'8"	4473 14'8"	4872 16'0"	4872 16'0"	4547 14'11"	4547 14'11"	4547 14'11"	4547 14'11"
Loader clearance circle with bucket in carry position	m ft/in	9.04 29'8"	8.98 29'5"	9.01 29'7"	9.05 29'8"	9.01 29'6"	9.08 29'9"	9.12 29'11"	9.08 29'9"
Static tipping load, straight* (\$)	kg lb	4127 9079	4197 9233	4132 9090	4064 8941	4114 9051	3971 8736	3870 8514	3917 8617
Static tipping load, full turn* (\$)	kg lb	3510 7722	3575 7865	3523 7751	3457 7605	3436 7559	3385 7447	3288 7234	3331 7328
Breakout force (\$)	kN lb	50.7 11,408	56.6 12,735	52.4 11,790	50.1 11,270	52.2 11,745	52.0 11,700	42.3 9517	43.9 9877
Operating weight*	kg lb	6301 13,860	6278 13,810	6231 13,710	6272 13,800	5227 11,500	6232 13,710	6310 13,880	6285 13,830

\*Static tipping load and operating weights shown are with implements, ROPS cab, 14.5-20 tires, full fuel tank, operator and 75 kg (165 lb) counterweight.

NOTE: Specifications and ratings conform to all applicable standards recommended by the Society of Automotive Engineers (SAE). SAE Standards J732 JUN92 and J742 FEB85 govern loader rating, denoted in the text by (\$).

	Change in Operating Weight		Change in Articulated Static Tipping Load	
	kg	lb	kg	lb
Limited slip rear axle	0	0	0	0
Enclosed ROPS (Comfort)	+ 2	+ 4	+ 1	+ 2
Enclosed ROPS (Deluxe)	+ 5	+ 11	+ 4	+ 9
Boom with load check valves	+ 12	+ 26	+ 2	+ 4
Third valve hydraulics	+ 11	+ 24	- 1	- 2
Counterweight (standard) removed	- 80	- 176	- 112	- 247
Counterweight 200 kg (440 lb)	+ 200	+ 441	+ 210	+ 463
Wheel chock	+ 5	+ 11	+ 2	+ 4
Tool roll	+ 4	+ 9	+ 4	+ 9

Bucket Type	Light Material		Stone Sieve			
		Bare	Bolt-on Edges	Bare	Bolt-on Edges	Bolt-on Teeth
<b>Ground Engaging Type</b>						
Rated bucket capacity (\$)	m <sup>3</sup> yd <sup>3</sup>	1.5 <b>1.95</b>	1.5 <b>1.95</b>	0.9 <b>1.2</b>	0.9 <b>1.2</b>	0.9 <b>1.2</b>
Struck capacity (\$)	m <sup>3</sup> yd <sup>3</sup>	1.235 <b>1.606</b>	1.261 <b>1.639</b>	0.718 <b>0.933</b>	0.749 <b>0.974</b>	0.718 <b>0.933</b>
Heaped capacity	m <sup>3</sup> yd <sup>3</sup>	1.498 <b>1.947</b>	1.535 <b>1.996</b>	0.906 <b>1.178</b>	0.946 <b>1.23</b>	0.906 <b>1.178</b>
Width	mm ft/in	2060 <b>6'9"</b>	2060 <b>6'9"</b>	2060 <b>6'9"</b>	2060 <b>6'9"</b>	2060 <b>6'9"</b>
Dump clearance at full lift and 43° discharge (\$)	mm ft/in	2440 <b>8'0"</b>	2406 <b>7'11"</b>	2645 <b>8'8"</b>	2611 <b>8'7"</b>	2645 <b>8'8"</b>
Reach at full lift and 43° discharge (\$)	mm ft/in	1120 <b>3'8"</b>	1133 <b>3'9"</b>	901 <b>2'11"</b>	914 <b>3'0"</b>	901 <b>2'11"</b>
Reach at 43° discharge and 2130 mm (7'0") clearance (\$)	mm ft/in	1410 <b>4'8"</b>	1397 <b>4'7"</b>	1332 <b>4'4"</b>	1324 <b>4'4"</b>	1288 <b>4'3"</b>
Reach with lift arms horizontal and bucket level	mm ft/in	2347 <b>7'8"</b>	2379 <b>7'10"</b>	2047 <b>6'9"</b>	2080 <b>6'10"</b>	2047 <b>6'9"</b>
Digging depth (\$)	mm in	88 <b>3.5</b>	104 <b>4</b>	88 <b>3.5</b>	104 <b>4</b>	88 <b>3.5</b>
Overall length	mm ft/in	6312 <b>20'9"</b>	6357 <b>20'10"</b>	6012 <b>19'9"</b>	6057 <b>19'0"</b>	6012 <b>19'9"</b>
Overall height with bucket at full raise (\$)	mm ft/in	4644 <b>15'3"</b>	4644 <b>15'3"</b>	4383 <b>14'5"</b>	4383 <b>14'5"</b>	4383 <b>14'5"</b>
Loader clearance circle with bucket in carry position	m ft/in	9.13 <b>29'11"</b>	9.17 <b>30'1"</b>	8.98 <b>29'6"</b>	9.02 <b>29'7"</b>	8.98 <b>29'6"</b>
Static tipping load, straight* (\$)	kg lb	4197 <b>9233</b>	4129 <b>9084</b>	4303 <b>9467</b>	4232 <b>9310</b>	4285 <b>9427</b>
Static tipping load, full turn* (\$)	kg lb	3588 <b>7894</b>	3523 <b>7751</b>	3688 <b>8114</b>	3620 <b>7964</b>	3670 <b>8074</b>
Breakout force (\$)	kN lb	40.6 <b>9135</b>	39.1 <b>8798</b>	57.7 <b>12,983</b>	55.0 <b>12,375</b>	57.5 <b>12,938</b>
Operating weight*	kg lb	6144 <b>13,520</b>	6184 <b>13,600</b>	6109 <b>13,440</b>	6148 <b>13,530</b>	6123 <b>13,470</b>

\*Static tipping load and operating weights shown are with implements, ROPS cab, 14.5-20 tires, full fuel tank, operator and 75 kg (165 lb) counterweight.

**NOTE:** Specifications and ratings conform to all applicable standards recommended by the Society of Automotive Engineers (SAE). SAE Standards J732 JUN92 and J742 FEB85 govern loader rating, denoted in the text by (\$).

	Change in Operating Weight		Change in Articulated Static Tipping Load	
	kg	lb	kg	lb
Limited slip rear axle	0	0	0	0
Enclosed ROPS (Comfort)	+ 2	+ 4	+ 1	+ 2
Enclosed ROPS (Deluxe)	+ 5	+ 11	+ 4	+ 9
Boom with load check valves	+ 12	+ 26	+ 2	+ 4
Third valve hydraulics	+ 11	+ 24	- 1	- 2
Counterweight (standard) removed	- 80	- 176	- 112	- 247
Counterweight 200 kg (440 lb)	+ 200	+ 441	+ 210	+ 463
Wheel chock	+ 5	+ 11	+ 2	+ 4
Tool roll	+ 4	+ 9	+ 4	+ 9

Bucket Type	General Purpose						Penetration		
	Bolt-on Cutting Edges		Bolt-on Teeth & Segments		Bolt-on Teeth		Flush Mounted Teeth		
Rated bucket capacity (\$)	m <sup>3</sup> yd <sup>3</sup>	1.3 1.7	1.4 1.8	1.3 1.7	1.4 1.8	1.2 1.6	1.3 1.7	1.3 1.7	1.4 1.8
Struck capacity (\$)	m <sup>3</sup> yd <sup>3</sup>	1.1 1.4	1.2 1.5	1.1 1.4	1.2 1.5	1 1.3	1.1 1.5	1.1 1.5	1.2 1.5
Width	mm ft/in	2401 7'10.5"	2401 7'10.5"	2424 7'11.4"	2424 7'11.4"	2424 7'11.4"	2424 7'11.4"	2434 7'11.8"	2434 7'11.8"
Dump clearance at full lift and 45° discharge (\$)	mm ft/in	2658 8'9"	2623 8'7"	2658 8'9"	2630 8'7"	2714 8'11"	2679 8'10"	2679 8'10"	2679 8'10"
Reach at full lift and 45° discharge (\$)	mm ft/in	973 3'2"	1008 3'4"	966 3'2"	1001 3'3"	943 3'1"	979 3'3"	979 3'3"	979 3'3"
Reach at 45° discharge and 2130 mm (7'0") clearance (\$)	mm ft/in	1330 4'4"	1348 4'5"	1282 4'2"	1297 4'3"	1259 4'2"	1275 4'2"	1287 4'3"	1249 4'1"
Reach with lift arms horizontal and bucket level	mm ft/in	1980 6'6"	2030 6'8"	1970 6'6"	2020 6'8"	1920 6'4"	1970 6'6"	1970 6'6"	1970 6'6"
Digging depth (\$)	mm in	89 3.5	89 3.5	89 3.5	89 3.5	70 2.8	70 2.8	70 2.8	70 2.8
Overall length	mm ft/in	6229 20'5"	6279 20'7"	6328 20'9"	6378 20'11"	6310 20'8"	6360 20'10"	6358 20'10"	6438 21'1"
Overall height with bucket at full raise (\$)	mm ft/in	4390 14'5"	4442 14'7"	4390 14'5"	4442 14'7"	4390 14'5"	4442 14'7"	4442 14'7"	4442 14'7"
Loader clearance circle with bucket in carry position	m ft/in	10.34 33'11"	10.37 34'0"	10.42 34'2"	10.45 34'4"	10.42 34'2"	10.45 34'4"	10.44 34'3"	10.49 34'5"
Static tipping load, straight* (\$)	kg lb	5869 12,912	5840 12,848	5830 12,826	5800 12,760	5965 13,123	5935 13,057	5953 13,097	5774 12,703
Static tipping load, full 40° turn* (\$)	kg lb	5123 11,270	5095 11,209	5084 11,185	5056 11,123	5213 11,468	5185 11,407	5203 11,447	5024 11,053
Breakout force (\$)	kg lb	6367 14,007	5971 13,136	6415 14,113	6010 13,222	6930 15,246	6469 14,232	6484 14,265	6359 13,983
Operating weight*	kg lb	7198 15,836	7211 15,864	7230 15,906	7243 15,935	7157 15,745	7170 15,744	7156 15,743	7321 16,106

\*Static tipping load and operating weights shown are for high-speed version 914G and include lubricants, full fuel tank, ROPS cab, 80 kg (176 lb) operator and 17.5-R25 (L2 equivalent) tires.

**NOTE:** Specifications and ratings conform to all applicable standards recommended by the Society of Automotive Engineers (SAE). SAE Standards J732 JUN92 and J742 FEB85 govern loader rating, denoted in the text by (\$).

	Change in Operating Weight		Change in Articulated Static Tipping Load	
	kg	lb	kg	lb
Air conditioner	+ 55	+ 121	+ 71	+ 156
Canopy, ROPS (less cab)	- 199	- 438	- 174	- 383
Counterweight, 150 kg (330 lb)	+ 152	+ 334	+ 287	+ 631
Ride control	+ 32	+ 70	+ 6	+ 13
Supplemental steering	+ 30	+ 66	+ 44	+ 97
Tires & rims, 15.5-25, 12 PR (L-2)	- 127	- 280	- 79	- 174
Tires & rims, 15.5-25, 12 PR (L-3)	- 78	- 172	- 48	- 106
Tires & rims, 15.5-R25, radial (L-2 equivalent)	- 84	- 185	- 52	- 114
Tires & rims, 15.5-R25, radial (L-3 equivalent)	- 36	- 79	- 23	- 51
Tires & rims, 17.5-25, 12 PR (L-2)	- 126	- 277	- 78	- 172
Tires & rims, 17.5-25, 12 PR (L-3)	+ 12	+ 26	+ 7	+ 15
Tires & rims, 17.5-R25, radial (L-3 equivalent)	+ 156	+ 343	+ 96	+ 211
Tires & rims, 17.5-R25, radial (L-2/L-3 equivalent)	+ 95	+ 209	+ 58	+ 128



Bucket Type		General Purpose						
		With Bolt-on Cutting Edges		Bolt-on Teeth & Segments		With Bolt-on Teeth		
Ground Engaging Type	Rated bucket capacity (S)	m <sup>3</sup>	1.8	2.1	1.8	2.1	1.7	2.0
		yd <sup>3</sup>	2.3	2.7	2.3	2.7	2.2	2.6
Struck capacity (S)		m <sup>3</sup>	1.5	1.7	1.5	1.7	1.4	1.6
		yd <sup>3</sup>	2.0	2.2	2.0	2.2	1.8	2.1
Width		mm	2550	2550	2585	2585	2585	2585
		ft/in	8'4"	8'4"	8'6"	8'6"	8'6"	8'6"
Dump clearance at full lift and 45° discharge (S)		mm	2760	2691	2656	2587	2656	2587
		ft/in	9'1"	8'10"	8'9"	8'6"	8'9"	8'6"
Reach at full lift and 45° discharge		mm	865	934	969	1037	969	1037
		ft/in	2'10"	3'1"	3'2"	3'5"	3'2"	3'5"
Reach at 45° discharge and 2130 mm (7'0") clearance		mm	1357	1386	1399	1424	1399	1424
		ft/in	4'5"	4'6"	4'7"	4'8"	4'7"	4'8"
Reach with lift arms horizontal and bucket level		mm	2133	2230	2279	2376	2279	2376
		ft/in	7'0"	7'4"	7'6"	7'10"	7'6"	7'10"
Digging depth		mm	110	118	110	118	85	93
		in	4	4.5	4	4.5	3.5	3.5
Overall length		mm	6890	6993	7036	7138	7017	7120
		ft/in	22'7"	22'11"	23'1"	23'5"	23'0"	23'4"
Overall height with bucket at full raise		mm	4743	4870	4743	4870	4743	4870
		ft/in	15'7"	16'0"	15'7"	16'0"	15'7"	16'0"
Loader clearance circle with bucket in carry position		m	11.22	11.28	11.34	11.40	11.40	11.40
		ft/in	36'10"	37'0"	37'2"	37'5"	37'2"	37'5"
Static tipping load, straight*		kg	7868	7785	7700	7614	7862	7802
		lb	17,310	17,127	16,940	16,750	17,296	17,164
Static tipping load, full 40° turn*		kg	6886	6806	6717	6635	6872	6812
		lb	15,149	14,973	14,777	14,597	15,118	14,986
Breakout force		kg	9876	8902	9756	8782	10 660	9535
		lb	21,727	19,584	21,463	19,320	23,452	20,977
Operating weight*		kg	9907	9960	10 042	10 095	9957	10 010
		lb	21,795	21,912	22,092	22,209	21,905	22,022

\*Static tipping and operating weights shown include lubricants, full fuel tank, ROPS cab, 257 kg (566 lb) counterweight, 80 kg (176 lb) operator and 17.5 x 25 12 PR (L2) tires. NOTE: Specifications and ratings conform to all applicable standards recommended by the Society of Automotive Engineers (SAE). SAE Standards J732 JUN92 and J742 FEB85 govern loader rating, denoted in the text by (S).

	Change in Operating Weight		Change in Articulated Static Tipping Load	
	kg	lb	kg	lb
Air conditioner	+ 32	+ 70	+ 47	+ 103
Canopy, ROPS (less cab)	- 199	- 438	- 185	- 407
Counterweight, 175 kg (385 lb) (removal)	- 175	- 385	- 294	- 647
Crankcase guard	+ 15	+ 33	+ 22	+ 48
Driveshaft guard	+ 43	+ 95	+ 12	+ 26
Power train guard	+ 52	+ 114	+ 51	+ 112
Ride Control System	+ 40	+ 88	+ 28	+ 62
Secondary steering	+ 37	+ 81	+ 50	+ 110
17.5-25, 12 PR (L-2) tires & 1-piece rims	0	0	0	0
17.5-25, 12 PR (L-3) tires & 1-piece rims	+ 72	+ 158	+ 45	+ 99
17.5-R25, Radial (L-2) tires & 1-piece rims	+ 40	+ 88	+ 25	+ 55
17.5-R25, Radial (L-3) tires & 1-piece rims	+ 140	+ 308	+ 87	+ 191
17.5-25, 12 PR (L-2) tires & 3-piece rims	+ 124	+ 273	+ 78	+ 172
17.5-25, 12 PR (L-3) tires & 3-piece rims	+ 196	+ 431	+ 123	+ 270
17.5-R25, Radial (L-2) tires & 3-piece rims	+ 164	+ 361	+ 103	+ 227
17.5-R25, Radial (L-3) tires & 3-piece rims	+ 264	+ 581	+ 165	+ 363
555/70-R25, Radial (L-3) tires & 3-piece rims	+ 516	+ 1135	+ 322	+ 708
20.5-25, 12 PR (L-2) tires & 3-piece rims	+ 412	+ 906	+ 257	+ 565
20.5-25, 12 PR (L-3) tires & 3-piece rims	+ 626	+ 1377	+ 391	+ 860
20.5-R25, Radial (L-2) tires & 3-piece rims	+ 480	+ 1056	+ 300	+ 660
20.5-R25, Radial (L-3) tires & 3-piece rims	+ 652	+ 1434	+ 407	+ 895

Bucket Type		General Purpose						Penetration	
		Bolt-on Cutting Edges		Bolt-on Teeth & Segments		Bolt-on Teeth		Flush Mounted Teeth	
Rated bucket capacity (\$)	m <sup>3</sup> yd <sup>3</sup>	1.8 2.3	2.1 2.7	1.8 2.3	2.1 2.7	1.7 2.2	2.0 2.6	1.7 2.2	
Struck capacity (\$)	m <sup>3</sup> yd <sup>3</sup>	1.5 2.0	1.7 2.2	1.5 2.0	1.7 2.2	1.4 1.8	1.6 2.1	1.4 1.8	
Width	mm ft/in	2550 8'4"	2550 8'4"	2585 8'6"	2585 8'6"	2585 8'6"	2585 8'6"	2594 8'6"	
Dump clearance at full lift and 45° discharge (\$)	mm ft/in	2850 9'4"	2781 9'2"	2746 9'0"	2677 8'9"	2746 9'0"	2677 8'9"	2766 9'1"	
Reach at full lift and 45° discharge (\$)	mm ft/in	960 3'2"	1028 3'4"	1063 3'6"	1131 3'8"	1063 3'6"	1131 3'8"	1078 3'6"	
Reach at 45° discharge and 2130 mm (7'0") clearance (\$)	mm ft/in	1494 4'11"	1527 5'0"	1543 5'1"	1572 5'2"	1543 5'1"	1572 5'2"	1569 5'2"	
Reach with lift arms horizontal and bucket level	mm ft/in	2230 7'4"	2327 7'8"	2376 7'10"	2473 8'1"	2376 7'10"	2473 8'1"	2374 7'10"	
Digging depth (\$)	mm in	132 5	140 5.5	132 5	140 5.5	107 4	115 4.5	107 4	
Overall length	mm ft/in	7039 23'1"	7143 23'5"	7185 23'7"	7289 23'11"	7164 23'6"	7268 23'10"	7162 23'6"	
Overall height with bucket at full raise (\$)	mm ft/in	5020 16'6"	5132 16'10"	5020 16'6"	5132 16'10"	5020 16'6"	5132 16'10"	5020 16'6"	
Loader clearance circle with bucket in carry position	m ft/in	11.14 36'6"	11.19 36'9"	11.25 36'11"	11.31 37'1"	11.25 36'11"	11.31 37'1"	11.24 36'11"	
Static tipping load, straight* (\$)	kg lb	7874 17,323	7801 17,162	7708 16,958	7573 16,660	7894 17,367	7739 17,026	7969 17,532	
Static tipping load, full 40° turn* (\$)	kg lb	6875 15,125	6806 14,973	6708 14,758	6579 14,474	6884 15,145	6744 14,837	6962 15,316	
Breakout force (\$)	kg lb	11 452 25,195	10 405 22,891	11 330 24,925	10 243 22,535	12 251 26,952	11 052 24,315	12 345 27,158	
Operating weight*	kg lb	10 238 22,524	10 266 22,585	10 374 22,823	10 448 22,986	10 288 22,634	10 316 22,695	10 207 22,455	

\*Static tipping and operating weights shown include lubricants, full fuel tank, ROPS cab, 257 kg (566 lb) counterweight, 80 kg (176 lb) operator and 17.5 x 25 12 PR (L2) tires.  
NOTE: Specifications and ratings conform to all applicable standards recommended by the Society of Automotive Engineers (SAE). SAE Standards J732 JUN92 and J742 FEB85 govern loader rating, denoted in the text by (\$).

	Change in Operating Weight		Change in Articulated Static Tipping Load	
	kg	lb	kg	lb
Air conditioner	+ 32	+ 70	+ 43	+ 95
Canopy, ROPS (less cab)	- 199	- 438	- 168	- 370
Counterweight, 175 kg (385 lb) (removal)	- 175	- 385	- 267	- 587
Crankcase guard	+ 15	+ 33	+ 20	+ 44
Driveshaft guard	+ 43	+ 95	+ 3	+ 7
Power train guard	+ 52	+ 114	+ 46	+ 101
Ride Control System	+ 40	+ 88	+ 25	+ 55
Secondary steering	+ 37	+ 81	+ 46	+ 101
17.5-25, 12 PR (L-2) tires & 1-piece rims	0	0	0	0
17.5-25, 12 PR (L-3) tires & 1-piece rims	+ 72	+ 158	+ 41	+ 90
17.5-R25, Radial (L-2) tires & 1-piece rims	+ 40	+ 88	+ 23	+ 51
17.5-R25, Radial (L-3) tires & 1-piece rims	+ 140	+ 308	+ 79	+ 174
17.5-25, 12 PR (L-2) tires & 3-piece rims	+ 124	+ 273	+ 71	+ 156
17.5-25, 12 PR (L-3) tires & 3-piece rims	+ 196	+ 431	+ 112	+ 246
17.5-R25, Radial (L-2) tires & 3-piece rims	+ 164	+ 361	+ 94	+ 207
17.5-R25, Radial (L-3) tires & 3-piece rims	+ 264	+ 581	+ 150	+ 330
555/70-R25, Radial (L-3) tires & 3-piece rims	+ 516	+ 1135	+ 293	+ 645
20.5-25, 12 PR (L-2) tires & 3-piece rims	+ 412	+ 906	+ 234	+ 515
20.5-25, 12 PR (L-3) tires & 3-piece rims	+ 626	+ 1377	+ 356	+ 783
20.5-R25, Radial (L-2) tires & 3-piece rims	+ 480	+ 1056	+ 273	+ 600
20.5-R25, Radial (L-3) tires & 3-piece rims	+ 652	+ 1434	+ 371	+ 816

# Wheel Loaders

# Performance Data

● 928G

Bucket Type		General Purpose						Penetration
		Bolt-on Cutting Edges		Bolt-on Teeth & Segments*		Bolt-on Teeth*		Flush Mounted Teeth*
Ground Engaging Type								
Rated bucket capacity (\$)	m <sup>3</sup> yd <sup>3</sup>	2.0 2.6	2.2 2.9	2.0 2.6	2.2 2.9	1.9 2.5	2.1 2.75	2.1 2.75
Struck capacity (\$)	m <sup>3</sup> yd <sup>3</sup>	1.7 2.25	1.9 2.5	1.7 2.25	1.9 2.5	1.6 2.1	1.8 2.3	1.8 2.3
Bucket width	mm ft/in	2549 8'4"	2549 8'4"	2549 8'4"	2549 8'4"	2549 8'4"	2549 8'4"	2594 8'6"
Dump clearance at full lift and 45° discharge*** (\$)	mm ft/in	2879 9'5"	2842 9'4"	2766 9'1"	2730 8'11"	2766 9'1"	2729 8'11"	2748 9'0"
Reach at full lift and 45° discharge (\$)	mm ft/in	927 3'0"	964 3'2"	1021 3'4"	1058 3'6"	1021 3'4"	1058 3'6"	1074 3'6"
Reach at 45° discharge and 2130 mm (7'0") clearance (\$)	mm ft/in	1455 4'9"	1474 4'10"	1492 4'11"	1509 4'11"	1492 4'11"	1509 4'11"	1535 5'0"
Reach with arms horizontal and bucket level	mm ft/in	2253 7'5"	2305 7'7"	2399 7'10"	2451 8'0"	2399 7'10"	2451 8'0"	2449 8'0"
Digging depth (\$)	mm in	86 3.4	86 3.4	99 3.9	99 3.9	99 3.9	99 3.9	74 2.9
Overall length	mm ft/in	7255 23'10"	7307 24'0"	7401 24'3"	7453 24'5"	7416 24'4"	7433 24'5"	7432 24'5"
Overall height with bucket at full raise (\$)	mm ft/in	4971 16'4"	5070 16'8"	4971 16'4"	5070 16'8"	4971 16'4"	5070 16'8"	5057 16'7"
Bucket floor angle at full dump and maximum lift		47.5°	47.5°	47.5°	47.5°	47.5°	47.5°	47.5°
Loader clearance circle with bucket in carry position	m ft/in	11.56 38'0"	11.59 38'0"	11.69 38'4"	11.72 38'6"	11.69 38'4"	11.72 38'6"	11.70 38'4"
Static tipping load, straight* (\$)	kg lb	9231 20,354	9074 20,008	9062 19,982	8909 19,644	9150 20,176	9083 20,028	9074 20,008
Static tipping load, full 40° turn* (\$)	kg lb	8020 17,684	7877 17,369	7850 17,309	7709 16,998	7941 17,510	7877 17,369	7868 17,349
Breakout force** (\$)	kg lb	11 723 25,849	11 095 24,464	11 590 25,556	10 961 24,169	12 604 27,792	11 880 26,195	11 947 26,343
Operating weight*	kg lb	11 657 25,704	11 707 25,814	11 791 25,999	11 841 26,109	11 706 25,812	11 756 25,922	11 778 25,970
Shipping weight	kg lb	11 397 25,131	11 447 25,241	11 531 25,426	11 581 25,536	11 446 25,239	11 496 25,349	11 518 25,397

\*Static tipping load and operating weight are based on standard machine configuration with 20.5-25, 12 PR (L-2) tires, full fuel tank, coolant, lubricants, operator and optional counterweight.

\*\*Measured 102 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with SAE J732 JUN92.

\*\*\*Dump clearance, reach and overall length dimensions for bucket equipped with teeth reflect actual dimensions. SAE J732 JUN92 allows dimensions for buckets with teeth to reflect the dimension using the cutting edge. Caterpillar Inc. uses actual equipped bucket dimensions.

NOTE: Specifications and ratings conform to all applicable standards recommended by the Society of Automotive Engineers (SAE). SAE Standards J732 JUN92 and J742 FEB85 govern loader ratings, denoted in the text by (\$).

	Change in Operating Weight		Change in Articulated Static Tipping Load	
	kg	lb	kg	lb
Air conditioner	+ 48	+ 106	+ 56	+ 123
Canopy, ROPS (less cab)	- 198	- 437	- 182	- 401
Counterweight, 250 kg (550 lb) (removal)	- 252	- 556	- 421	- 928
Crankcase guard	+ 17	+ 37	+ 24	+ 53
Power train guard	+ 58	+ 128	+ 56	+ 123
Ride Control System	+ 41	+ 90	+ 20	+ 44
Secondary steering	+ 42	+ 93	+ 57	+ 126
Tires & 1-piece rims, 17.5-25, 12PR (L-2)	- 421	- 928	- 262	- 578
Tires & 1-piece rims, 17.5-25, 12PR (L-3)	- 342	- 354	- 213	- 470
Tires & 1-piece rims, 17.5-25, 12PR (L-2/L-3)	- 279	- 615	- 174	- 384
Tires & 1-piece rims, 17.5-R25, radial (L-2)	- 374	- 825	- 232	- 512
Tires & 1-piece rims, 17.5-R25, radial (L-3)	- 218	- 481	- 136	- 300
Tires & 3-piece rims, 17.5-25, 12PR (L-2)	- 289	- 367	- 180	- 370
Tires & 3-piece rims, 17.5-25, 12PR (L-3)	- 217	- 478	- 147	- 324
Tires & 3-piece rims, 17.5-25, 12PR (L-2/L-3)	- 173	- 381	- 108	- 238
Tires & 3-piece rims, 17.5-R25, radial (L-2)	- 249	- 549	- 155	- 342
Tires & 3-piece rims, 17.5-R25, radial (L-3)	- 149	- 329	- 93	- 205
Tires & 3-piece rims, 20.5-25, 12PR (L-3)	+ 204	+ 450	+ 126	+ 278
Tires & 3-piece rims, 20.5-25, 12PR (L-2/L-3)	+ 188	+ 415	+ 122	+ 269
Tires & 3-piece rims, 20.5-R25, radial (L-2)	+ 68	+ 150	+ 42	+ 93
Tires & 3-piece rims, 20.5-R25, radial (L-3)	+ 240	+ 529	+ 148	+ 326

Bucket Type	General Purpose										High Lift Arrangement****
	Bolt-on Edges	Bolt-on Adapters & Segments	Bolt-on Adapters	Bolt-on Edges	Bolt-on Adapters & Segments	Bolt-on Adapters	Bolt-on Edges	Bolt-on Adapters & Segments	Bolt-on Adapters		
Ground Engaging Type	m <sup>3</sup>	2.8	2.8	2.7	2.5	2.5	2.3	2.3	2.3	2.1	—
	yd <sup>3</sup>	<b>3.65</b>	<b>3.65</b>	<b>3.5</b>	<b>3.25</b>	<b>3.25</b>	<b>3.0</b>	<b>3.0</b>	<b>3.0</b>	<b>2.75</b>	—
Struck capacity	m <sup>3</sup>	2.41	2.41	2.04	2.11	2.11	2.01	1.97	1.97	1.87	—
	yd <sup>3</sup>	<b>3.15</b>	<b>3.15</b>	<b>3.02</b>	<b>2.76</b>	<b>2.76</b>	<b>2.63</b>	<b>2.58</b>	<b>2.58</b>	<b>2.45</b>	—
Width	mm	2705	2775	2775	2705	2775	2775	2705	2775	2775	—
	ft/in	<b>8'11"</b>	<b>9'1"</b>	<b>9'1"</b>	<b>8'11"</b>	<b>9'1"</b>	<b>9'1"</b>	<b>8'11"</b>	<b>9'1"</b>	<b>9'1"</b>	—
Dump clearance at full lift and 45° discharge**	mm	2720	2615	2615	2790	2685	2685	2825	2755	2755	+425
	ft/in	<b>8'11"</b>	<b>8'7"</b>	<b>8'7"</b>	<b>9'2"</b>	<b>8'10"</b>	<b>8'10"</b>	<b>9'3"</b>	<b>9'0"</b>	<b>9'0"</b>	<b>+17"</b>
Reach at full lift and 45° discharge**	mm	1055	1160	1160	985	1090	1090	1020	1125	1125	+68
	ft/in	<b>3'6"</b>	<b>3'10"</b>	<b>3'10"</b>	<b>3'3"</b>	<b>3'7"</b>	<b>3'7"</b>	<b>3'4"</b>	<b>3'8"</b>	<b>3'8"</b>	<b>+3"</b>
Reach with lift arms horizontal and bucket level	mm	2390	2540	2540	2290	2440	2440	2240	2390	2390	+375
	ft/in	<b>7'10"</b>	<b>8'4"</b>	<b>8'4"</b>	<b>7'6"</b>	<b>8'0"</b>	<b>8'0"</b>	<b>7'4"</b>	<b>7'10"</b>	<b>7'10"</b>	<b>+15"</b>
Digging depth	mm	50	50	25	50	50	25	50	50	25	+61
	in	<b>2</b>	<b>2</b>	<b>1</b>	<b>2</b>	<b>2</b>	<b>1</b>	<b>2</b>	<b>2</b>	<b>1</b>	<b>+2</b>
Overall length**	mm	7325	7475	7475	7225	7375	7375	7175	7325	7325	+470
	ft/in	<b>24'0"</b>	<b>24'6"</b>	<b>24'6"</b>	<b>23'8"</b>	<b>24'2"</b>	<b>24'2"</b>	<b>23'7"</b>	<b>24'0"</b>	<b>24'0"</b>	<b>+19"</b>
Overall height with bucket at full raise	mm	5285	5285	5285	5190	5190	5190	5140	5140	5140	+364
	ft/in	<b>17'4"</b>	<b>17'4"</b>	<b>17'4"</b>	<b>17'0"</b>	<b>17'0"</b>	<b>17'0"</b>	<b>16'10"</b>	<b>16'10"</b>	<b>16'10"</b>	<b>+14"</b>
Loader clearance circle with bucket in carry position	m	12.00	12.16	12.16	11.95	12.10	12.10	11.92	12.07	12.07	+430
	ft/in	<b>39'4"</b>	<b>39'11"</b>	<b>39'11"</b>	<b>39'3"</b>	<b>39'8"</b>	<b>39'8"</b>	<b>39'1"</b>	<b>39'7"</b>	<b>39'7"</b>	<b>+17"</b>
Static tipping load, straight*	kg	10 517	10 387	10 586	10 668	10 538	10 742	10 742	10 611	10 642	-1370
	lb	<b>23,190</b>	<b>22,900</b>	<b>23,340</b>	<b>23,520</b>	<b>23,230</b>	<b>23,680</b>	<b>23,680</b>	<b>23,390</b>	<b>23,460</b>	<b>-3020</b>
Static tipping load, full 40° turn*	kg	9189	9059	9246	9330	9199	9391	9397	9267	9308	-1241
	lb	<b>20,260</b>	<b>19,970</b>	<b>20,380</b>	<b>20,570</b>	<b>20,280</b>	<b>20,700</b>	<b>20,720</b>	<b>20,430</b>	<b>20,520</b>	<b>-2730</b>
Breakout force***	kN	110.1	110.1	117.3	120.3	120.3	128.9	126.1	126.1	135.6	-5.5
	lb	<b>24,770</b>	<b>24,770</b>	<b>26,390</b>	<b>27,060</b>	<b>27,060</b>	<b>29,000</b>	<b>28,370</b>	<b>28,370</b>	<b>30,510</b>	<b>-1230</b>
Operating weight*	kg	13 181	13 289	13 196	13 110	13 218	13 125	13 077	13 185	13 092	+162
	lb	<b>29,060</b>	<b>29,300</b>	<b>29,090</b>	<b>28,900</b>	<b>29,140</b>	<b>28,940</b>	<b>28,830</b>	<b>29,070</b>	<b>28,860</b>	<b>+350</b>

\*Static tipping load and operating weight shown are based on standard machine configuration with sound-suppression cab and ROPS, 20.5-R25 XTLA 1★(L-2) tires, full fuel tank, coolant, lubricants and operator.

\*\*Dump clearance, reach and overall length dimensions for bucket equipped with teeth reflect actual dimensions. SAE J732C allows dimensions for bucket with teeth to reflect the dimension using the cutting edge. Caterpillar Inc. uses actual equipped bucket dimensions.

\*\*\*Measured 102 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with SAE J732 JUN92.

\*\*\*\*All buckets shown can be used on the high lift arrangement. High lift column shows changes in specifications from standard lift to high lift. Add or subtract as indicated to or from specifications given for appropriate bucket to calculate high lift specifications.

	Change in Operating Weight		Change in Articulated Static Tipping Load	
	kg	lb	kg	lb
Remove cab only, ROPS .....	-198	-437	-191	-421
20.5-25, 12 PR (L-2) .....	- 60	-132	- 39	- 86
20.5-25, 12 PR (L-3) .....	+ 85	+187	+ 56	+123
20.5-R25, XTLA (L-2) .....	—	—	—	—
20.5-R25, GP-2B (L-2/L-3) .....	+130	+287	+ 86	+190
20.5-R25, XHA (L-3) .....	+172	+379	+114	+251

Bucket Type	Ground Engaging Type	Material Handling						High Lift Arrangement****
		Bolt-on Edges	Bolt-on Adapters & Segments	Bolt-on Adapters	Bolt-on Edges	Bolt-on Adapters & Segments	Bolt-on Adapters	
Rated bucket capacity	m <sup>3</sup> yd <sup>3</sup>	2.8 <b>3.65</b>	2.8 <b>3.65</b>	2.7 <b>3.5</b>	2.5 <b>3.25</b>	2.5 <b>3.25</b>	2.3 <b>3.0</b>	— —
Struck capacity	m <sup>3</sup> yd <sup>3</sup>	2.42 <b>3.17</b>	2.42 <b>3.17</b>	2.32 <b>3.04</b>	2.13 <b>2.79</b>	2.13 <b>2.79</b>	2.03 <b>2.66</b>	— —
Width	mm ft/in	2705 <b>8'11"</b>	2775 <b>9'1"</b>	2775 <b>9'1"</b>	2705 <b>8'11"</b>	2775 <b>9'1"</b>	2775 <b>9'1"</b>	— —
Dump clearance at full lift and 45° discharge**	mm ft/in	2720 <b>8'11"</b>	2615 <b>8'7"</b>	2615 <b>8'7"</b>	2790 <b>9'2"</b>	2685 <b>8'10"</b>	2685 <b>8'10"</b>	+425 <b>+17"</b>
Reach at full lift and 45° discharge**	mm ft/in	1055 <b>3'6"</b>	1160 <b>3'10"</b>	1160 <b>3'10"</b>	985 <b>3'3"</b>	1090 <b>3'7"</b>	1090 <b>3'7"</b>	+68 <b>+3"</b>
Reach with lift arms horizontal and bucket level	mm ft/in	2390 <b>7'10"</b>	2540 <b>8'4"</b>	2540 <b>8'4"</b>	2290 <b>7'6"</b>	2440 <b>8'0"</b>	2440 <b>8'0"</b>	+375 <b>+15"</b>
Digging depth	mm in	50 <b>2</b>	50 <b>2</b>	25 <b>1</b>	50 <b>2</b>	50 <b>2</b>	25 <b>1</b>	+61 <b>+2</b>
Overall length**	mm ft/in	7325 <b>24'0"</b>	7475 <b>24'6"</b>	7475 <b>24'6"</b>	7225 <b>23'8"</b>	7375 <b>24'2"</b>	7375 <b>24'2"</b>	+470 <b>+19"</b>
Overall height with bucket at full raise	mm ft/in	5270 <b>17'4"</b>	5270 <b>17'4"</b>	5270 <b>17'4"</b>	5175 <b>17'0"</b>	5175 <b>17'0"</b>	5175 <b>17'0"</b>	+364 <b>+14"</b>
Loader clearance circle with bucket in carry position	m ft/in	12.00 <b>39'4"</b>	12.16 <b>39'11"</b>	12.16 <b>39'11"</b>	11.95 <b>39'3"</b>	12.10 <b>39'8"</b>	12.10 <b>39'8"</b>	+430 <b>+17"</b>
Static tipping load, straight*	kg lb	10 447 <b>23,030</b>	10 317 <b>22,740</b>	10 512 <b>23,170</b>	10 617 <b>23,410</b>	10 489 <b>23,120</b>	10 686 <b>23,560</b>	-1370 <b>-3020</b>
Static tipping load, full 40° turn*	kg lb	9128 <b>20,120</b>	8998 <b>19,840</b>	9182 <b>20,240</b>	9287 <b>20,470</b>	9159 <b>20,190</b>	9345 <b>20,600</b>	-1241 <b>-2730</b>
Breakout force***	kN lb	110.1 <b>24,770</b>	110.1 <b>24,770</b>	117.3 <b>26,390</b>	120.3 <b>27,060</b>	120.3 <b>27,060</b>	128.9 <b>29,000</b>	-5.5 <b>-1230</b>
Operating weight*	kg lb	13 166 <b>29,030</b>	13 274 <b>29,260</b>	13 181 <b>29,060</b>	13 099 <b>28,880</b>	13 207 <b>29,120</b>	13 114 <b>28,910</b>	+162 <b>+350</b>

\*Static tipping load and operating weight shown are based on standard machine configuration with sound-suppression cab and ROPS, 20.5-R25 XTLA 1★(L-2) tires, full fuel tank, coolant, lubricants and operator.

\*\*Dump clearance, reach and overall length dimensions for bucket equipped with teeth reflect actual dimensions. SAE J732C allows dimensions for bucket with teeth to reflect the dimension using the cutting edge. Caterpillar Inc. uses actual equipped bucket dimensions.

\*\*\*Measured 102 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with SAE J732 JUN92.

\*\*\*\*All buckets shown can be used on the high lift arrangement. High lift column shows changes in specifications from standard lift to high lift. Add or subtract as indicated to or from specifications given for appropriate bucket to calculate high lift specifications.

	Change in Operating Weight		Change in Articulated Static Tipping Load	
	kg	lb	kg	lb
Remove cab only, ROPS	-198	-437	-191	-421
20.5-25, 12 PR (L-2)	- 60	-132	- 39	- 86
20.5-25, 12 PR (L-3)	+ 85	+187	+ 56	+123
20.5-R25, XTLA (L-2)	—	—	—	—
20.5-R25, GP-2B (L-2/L-3)	+130	+287	+ 86	+190
20.5-R25, XHA (L-3)	+172	+379	+114	+251

Bucket Type	Ground Engaging Type	General Purpose								Material Handling	
		Bolt-on Edges	Teeth & Seg-ments*	Teeth*	Bolt-on Edges	Teeth & Seg-ments*	Teeth*	Bolt-on Edges	Teeth & Seg-ments*	Teeth*	Bolt-on Edges
Rated bucket capacity (\$)	m <sup>3</sup> yd <sup>3</sup>	3.1 4.0	3.1 4.0	2.9 3.75	2.9 3.75	2.9 3.75	2.7 3.5	2.7 3.5	2.7 3.5	2.5 3.25	3.5 4.5
Struck capacity (\$)	m <sup>3</sup> yd <sup>3</sup>	2.66 3.46	2.66 3.46	2.5 3.25	2.46 3.2	2.46 3.2	2.27 2.95	2.27 2.95	2.27 2.95	2.12 2.76	3.0 3.9
Width (\$)	mm ft/in	2930 9'7"	2995 9'10"	2995 9'10"	2930 9'7"	2995 9'10"	2995 9'10"	2930 9'7"	2995 9'10"	2995 9'10"	2930 9'7"
Dump clearance at full lift and 45° discharge (\$)	mm ft/in	2890 9'6"	2785 9'2"	2785 9'2"	2935 9'8"	2835 9'4"	2835 9'4"	2985 9'10"	2880 9'5"	2880 9'5"	2810 9'3"
Reach at full lift and 45° discharge (\$)	mm ft/in	1270 4'2"	1365 4'6"	1365 4'6"	1235 4'1"	1330 4'4"	1330 4'4"	1200 3'11"	1300 4'3"	1300 4'3"	1210 4'0"
Reach with lift arms horizontal and bucket level	mm ft/in	2570 8'5"	2710 8'11"	2710 8'11"	2510 8'3"	2650 8'8"	2650 8'8"	2450 8'0"	2590 8'6"	2590 8'6"	2605 8'7"
Digging depth (\$)	mm in	85 3.3	95 3.7	95 3.7	85 3.3	95 3.7	95 3.7	85 3.3	95 3.7	95 3.7	85 3.3
Overall length (\$)	mm ft/in	8025 26'4"	8165 26'9"	8165 26'9"	7965 26'2"	8105 26'7"	8105 26'7"	7905 25'11"	8045 26'5"	8045 26'5"	8060 26'5"
Overall height with bucket at full raise (\$)	mm ft/in	5400 17'9"	5400 17'9"	5400 17'9"	5340 17'6"	5340 17'6"	5340 17'6"	5280 17'4"	5280 17'4"	5280 17'4"	5435 17'10"
Loader clearance circle with bucket in carry position (\$)	m ft/in	13.29 43'7"	13.43 44'1"	13.43 44'1"	13.26 43'6"	13.40 43'11"	13.40 43'11"	13.22 43'4"	13.36 43'10"	13.36 43'10"	13.46 44'2"
Static tipping load, straight** (\$)	kg lb	12 195 26,890	12 094 26,660	12 388 27,310	12 311 27,140	12 210 26,920	12 508 27,580	12 430 27,400	12 329 27,180	12 631 27,850	12 317 27,150
Static tipping load, full 35° turn** (\$)	kg lb	11 074 24,410	10 973 24,190	11 255 24,810	11 185 24,660	11 084 24,440	11 369 25,060	11 299 24,910	11 198 24,690	11 487 25,320	11 186 24,660
Static tipping load, full 40° turn** (\$)	kg lb	10 710 23,610	10 609 23,390	10 887 24,000	10 820 23,850	10 719 23,630	11 000 24,250	10 932 24,100	10 832 23,880	11 116 24,510	10 820 23,850
Breakout force*** (\$)	kN lb	146.3 32,810	145.8 32,690	146.6 32,870	154.5 34,640	154.0 34,530	154.8 34,710	163.1 36,570	162.7 36,480	163.4 36,640	141.9 31,910
Operating weight** (\$)	kg lb	17 782 39,200	17 877 39,410	17 712 39,050	17 730 39,090	17 825 39,300	17 660 38,940	17 676 38,970	17 771 39,170	17 606 38,820	17 752 39,140

\*Dimensions are measured to the tip of the bucket teeth to provide accurate clearance data. SAE Standards specifies the cutting edge.  
 \*\*Static tipping load and operating weight shown are based on standard machine configuration with 23.5-R25 XHA (L-3) tires, air conditioning, cranks case guard, power train guard, full fuel tank, lubricants and operator.  
 \*\*\*Measured 102 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with SAE J732 JUN92.  
**NOTE:** Specifications and ratings conform to all applicable standards recommended by the Society of Automotive Engineers (SAE). SAE Standards J732 JUN92 and J742 FEB85 govern loader rating, denoted in the text by (\$).

	Change in Operating Weight		Change in Static Tipping Load — Straight	
	kg	lb	kg	lb
23.5-25, 12 PR (L-2)	-408	-900	-300	-660
23.5-25, 16 PR (L-3)	-300	-660	-221	-480
23.5-R25, XHA (L-2) standard	—	—	—	—
23.5-R25, XTLA (L-2) steel radial	-100	-220	- 63	-130
23.5-R25, GP-2B (L-2/3) steel radial	- 76	-160	- 60	-130

Bucket Type	Material Handling								Rock	
	Teeth & Segments*	Teeth*	Bolt-on Edges	Teeth & Segments*	Teeth*	Bolt-on Edges	Teeth & Segments*	Teeth*	Bolt-on Edges	Bottom Strap Teeth
Ground Engaging Type										
Rated bucket capacity (\$)	m <sup>3</sup> yd <sup>3</sup>	3.5 4.5	3.3 4.25	3.3 4.25	3.3 4.25	3.1 4.0	3.1 4.0	3.1 4.0	2.9 3.75	2.9 3.75
Struck capacity (\$)	m <sup>3</sup> yd <sup>3</sup>	3.0 3.9	2.83 3.68	2.83 3.68	2.83 3.68	2.66 3.46	2.66 3.46	2.66 3.46	2.51 3.26	2.45 3.18
Width (\$)	mm ft/in	2995 9'10"	2995 9'10"	2930 9'7"	2995 9'10"	2995 9'10"	2930 9'7"	2995 9'10"	2995 9'10"	2985 9'9"
Dump clearance at full lift and 45° discharge (\$)	mm ft/in	2700 8'10"	2700 8'10"	2845 9'4"	2735 9'0"	2735 9'0"	2880 9'5"	2770 9'1"	2770 9'1"	2880 9'5"
Reach at full lift and 45° discharge (\$)	mm ft/in	1300 4'3"	1300 4'3"	1175 3'10"	1265 4'2"	1265 4'2"	1140 3'9"	1230 4'0"	1230 4'0"	1315 4'4"
Reach with lift arms horizontal and bucket level	mm ft/in	2745 9'0"	2745 9'0"	2555 8'5"	2695 8'10"	2695 8'10"	2505 8'3"	2645 8'8"	2645 8'8"	2605 8'7"
Digging depth (\$)	mm in	95 3.7	95 3.7	85 3.3	95 3.7	95 3.7	85 3.3	95 3.7	95 3.7	85 3.3
Overall length (\$)	mm ft/in	8200 26'11"	8200 26'11"	8010 26'3"	8155 26'9"	8155 26'9"	7960 26'1"	8100 26'7"	8100 26'7"	8060 26'5"
Overall height with bucket at full raise (\$)	mm ft/in	5435 17'10"	5435 17'10"	5390 17'8"	5390 17'8"	5390 17'8"	5485 18'0"	5485 18'0"	5485 18'0"	5350 17'7"
Loader clearance circle with bucket in carry position (\$)	m ft/in	13.58 44'7"	13.58 44'7"	13.28 43'7"	13.42 44'1"	13.42 44'1"	13.25 43'6"	13.40 43'11"	13.40 43'11"	13.36 43'10"
Static tipping load, straight** (\$)	kg lb	12 215 26,930	12 513 27,590	12 421 27,380	12 319 27,160	12 621 27,820	12 525 27,610	12 423 27,390	12 728 28,060	12 197 26,890
Static tipping load, full 35° turn** (\$)	kg lb	11 084 24,440	11 369 25,060	11 286 24,880	11 184 24,660	11 472 25,290	11 385 25,100	11 282 24,870	11 574 25,520	11 056 24,370
Static tipping load, full 40° turn** (\$)	kg lb	10 717 23,630	10 999 24,250	10 918 24,070	10 815 23,840	11 100 24,470	11 015 24,280	10 913 24,060	11 200 24,690	10 686 23,560
Breakout force*** (\$)	kN lb	140.9 31,680	141.7 31,860	148.1 33,210	147.6 33,100	148.4 33,280	155.3 34,820	154.8 34,710	155.6 34,890	144.3 31,680
Operating weight** (\$)	kg lb	17 847 39,350	17 682 38,980	17 711 39,050	17 806 39,260	17 641 38,890	17 670 38,960	17 765 39,170	17 600 38,600	17 984 39,650

\*Dimensions are measured to the tip of the bucket teeth to provide accurate clearance data. SAE Standards specifies the cutting edge.

\*\*Static tipping load and operating weight shown are based on standard machine configuration with 23.5-R25 XHA (L-3) tires, air conditioning, cranks case guard, power train guard, full fuel tank, lubricants and operator.

\*\*\*Measured 102 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with SAE J732 JUN92.

**NOTE:** Specifications and ratings conform to all applicable standards recommended by the Society of Automotive Engineers (SAE). SAE Standards J732 JUN92 and J742 FEB85 govern loader rating, denoted in the text by (\$).

	Change in Operating Weight		Change in Static Tipping Load — Straight	
	kg	lb	kg	lb
23.5-25, 12 PR (L-2)	-408	-900	-300	-660
23.5-25, 16 PR (L-3)	-300	-660	-221	-480
23.5-R25, XHA (L-2) standard	—	—	—	—
23.5-R25, XTLA (L-2) steel radial	-100	-220	- 63	-130
23.5-R25, GP-2B (L-2/3) steel radial	- 76	-160	- 60	-130

Bucket Type	General Purpose									Material Handling	
	Ground Engaging Type	Bolt-on Edges	Teeth & Seg-ments*	Teeth*	Bolt-on Edges	Teeth & Seg-ments*	Teeth*	Bolt-on Edges	Teeth & Seg-ments*	Teeth*	Bolt-on Edges
Rated bucket capacity (\$)	m <sup>3</sup> yd <sup>3</sup>	3.3 <b>4.25</b>	3.3 <b>4.25</b>	3.1 <b>4.0</b>	3.1 <b>4.0</b>	3.1 <b>4.0</b>	2.9 <b>3.75</b>	2.9 <b>3.75</b>	2.9 <b>3.75</b>	2.7 <b>3.5</b>	3.8 <b>5.0</b>
Struck capacity (\$)	m <sup>3</sup> yd <sup>3</sup>	2.83 <b>3.68</b>	2.83 <b>3.68</b>	2.66 <b>3.46</b>	2.66 <b>3.46</b>	2.66 <b>3.46</b>	2.5 <b>3.25</b>	2.46 <b>3.2</b>	2.46 <b>3.2</b>	2.27 <b>2.95</b>	3.26 <b>4.24</b>
Width (\$)	mm ft/in	2930 <b>9'7"</b>	2995 <b>9'10"</b>	2995 <b>9'10"</b>	2930 <b>9'7"</b>	2995 <b>9'10"</b>	2995 <b>9'10"</b>	2930 <b>9'7"</b>	2995 <b>9'10"</b>	2995 <b>9'10"</b>	2930 <b>9'7"</b>
Dump clearance at full lift and 45° discharge (\$)	mm ft/in	3040 <b>10'0"</b>	2940 <b>9'8"</b>	2940 <b>9'8"</b>	3080 <b>10'1"</b>	2975 <b>9'9"</b>	2975 <b>9'9"</b>	3125 <b>10'3"</b>	3025 <b>9'11"</b>	3025 <b>9'11"</b>	2945 <b>9'8"</b>
Reach at full lift and 45° discharge (\$)	mm ft/in	1250 <b>4'1"</b>	1350 <b>4'5"</b>	1350 <b>4'5"</b>	1220 <b>4'0"</b>	1315 <b>4'4"</b>	1315 <b>4'4"</b>	1185 <b>3'11"</b>	1285 <b>4'3"</b>	1285 <b>4'3"</b>	1215 <b>4'0"</b>
Reach with lift arms horizontal and bucket level	mm ft/in	2720 <b>8'11"</b>	2860 <b>9'5"</b>	2860 <b>9'5"</b>	2670 <b>8'9"</b>	2810 <b>9'3"</b>	2810 <b>9'3"</b>	2610 <b>8'7"</b>	2750 <b>9'0"</b>	2750 <b>9'0"</b>	2780 <b>9'1"</b>
Digging depth (\$)	mm in	85 <b>3.3</b>	95 <b>3.7</b>	95 <b>3.7</b>	85 <b>3.3</b>	95 <b>3.7</b>	95 <b>3.7</b>	85 <b>3.3</b>	95 <b>3.7</b>	95 <b>3.7</b>	85 <b>3.3</b>
Overall length (\$)	mm ft/in	8230 <b>27'0"</b>	8370 <b>27'6"</b>	8370 <b>27'6"</b>	8180 <b>26'10"</b>	8320 <b>27'4"</b>	8320 <b>27'4"</b>	8120 <b>26'8"</b>	8260 <b>27'1"</b>	8260 <b>27'1"</b>	8290 <b>27'2"</b>
Overall height with bucket at full raise (\$)	mm ft/in	5640 <b>18'6"</b>	5640 <b>18'6"</b>	5640 <b>18'6"</b>	5590 <b>18'4"</b>	5590 <b>18'4"</b>	5590 <b>18'4"</b>	5530 <b>18'2"</b>	5530 <b>18'2"</b>	5530 <b>18'2"</b>	5700 <b>18'9"</b>
Loader clearance circle with bucket in carry position (\$)	m ft/in	14.47 <b>44'2"</b>	13.60 <b>44'7"</b>	13.60 <b>44'7"</b>	13.44 <b>44'1"</b>	13.56 <b>44'6"</b>	13.56 <b>44'6"</b>	13.26 <b>43'6"</b>	13.40 <b>43'11"</b>	13.40 <b>43'11"</b>	13.51 <b>44'4"</b>
Static tipping load, straight*** (\$)	kg lb	12 650 <b>27,890</b>	12 548 <b>27,660</b>	12 839 <b>28,310</b>	12 761 <b>28,130</b>	12 661 <b>27,910</b>	12 956 <b>28,560</b>	12 879 <b>28,390</b>	12 778 <b>28,170</b>	13 077 <b>28,830</b>	12 729 <b>28,060</b>
Static tipping load, full 35° turn** (\$)	kg lb	11 433 <b>25,210</b>	11 333 <b>24,980</b>	11 609 <b>25,590</b>	11 540 <b>25,440</b>	11 439 <b>25,220</b>	11 722 <b>25,840</b>	11 652 <b>25,690</b>	11 552 <b>25,470</b>	11 838 <b>26,100</b>	11 505 <b>25,360</b>
Static tipping load, full 40° turn** (\$)	kg lb	11 042 <b>24,340</b>	10 941 <b>24,120</b>	11 214 <b>24,720</b>	11 148 <b>24,580</b>	11 047 <b>24,350</b>	11 326 <b>24,970</b>	11 258 <b>24,820</b>	11 158 <b>24,600</b>	11 439 <b>25,220</b>	11 112 <b>24,500</b>
Breakout force*** (\$)	kN lb	140.7 <b>31,550</b>	140.2 <b>31,440</b>	141.0 <b>31,620</b>	147.1 <b>32,980</b>	146.7 <b>32,900</b>	147.5 <b>33,070</b>	150.7 <b>33,890</b>	150.2 <b>33,770</b>	150.9 <b>33,910</b>	133.8 <b>30,000</b>
Operating weight** (\$)	kg lb	18 578 <b>40,960</b>	18 673 <b>41,170</b>	18 508 <b>40,810</b>	18 513 <b>40,820</b>	18 608 <b>41,030</b>	18 443 <b>40,660</b>	18 461 <b>40,700</b>	18 556 <b>40,910</b>	18 391 <b>40,550</b>	18 549 <b>40,900</b>

\*Dimensions are measured to the tip of the bucket teeth to provide accurate clearance data. SAE Standards specifies the cutting edge.

\*\*Static tipping load and operating weight shown are based on standard machine configuration with 23.5-R25 XHA (L-3) tires, air conditioning, cranks case guard, power train guard, full fuel tank, lubricants and operator.

\*\*\*Measured 102 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with SAE J732 JUN92.

NOTE: Specifications and ratings conform to all applicable standards recommended by the Society of Automotive Engineers (SAE). SAE Standards J732 JUN92 and J742 FEB85 govern loader rating, denoted in the text by (\$).

	Change in Operating Weight		Change in Static Tipping Load — Straight	
	kg	lb	kg	lb
23.5-25, 16 PR (L-2)	-408	-900	-300	-660
23.5-25, 16 PR (L-3)	-300	-660	-221	-480
23.5-R25, XHA (L-3) standard	—	—	—	—
23.5-R25, XTLA (L-2) steel radial	-100	-220	- 63	-130
23.5-R25, GP-2B (L-2/3) steel radial	- 76	-160	- 60	-130
625/70-R25, (L-3) low profile	-194	-420	-137	-300

23.5-25, 16 PR (L-2)	-408	-900	-300	-660
23.5-25, 16 PR (L-3)	-300	-660	-221	-480
23.5-R25, XHA (L-3) standard	—	—	—	—
23.5-R25, XTLA (L-2) steel radial	-100	-220	- 63	-130
23.5-R25, GP-2B (L-2/3) steel radial	- 76	-160	- 60	-130
625/70-R25, (L-3) low profile	-194	-420	-137	-300



Bucket Type	Material Handling								Rock		
	Teeth & Segments*	Teeth*	Bolt-on Edges	Teeth & Segments*	Teeth*	Bolt-on Edges	Teeth & Segments*	Teeth*	Bolt-on Edges	Bottom Strap Teeth	
Ground Engaging Type											
Rated bucket capacity (\$)	m <sup>3</sup> yd <sup>3</sup>	3.8 5.0	3.6 4.75	3.5 4.5	3.5 4.5	3.3 4.25	3.3 4.25	3.3 4.25	3.1 4.0	3.1 4.0	3.1 4.0
Struck capacity (\$)	m <sup>3</sup> yd <sup>3</sup>	3.26 4.24	3.1 4.0	3.0 3.9	3.0 3.9	2.83 3.68	2.83 3.68	2.83 3.68	2.67 3.47	2.72 3.53	2.72 3.53
Width (\$)	mm ft/in	2995 9'10"	2995 9'10"	2930 9'7"	2995 9'10"	2995 9'10"	2930 9'7"	2995 9'10"	2995 9'10"	2985 9'10"	2970 9'9"
Dump clearance at full lift and 45° discharge (\$)	mm ft/in	2835 9'4"	2835 9'4"	3000 9'10"	2890 9'6"	2890 9'6"	3035 9'11"	2925 9'7"	2925 9'7"	3005 9'10"	2845 9'4"
Reach at full lift and 45° discharge (\$)	mm ft/in	1305 4'3"	1305 4'3"	1165 3'10"	1255 4'1"	1255 4'1"	1125 3'8"	1215 4'0"	1215 4'0"	1310 4'4"	1435 4'8"
Reach with lift arms horizontal and bucket level	mm ft/in	2920 9'7"	2920 9'7"	2705 8'10"	2845 9'4"	2845 9'4"	2655 8'9"	2795 9'2"	2795 9'2"	2785 9'2"	2985 9'10"
Digging depth (\$)	mm in	95 3.7	95 3.7	85 3.3	95 3.7	95 3.7	85 3.3	95 3.7	95 3.7	85 3.3	125 4.8
Overall length (\$)	mm ft/in	8430 27'8"	8430 27'8"	8215 26'11"	8355 27'5"	8355 27'5"	8165 26'9"	8305 27'3"	8305 27'3"	8295 27'3"	8495 27'10"
Overall height with bucket at full raise (\$)	mm ft/in	5700 18'9"	5700 18'9"	5630 18'6"	5630 18'6"	5630 18'6"	5580 18'4"	5580 18'4"	5580 18'4"	5620 18'5"	5620 18'5"
Loader clearance circle with bucket in carry position (\$)	m ft/in	13.63 44'9"	13.63 44'9"	13.46 44'2"	13.58 44'7"	13.58 44'7"	13.43 44'1"	13.55 44'6"	13.55 44'6"	13.54 44'5"	13.65 44'8"
Static tipping load, straight*** (\$)	kg lb	12 627 27,840	12 917 28,480	12 884 28,400	12 782 28,180	13 081 28,840	12 989 28,640	12 887 28,410	13 190 29,080	12 316 27,150	12 468 27,490
Static tipping load, full 35° turn** (\$)	kg lb	11 403 25,140	11 681 25,750	11 652 25,690	11 550 25,460	11 837 26,100	11 752 25,910	11 650 25,680	11 940 26,320	11 081 24,430	11 230 24,760
Static tipping load, full 40° turn** (\$)	kg lb	11 010 24,270	11 284 24,880	11 257 24,820	11 155 24,590	11 437 25,210	11 355 25,030	11 253 24,810	11 538 25,440	10 684 23,550	10 832 23,880
Breakout force*** (\$)	kN lb	133.3 29,890	134.2 30,090	142.5 31,950	142.0 31,840	142.8 32,020	148.9 33,390	148.5 33,300	149.2 33,460	131.6 29,510	137.8 30,900
Operating weight** (\$)	kg lb	18 644 41,110	18 479 40,740	18 484 40,750	18 579 40,960	18 414 40,600	18 442 40,660	18 537 40,870	18 372 40,570	19 071 42,050	18 988 41,860

\*Dimensions are measured to the tip of the bucket teeth to provide accurate clearance data. SAE Standards specifies the cutting edge.

\*\*Static tipping load and operating weight shown are based on standard machine configuration with 23.5-R25 XHA (L-3) tires, air conditioning, cranks case guard, power train guard, full fuel tank, lubricants and operator.

\*\*\*Measured 102 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with SAE J732 JUN92.

**NOTE:** Specifications and ratings conform to all applicable standards recommended by the Society of Automotive Engineers (SAE). SAE Standards J732 JUN92 and J742 FEB85 govern loader rating, denoted in the text by (\$).

	Change in Operating Weight		Change in Static Tipping Load — Straight	
	kg	lb	kg	lb
23.5-25, 16 PR (L-2)	-408	-900	-300	-660
23.5-25, 16 PR (L-3)	-300	-660	-221	-480
23.5-R25, XHA (L-3) standard	—	—	—	—
23.5-R25, XTLA (L-2) steel radial	-100	-220	- 63	-130
23.5-R25, GP-2B (L-2/3) steel radial	- 76	-160	- 60	-130
625/70-R25, (L-3) low profile	-194	-420	-137	-300

Bucket Type		General Purpose									
		Bolt-on Edges	Teeth & Segments*	Teeth*	Bolt-on Edges	Teeth & Segments*	Teeth*	Bolt-on Edges	Teeth & Segments*	Teeth*	
Ground Engaging Type	Rated bucket capacity (\$)	m <sup>3</sup> yd <sup>3</sup>	3.8 5.0	3.8 5.0	3.6 4.75	3.6 4.75	3.6 4.75	3.5 4.5	3.5 4.5	3.5 4.5	3.3 4.25
	Struck capacity (\$)	m <sup>3</sup> yd <sup>3</sup>	3.27 4.25	3.27 4.25	3.12 4.06	3.1 4.03	3.1 4.03	2.96 3.85	2.96 3.85	2.96 3.85	2.82 3.67
Width (\$)	Dump clearance at full lift and 45° discharge (\$)	mm	3060	3150	3150	3060	3150	3150	3060	3150	3150
		ft/in	10'0"	10'4"	10'4"	10'0"	10'4"	10'4"	10'0"	10'4"	10'4"
Reach at full lift and 45° discharge (\$)	Reach with lift arms horizontal and bucket level	mm	1305	1425	1425	1280	1405	1405	1265	1385	1385
		ft/in	4'3"	4'8"	4'8"	4'2"	4'7"	4'7"	4'2"	4'7"	4'7"
Digging depth (\$)	Overall length (\$)	mm	130	130	100	130	130	100	130	130	100
		in	5	5	4	5	5	4	5	5	4
Overall height with bucket at full raise (\$)	Loader clearance circle with bucket in carry position (\$)	mm	8825	9010	9010	8785	8965	8965	8745	8925	8925
		ft/in	28'11"	29'7"	29'7"	28'10"	29'5"	29'5"	28'8"	29'3"	29'3"
Static tipping load, straight** (\$)	Static tipping load, full 37° turn** (\$)	mm	5710	5710	5710	5670	5670	5670	5630	5630	5630
		ft/in	18'9"	18'9"	18'9"	18'7"	18'7"	18'7"	18'6"	18'6"	18'6"
Breakout force*** (\$)	Operating weight*** (\$)	m	14.52	14.71	14.71	14.49	14.69	14.69	14.47	14.66	14.66
		ft/in	47'7"	48'3"	48'3"	47'7"	48'2"	48'2"	47'6"	48'1"	48'1"
Operating weight*** (\$)	Operating weight*** (\$)	kg	15 754	15 580	15 878	15 877	15 706	16 004	16 003	15 835	16 133
		lb	34,730	34,350	35,010	35,000	34,630	35,280	35,280	34,910	35,570
Operating weight*** (\$)	Operating weight*** (\$)	kg	14 000	13 827	14 108	14 118	13 974	14 229	14 239	14 071	14 354
		lb	30,870	30,480	31,100	31,130	30,810	31,370	31,390	31,020	31,650
Operating weight*** (\$)	Operating weight*** (\$)	kN	196.1	196.1	210.7	202.8	202.8	210.8	209.3	209.3	226.1
		lb	44,120	44,120	47,400	45,630	45,630	47,430	47,090	47,090	50,870
Operating weight*** (\$)	Operating weight*** (\$)	kg	22 750	22 923	22 769	22 707	22 880	22 726	22 667	22 840	22 686
		lb	50,160	50,540	50,200	50,060	50,450	50,110	49,980	50,360	50,020

\*Dimensions are measured to the tip of the bucket teeth to provide accurate clearance data. SAE Standards specifies the cutting edge.  
 \*\*Static tipping load and operating weight shown are based on standard machine configuration with 26.5-R25 XHA (L-3) tires, full fuel tank, coolant, lubricants, air conditioning, ride control and operator.  
 \*\*\*Measured 102 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with SAE J732 JUN92.  
 NOTE: Specifications and ratings conform to all applicable standards recommended by the Society of Automotive Engineers (SAE). SAE Standards J732 JUN92 and J742 FEB85 govern loader rating, denoted in the text by (\$).

	Change in Operating Weight		Change in Static Tipping Load — Straight	
	kg	lb	kg	lb
26.5-25, 20 PR (L-2)	-469	-1030	-349	-770
26.5-25, 20 PR (L-3)	-224	-490	-168	-370
26.5-R25, XHA 1★(L-3) standard	—	—	—	—
26.5-R25, GP-2B 1★(L-3) steel radial	- 49	- 100	- 36	- 80

NOTE: Tire options include tires and rims.

Bucket Type		Material Handling						Rock		Heavy Duty Rock	
		Bolt-on Edges	Teeth & Segments*	Teeth*	Bolt-on Edges	Teeth & Segments*	Teeth*	Bolt-on Edges	Double Strap Teeth & Segments	Bolt-on Edges	Double Strap Teeth & Segments
Ground Engaging Type											
Rated bucket capacity (\$)	m <sup>3</sup> yd <sup>3</sup>	4.0 5.25	4.0 5.25	3.8 5.0	3.8 5.0	3.8 5.0	3.6 4.75	3.5 4.5	3.5 4.5	3.5 4.5	3.5 4.5
Struck capacity (\$)	m <sup>3</sup> yd <sup>3</sup>	3.46 4.5	3.46 4.5	3.31 4.3	3.22 4.19	3.22 4.19	3.08 4.0	2.99 3.89	2.99 3.89	2.99 3.89	2.99 3.89
Width (\$)	mm ft/in	3220 10'7"	3310 10'10"	3310 10'10"	3220 10'7"	3310 10'10"	3310 10'10"	3305 10'10"	3250 10'8"	3305 10'10"	3250 10'8"
Dump clearance at full lift and 45° discharge (\$)	mm ft/in	3020 9'11"	2875 9'5"	2875 9'5"	3065 10'1"	2915 9'7"	2915 9'7"	3100 10'2"	2925 9'7"	3100 10'2"	2925 9'7"
Reach at full lift and 45° discharge (\$)	mm ft/in	1205 3'11"	1315 4'4"	1315 4'4"	1160 3'10"	1270 4'2"	1270 4'2"	1465 4'10"	1600 5'3"	1465 4'10"	1600 5'3"
Reach with lift arms horizontal and bucket level	mm ft/in	2700 8'10"	2880 9'5"	2880 9'5"	2640 8'8"	2820 9'3"	2820 9'3"	2800 9'2"	3015 9'11"	2800 9'2"	3015 9'11"
Digging depth (\$)	mm in	130 5	130 5	100 4	130 5	130 5	100 4	130 5	130 5	130 5	130 5
Overall length (\$)	mm ft/in	8835 29'0"	9015 29'7"	9015 29'7"	8775 28'9"	8955 29'5"	8955 29'5"	8930 29'4"	9145 30'0"	8930 29'4"	9145 30'0"
Overall height with bucket at full raise (\$)	mm ft/in	5710 18'9"	5710 18'9"	5710 18'9"	5650 18'6"	5650 18'6"	5650 18'6"	5605 18'5"	5605 18'5"	5925 19'5"	5925 19'5"
Loader clearance circle with bucket in carry position (\$)	m ft/in	14.66 48'1"	14.83 48'8"	14.83 48'8"	14.64 48'0"	14.86 48'9"	14.86 48'9"	14.62 47'11"	14.71 48'3"	14.62 47'11"	14.71 48'3"
Static tipping load, straight** (\$)	kg lb	15 526 34,230	15 357 33,860	15 653 34,510	15 632 34,460	15 460 34,080	15 762 34,750	15 785 34,800	15 691 34,600	15 624 34,450	15 531 34,240
Static tipping load, full 37° turn** (\$)	kg lb	13 789 30,400	13 620 30,030	13 901 30,650	13 888 30,620	13 716 30,240	14 003 30,870	14 008 30,880	13 914 30,680	13 847 30,530	13 754 30,320
Breakout force*** (\$)	kN lb	195.4 43,960	195.4 43,960	209.9 47,220	205.6 46,260	205.6 46,260	221.6 49,860	180.2 40,540	180.2 40,540	179.4 40,360	179.0 40,270
Operating weight** (\$)	kg lb	22 865 50,410	23 038 50,800	22 872 50,430	22 795 50,260	22 968 50,640	22 802 50,270	22 921 50,540	23 013 50,740	23 079 50,890	23 170 51,090

\*Dimensions are measured to the tip of the bucket teeth to provide accurate clearance data. SAE Standards specifies the cutting edge.

\*\*Static tipping load and operating weight shown are based on standard machine configuration with 26.5-R25 XHA (L-3) tires, full fuel tank, coolant, lubricants, air conditioning, ride control and operator.

\*\*\*Measured 102 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with SAE J732 JUN92.

**NOTE:** Specifications and ratings conform to all applicable standards recommended by the Society of Automotive Engineers (SAE). SAE Standards J732 JUN92 and J742 FEB85 govern loader rating, denoted in the text by (\$).

	Change in Operating Weight		Change in Static Tipping Load — Straight	
	kg	lb	kg	lb
26.5-25, 20 PR (L-2)	-469	-1030	-349	-770
26.5-25, 20 PR (L-3)	-224	-490	-168	-370
26.5-R25, XHA 1★(L-3) standard	—	—	—	—
26.5-R25, GP-2B 1★(L-3) steel radial	- 49	- 100	- 36	- 80

**NOTE:** Tire options include tires and rims.

Bucket Type	General Purpose						
		Bolt-on Edges	Teeth & Segments*	Teeth*	Bolt-on Edges	Teeth & Segments*	Teeth*
<b>Ground Engaging Type</b>							
Rated bucket capacity (\$)	m <sup>3</sup> yd <sup>3</sup>	4.3 5.5	4.3 5.5	4.0 5.25	4.0 5.25	4.0 5.25	3.8 5.0
Struck capacity (\$)	m <sup>3</sup> yd <sup>3</sup>	3.62 4.71	3.62 4.71	3.43 4.46	4.48 5.82	4.48 5.82	4.29 5.58
Width (\$)	mm ft/in	3220 10'7"	3310 10'10"	3310 10'10"	3060 10'0"	3150 10'4"	3150 10'4"
Dump clearance at full lift and 45° discharge (\$)	mm ft/in	3290 10'9"	3150 10'4"	3150 10'4"	3290 10'9"	3150 10'4"	3150 10'4"
Reach at full lift and 45° discharge (\$)	mm ft/in	1280 4'2"	1400 4'7"	1400 4'7"	1280 4'2"	1400 4'7"	1400 4'7"
Reach with lift arms horizontal and bucket level	mm ft/in	2865 9'5"	3045 10'0"	3045 10'0"	2865 9'5"	3045 10'0"	3045 10'0"
Digging depth (\$)	mm in	110 4	110 4	90 3.5	110 4	110 4	90 3.5
Overall length (\$)	mm ft/in	9035 29'8"	9215 30'3"	9215 30'3"	9035 29'8"	9215 30'3"	9215 30'3"
Overall height with bucket at full raise (\$)	mm ft/in	6015 19'9"	6015 19'9"	6015 19'9"	6015 19'9"	6015 19'9"	6015 19'9"
Loader clearance circle with bucket in carry position (\$)	m ft/in	14.82 48'7"	15.02 49'3"	15.02 49'3"	14.68 46'6"	14.88 48'10"	14.88 48'10"
Static tipping load, straight** (\$)	kg lb	18 324 40,400	18 160 40,040	18 317 40,390	18 394 40,560	18 230 40,190	18 537 40,870
Static tipping load, full 37° turn** (\$)	kg lb	16 167 35,640	16 004 35,290	16 161 35,630	16 237 35,800	16 074 35,440	16 362 36,070
Breakout force*** (\$)	kN lb	227.6 51,210	227.6 51,210	244.6 55,030	228.0 51,300	228.0 51,300	246.8 55,530
Operating weight** (\$)	kg lb	24 931 54,970	25 104 55,350	24 938 54,980	24 857 54,810	25 030 55,190	24 876 54,850

\*Dimensions are measured to the tip of the bucket teeth to provide accurate clearance data. SAE Standards specifies the cutting edge.

\*\*Static tipping load and operating weight shown are based on standard machine configuration with 26.5-R25 XHA (L-3) tires, full fuel tank, coolant, lubricants, air conditioning, ride control and operator.

\*\*\*Measured 102 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with SAE J732 JUN92.

NOTE: Specifications and ratings conform to all applicable standards recommended by the Society of Automotive Engineers (SAE). SAE Standards J732 JUN92 and J742 FEB85 govern loader rating, denoted in the text by (\$).

	Change in Operating Weight		Change in Static Tipping Load — Straight	
	kg	lb	kg	lb
26.5-25, 20 PR (L-2)	-469	-1030	-324	-710
26.5-25, 20 PR (L-3)	-224	-490	-155	-340
26.5-R25, XHA 1★(L-3) standard	—	—	—	—
26.5-R25, GP-2B 1★(L-3) steel radial	- 49	- 100	- 33	- 70

NOTE: Tire options include tires and rims.

# Wheel Loaders

## Performance Data

● 972G

Bucket Type	Ground Engaging Type	Material Handling						Rock		Heavy Duty Rock	
		Bolt-on Edges	Teeth & Segments*	Teeth*	Bolt-on Edges	Teeth & Segments*	Teeth*	Bolt-on Edges	Double Strap Teeth & Segments	Bolt-on Edges	Double Strap Teeth & Segments
Rated bucket capacity (\$)	m <sup>3</sup> yd <sup>3</sup>	4.7 6.0	4.7 6.0	4.5 5.75	4.3 5.5	4.3 5.5	4.0 5.25	4.0 5.25	4.0 5.25	4.0 5.25	4.0 5.25
Struck capacity (\$)	m <sup>3</sup> yd <sup>3</sup>	4.03 5.24	4.03 5.24	3.88 5.04	3.66 4.76	3.66 4.76	3.51 4.56	3.45 4.49	3.45 4.49	3.45 4.49	3.45 4.49
Width (\$)	mm ft/in	3220 10'7"	3310 10'10"	3310 10'10"	3220 10'7"	3310 10'10"	3310 10'10"	3305 10'10"	3250 10'8"	3305 10'10"	3250 10'8"
Dump clearance at full lift and 45° discharge (\$)	mm ft/in	3145 10'4"	2995 9'10"	2995 9'10"	3210 10'6"	3060 10'1"	3060 10'1"	3215 10'7"	3035 9'11"	3215 10'7"	3035 9'11"
Reach at full lift and 45° discharge (\$)	mm ft/in	1255 4'1"	1365 4'6"	1365 4'6"	1190 3'11"	1300 4'3"	1300 4'3"	1460 4'9"	1590 5'3"	1460 4'9"	1590 5'3"
Reach with lift arms horizontal and bucket level	mm ft/in	2970 9'9"	3150 10'4"	3150 10'4"	2880 9'5"	3060 10'1"	3060 10'1"	3040 10'0"	3255 10'8"	3040 10'0"	3255 10'8"
Digging depth (\$)	mm in	110 4	110 4	90 3.5	110 4	110 4	90 3.5	110 4	110 4	110 4	110 4
Overall length (\$)	mm ft/in	9140 30'0"	9320 30'7"	9320 30'7"	9050 29'8"	9230 30'3"	9230 30'3"	9205 30'2"	9420 30'11"	9205 30'2"	9420 30'11"
Overall height with bucket at full raise (\$)	mm ft/in	6105 20'0"	6105 20'0"	6105 20'0"	6020 19'9"	6020 19'9"	6020 19'9"	5985 19'8"	5985 19'8"	6310 20'9"	6310 20'9"
Loader clearance circle with bucket in carry position (\$)	m ft/in	14.88 48'10"	15.08 49'6"	15.08 49'6"	14.83 48'8"	15.03 49'4"	15.03 49'4"	14.80 48'7"	14.90 48'11"	14.80 48'7"	14.90 48'11"
Static tipping load, straight** (\$)	kg lb	17 850 39,350	17 686 38,990	17 990 39,660	18 051 39,800	17 884 39,430	18 195 40,120	18 606 41,020	18 528 40,850	18 461 40,700	18 383 40,530
Static tipping load, full 37° turn** (\$)	kg lb	15 728 34,680	15 564 34,310	15 850 34,940	15 914 35,090	15 748 34,720	16 041 35,370	16 429 36,220	16 351 36,050	16 284 35,900	16 206 35,730
Breakout force*** (\$)	kN lb	211.5 47,580	211.5 47,580	225.9 50,820	226.4 50,940	226.4 50,940	243.0 54,670	204.2 45,940	204.0 45,900	203.6 45,810	203.3 45,740
Operating weight** (\$)	kg lb	25 085 55,310	25 258 55,690	25 092 55,320	24 977 55,070	25 150 55,450	24 984 55,090	25 098 55,340	25 191 55,540	25 270 55,720	25 361 55,920

\*Dimensions are measured to the tip of the bucket teeth to provide accurate clearance data. SAE Standards specifies the cutting edge.

\*\*Static tipping load and operating weight shown are based on standard machine configuration with 26.5-R25 XHA (L-3) tires, full fuel tank, coolant, lubricants, air conditioning, ride control and operator.

\*\*\*Measured 102 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with SAE J732 JUN92.

**NOTE:** Specifications and ratings conform to all applicable standards recommended by the Society of Automotive Engineers (SAE). SAE Standards J732 JUN92 and J742 FEB85 govern loader rating, denoted in the text by (\$).

	Change in Operating Weight		Change in Static Tipping Load — Straight	
	kg	lb	kg	lb
26.5-25, 20 PR (L-2)	-469	-1030	-324	-710
26.5-25, 20 PR (L-3)	-224	-490	-155	-340
26.5-R25, XHA 1★(L-3) standard	—	—	—	—
26.5-R25, GP-2B 1★(L-3) steel radial	-49	-100	-33	-70

**NOTE:** Tire options include tires and rims.

Bucket Type	General Purpose								
		Bolt-on Edges	Teeth & Segments*	Bolt-on Edges	Teeth*	Teeth & Segments*	Bolt-on Edges	Teeth*	Teeth & Segments*
Ground Engaging Tools									
Rated bucket capacity (\$)	m³ yd³	5.7 7.5	5.6 7.25	5.4 7.0	5.4 7.0	5.3 6.75	5.0 6.5	5.0 6.5	4.9 6.25
Struck capacity (\$)	m³ yd³	4.92 6.44	4.85 6.34	4.61 6.03	4.68 6.12	4.55 5.95	4.25 5.56	4.38 5.73	4.19 5.48
Width (\$)	mm ft/in	3447 11'4"	3533 11'7"	3447 11'4"	3533 11'7"	3533 11'7"	3447 11'4"	3533 11'7"	3533 11'7"
Dump clearance at full lift and 45° discharge (\$)	mm ft/in	3271 10'9"	3160 10'4"	3311 10'10"	3160 10'4"	3201 10'6"	3374 11'1"	3201 10'6"	3265 10'9"
Reach at full lift and 45° discharge (\$)	mm ft/in	1545 5'1"	1656 5'5"	1516 5'0"	1656 5'5"	1627 5'4"	1469 4'10"	1627 5'4"	1581 5'2"
Reach with lift arms horizontal and bucket level	mm ft/in	3021 9'11"	3177 10'5"	2971 9'9"	3177 10'5"	3127 10'3"	2891 9'6"	3127 10'3"	3047 10'0"
Digging depth (\$)	mm in	138 5	133 5	138 5	103 4	133 5	138 5	103 4	133 5
Overall length (\$)	mm ft/in	9465 31'1"	9632 31'7"	9415 30'11"	9632 31'7"	9582 31'5"	9335 30'8"	9582 31'5"	9502 31'2"
Overall height with bucket at full raise (\$)	mm ft/in	6205 20'4"	6205 20'4"	6135 20'2"	6205 20'4"	6135 20'2"	6067 19'11"	6135 20'2"	6067 19'11"
Loader clearance circle with bucket in carry position (\$)	m ft/in	15.78 51'9"	15.94 52'3"	15.75 51'8"	15.94 52'3"	15.91 52'2"	15.71 51'7"	15.91 52'2"	15.86 52'1"
Static tipping load, straight** (\$)	kg lb	20 306 44,767	20 274 44,696	20 648 45,521	20 646 45,516	20 600 45,415	20 886 46,045	21 008 46,314	20 837 45,937
Static tipping load at full 37° turn** (\$)	kg lb	18 146 40,005	18 109 39,923	18 483 40,748	18 465 40,708	18 431 40,633	18 707 41,241	18 819 41,488	18 655 41,127
Breakout force*** (\$)	kN lb	210 47,277	213 47,836	219 49,255	225 50,736	222 49,868	233 52,391	235 52,978	236 53,104
Operating weight** (\$)	kg lb	29 773 65,638	29 831 65,765	29 519 65,078	29 666 65,402	29 576 65,203	29 426 64,873	29 411 64,839	29 484 65,000

\*Dimensions are measured to the tip of the bucket teeth to provide accurate clearance data. SAE Standards specifies the cutting edge.  
 \*\*Static tipping load and operating weight shown are based on standard machine configuration with 29.5-R25 1-Star (L-3) tires, full fuel tank, coolant, lubricants and operator.  
 \*\*\*Measured 102 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with SAE J732 JUN92.  
**NOTE:** Specifications and ratings conform to all applicable standards recommended by the Society of Automotive Engineers (SAE). SAE Standards J732 JUN92 and J742 FEB85 govern loader ratings, denoted in the text by (\$).

	Change in Operating Weight Standard		Change in Articulated Static Tipping Load			
	kg	lb	Standard		High Lift	
	kg	lb	kg	lb	kg	lb
29.5-25, 22 PR (L-3)	-323	- 712	-255	- 562	-235	- 517
29.5-25, 22 PR (L-4)	+337	+ 743	+266	+ 586	+245	+ 540
29.5-25, 22 PR (L-5)	+951	+2097	+751	+1655	+691	+1523
29.5-R25, 1-Star (L-2/L-3)	- 82	- 181	- 65	- 143	- 60	- 131
29.5-R25, 1-Star (L-5)	+868	+1914	+685	+1510	+631	+1390

# Wheel Loaders

## Performance Data

● 980G

Bucket Type	General Purpose					Rock			High Lift Change in Specs	
	Bolt-on Edges	Teeth*	Teeth & Segments*	Teeth*	Spade Teeth & Segments*	Spade With Teeth*	Spade No Teeth	Spade With Teeth*		
<b>Ground Engaging Tools</b>										
Rated bucket capacity (\$)	m <sup>3</sup> yd <sup>3</sup>	4.7 <b>6.0</b>	4.7 <b>6.0</b>	4.5 <b>5.75</b>	4.2 <b>5.5</b>	4.5 <b>5.75</b>	4.2 <b>5.5</b>	4.2 <b>5.5</b>	3.8 <b>5.0</b>	— —
Struck capacity (\$)	m <sup>3</sup> yd <sup>3</sup>	3.87 <b>5.06</b>	4.03 <b>5.27</b>	3.81 <b>4.98</b>	3.66 <b>4.79</b>	3.73 <b>4.88</b>	3.53 <b>4.62</b>	3.53 <b>4.62</b>	3.53 <b>4.25</b>	— —
Width (\$)	mm ft/in	3447 <b>11'4"</b>	3533 <b>11'7"</b>	3533 <b>11'7"</b>	3533 <b>11'7"</b>	3492 <b>11'5"</b>	3492 <b>11'5"</b>	3492 <b>11'5"</b>	3492 <b>11'5"</b>	— —
Dump clearance at full lift and 45° discharge (\$)	mm ft/in	3448 <b>11'4"</b>	3265 <b>10'9"</b>	3342 <b>11'0"</b>	3342 <b>11'0"</b>	3206 <b>10'6"</b>	3206 <b>10'6"</b>	3415 <b>11'2"</b>	3271 <b>10'9"</b>	221 <b>9"</b>
Reach at full lift and 45° discharge (\$)	mm ft/in	1419 <b>4'8"</b>	1581 <b>5'2"</b>	1534 <b>5'0"</b>	1534 <b>5'0"</b>	1798 <b>5'11"</b>	1798 <b>5'11"</b>	1580 <b>5'2"</b>	1760 <b>5'9"</b>	— —
Reach with lift arms horizontal and bucket level	mm ft/in	2801 <b>9'2"</b>	3047 <b>10'0"</b>	2957 <b>9'8"</b>	2957 <b>9'8"</b>	3243 <b>10'8"</b>	3243 <b>10'8"</b>	2940 <b>9'8"</b>	3169 <b>10'5"</b>	160 <b>6"</b>
Digging depth (\$)	mm in	138 <b>5</b>	103 <b>4</b>	133 <b>5</b>	103 <b>4</b>	133 <b>5</b>	103 <b>4</b>	103 <b>4</b>	103 <b>4</b>	— —
Overall length (\$)	mm ft/in	9245 <b>30'4"</b>	9502 <b>31'2"</b>	9412 <b>30'11"</b>	9412 <b>30'11"</b>	9687 <b>31'9"</b>	9687 <b>31'9"</b>	9357 <b>30'8"</b>	9614 <b>31'7"</b>	199 <b>8"</b>
Overall height with bucket at full raise (\$)	mm ft/in	5994 <b>19'8"</b>	6067 <b>19'11"</b>	5994 <b>19'8"</b>	5994 <b>19'8"</b>	6360 <b>20'10"</b>	6360 <b>20'10"</b>	6360 <b>20'10"</b>	6282 <b>20'7"</b>	221 <b>9"</b>
Loader clearance circle with bucket in carry position (\$)	m ft/in	15.66 <b>51'5"</b>	15.86 <b>52'1"</b>	15.82 <b>51'11"</b>	15.82 <b>51'11"</b>	15.76 <b>51'8"</b>	15.76 <b>51'8"</b>	15.56 <b>51'1"</b>	15.72 <b>51'7"</b>	225 <b>9"</b>
Static tipping load, straight*** (\$)	kg lb	21 122 <b>46,566</b>	21 208 <b>46,755</b>	21 071 <b>46,453</b>	21 468 <b>47,328</b>	20 428 <b>45,036</b>	20 942 <b>46,169</b>	21 274 <b>46,901</b>	21 040 <b>46,385</b>	(1830) <b>(4034)</b>
Static tipping load, full 37° turn** (\$)	kg lb	18 932 <b>41,737</b>	19 010 <b>41,909</b>	18 878 <b>41,618</b>	19 256 <b>42,452</b>	18 256 <b>40,247</b>	18 753 <b>41,343</b>	19 086 <b>42,077</b>	18 848 <b>41,552</b>	(1680) <b>(3704)</b>
Breakout force*** (\$)	kN lb	251 <b>56,386</b>	251 <b>56,583</b>	254 <b>57,216</b>	272 <b>61,214</b>	207 <b>46,485</b>	224 <b>50,473</b>	228 <b>51,228</b>	233 <b>52,488</b>	— —
Operating weight** (\$)	kg lb	29 325 <b>64,650</b>	29 319 <b>64,637</b>	29 383 <b>64,778</b>	29 218 <b>64,414</b>	29 770 <b>65,631</b>	29 497 <b>65,029</b>	29 247 <b>64,478</b>	29 449 <b>64,923</b>	105 <b>231</b>

\*Dimensions are measured to the tip of the bucket teeth to provide accurate clearance data. SAE Standards specifies the cutting edge.

\*\*Static tipping load and operating weight shown are based on standard machine configuration with 29.5-R25 1-Star (L-3) tires, full fuel tank, coolant, lubricants and operator.

\*\*\*Measured 102 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with SAE J732 JUN92.

**NOTE:** Specifications and ratings conform to all applicable standards recommended by the Society of Automotive Engineers (SAE). SAE Standards J732 JUN92 and J742 FEB85 govern loader ratings, denoted in the text by (\$).

### Change in Operating Weight Standard

### Change in Articulated Static Tipping Load

	kg		lb		Standard		High Lift	
	kg	lb	kg	lb	kg	lb	kg	lb
29.5-25, 22 PR (L-3)	-323	- 712	-255	- 562	-235	- 517	-235	- 517
29.5-25, 22 PR (L-4)	+337	+ 743	+266	+ 586	+245	+ 540	+245	+ 540
29.5-25, 22 PR (L-5)	+951	+2097	+751	+1655	+691	+1523	+691	+1523
29.5-R25, 1-Star (L-2/L-3)	- 82	- 181	- 65	- 143	- 60	- 131	- 60	- 131
29.5-R25, 1-Star (L-5)	+868	+1914	+685	+1510	+631	+1390	+631	+1390

		Straight Rock Teeth & Segments	Spade Rock Teeth & Segments	Spade Rock Teeth & Segments	Wide Spade Rock Teeth & Segments	General Purpose BOCE	HD Quarry Teeth & Segments	HD Abrasion Teeth & Segments
Heaped capacity	m <sup>3</sup> yd <sup>3</sup>	6.3 8.2	6.4 8.33	6.7 8.7	6.9 9.0	7.0 9.2	6.4 8.33	6.4 8.36
Struck capacity (\$)	m <sup>3</sup> yd <sup>3</sup>	5.2 6.8	5.3 6.9	5.5 7.2	5.7 7.5	5.9 7.7	5.3 6.9	5.3 6.9
Operating load at rated capacity	kg lb	11 340 25,000	11 340 25,000	11 340 25,000	11 340 25,000	11 340 25,000	11 340 25,000	11 340 25,000
Width (\$)	mm ft/in	3800 12'6"	3800 12'6"	3900 12'10"	3980 13'1"	3729 12'3"	3800 12'6"	3926 12'11"
Dump clearance at full lift and 45° discharge (\$)	With teeth	mm ft/in	4199 13'9"	3994 13'1"	3993 13'1"	3993 13'1"	N/A 12'11"	3930 12'10"
	Bare	mm ft/in	4460 14'8"	4276 14'0"	4278 14'0"	4278 14'0"	4333 14'3"	4285 14'1"
Reach at full lift and 45° discharge (\$)	With teeth	mm ft/in	1895 6'3"	2096 6'10"	2099 6'11"	2099 6'11"	N/A 7'0"	2127 7'2"
	Bare	mm ft/in	1669 5'6"	1613 5'3"	1655 5'5"	1648 5'5"	1838 6'0"	1616 5'4"
Reach with lift arms horizontal and bucket level	With teeth	mm ft/in	4199 13'9"	4485 14'9"	4488 14'9"	4488 14'9"	N/A 14'11"	4613 15'2"
	Bare	mm ft/in	3854 12'8"	3746 12'4"	3804 12'6"	3795 12'5"	4064 13'4"	3750 12'4"
Digging depth (\$)	mm in	129 5.1"	100 3.9"	98 3.9"	100 3.9"	100 3.9"	100 3.9"	102 4.0"
Overall length (\$)	With teeth	mm ft/in	12 238 40'2"	12 505 41'0"	12 508 41'0"	12 508 41'0"	N/A 41'3"	12 634 41'5"
	Bare	mm ft/in	11 893 39'0"	12 163 39'11"	12 160 39'11"	12 160 39'11"	12 083 39'8"	12 151 39'10"
Overall height with bucket at full raise (\$)	mm ft/in	8164 26'9"	8164 26'9"	8164 26'9"	8164 26'9"	7943 26'1"	8164 26'9"	8164 26'9"
Loader clearance circle with bucket in carry position (\$)	With teeth	mm ft/in	17 558 57'8"	17 500 57'5"	17 656 57'11"	17 722 58'2"	N/A 57'9"	17 602 57'7"
	Bare	mm ft/in	17 482 57'4"	17 394 57'1"	17 550 57'7"	17 616 57'9"	17 408 57'1"	17 496 57'5"
Static tipping load, straight† (\$)	kg lb	32 725 72,146	32 282 71,170	32 278 71,161	32 280 71,165	32 626 71,928	30 824 67,955	30 793 67,898
Static tipping load, 35° turn† (\$)	kg lb	29 136 64,234	28 705 63,284	28 699 63,270	28 700 63,273	29 079 64,108	27 246 60,067	27 215 59,999
Static tipping load, 40° turn† (\$)	kg lb	28 081 61,908	27 654 60,967	27 647 60,951	27 648 60,953	28 037 61,811	26 195 57,750	26 165 57,684
Static tipping load, full 43° turn† (\$)	kg lb	27,391 60,387	26 968 58,464	26 959 59,434	26 961 59,439	27 354 60,305	25 509 56,238	25 478 56,169
Breakout force†† (\$)	kN lb	55 876 123,185	46 858 103,304	46 912 103,423	46 928 103,459	49 421 108,955	46 356 102,197	46 044 101,510
Operating weight†	kg lb	49 846 109,892	50 090 110,430	50 120 110,496	50 127 110,511	49 560 109,261	51 352 113,212	51 400 113,318
Rack angle at maximum lift	Degrees	65	65	65	65	65	65	65

† Static tipping load and operating weight are based on standard machine configuration with 35/65-33, 30 PR (L-4) tires, full fuel tank, coolant, lubricants and operator.  
 †† Measured 102 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with SAE J732 JUN92.  
**NOTE:** Specifications and ratings conform to all applicable standards recommended by the Society of Automotive Engineers (SAE). SAE Standards J732 JUN92 and J742 FEB85 govern loader ratings, denoted in the text by (\$).

	Change in Operating Weight			Change in Articulated Static Tipping Load			
	Standard		Standard	Standard		High Lift	
	kg	lb		kg	lb	kg	lb
Remove cab only . . . . .	- 480	-1058	- 487	-1074	- 438	- 966	
Remove ROPS canopy and cab . . . . .	-2257	-4976	-2625	-5787	-2337	-5152	
35/65-33, 24 PR (L-5) tires . . . . .	+ 493	+1087	+ 349	+ 769	+ 310	+ 683	
35/65 R33, (L-5) equivalent tires . . . . .	- 588	-1290	- 416	- 917	- 369	- 813	



		Standard					
		Spade Edge					
Standard Rock Buckets		With Teeth**	Bare	With DST & BOS*	With BOCE*	Modulok	Quarry
Heaped capacity	m <sup>3</sup>	8.4	8.4	8.6	8.6	8.6	9.2
	yd <sup>3</sup>	<b>11.0</b>	<b>11.0</b>	<b>11.2</b>	<b>11.2</b>	<b>11.2</b>	<b>12.0</b>
Struck capacity	m <sup>3</sup>	6.9	6.9	7.0	7.0	7.2	7.5
	yd <sup>3</sup>	<b>9.0</b>	<b>9.0</b>	<b>9.1</b>	<b>9.1</b>	<b>9.4</b>	<b>9.8</b>
Width (§)	mm	4450	4450	4450	4500	4486	4610
	ft/in	<b>14'7"</b>	<b>14'7"</b>	<b>14'7"</b>	<b>14'9"</b>	<b>14'9"</b>	<b>15'2"</b>
Dump clearance at full lift and 45° discharge (§)	mm	4046	4367	4046	4254	4028	4005
	ft/in	<b>13'3"</b>	<b>14'4"</b>	<b>13'3"</b>	<b>13'11"</b>	<b>13'3"</b>	<b>13'2"</b>
Reach at full lift and 45° discharge (§)	mm	1886	1671	1886	1727	1998	1929
	ft/in	<b>6'2"</b>	<b>5'6"</b>	<b>6'2"</b>	<b>5'8"</b>	<b>6'7"</b>	<b>6'4"</b>
Reach at 45° dump and 2130 mm (7'0") height (§)	mm	2865	2710	2865	2749	2974	2899
	ft/in	<b>9'5"</b>	<b>8'11"</b>	<b>9'5"</b>	<b>9'0"</b>	<b>9'9"</b>	<b>9'6"</b>
Reach with lift arms horizontal and bucket level	mm	3756	3376	3756	3496	3548	3805
	ft/in	<b>12'4"</b>	<b>11'1"</b>	<b>12'4"</b>	<b>11'6"</b>	<b>11'8"</b>	<b>12'6"</b>
Digging depth (§)	mm	72	72	112	112	107	112
	in	<b>2.8</b>	<b>2.8</b>	<b>4.4</b>	<b>4.4</b>	<b>4.2</b>	<b>4.4</b>
Overall length (§)	mm	12 610	12 170	12 610	12 322	12 646	12 670
	ft/in	<b>41'4"</b>	<b>39'11"</b>	<b>41'4"</b>	<b>40'5"</b>	<b>41'6"</b>	<b>41'8"</b>
Overall height with bucket at full raise (§)	mm	8130	8130	8130	8130	8130	8130
	ft/in	<b>26'8"</b>	<b>26'8"</b>	<b>26'8"</b>	<b>26'8"</b>	<b>26'8"</b>	<b>26'8"</b>
Loader clearance circle with bucket in carry position (§)	m	20.69	20.39	20.69	20.59	20.76	21.29
	ft/in	<b>67'11"</b>	<b>66'11"</b>	<b>68'9"</b>	<b>67'7"</b>	<b>68'2"</b>	<b>69'10"</b>
Static tipping load, straight† (§)	kg	40 956	41 567	40 161	40 752	39 387	39 626
	lb	<b>90,300</b>	<b>91,447</b>	<b>88,550</b>	<b>89,850</b>	<b>86,651</b>	<b>87,370</b>
Static tipping load, full 35° turn† (§)	kg	37 098	37 709	36 315	36 906	35 561	35 797
	lb	<b>81,800</b>	<b>82,960</b>	<b>80,070</b>	<b>81,370</b>	<b>78,234</b>	<b>78,930</b>
Breakout force†† (§)	kg	63 066	63 501	58 734	51 982	58 192	56 132
	lb	<b>139,060</b>	<b>140,010</b>	<b>129,500</b>	<b>114,620</b>	<b>128,310</b>	<b>123,770</b>
Operating weight†	kg	73 490	73 023	74 010	73 825	74 454	74 315
	lb	<b>162,040</b>	<b>160,651</b>	<b>163,190</b>	<b>162,415</b>	<b>163,800</b>	<b>163,493</b>

\* DST & BOS = Double Strap Teeth and Bolt-on Segments, BOCE = Bolt-on Cutting Edge.

\*\* Dimensions measured to end of teeth and do not conform to SAE standards.

† Static tipping load and operating weight are based on standard machine configuration with 41.25/70-39, 34 PR (L-5) tires, full fuel lubricants and operator.

†† Measured 102 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with SAE J732 JUN92.

**NOTE:** Specifications and ratings conform to all applicable standards recommended by the Society of Automotive Engineers (SAE). SAE Standards J732 JUN92 and J742 FEB85 govern loader ratings, denoted in the text by (§).

		Standard		High Lift	
		Straight Edge		Spade Edge	
Standard Rock Buckets		With DST & BOS*	With BOCE*	With DST & BOS*	With DST & BOS*
Heaped capacity	m <sup>3</sup>	8.6	8.6	8.6	9.2
	yd <sup>3</sup>	<b>11.2</b>	<b>11.2</b>	<b>11.2</b>	<b>12.0</b>
Struck capacity	m <sup>3</sup>	7.0	7.0	7.0	7.5
	yd <sup>3</sup>	<b>9.1</b>	<b>9.1</b>	<b>9.1</b>	<b>9.8</b>
Width (§)	mm	4450	4500	4450	4610
	ft/in	<b>14'7"</b>	<b>14'9"</b>	<b>14'7"</b>	<b>15'1"</b>
Dump clearance at full lift and 45° discharge (§)	mm	4454	4641	4611	4570
	ft/in	<b>14'7"</b>	<b>15'3"</b>	<b>15'2"</b>	<b>15'0"</b>
Reach at full lift and 45° discharge (§)	mm	2140	1956	2180	2223
	ft/in	<b>7'0"</b>	<b>6'5"</b>	<b>7'1"</b>	<b>7'4"</b>
Reach at 45° dump and 2130 mm (7'0") height (§)	mm	3193	3029	3479	3515
	ft/in	<b>10'6"</b>	<b>9'11"</b>	<b>11'5"</b>	<b>11'6"</b>
Reach with lift arms horizontal and bucket level	mm	3842	3582	4356	4405
	ft/in	<b>12'7"</b>	<b>11'9"</b>	<b>14'3"</b>	<b>14'5"</b>
Digging depth (§)	mm	112	112	154	154
	in	<b>4.4</b>	<b>4.4</b>	<b>6.0</b>	<b>6.0</b>
Overall length (§)	mm	12 250	11 962	13 343	13 406
	ft/in	<b>40'2"</b>	<b>39'3"</b>	<b>43'9"</b>	<b>44'0"</b>
Overall height with bucket at full raise (§)	mm	8130	8130	9000	9000
	ft/in	<b>26'8"</b>	<b>26'8"</b>	<b>29'6"</b>	<b>29'6"</b>
Loader clearance circle with bucket in carry position (§)	m	20.74	20.63	21.30	21.47
	ft/in	<b>68'0"</b>	<b>67'8"</b>	<b>69'11"</b>	<b>70'5"</b>
Static tipping load, straight† (§)	kg	40 701	40 960	39 612	39 104
	lb	<b>89,740</b>	<b>90,112</b>	<b>87,340</b>	<b>86,220</b>
Static tipping load, full 35° turn† (§)	kg	36 862	37 120	35 443	34 952
	lb	<b>81,280</b>	<b>81,664</b>	<b>78,150</b>	<b>77,060</b>
Breakout force†† (§)	kg	72 873	73 088	55 361	52 894
	lb	<b>160,680</b>	<b>161,150</b>	<b>122,070</b>	<b>116,630</b>
Operating weight†	kg	73 560	73 357	79 415	79 719
	lb	<b>162,200</b>	<b>161,385</b>	<b>175,110</b>	<b>175,780</b>

\* DST & BOS = Double Strap Teeth and Bolt-on Segments, BOCE = Bolt-on Cutting Edge.

\*\* Dimensions measured to end of teeth and do not conform to SAE standards.

† Static tipping load and operating weight are based on standard machine configuration with 41.25/70-39, 34 PR (L-5) tires, full fuel lubricants and operator.

†† Measured 102 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with SAE J732 JUN92.

**NOTE:** Specifications and ratings conform to all applicable standards recommended by the Society of Automotive Engineers (SAE). SAE Standards J732 JUN92 and J742 FEB85 govern loader ratings, denoted in the text by (§).

		Standard Spade Edge		Large Standard Spade Edge		Heavy Duty Quarry		Heavy Duty Mining		
		Teeth & Segments		Teeth & Segments		Teeth & Segments		Teeth		
		Std.	Hi-Lift	Std.	Hi-Lift	Std.	Hi-Lift	Std.	Hi-Lift	
<b>Rock Buckets</b>										
Rated bucket capacity (\$)	m <sup>3</sup>	11.5	11.5	12.3	12.3	11.5	11.5	12.0	12.0	
	yd <sup>3</sup>	<b>15.0</b>	<b>15.0</b>	<b>16.0</b>	<b>16.0</b>	<b>15.0</b>	<b>15.0</b>	<b>15.5</b>	<b>15.5</b>	
Struck capacity (\$)	m <sup>3</sup>	9.34	9.34	10.1	10.1	9.45	9.45	9.86	9.86	
	yd <sup>3</sup>	<b>12.2</b>	<b>12.2</b>	<b>13.1</b>	<b>13.1</b>	<b>12.4</b>	<b>12.4</b>	<b>12.9</b>	<b>12.9</b>	
Width (\$)	mm	4824	4824	4824	4824	4824	4824	4840	4840	
	ft/in	<b>15'10"</b>	<b>15'10"</b>	<b>15'10"</b>	<b>15'10"</b>	<b>15'10"</b>	<b>15'10"</b>	<b>15'11"</b>	<b>15'11"</b>	
Dump clearance at full lift and 45° discharge (\$)	<b>With teeth:</b>	mm	4636	5256	4636	5256	4636	5256	4623	5243
		ft/in	<b>15'3"</b>	<b>17'3"</b>	<b>15'3"</b>	<b>17'3"</b>	<b>15'3"</b>	<b>17'3"</b>	<b>15'2"</b>	<b>17'2"</b>
	<b>Bare:</b>	mm	5003	5623	5003	5623	5003	5623	5003	5623
		ft/in	<b>16'5"</b>	<b>18'5"</b>	<b>16'5"</b>	<b>18'5"</b>	<b>16'5"</b>	<b>18'5"</b>	<b>16'5"</b>	<b>18'5"</b>
Reach at full lift and 45° discharge (\$)	<b>With teeth:</b>	mm	2303	2299	2303	2299	2303	2294	2363	2358
		ft/in	<b>7'7"</b>	<b>7'6"</b>	<b>7'7"</b>	<b>7'6"</b>	<b>7'7"</b>	<b>7'6"</b>	<b>7'9"</b>	<b>7'9"</b>
	<b>Bare:</b>	mm	1699	1694	1699	1694	1699	1694	1729	1725
		ft/in	<b>5'7"</b>	<b>5'7"</b>	<b>5'7"</b>	<b>5'7"</b>	<b>5'7"</b>	<b>5'7"</b>	<b>5'8"</b>	<b>5'8"</b>
Reach with boom – horizontal and bucket level	<b>With teeth:</b>	mm	5105	5585	5105	5585	5122	5602	5156	5636
		ft/in	<b>16'9"</b>	<b>18'4"</b>	<b>16'9"</b>	<b>18'4"</b>	<b>16'10"</b>	<b>18'5"</b>	<b>16'11"</b>	<b>18'6"</b>
	<b>Bare:</b>	mm	4663	5143	4663	5143	4661	5141	4663	5143
		ft/in	<b>15'4"</b>	<b>16'10"</b>	<b>15'7"</b>	<b>16'10"</b>	<b>15'4"</b>	<b>16'10"</b>	<b>15'4"</b>	<b>16'10"</b>
Digging depth (\$)	mm	140	144	140	144	140	144	149	149	
	in	<b>5.5</b>	<b>5.7</b>	<b>5.5</b>	<b>5.7</b>	<b>5.5</b>	<b>5.7</b>	<b>5.9</b>	<b>5.9</b>	
Overall length (\$)	<b>With teeth:</b>	mm	15 585	16 175	15 585	16 175	15 604	16 194	15 636	16 226
		ft/in	<b>51'2"</b>	<b>53'1"</b>	<b>51'2"</b>	<b>53'1"</b>	<b>51'3"</b>	<b>53'2"</b>	<b>51'4"</b>	<b>53'3"</b>
	<b>Bare:</b>	mm	15 143	15 733	15 143	15 733	15 143	15 733	15 143	15 733
		ft/in	<b>49'8"</b>	<b>51'7"</b>	<b>49'8"</b>	<b>51'7"</b>	<b>49'8"</b>	<b>51'7"</b>	<b>49'8"</b>	<b>51'7"</b>
Overall height with bucket at full raise (\$)	mm	9415	10 035	9415	10 035	9415	10 035	9415	10 035	
	ft/in	<b>30'11"</b>	<b>32'11"</b>	<b>30'11"</b>	<b>32'11"</b>	<b>30'11"</b>	<b>32'11"</b>	<b>30'11"</b>	<b>32'11"</b>	
Loader clearance circle with bucket in carry position (\$)	<b>With teeth:</b>	m	22.27	22.88	22.27	22.88	22.27	22.88	22.31	22.92
		ft/in	<b>73'1"</b>	<b>75'1"</b>	<b>73'1"</b>	<b>75'1"</b>	<b>73'1"</b>	<b>75'1"</b>	<b>73'2"</b>	<b>75'2"</b>
	<b>Bare:</b>	m	21.88	22.46	21.88	22.46	21.88	22.46	21.94	22.51
		ft/in	<b>71'9"</b>	<b>73'8"</b>	<b>71'9"</b>	<b>73'8"</b>	<b>71'9"</b>	<b>73'8"</b>	<b>72'</b>	<b>73'10"</b>
Static tipping load, straight†	kg	58 070	56 080	57 730	57 740	56 020	54 050	57 290	55 300	
	lb	<b>128,040</b>	<b>123,650</b>	<b>127,290</b>	<b>127,310</b>	<b>123,520</b>	<b>119,180</b>	<b>126,320</b>	<b>121,930</b>	
Static tipping load, full 43° turn†	kg	50 050	47 800	49 710	47 465	48 000	45 770	49 270	47 030	
	lb	<b>110,360</b>	<b>105,390</b>	<b>109,610</b>	<b>104,660</b>	<b>105,840</b>	<b>100,920</b>	<b>108,640</b>	<b>103,700</b>	
Breakout force†† (\$)	kg	66 460	64 990	65 690	64 220	64 750	63 280	65 420	63 950	
	lb	<b>146,540</b>	<b>143,300</b>	<b>144,840</b>	<b>141,600</b>	<b>142,770</b>	<b>139,530</b>	<b>144,250</b>	<b>141,000</b>	
Operating weight† (\$)	kg	92 780	96 550	93 120	96 880	94 800	98 570	93 550	97 310	
	lb	<b>204,580</b>	<b>212,890</b>	<b>205,330</b>	<b>213,620</b>	<b>209,030</b>	<b>217,350</b>	<b>206,280</b>	<b>214,560</b>	

† Static tipping load and operating weight shown are based on standard machine configuration with 45/65-45, 46 PR (L-5) tires, full fuel tank, coolant, lubricants and operator.

†† Measured 102 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with SAE J732 JUN92.

NOTE: Specifications and ratings conform to all applicable standards recommended by the Society of Automotive Engineers (SAE). SAE Standards J732 JUN92 and J742 FEB85 govern loader ratings, denoted in the text by (\$). Dimensions are also measured to the tip of the bucket teeth to provide accurate clearance data. SAE Standards specifies the cutting edge.

**Change in Operating Weight**

**Standard (for four tires)**

**Change in Articulated Static Tipping Load**

**Standard High Lift**

	Standard (for four tires)		Standard		High Lift	
	kg	lb	kg	lb	kg	lb
45/65-45, 46 ply L-5 Firestone	0	0	0	0	0	0
45/65-45, 46 ply L-5 General	+ 427	+ 940	+ 284	+ 625	+256	+ 564
45/65-45, 46 ply L-5 Goodyear	- 162	- 356	- 108	- 238	- 97	- 214
45/65 R45 1-Star L-4 (XLDD1) Michelin	-1942	-4272	-1290	-2838	-882	-1942
45/65 R45 1-Star L-5 (XLDD2) Michelin	- 681	-1500	- 452	- 994	-409	- 900
45/65 R45 1-Star L-5 (XMINED2) Michelin	+ 752	+1656	+ 523	+1151	+451	+ 994
45/65-45, 50PR L-5 Firestone	- 278	-612	- 167	-367	-167	- 367
45/65-45, 50PR L-5 Firestone	+ 441	+ 972	+ 265	+ 583	+265	+ 583

Performance Data  
 ● 994D with 5650 mm (18'6") Bucket

Wheel Loaders

		Spade Edge Rock Buckets With Teeth and Segment			Spade Edge Rock Buckets With MAA		High Lift	50/80-57 Tires
		18 yd <sup>3</sup> 222"	21 yd <sup>3</sup> 222"	23 yd <sup>3</sup> 222"	21 yd <sup>3</sup> 226"	23 yd <sup>3</sup> 226"		
Rated bucket capacity (\$)	m <sup>3</sup> yd <sup>3</sup>	14.0 18.0	16.0 21.0	18.0 23.0	16.0 21.0	18.0 23.0	Same Same	Same Same
Struck capacity (\$)	m <sup>3</sup> yd <sup>3</sup>	11.1 14.5	13.0 17.0	14.5 18.9	13.0 17.0	14.5 18.9	Same Same	Same Same
Width (\$)	mm ft/in	5650 18'6"	5650 18'6"	5650 18'6"	5740 18'10"	5740 18'10"	Same Same	Same Same
Dump clearance at full lift and 45° discharge (\$)	mm ft/in	5799 19'0"	5698 18'8"	5592 18'4"	5607 18'5"	5502 18'1"	+339 +1'1"	-180 -7"
Reach at full lift and 45° discharge (\$)	mm ft/in	2055 6'9"	2157 7'1"	2263 7'5"	2246 7'4"	2351 7'9"	+562 +1'10"	+180 +7"
Reach with lift arms horizontal and bucket level	mm ft/in	4912 16'1"	5056 16'7"	5206 17'1"	5183 17'0"	5333 17'6"	+640 +2'2"	+180 +7"
Digging depth (\$)	mm in	68 3	68 3	68 3	68 3	68 3	+14 +0.5	+180 +7
Overall length (\$)	mm ft/in	16 621 54'6"	16 659 54'8"	16 809 55'2"	16 892 55'5"	17 042 55'11"	+780 +2'3"	+120 +5"
Overall height with bucket at full raise (\$)	mm ft/in	10 786 35'5"	10 916 35'10"	10 996 36'1"	11 036 36'2"	11 174 36'8"	+340 +1'1"	-180 -7"
Loader clearance circle with bucket in carry position (\$)	m ft/in	12.57 41'3"	12.68 41'7"	12.72 41'9"	12.78 41'11"	12.89 42'4"	+299 +1'0"	+64 +3"
Static tipping load, straight*** (\$)	kg lb	126 758 279,501	125 829 277,453	124 764 275,105	125 278 276,238	124 495 274,511	†0.82 †0.82	†1.02 †1.02
Static tipping load, full 40° turn** (\$)	kg lb	107 095 236,144	106 166 234,096	105 101 231,748	105 615 232,881	104 832 231,155	†0.80 †0.80	†1.02 †1.02
Breakout force*** (\$)	kN lb	1057 237,825	950 213,750	886 199,350	961 216,225	923 207,675	†0.96 †0.96	†1.00 †1.00
Operating weight** (\$)	kg lb	189 343 417,501	190 229 419,455	191 244 421,693	190 754 420,613	191 500 422,258	+2553 +5630	-4681 -10,320

\*Dimensions are measured to the tip of the bucket teeth to provide accurate clearance data. SAE Standards specifies the cutting edge.

\*\*Static tipping load and operating weight shown are based on standard machine configuration with 53.5/85-57 tires, full fuel tank, coolant and lubricants.

\*\*\*Measured 102 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with SAE J732 JUN92.

†Factor multiplied by standard arrangement data to get high lift arrangement value.

**NOTE:** Specifications and ratings conform to all applicable standards recommended by the Society of Automotive Engineers (SAE). SAE Standards J732 JUN92 and J742 FEB85 govern loader ratings, denoted in the text by (\$).

# Wheel Loaders

## Performance Data

- 994D with 6220 mm (20'5") Bucket

		Spade Edge Rock Buckets With Teeth and Segment		Straight Edge Coal Bucket	Spade Edge Rock Buckets With MAA		High Lift	50/80-57 Tires
		21 yd <sup>3</sup> 245"	23 yd <sup>3</sup> 245"	40 yd <sup>3</sup> 245"	21 yd <sup>3</sup> 248"	23 yd <sup>3</sup> 248"		
Rated bucket capacity (§)	m <sup>3</sup> yd <sup>3</sup>	16.0 21.0	18.0 23.0	31.0 40.0	16.0 21.0	18.0 23.0	Same Same	Same Same
Struck capacity (§)	m <sup>3</sup> yd <sup>3</sup>	12.8 16.8	14.3 18.7	25.6 33.5	12.8 16.8	14.5 18.9	Same Same	Same Same
Width (§)	mm ft/in	6220 20'5"	6220 20'5"	6220 20'5"	6300 20'8"	6300 20'8"	Same Same	Same Same
Dump clearance at full lift and 45° discharge (§)	mm ft/in	5698 18'8"	5592 18'4"	5610 18'5"	5608 18'5"	5502 18'1"	+339 +1'1"	-180 -7"
Reach at full lift and 45° discharge (§)	mm ft/in	2157 7'1"	2263 7'5"	2243 7'4"	2246 7'4"	2352 7'9"	+562 +1'10"	+180 +7"
Reach with lift arms horizontal and bucket level	mm ft/in	5056 16'7"	5206 17'1"	5177 17'0"	5183 17'0"	5333 17'6"	+640 +2'2"	+180 +7"
Digging depth (§)	mm in	68 3	68 3	68 3	68 3	68 3	+14 +0.5	+180 +7
Overall length (§)	mm ft/in	16 659 54'8"	16 809 55'2"	16 888 55'5"	16 892 55'5"	17 042 55'11"	+780 +2'3"	+120 +5"
Overall height with bucket at full raise (§)	mm ft/in	10 919 35'10"	11 011 36'2"	11 032 36'2"	11 036 36'2"	11 174 36'8"	+340 +1'1"	-180 -7"
Loader clearance circle with bucket in carry position (§)	m ft/in	12.68 41'7"	12.72 41'9"	13.18 43'3"	12.78 41'11"	12.89 42'4"	+299 +1'0"	+64 +3"
Static tipping load, straight** (§)	kg lb	124 561 274,657	123 877 273,149	123 448 272,203	123 753 272,875	123 298 271,872	†0.82 †0.82	†1.02 †1.02
Static tipping load, full 40° turn** (§)	kg lb	104 898 231,300	104 214 229,792	103 785 228,846	104 090 229,518	103 635 228,515	†0.80 †0.80	†1.02 †1.02
Breakout force*** (§)	kN lb	944 212,400	877 197,325	959 215,775	958 215,550	913 205,425	†0.96 †0.96	†1.00 †1.00
Operating weight** (§)	kg lb	191 437 422,119	192 089 423,556	192 498 424,458	192 207 423,816	192 641 424,773	+2553 +5630	-4681 -10,320


\*Dimensions are measured to the tip of the bucket teeth to provide accurate clearance data. SAE Standards specifies the cutting edge.

\*\*Static tipping load and operating weight shown are based on standard machine configuration with 53.5/85-57 tires, full fuel tank, coolant and lubricants.

\*\*\*Measured 102 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point in accordance with SAE J732 JUN92.

†Factor multiplied by standard arrangement data to get high lift arrangement value.


**NOTE:** Specifications and ratings conform to all applicable standards recommended by the Society of Automotive Engineers (SAE). SAE Standards J732 JUN92 and J742 FEB85 govern loader ratings, denoted in the text by (§).

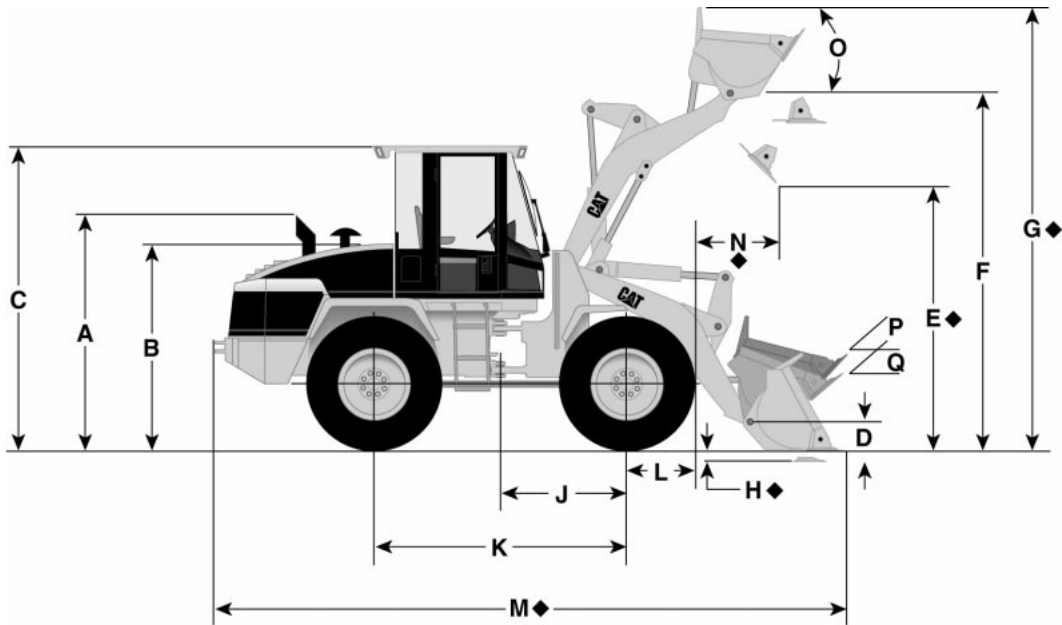

Dimensions shown represent standard machine with General Purpose bucket (bolt-on cutting edge) and standard tires.

◆ Varies with Bucket Size and/or Bucket Configuration — Refer to Performance Data


MODEL	902		906		908		914G	
	General Purpose Bolt-on Edges		General Purpose Bolt-on Edges		General Purpose Bolt-on Edges		General Purpose Bolt-on Edges	
	0.6 m <sup>3</sup>	0.78 yd <sup>3</sup>	0.8 m <sup>3</sup>	1.05 yd <sup>3</sup>	1 m <sup>3</sup>	1.3 yd <sup>3</sup>	1.3 m <sup>3</sup>	1.7 yd <sup>3</sup>
A Height to top of stack	2.69 m	8'10"	2.72 m	8'11"	2.71 m	8'7"	2.26 m	7'5"
B Height to top of engine compartment	1.78 m	5'10"	1.82 m	6'0"	1.95 m	6'5"	2.08 m	6'10"
C Height to top of ROPS	2.65 m	8'8"	2.68 m	8'10"	2.77 m	9'1"	3.1 m	10'2"
D Hinge pin height at carry position	330 mm	13"	416 mm	16"	297 mm	12"	374 mm	15"
◆E Dump clearance at full lift and 45° discharge angle	2.31 m	7'7"	2.38 m	7'10"	2.60 m	8'5"	2.66 m	8'9"
F Hinge pin height at full lift	3.02 m	9'11"	3.13 m	10'3"	3.39 m	11'1"	3.44 m	11'3"
◆G Maximum overall height	3.97 m	13'0"	4.17 m	13'8"	4.50 m	14'10"	4.39 m	14'5"
◆H Maximum digging depth	68 mm	2.7"	100 mm	3.9"	104 mm	4"	89 mm	3.5"
J Machine center point to axle	1 m	3'3"	1 m	3'3"	1.1 m	3'7"	1.3 m	4'3"
K Wheelbase	2 m	6'7"	2 m	6'7"	2.2 m	7'3"	2.6 m	8'6"
L Free radius of tire	495 mm	19"	508 mm	18.7"	543 mm	21"	670 mm	26"
◆M Maximum overall length	5.2 m	17'4"	5.34 m	17'5"	6.06 m	19'11"	6.23 m	20'5"
◆N Reach at full lift	764 mm	2'6"	824 mm	2'8"	915 mm	3'0"	973 mm	3'2"
O Maximum rollback at maximum lift	63°		63°		63°		60°	
P Maximum rollback at carry height	50°		53°		56°		46°	
Q Maximum rollback at ground	44°		43°		47°		41°	
Ground clearance (std. tires)	282 mm	11.1"	317 mm	12.5"	334 mm	13.1"	456 mm	18"
Tread width (std. tires)	1.39 m	4'5"	1.5 m	4'9"	1.58 m	5'2"	1.8 m	5'10.9"
Width over tires (std. tires)	1.74 m	5'7"	1.84 m	6'	1.97 m	6'6"	2.26 m	7'4.9"
Tires used for measurements	12.5-18		12.5-20		14.5-20		17.5-R25 (L-2)	

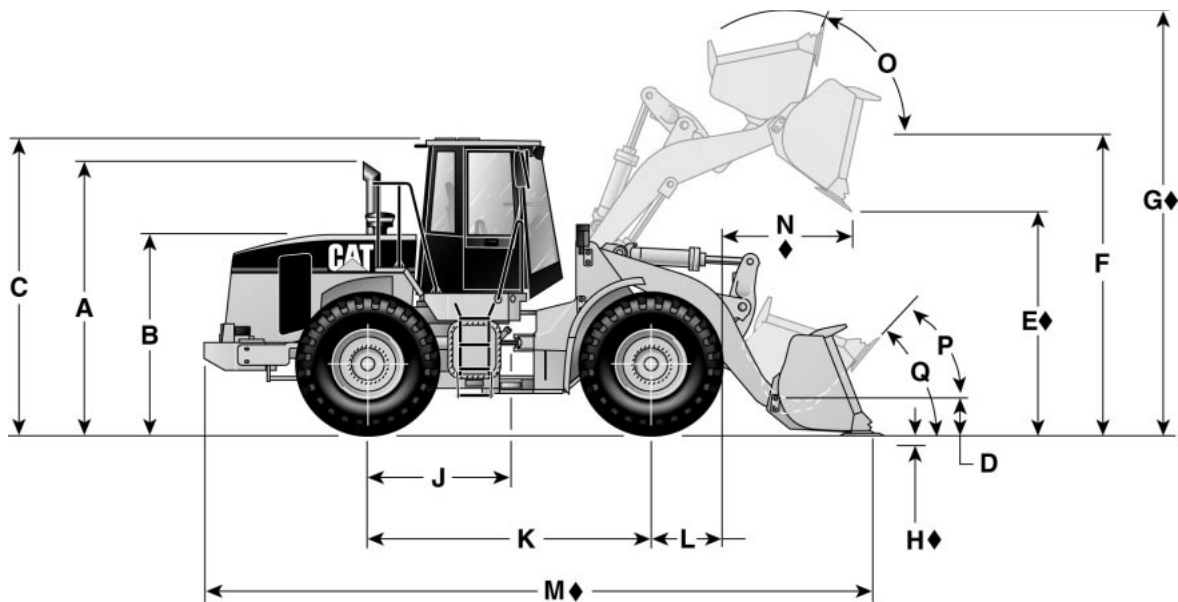

Dimensions shown represent standard machine with bucket, bolt-on cutting edge, and standard tires.

◆ Varies with Bucket Size and/or Bucket Configuration — Refer to Performance Data.

MODEL	924Gz		924G Pin On		928G		938G	
	Loose Material Bolt-on Edges 1.8 m <sup>3</sup>	2.3 yd <sup>3</sup>	Loose Material Bolt-on Edges 1.8 m <sup>3</sup>	2.3 yd <sup>3</sup>	General Purpose Bolt-on Edges 2.2 m <sup>3</sup>	2.9 yd <sup>3</sup>	General Purpose Bolt-on Edges 2.5 m <sup>3</sup>	3.25 yd <sup>3</sup>
A Height to top of stack	2.90 m	9'6"	2.90 m	9'6"	3.11 m	10'2"	3.23 m	10'7"
B Height to top of engine compartment	2.06 m	6'9"	2.06 m	6'9"	2.16 m	7'1"	2.36 m	7'9"
C Height to top of ROPS	3.16 m	10'5"	3.16 m	10'5"	3.27 m	10'8"	3.3 m	10'10"
D Hinge pin height at carry position	451 mm	18"	367 mm	14"	449 mm	18"	420 mm	16"
◆E Dump clearance at full lift and 45° discharge angle	2.76 m	9'1"	2.85 m	9'4"	2.84 m	9'4"	2.79 m	9'2"
F Hinge pin height at full lift	3.69 m	12'1"	3.81 m	12'6"	3.87 m	12'8"	3.84 m	12'7"
◆G Maximum overall height	4.74 m	15'7"	5.02 m	16'6"	5.07 m	16'8"	5.19 m	17'0"
◆H Maximum digging depth	110 mm	4"	132 mm	5"	86 mm	3.4"	50 mm	2"
J Machine center point to axle	1.40 m	4'7"	1.40 m	4'7"	1.45 m	4'9"	1.51 m	4'11"
K Wheelbase	2.80 m	9'2"	2.80 m	9'2"	2.90 m	9'6"	3.02 m	9'11"
L Radius of wheel	623 mm	24"	623 mm	24"	752 mm	30"	750 mm	30"
◆M Maximum overall length	6.89 m	22'7"	7.04 m	23'1"	7.81 m	24'0"	7.23 m	23'8"
◆N Reach at full lift	865 mm	2'10"	960 mm	3'2"	964 mm	3'2"	1004 mm	3'3"
O Maximum rollback at maximum lift		58°		58°		58°		65°
P Maximum rollback at carry height		48°		51°		47.8°		46°
Q Maximum rollback at ground		44°		50°		44°		39°
Ground clearance (std. tires)	370 mm	14"	368 mm	14"	408 mm	16"	400 mm	16"
Tread width (std. tires)	1.88 m	6'0"	1.88 m	6'0"	1.82 m	6'1"	2.02 m	6'8"
Width over tires (std. tires)	2.36 m	7'7"	2.36 m	7'7"	2.44 m	8'0"	2.60 m	8'6"
Tires used for measurements	17.5-25 (L-2)		17.5-25 (L-2)		20.5-25 (L-2)		20.5-R25 (L-2)	

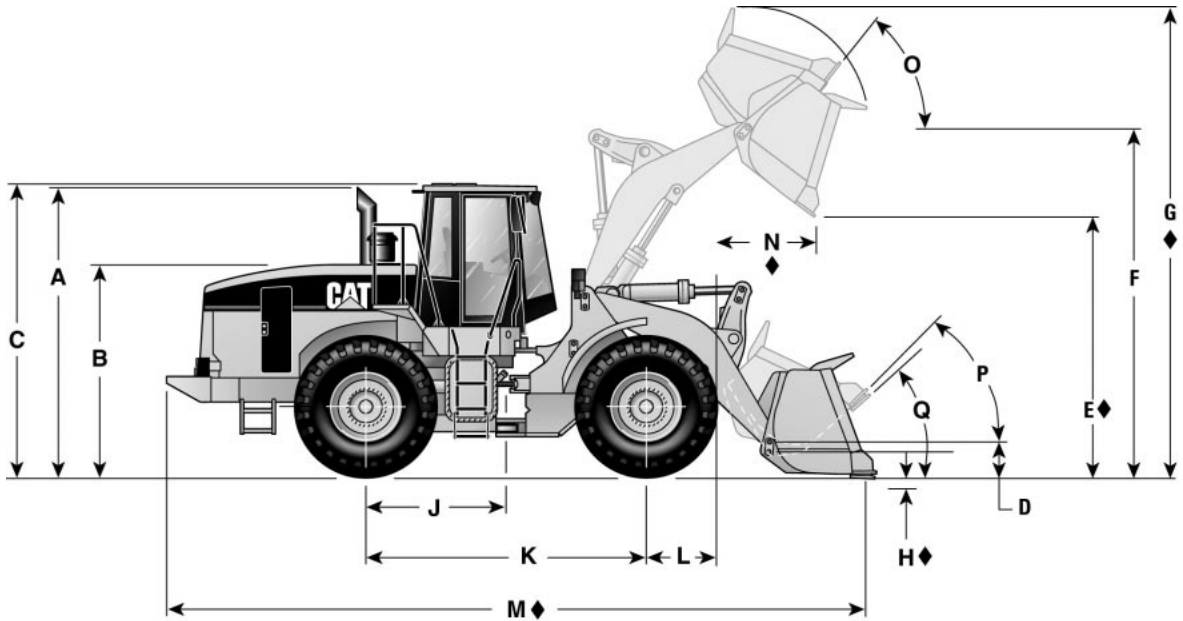


Dimensions shown represent standard machine with bucket, bolt-on cutting edge, and standard tires.

◆ Varies with Bucket Size and/or Bucket Configuration — Refer to Performance Data.

MODEL	950G General Purpose		962G General Purpose		966G General Purpose		972G General Purpose	
	Bolt-on Edges 3.1 m <sup>3</sup> 4 yd <sup>3</sup>		Bolt-on Edges 3.3 m <sup>3</sup> 4.25 yd <sup>3</sup>		Bolt-on Edges 3.8 m <sup>3</sup> 5 yd <sup>3</sup>		Bolt-on Edges 4.3 m <sup>3</sup> 5.5 yd <sup>3</sup>	
A Height to top of stack	3.22 m	10'7"	3.22 m	10'7"	3.54 m	11'7"	3.54 m	11'7"
B Height to top of engine compartment	2.25 m	7'5"	2.25 m	7'5"	2.56 m	8'5"	2.56 m	8'5"
C Height to top of ROPS	3.37 m	11'1"	3.37 m	11'1"	3.55 m	11'8"	3.55 m	11'8"
D Hinge pin height at carry position	230 mm	9"	230 mm	9"	485 mm	19"	485 mm	19"
◆E Dump clearance at full lift and 45° discharge angle	2.89 m	9'6"	3.04 m	10'0"	3.10 m	10'2"	3.29 m	10'9"
F Hinge pin height at full lift	3.98 m	13'1"	4.17 m	13'8"	4.22 m	13'10"	4.44 m	14'7"
◆G Maximum overall height	5.40 m	17'9"	5.64 m	18'6"	5.71 m	18'9"	6.02 m	19'9"
◆H Maximum digging depth	85 mm	3.3"	85 mm	3.3"	130 mm	5"	110 mm	4"
J Machine center point to axle	1.68 m	5'6"	1.68 m	5'6"	1.72 m	5'8"	1.72 m	5'8"
K Wheelbase	3.35 m	11'0"	3.35 m	11'0"	3.45 m	11'4"	3.45 m	11'4"
L Radius of wheel	820 mm	32"	820 mm	32"	795 mm	31"	795 mm	31"
◆M Maximum overall length	8.03 m	26'4"	8.23 m	27'0"	8.82 m	28'11"	9.04 m	29'8"
◆N Reach at full lift	1.27 m	4'2"	1.25 m	4'1"	1305 mm	4'3"	1280 mm	4'2"
O Maximum rollback at maximum lift		59°		60°		61°		55°
P Maximum rollback at carry height		45°		45°		47°		47°
Q Maximum rollback at ground		37.5°		37.5°		42°		41°
Ground clearance (std. tires)	400 mm	16"	400 mm	16"	430 mm	17"	430 mm	17"
Tread width (std. tires)	2.14 m	7'0"	2.14 m	7'0"	2.23 m	7'4"	2.23 m	7'4"
Width over tires (std. tires)	2.89 m	9'6"	2.89 m	9'6"	2.96 m	9'9"	2.96 m	9'9"
Tires used for measurements	23.5-R25, XHA (L-3)		23.5-R25, XHA (L-3)		26.5-R25, XHA (L-3)		26.5-R25, XHA (L-3)	




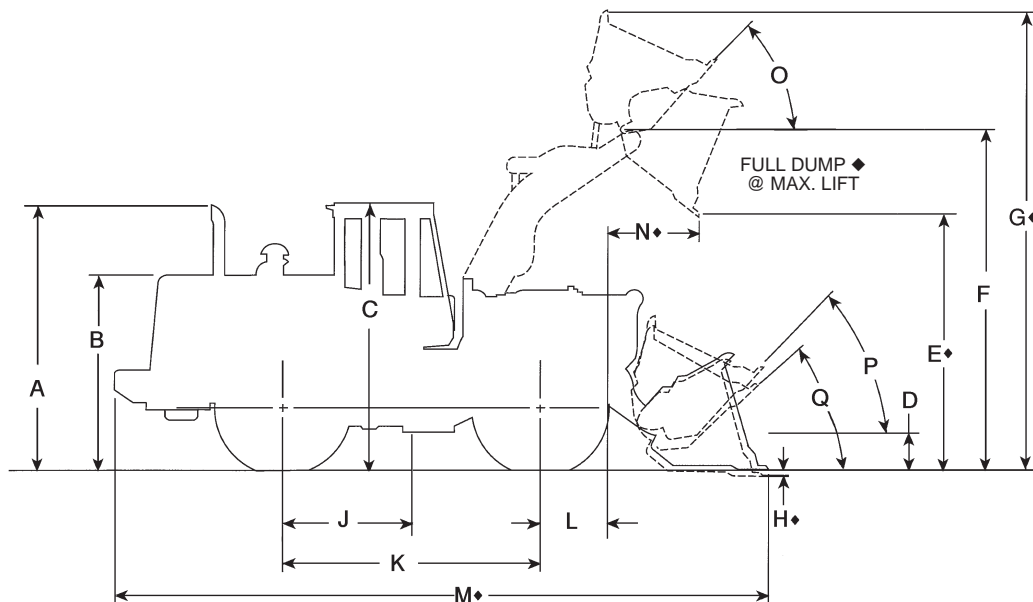

Dimensions shown represent standard machine with spade edge rock bucket and standard tires.

◆ Varies with Bucket Size and/or Bucket Configuration — Refer to Performance Data


MODEL	980G		980G		988G		988G	
	General Purpose Bolt-on Edges		General Purpose High Lift Bolt-on Edges		Spade Edge Rock With Teeth & Segments		Spade Edge Rock With Teeth & Segments	
	5.7 m <sup>3</sup>	7.5 yd <sup>3</sup>	5.7 m <sup>3</sup>	7.5 yd <sup>3</sup>	6.4 m <sup>3</sup>	8.33 yd <sup>3</sup>	6.9 m <sup>3</sup>	9.0 yd <sup>3</sup>
A Height to top of stack	3.39 m	11'1"	3.39 m	11'1"	4.155 m	13'8"	4.155 m	13'8"
B Height to top of engine compartment	2.33 m	7'8"	2.33 m	7'8"	3.185 m	10'5"	3.185 m	10'5"
C Height to top of ROPS	3.75 m	12'4"	3.75 m	12'4"	4.155 m	13'8"	4.155 m	13'8"
D Hinge pin height at carry position	453 mm	18"	453 mm	18"	959 mm	3'2"	959 mm	3'2"
◆ E Dump clearance at full lift and 45° discharge angle	3.27 m	10'9"	3.49 m	11'6"	3.994 m	13'1"	3.994 m	13'1"
F Hinge pin height at full lift	4.50 m	14'9"	4.73 m	15'6"	5.888 m	19'4"	5.888 m	19'4"
◆ G Maximum overall height	6.20 m	20'4"	6.43 m	21'1"	8.164 m	26'9"	8.164 m	26'9"
◆ H Maximum digging depth	138 mm	5"	138 mm	5"	100 mm	4"	100 mm	4"
J Machine center point to axle	1.85 m	6'1"	1.85 m	6'1"	2.275 m	7'6"	2.275 m	7'6"
K Wheelbase	3.70 m	12'2"	3.70 m	12'2"	4.55 m	14'11"	4.55 m	14'11"
L Radius of wheel	928 mm	3'1"	928 mm	3'1"	1.012 m	3'4"	1.012 m	3'4"
◆ M Maximum overall length	9.46 m	31'1"	9.68 m	31'9"	12.505 m	41"	12.505 m	41"
◆ N Reach at full lift	1.54 m	5'1"	1.54 m	5'1"	2.096 m	6'10"	2.096 m	6'10"
Full dump at maximum lift						49°		49°
O Maximum rollback at maximum lift		61°		61°		65°		65°
P Maximum rollback at carry height		46°		46°		55.5°		55.5°
Q Maximum rollback at ground		36°		36°		45.7°		45.7°
Ground clearance (std. tires)	467 mm	18.4"	467 mm	18.4"	583 mm	1'11"	583 mm	1'11"
Tread width (std. tires)	2.44 m	8'0"	2.44 m	8'0"	2.59 m	8'6"	2.59 m	8'6"
Width over tires (std. tires)	3.25 m	10'8"	3.25 m	10'8"	3.54 m	11'7"	3.54 m	11'7"
Tires used for measurements	29.5-R25 (L-3)		29.5-R25 (L-3)		35/65-33 (L-4)		35/65-33 (L-4)	

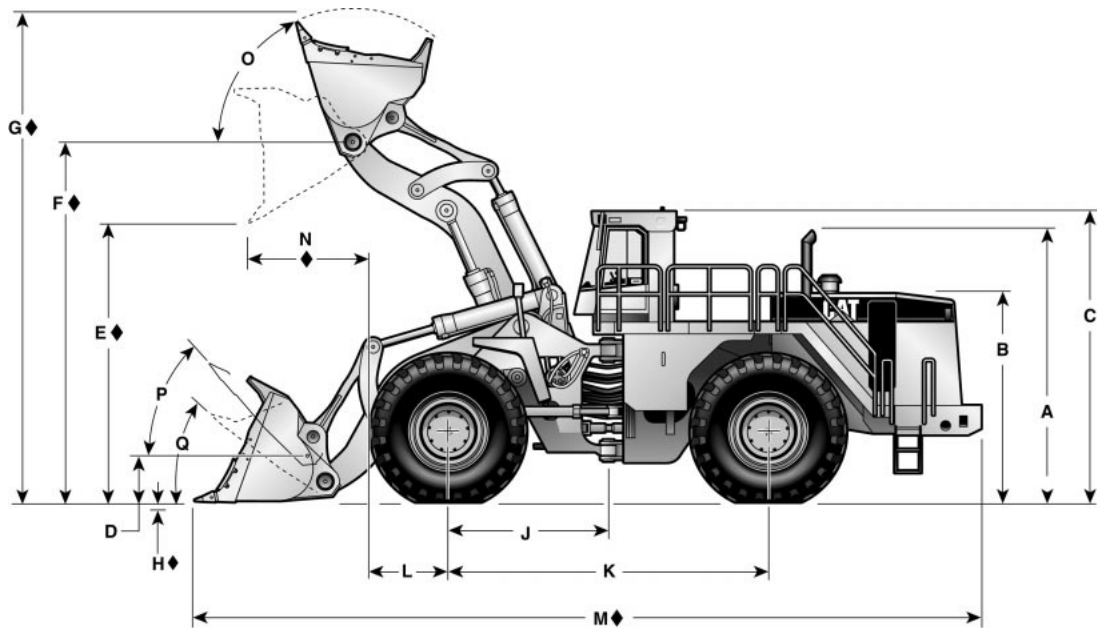

Dimensions shown represent standard machine with spade edge rock bucket and standard tires.

◆ Varies with Bucket Size and/or Bucket Configuration — Refer to Performance Data

MODEL	990 Series II Spade Edge Rock With Teeth		990 Series II High Lift Spade Edge Rock With Teeth		992G Spade Edge Rock With Teeth		992G High Lift Spade Edge Rock With Teeth	
	8.6 m <sup>3</sup>	11.2 yd <sup>3</sup>	8.6 m <sup>3</sup>	11.2 yd <sup>3</sup>	11.5 m <sup>3</sup>	15 yd <sup>3</sup>	11.5 m <sup>3</sup>	15 yd <sup>3</sup>
A Height to top of stack	4.59 m	15'5"	4.59 m	15'5"	5.23 m	17'2"	5.23 m	17'2"
B Height to top of engine compartment	3.46 m	11'4"	3.46 m	11'4"	4.03 m	13'3"	4.03 m	13'3"
C Height to top of ROPS	5.13 m	16'10"	5.13 m	16'10"	5.61 m	18'5"	5.61 m	18'5"
D Hinge pin height at carry position	816 mm	2'8"	826 mm	2'9"	960 mm	3'1.8"	1125 mm	3'8.3"
◆ E Dump clearance at full lift and 45° discharge angle	4.05 m	13'3"	4.61 m	15'1"	4.63 m	15'3"	5.25 m	17'3"
◆ F Hinge pin height at full lift	5.89 m	19'4"	6.77 m	22'3"	6.94 m	22'9"	7.55 m	24'10"
◆ G Maximum overall height	8.13 m	26'8"	9.00 m	29'6"	9.41 m	30'11"	10.03 m	32'11"
◆ H Maximum digging depth	72 mm	2.8"	154 mm	6"	140 mm	5.5"	144 mm	5.7"
J Machine center point to axle	2.30 m	7'7"	2.30 m	7'7"	2.94 m	9'8"	2.94 m	9'8"
K Wheelbase	4.60 m	15'1"	4.60 m	15'1"	5.89 m	19'4"	5.89 m	19'4"
L Radius of wheel	1.25 m	4'1"	1.25 m	4'1"	1.37 m	4'6"	1.37 m	4'6"
◆ M Maximum overall length	12.61 m	41'4"	13.34 m	43'9"	15.58 m	49'8"	16.17 m	53'1"
◆ N Reach at full lift	1.89 m	6'2"	2.18 m	7'2"	2.3 m	7'7"	2.29 m	7'7"
O Maximum rollback at maximum lift	63.8°		60.6°		65°		65°	
P Maximum rollback at carry height	48.4°		47.4°		50.7°		50°	
Q Maximum rollback at ground	39.1°		38.9°		41.6°		40.7°	
Ground clearance (std. tires)	491 mm	19"	491 mm	19"	691 mm	27.2"	691 mm	27.2"
Tread width (std. tires)	3.05 m	10'0"	3.05 m	10'0"	3.30 m	10'10"	3.30 m	10'10"
Width over tires (std. tires)	4.16 m	13'3"	4.16 m	13'3"	4.50 m	14'9"	4.49 m	14'9"
Tires used for measurements	41.25/70-39 (L-5)		41.25/70-39 (L-5)		45/65-45 (L-5)		45/65-45 (L-5)	

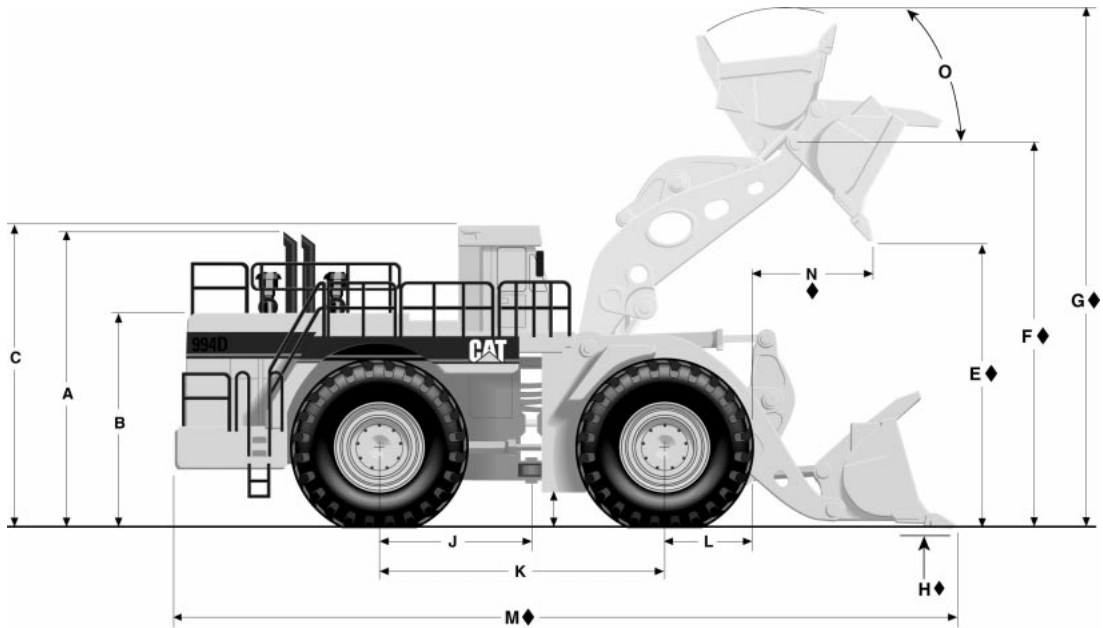

Dimensions shown represent standard machine with spade edge rock bucket and standard tires.

◆ Varies with Bucket Size and/or Bucket Configuration — Refer to Performance Data

MODEL	994D 5650 mm (18'6") Spade Edge Bucket With Teeth And Segments 16 m <sup>3</sup> 21 yd <sup>3</sup>		994D High Lift 5650 mm (18'6") Spade Edge Bucket With Teeth And Segments 16 m <sup>3</sup> 21 yd <sup>3</sup>		994D 5650 mm (18'6") Spade Edge Bucket With Teeth And Segments 18 m <sup>3</sup> 23 yd <sup>3</sup>		994D High Lift 5650 mm (18'6") Spade Edge Bucket With Teeth And Segments 18 m <sup>3</sup> 23 yd <sup>3</sup>	
	A Height to top of stack	6.80 m	22'4"	6.80 m	22'4"	6.98 m	22'11"	6.98 m
B Height to top of engine compartment	4.66 m	15'3"	4.66 m	15'3"	4.84 m	15'11"	4.84 m	15'11"
C Height to top of ROPS	6.53 m	21'5"	6.53 m	21'5"	6.71 m	22'0"	6.71 m	22'0"
D Hinge pin height at carry position	1030 mm	3'5"	1258 mm	4'2"	1030 mm	3'5"	1258 mm	4'2"
◆ E Dump clearance at full lift and 45° discharge angle	5.51 m	18'1"	5.85 m	19'2"	5.58 m	18'4"	5.92 m	19'5"
◆ F Hinge pin height at full lift	7.98 m	26'2"	8.32 m	27'3"	8.16 m	26'9"	8.50 m	27'11"
◆ G Maximum overall height	10.75 m	35'3"	11.09 m	36'5"	11.02 m	36'2"	11.36 m	37'3"
◆ H Maximum digging depth	248 mm	9"	262 mm	10"	68 mm	3"	82 mm	3"
J Machine center point to axle	3.20 m	10'6"	3.20 m	10'6"	3.20 m	10'6"	3.20 m	10'6"
K Wheelbase	6.40 m	21'0"	6.40 m	21'0"	6.40 m	21'0"	6.40 m	21'0"
L Radius of wheel	1.80 m	5'11"	1.80 m	5'11"	2.00 m	6'7"	2.00 m	6'7"
◆ M Maximum overall length	16.84 m	55'3"	17.61 m	57'9"	16.86 m	55'4"	17.64 m	57'11"
◆ N Reach at full lift	2.31 m	7'7"	2.87 m	9'5"	2.26 m	7'5"	2.82 m	9'2"
O Maximum rollback at maximum lift	64°		64°		64°		64°	
P Maximum rollback at carry height	53°		58°		53°		58°	
Q Maximum rollback at ground	40°		40°		40°		40°	
Ground clearance (std. tires)	650 mm	2'2"	650 mm	2'2"	830 mm	2'9"	830 mm	2'9"
Tread width (std. tires)	3.90 m	12'10"	3.90 m	12'10"	4.00 m	13'1"	4.00 m	13'1"
Width over tires (std. tires)	5.20 m	17'1"	5.20 m	17'1"	5.35 m	17'7"	5.35 m	17'7"
Tires used for measurements	50/80-57 (L-4)		50/80-57 (L-4)		53.5/85-57 (L-5)		53.5/85-57 (L-5)	

## SPECIFICATION DEFINITIONS FOR FRONT END LOADERS

Caterpillar wheel and track loader specifications conform to Society of Automotive Engineers (SAE) definitions as expressed in standards J732 (JUN92), as follows:

### Description of Specification Machine

On wheel loaders the tire inflation pressure at which specifications are taken must be described in addition to the current written basic machine description. On track loaders the type of grouser must be specified.

### Hydraulic Cycle Times

- “Raise Time” — Time in seconds required to raise the bucket from level position on the ground.
- “Lower Time” — Time in seconds required to lower the empty bucket from the full height to a level position on the ground.
- “Dump Time” — Time in seconds required to move the bucket at maximum height from the maximum rollback position to full dump position while dumping the SAE loose material operating load.


### Breakout Force

“Breakout force,” pounds (and kilonewtons or kilograms) — the maximum sustained vertical upward force exerted 100 mm (4") behind the tip of the bucket cutting edge and achieved through the ability to lift and/or rollback about the specified pivot point under the following conditions:

- Loader on a hard level surface with transmission in neutral.
- All brakes released.
- Unit at standard operating weight — rear of loader not tied down.
- Bottom of cutting edge parallel to and not more than 20 mm (0.75") above or below the ground line.

- When bucket circuit is used the pivot point must be specified as the bucket hinge pin, and the unit blocked under the bucket hinge pin pivot point in order to minimize linkage movement.
- When the lift circuit is used, the pivot point must be specified as the lift arm hinge pin. Wheel loaders shall have front axle blocked to eliminate change in position of pivot pins due to tire deflection.
- If both circuits are used simultaneously, the dominating pivot point listed in (e) or (f) must be specified.
- If the circuit used causes the rear of the vehicle to leave the ground, then the vertical force value required to raise the rear of the vehicle is the breakout force.
- For irregular shaped buckets, the tip of the bucket cutting edge referred to above shall mean the farther forward point of the cutting edge.


The following are illustrations used (according to provisions of SAE J732 JUN92) to measure Caterpillar Loader breakout forces.

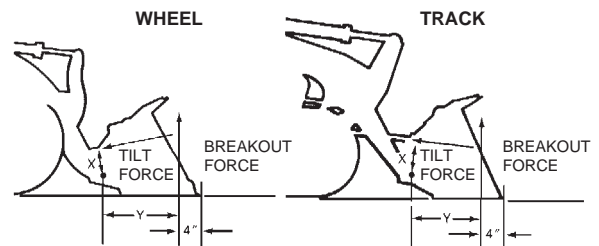

- Breakout force resulting from rollback:  
 $(\text{Tilt Force}) \times (\text{Dist. "X"}) = (\text{"Y" Dist.}) \times (\text{Breakout Force})$

$$\frac{(\text{Tilt Force}) \times (\text{Dist. "X"})}{\text{"Y" Dist.}} = \text{Breakout Force}$$

b. Breakout force resulting from bucket lift:

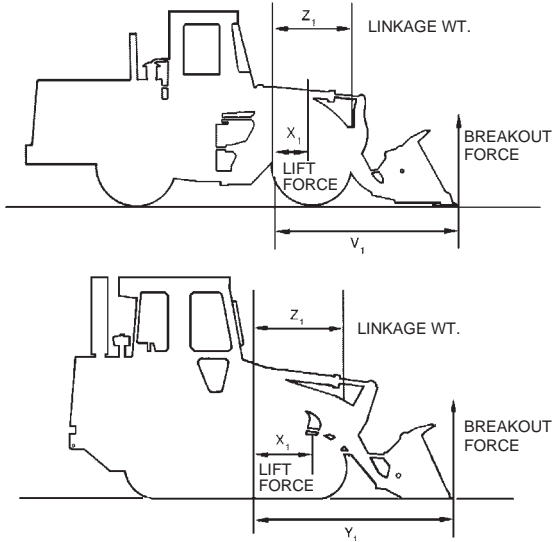

$$\begin{aligned}
 (\text{Lift Force}) \times (\text{Dist. "X}_1\text{")} &= (\text{"Y}_1\text{ Dist.}) \times (\text{Breakout Force}) \\
 &+ (\text{Linkage Wt.}) \times (\text{Dist. "Z}_1\text{")} \\
 &+ (\text{Breakout Force}) \\
 &\times (\text{Linkage Mechanical Advantage}) \text{ "V}_1\text{"}
 \end{aligned}$$

$$\begin{aligned}
 \text{Breakout Force} &= \frac{(\text{Lift Force}) \times (\text{Dist. "X}_1\text{")} - (\text{Linkage Wt.}) \times (\text{Dist. "Z}_1\text{")}}{(\text{Dist. "Y}_1\text{") + (\text{Dist. "V}_1\text{")} \times (\text{Linkage Mech. Advantage})}
 \end{aligned}$$

**Static Tipping Load**

The minimum weight at center of gravity of "SAE Rated" load in bucket which will rotate rear of machine to a point where, on track loaders, front rollers are clear of the track and on wheel loaders, rear wheels are clear of the ground under the following conditions:

- a. Loader on hard level surface and stationary.
- b. Unit at standard operating weight.
- c. Bucket at maximum rollback position.
- d. Load at maximum forward position during raising cycle.
- e. For articulated wheel loaders, the test will be run both with frame straight (straight static tipping load) and fully turned to a specific angle (full turn static tipping load).


- f. Unit with standard equipment as described in specifications unless otherwise noted under the heading.

**Operating Load**

In order to comply with SAE standard J818 MAY87, the operating load of Wheel Loaders should not exceed 50% of the full turn Static Tipping load of the machine when equipped with attachments needed for the job. (For track loaders, operating load should not exceed 35% of the Static Tipping load rating.) See "Performance Data" of each machine in this handbook for increases to static tipping load by adding cab, counterweights, ripper-scarifier, etc.

**Carry Position**

SAE defines carry positions as: "The vertical distance from the ground to the center line of the bucket hinge pin, with the angle of approach at 15°." The sketch below illustrates this definition:

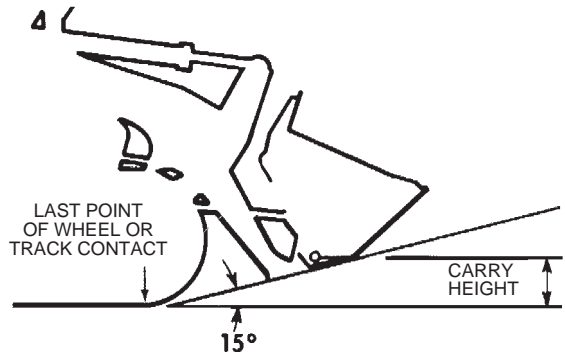


**Loader Clearance Circle**

SAE J732 JUN92 states that "minimum turning radius (over tire)" and "loader clearance circle" should be given for wheel loaders. Both are given on Caterpillar specification sheets, including loader clearance circles for all available buckets for each machine.

**Digging Depth**

J732 JUN92 specifies digging depth as "the vertical distance in mm (inches) from the ground line to the bottom of the bucket cutting edge at the lowest position with the bucket cutting edge horizontal."

## SAE BUCKET RATING

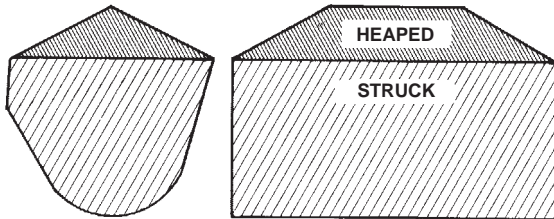

### SAE Bucket Capacities

*Struck capacity* is that volume contained in a bucket after a load is leveled by drawing a straight edge resting on the cutting edge and the back of the bucket.

*Heaped capacity* is a struck capacity plus that additional material that would heap on the struck load at a 2:1 angle of repose with the struck line parallel to the ground.

SAE J742 (FEB85) specifies that the addition of any auxiliary spill guard to protect against spillage which might injure the operator will not be included in bucket capacity ratings. Buckets with irregular shaped cutting edges (vee edge) the strike plane should be drawn at one-third the distance of the protruding portion of the cutting edge. Caterpillar rock buckets are built with integral see-through rock guards. Caterpillar light material buckets come standard with bolt-on edges. These features which add to actual bucket capacity are included in published ratings.

### Dump Height

SAE J732 JUN92 specifies that dump height is the vertical distance from the ground to the lowest point of the cutting edge with the bucket hinge pin at maximum height and the bucket at a 45° dump angle. Dump angle is the angle in degrees that the longest flat section of the inside bottom of the bucket will rotate below horizontal.

## SELECTING A MACHINE

### Steps in selecting the proper size loader:

1. Determine production required or desired.
2. Determine loader cycle time and cycles per hour.  
A machine size must be assumed to select a basic cycle time.

3. Determine required payload per cycle in loose cubic yards and pounds (meters and kilograms).
4. Determine bucket size needed.
5. Make machine selection using bucket size and payload as criteria to meet production requirements.
6. Compare the loader cycle time used in calculations to the cycle time of the machine selected. If there is a difference, rework the process beginning at step 2.

### 1. Production Required

The production required of a wheel or track loader should be slightly greater than the production capability of the other critical units in the earth or material moving system. For example, if a hopper can handle 300 tons per hour, a loader capable of slightly more than 300 tons should be used. Required production should be carefully calculated so the proper machine and bucket selections are made.

### 2. Loader Cycle Times

When hauling loose granular material on a hard smooth operating surface, a .45-.55 minute basic cycle time is considered reasonable for Caterpillar articulated loaders with a competent operator. This includes load, dump, four reversals of direction, full cycle of hydraulics and minimum travel.

Material type, pile height, and other factors may improve or reduce production, and should be added to or subtracted from the basic cycle time when applicable.

When hauls are involved, obtain the haul and return portion of the cycle from the estimated travel chart (this section). Add the haul and return times to the estimated basic cycle time to obtain total cycle time.

### CYCLE TIME FACTORS

A basic cycle time (Load, Dump, Maneuver) of .45-.55 minutes is average for an articulated loader [the basic cycle for large loaders, 3 m<sup>3</sup> (4 yd<sup>3</sup>) and up, can be slightly longer], but variations can be anticipated in the field. The following values for many variable elements are based on normal operations. Adding or subtracting any of the variable times will give the total basic cycle time.

# Wheel Loaders

## Machine Selection

- Truck Loading
- Bucket Fill Factors

*Minutes added (+)  
or Subtracted (-)  
From Basic Cycle*

<i>Machine</i>	
— Material handler . . . . .	-.05
<i>Materials</i>	
— Mixed . . . . .	+.02
— Up to 3 mm (1/8 in). . . . .	+.02
— 3 mm (1/8 in) to 20 mm (3/4 in) . . . . .	-.02
— 20 mm (3/4 in) to 150 mm (6 in) . . . . .	.00
— 150 mm (6 in) and over. . . . .	+.03 and Up
— Bank or broken . . . . .	+.04 and Up
<i>Pile</i>	
— Conveyor or Dozer piled 3 m (10 ft) and up . . . . .	.00
— Conveyor or Dozer piled 3 m (10 ft) or less . . . . .	+.01
— Dumped by truck . . . . .	+.02
<i>Miscellaneous</i>	
— Common ownership of trucks and loaders . . . . .	Up to -.04
— Independently owned trucks . . . . .	Up to +.04
— Constant operation. . . . .	Up to -.04
— Inconsistent operation . . . . .	Up to +.04
— Small target . . . . .	Up to +.04
— Fragile target . . . . .	Up to +.05

Using actual job conditions and the above factors, total cycle time can be estimated. Convert total cycle time to cycles per hour.

$$\text{Cycles per hour at 100\% Efficiency} = \frac{60 \text{ min}}{\text{Total Cycle Time in Minutes}}$$

Job efficiency is an important factor in machine selection. Efficiency is the actual number of minutes worked during an hour. Job efficiency accounts for bathroom breaks and other work interruptions.

Cycles per hour at 50 minutes per hour (83% efficiency)	Cycles per hour = at 100% efficiency	50 min × actual work time ————— 60 min hour
---	--------------------------------------	--

## TRUCK LOADING

*Average loader cycle times*

914G-962G . . . . .	0.45-0.50 min
966G-980G . . . . .	0.50-0.55 min
988F-990 . . . . .	0.55-0.60 min
992G-994D . . . . .	0.60-0.70 min

### 3. Required Payload Per Cycle

Required payload per cycle is determined by dividing required hourly production by the number of cycles per hour.

### 4. Bucket Selection

After required payload per cycle has been calculated, the payload should be divided by the loose cubic yard (meter) material weight to determine number of loose cubic yards (meters) required per cycle.

The bulk of material handled does not weigh 1800 kg/m<sup>3</sup> (3000 lb/yd<sup>3</sup>), so a reasonable knowledge of material weight is necessary for accurate production estimates. The Tables Section has average weight for certain materials when actual weights are not known.

The percentage of rated capacity a bucket carries in various materials is estimated below. The bucket size required to handle the required volume per cycle is found with the aid of the percentage of rated bucket capacity called "Bucket Fill Factor."

The bucket size needed is determined by dividing loose cubic meters (or yards) required per cycle by the bucket fill factor.

$$\text{Bucket size} = \frac{\text{Volume Required / Cycle}}{\text{Bucket Fill Factor}}$$

### BUCKET FILL FACTORS

The following indicates the approximate amounts of material as a percent of rated bucket capacity which will actually be delivered per bucket per cycle. This is known as "Bucket Fill Factor."

Loose Material	Fill factor
Mixed moist aggregates . . . . .	95-100%
Uniform aggregates up to 3 mm (1/8 in). . . . .	95-100
3 mm (1/8 in) to 9 mm (3/8 in) . . . . .	90-95
12 mm (1/2 in) to 20 mm (3/4 in) . . . . .	85-90
24 mm (1.0 in) and over . . . . .	85-90

*Blasted Rock*

Well blasted . . . . .	80-95%
Average . . . . .	75-90
Poor . . . . .	60-75

*Other*

Rock dirt mixtures . . . . .	100-120%
Moist loam . . . . .	100-110
Soil, boulders, roots . . . . .	80-100
Cemented materials . . . . .	85-95

**NOTE:** Fill factors on wheel loaders are affected by bucket penetration, breakout force, rackback angle, bucket profile and ground engaging tools such as bucket teeth or bolt-on replaceable cutting edges.

Example:

12 mm (1/2 in) material and 3 m<sup>3</sup> (4 yd<sup>3</sup>) bucket.  
 .90 × 3 m<sup>3</sup> = 2.75 Loose m<sup>3</sup> delivered per cycle.  
 .90 × 4 yd<sup>3</sup> = 3.6 Loose yd<sup>3</sup> delivered per cycle.

**NOTE:** Check the static tipping load on the specific machine to determine if bucket load is in fact a safe operating load.

*Bucket Selection*

$$\text{Tons Required/Cycle} = \frac{\text{Tons Required/Hour}}{\text{CyclesHour}}$$

$$\text{Kg (Pounds) Required/Cycle} = \frac{\text{Tons Required/Cycle}}{\times 907 \text{ kg (2000 lb)}}$$

$$\text{Volume Required/Cycle} = \frac{\text{kg (Pounds) Cycle}}{\text{Material Weight kg/m}^3 \text{ (lb/yd}^3\text{)}}$$

Always select a machine with a greater capacity than the calculated required operating capacity. For most applications, payload above recommended and excessive counterweight can hinder machine performance and reduce dynamic stability and machine life.

For optimum performance in fast cycling situations such as truck loading, operating loads should not exceed the recommended capacity. To provide extra stability, calcium chloride (CaCl<sub>2</sub>) ballast may be desired when operating at recommended operating load, see SAE Loader rating pages in this section. For specific stability data and optional tire sizes, see the "Performance Data" pages in this section.

When selecting special application buckets, such as multi-purpose and side dump the additional bucket weight must be deducted from recommended capacity.

Specific circumstances may involve other conditions which would also affect loader capacity. Because of the greatly varied applications and conditions, your Caterpillar dealer should be contacted for guidance.

Example problem:

**JOB CONDITIONS**

Application	Truck loading
Production Required	450 metric ton (496 Tons) per hour
Material	9 mm (3/8") gravel in 6 m (20 ft) high stockpile
Density	1660 kg/m <sup>3</sup> (2800 lb/yd <sup>3</sup> )

Trucks are 6-9 m<sup>3</sup> (8-12 yd<sup>3</sup>) capacity and are owned by three contractors. Loading is constant. Hard level surface for loader maneuvering.

1. **PRODUCTION REQUIRED:** Given
2. **CYCLE TIME:** Assume loader size between 914G and 962G for initial choice of basic cycle.  
 (Refer to Cycle Time Factors in this section)
 

Independent trucks	.04 min
Basic Cycle	.50 min
Material	-.02 min
Independent trucks	+.04 min
Constant operation	-.02 min
<b>Total Cycle</b>	<b>.50 min</b>

**NOTE:** Load and carry times not required in total cycle.

$$\begin{aligned} \text{Cycles/hr at 83\% efficiency} &= 120 \text{ cycles/hr} \times \frac{50 \text{ min actual work time}}{60 \text{ min per hr}} \\ &= 100 \text{ cycles/hr} \end{aligned}$$

3. **VOLUME REQUIRED PER CYCLE** (Density in tons)  
 Density in this example was given. When not given, refer to Tables Section to obtain an estimated density for the material being handled.

$$\text{Metric: } \frac{1660 \text{ kg/m}^3}{1000 \text{ kg/ton}} = 1.66 \text{ ton/m}^3$$

$$\text{English: } \frac{2800 \text{ lb/yd}^3}{2000 \text{ lb/ton}} = 1.4 \text{ tons/yd}^3$$



### Production Rate Required

$$\text{Metric: } \frac{450 \text{ tons/hr}}{1.66 \text{ tons/m}^3} = 271 \text{ m}^3/\text{hr}$$

$$\text{English: } \frac{496 \text{ tons/hr}}{1.4 \text{ tons/yd}^3} = 354 \text{ yd}^3/\text{hr}$$

### Volume Required per Cycle

$$\text{Metric: } \frac{271 \text{ m}^3/\text{hr}}{100 \text{ cycles/hr}} = 2.71 \text{ m}^3/\text{cycle}$$

$$\text{English: } \frac{354 \text{ yd}^3/\text{hr}}{100 \text{ cycles/hr}} = 3.54 \text{ yd}^3/\text{cycle}$$

#### 4. DETERMINE BUCKET SIZE

##### BUCKET FILL FACTOR

The volume of material required per cycle has been determined. Because of varying material fill factors, buckets do not always carry their rated load, a larger capacity bucket may be needed to carry the volume required. For fill factors, refer to Bucket Fill Factor Chart in this section.

##### Rated Bucket Capacity Required (Heaped)

$$\frac{2.71 \text{ m}^3/\text{cycle}}{.95 \text{ fill factor}} = 2.85 \text{ m}^3$$

$$\frac{3.54 \text{ yd}^3/\text{cycle}}{.95 \text{ fill factor}} = 3.73 \text{ yd}^3$$

A 2.9 m<sup>3</sup> (3.75 yd<sup>3</sup>) bucket would provide the required capacity.

#### 5. MACHINE SELECTION

The bucket size required and material density lead to the choice of a 950G with a 2.9 m<sup>3</sup> (3.75 yd<sup>3</sup>) General Purpose Bucket (see bucket selection guide pages which follow.)

Finally, SAE payload criteria must be satisfied as follows:

The required operating capacity must not exceed one-half of the full turn static tipping load of the loader as equipped with a specific bucket.

The required operating capacity of the machine is determined by the volume the machine will carry per load times the density.

$$2.9 \text{ m}^3 \times 1660 \text{ kg/m}^3 = 4814 \text{ kg}$$

$$(3.75 \text{ yd}^3 \times 2800 \text{ lb/yd}^3 = 10,500 \text{ lb})$$

One half of full turn static tipping load for the 950G with a 2.9 m<sup>3</sup> (3.75 yd<sup>3</sup>) General Purpose Bucket is 5410 kg (11,925 lb). SAE criteria is satisfied.



### An Alternative Method of Machine Selection

Another method of selecting the right Wheel Loader and bucket to meet production requirements is by use of the nomographs on the following pages. The method is quicker and easier than the preceding example because it does not require as many calculations, yet the accuracy is about the same within the normal limits of input data.

Be careful when entering and reading data from the nomographs because some scales increase from bottom to top, while others are the reverse. Do not be overly concerned with the precision as affected by pencil line width or reading to the hundredth of a m<sup>3</sup> (yd<sup>3</sup>). Remember that bucket fill factor, material density and cycle time are at best close estimates.

##### Example problem:

A Wheel Loader must produce 230 m<sup>3</sup> (300 yd<sup>3</sup>) per hour in a truck loading application. Estimated cycle time is .6 minutes, working 45 minutes per hour. Bucket fill factor is 95% and material density is 1780 kg/m<sup>3</sup> (3000 lb/yd<sup>3</sup>).

Determine bucket size and machine model.

Solution:

At full efficiency, the Wheel Loader will cycle 100 times per hour. Since only an average of 45 minutes are available, only 75 cycles will be completed.


Starting on Scale A at 75 cycles per hour draw a straight line intersecting 230 m<sup>3</sup>/hr (300 yd<sup>3</sup>/hr) on Scale B and extending it on to Scale C giving 3 m<sup>3</sup>/cycle (4 yd<sup>3</sup>/cycle) required payload. Follow solution steps 1-10.

# Production and Machine Selection Nomograph

# Wheel Loaders

● To find payload weight and tons per hour

1. Enter required hourly production on Scale B  
230 m<sup>3</sup>/hr (300 yd<sup>3</sup>/hr).
2. Enter cycles per hour on Scale A (60 ÷ .6 = 100  
× .75 = 75 cycles/hr).
3. Connect A thru B to C. This shows a required  
payload of 3 m<sup>3</sup> (4 yd<sup>3</sup>) per cycle.
4. Enter estimated bucket fill factor on Scale D  
(0.95).
5. Connect C thru Scale D to E for required bucket  
size 3 m<sup>3</sup> (4 yd<sup>3</sup>).
6. Transfer cycles per hour Scale A and required  
payload Scale C to the following page.

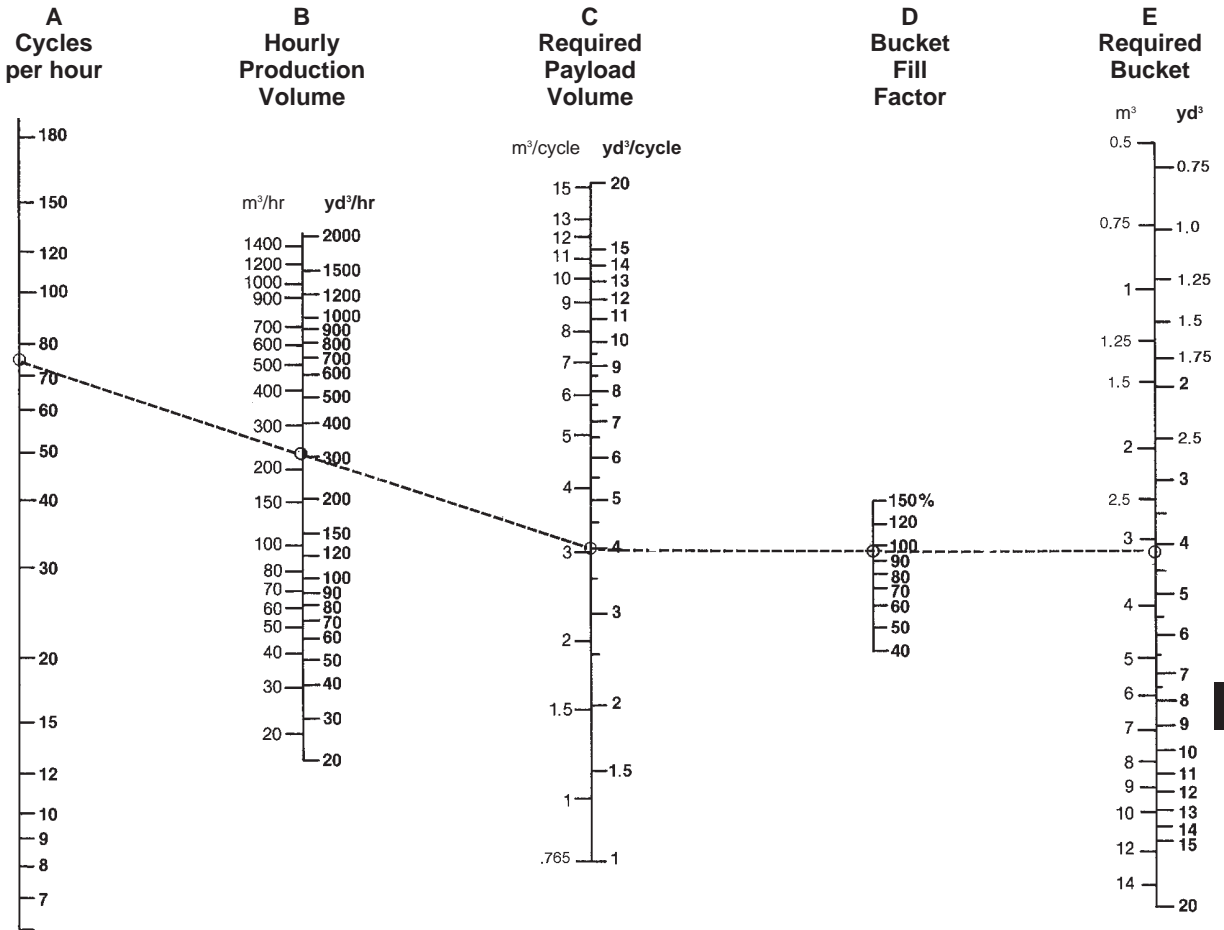


# Wheel Loaders

## Production and Machine Selection Nomograph

- To find required bucket payload and bucket size

- Enter material density on Scale F 1780 kg/m<sup>3</sup> (3000 lb/yd<sup>3</sup>).
- Connect C thru Scale F to Scale G to give payload weight per cycle 5300 kg (11,500 lb).
- Compare Scale G quantity 5300 kg (11,500 lb) with recommended machine working range listed on the following bucket selection pages.

- Operating capacity for the 950G with 3.1 m<sup>3</sup> (4 yd<sup>3</sup>) bucket is dependent on material density and bucket capacity (see bucket selection pages that follow).
- For hourly tonnage, draw a straight line from Scale G thru Scale A to Scale I 400 metric tons (450 U.S. tons).

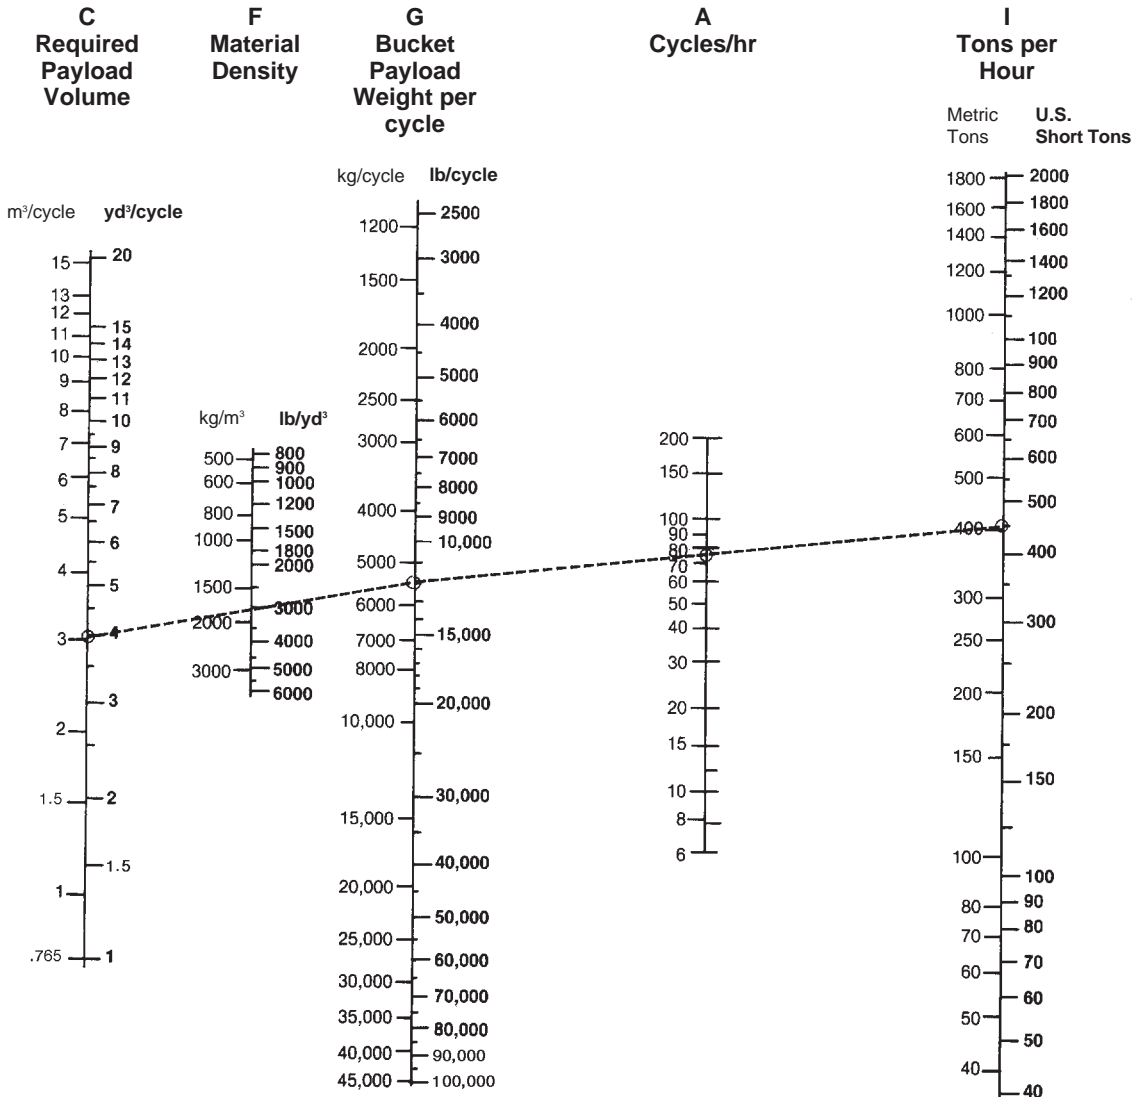

**902**

Bucket Type	Rated Capacity		Maximum Material Density	
	m <sup>3</sup>	yd <sup>3</sup>	kg/m <sup>3</sup>	lb/yd <sup>3</sup>
General Purpose	0.6	<b>0.78</b>	2100	<b>3540</b>
Light Material	1.0	<b>1.31</b>	1230	<b>2070</b>
Stone Sieve	0.6	<b>0.78</b>	2050	<b>3460</b>
Multi-Purpose	0.6	<b>0.78</b>	1900	<b>3200</b>
High Dump	0.6	<b>0.78</b>	2000	<b>3370</b>


**906**

Bucket Type	Rated Capacity		Maximum Material Density	
	m <sup>3</sup>	yd <sup>3</sup>	kg/m <sup>3</sup>	lb/yd <sup>3</sup>
General Purpose	0.8	<b>1.05</b>	1850	<b>3120</b>
Light Material	1.2	<b>1.57</b>	1200	<b>2020</b>
Stone Sieve	0.7	<b>0.92</b>	2000	<b>3370</b>
Multi-Purpose	0.7	<b>0.92</b>	1730	<b>2920</b>
Side Dump	0.7	<b>0.92</b>	1850	<b>3120</b>
High Dump	0.7	<b>0.92</b>	2000	<b>3370</b>


**908**

Bucket Type	Rated Capacity		Maximum Material Density	
	m <sup>3</sup>	yd <sup>3</sup>	kg/m <sup>3</sup>	lb/yd <sup>3</sup>
General Purpose	1.0	<b>1.30</b>	1830	<b>3100</b>
Light Material	1.5	<b>1.95</b>	1170	<b>1990</b>
Stone Sieve	0.9	<b>1.20</b>	2010	<b>3320</b>
Multi-Purpose	0.9	<b>1.20</b>	1950	<b>3220</b>
Side Dump	0.9	<b>1.20</b>	1820	<b>3010</b>
High Dump	0.9	<b>1.20</b>	1900	<b>3170</b>

**914G**

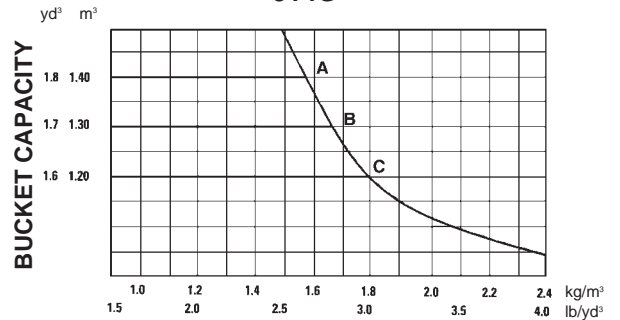

**924Gz**

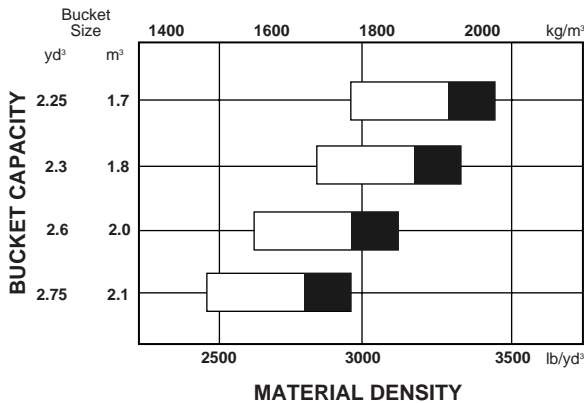

% = Bucket Fill Factor


115%    100%    95%

**MATERIAL DENSITY (THOUSANDS)**

KEY

- A — 1.4 m<sup>3</sup> (1.8 yd<sup>3</sup>) General Purpose Bucket, bolt-on edge  
1.4 m<sup>3</sup> (1.8 yd<sup>3</sup>) General Purpose Bucket, bolt-on teeth and segments
- B — 1.3 m<sup>3</sup> (1.7 yd<sup>3</sup>) General Purpose Bucket, bolt-on edge  
1.3 m<sup>3</sup> (1.7 yd<sup>3</sup>) General Purpose Bucket, bolt-on teeth and segments  
1.3 m<sup>3</sup> (1.7 yd<sup>3</sup>) General Bucket, bolt-on teeth  
1.3 m<sup>3</sup> (1.7 yd<sup>3</sup>) General Purpose Bucket, flush mounted teeth
- C — 1.2 m<sup>3</sup> (1.6 yd<sup>3</sup>) General Purpose Bucket, bolt-on teeth

**924G  
Pin on**

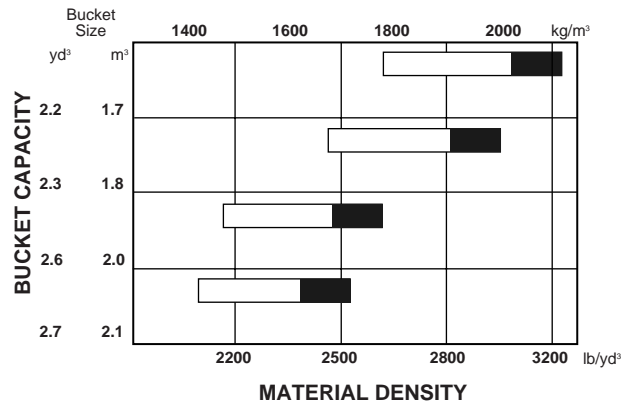


# Wheel Loaders


## Bucket Selection

● 928G-972G


### 928G

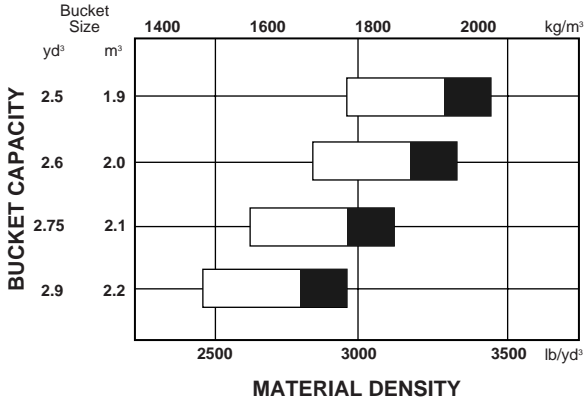


### 938G

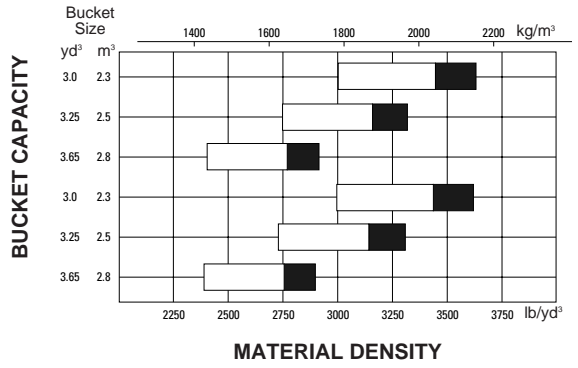


### 950G

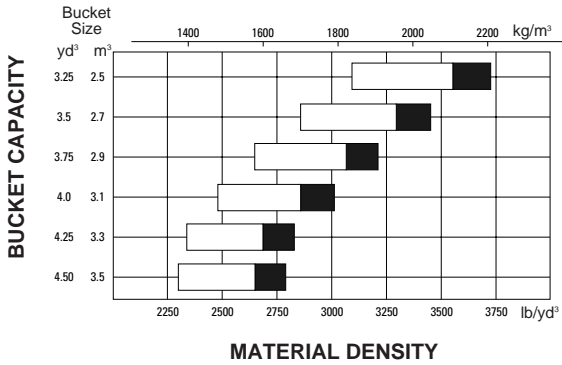


### 962G

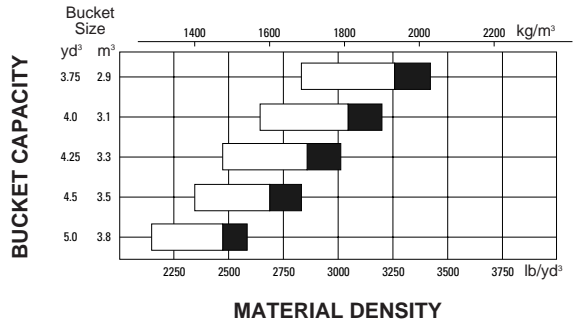

### 966G

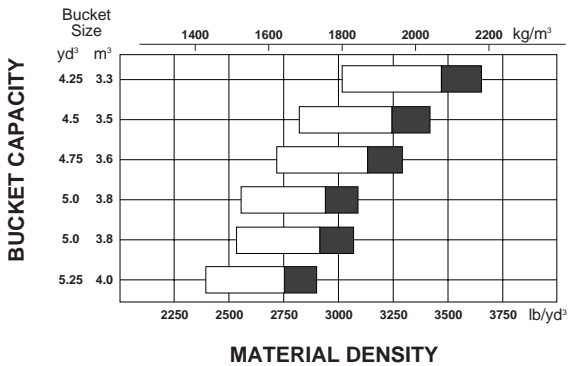

### 972G

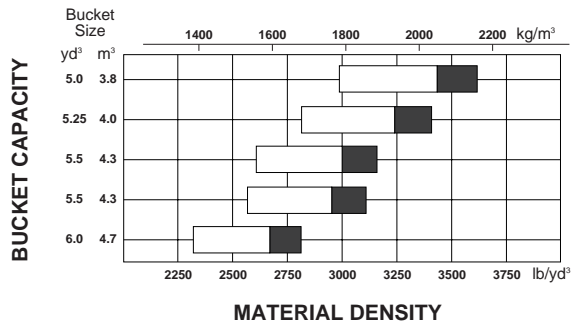


% = Bucket Fill Factor



115% 100% 95%

- Bucket Selection
- 980G
  - 980G High Lift
  - 988G
  - 990 Series II



**980G**

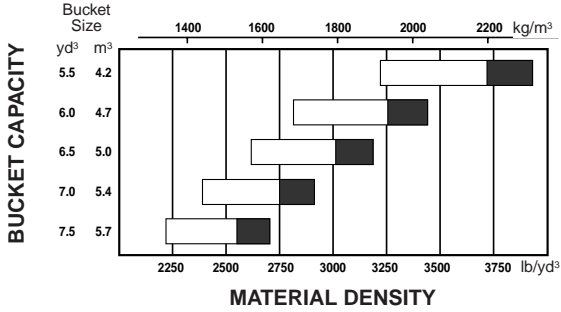

**980G High Lift**

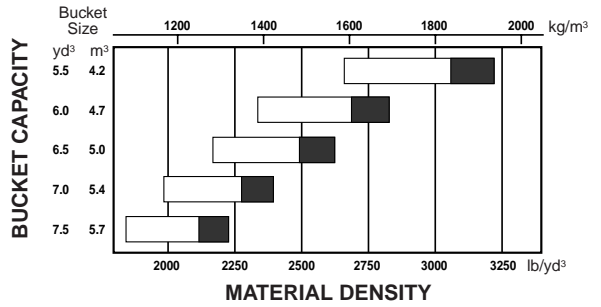


**988G**

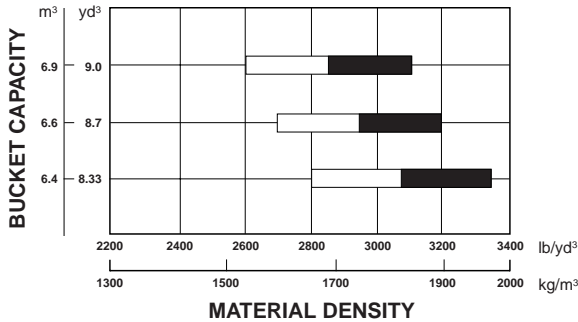

NOTE: Percentages represent bucket fill factors.

**990 Series II**

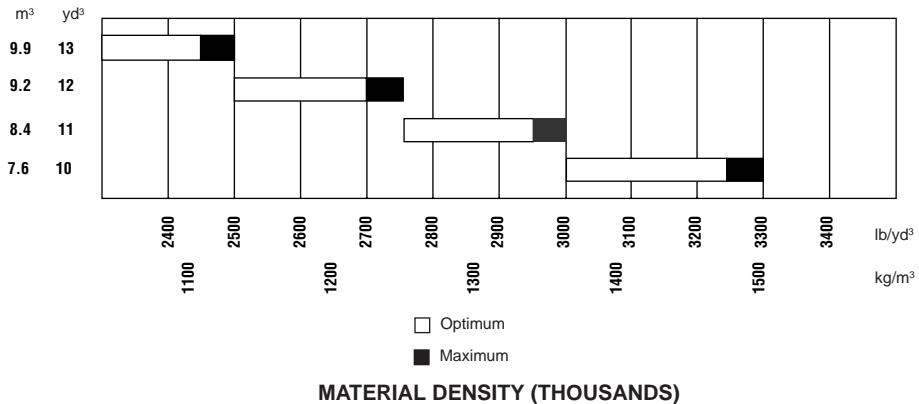


- Optimum
- Maximum

MATERIAL DENSITY (THOUSANDS)

# Wheel Loaders


## Bucket Selection

- 992G
- 994D
- 994D High Lift


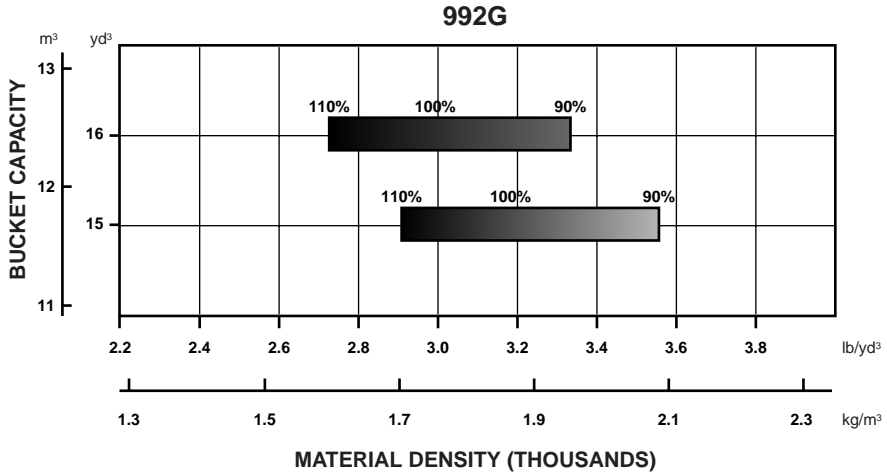



NOTE: Percentages represent bucket fill factors.

### 994D

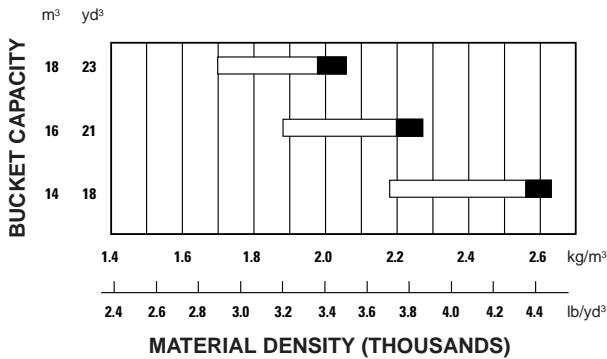

### 994D High Lift

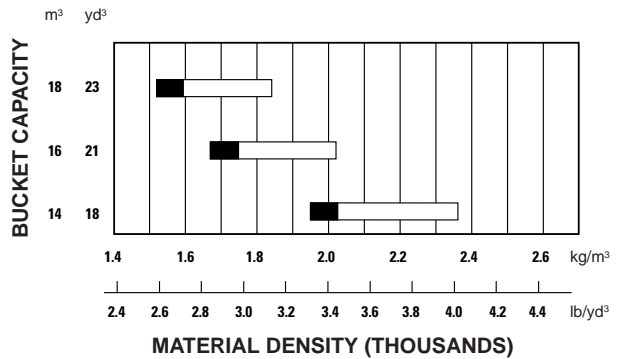

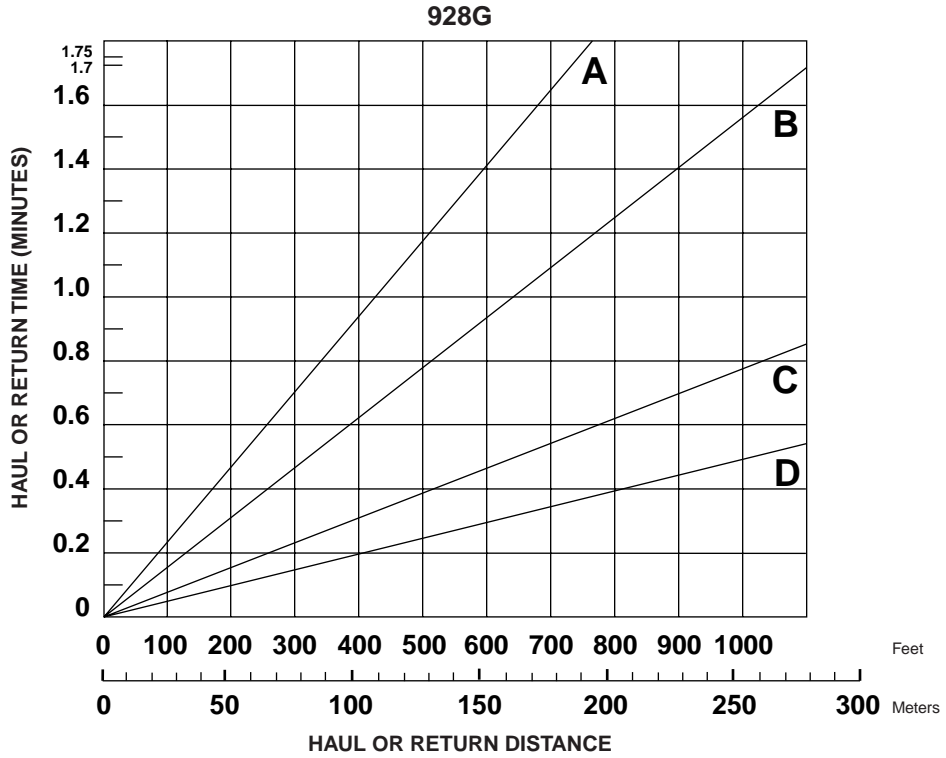

- KEY**
- A — 1st Forward and Reverse Speed
  - B — 2nd Forward and Reverse Speed
  - C — 3rd Forward and Reverse Speed
  - D — 4th Forward Speed

**NOTE:** Loader maneuver, load and dump time must be added to travel time. 4th gear curve not indicated; primarily used for transporting machine.





# Wheel Loaders

Travel Time — Loaded

- 938G
- 20.5R-25 Tires



## 938G TRAVEL TIME — LOADED

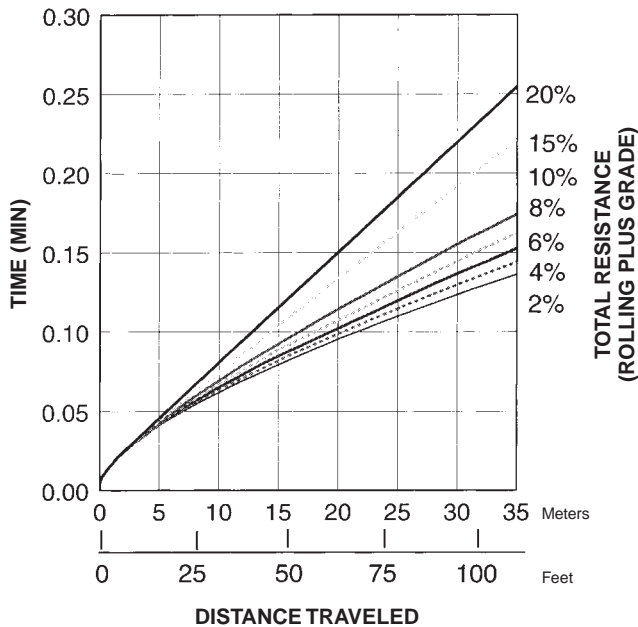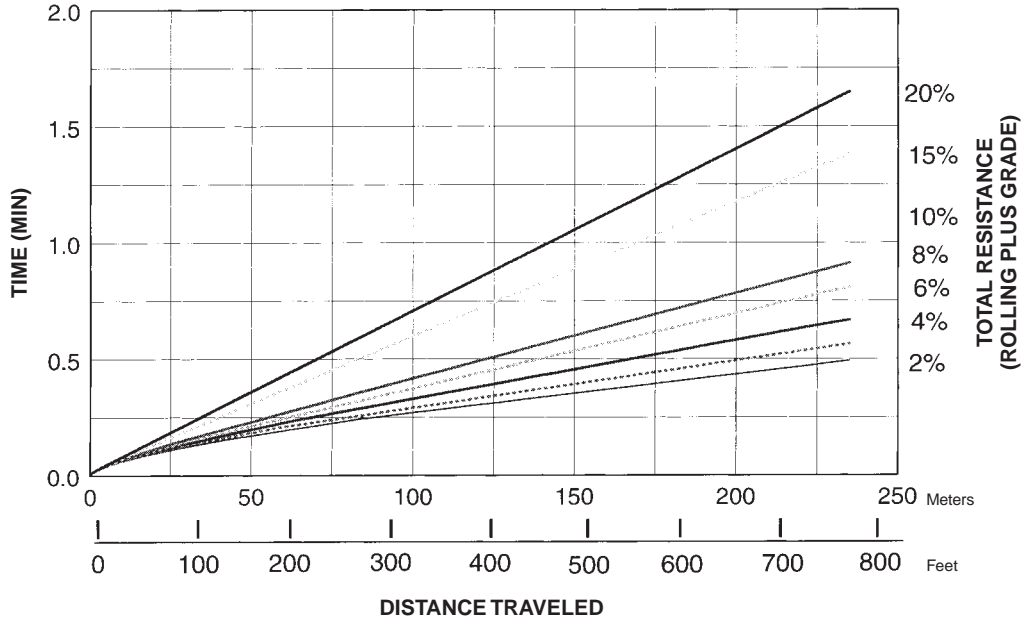

**NOTE:** Curves assume use of highest operating speed attainable:  
 4th gear for 2%-6% TR,  
 3rd gear for 8%-10% TR,  
 2nd gear for 15%-20% TR.

In load and carry applications it is important to consult the tire manufacturer on Ton-MPH ratings and pressure recommendations.

938G TRAVEL TIME — EMPTY

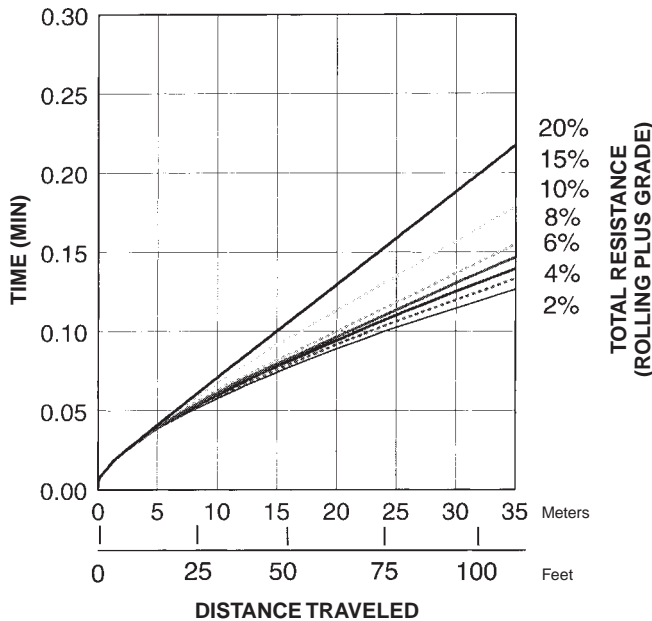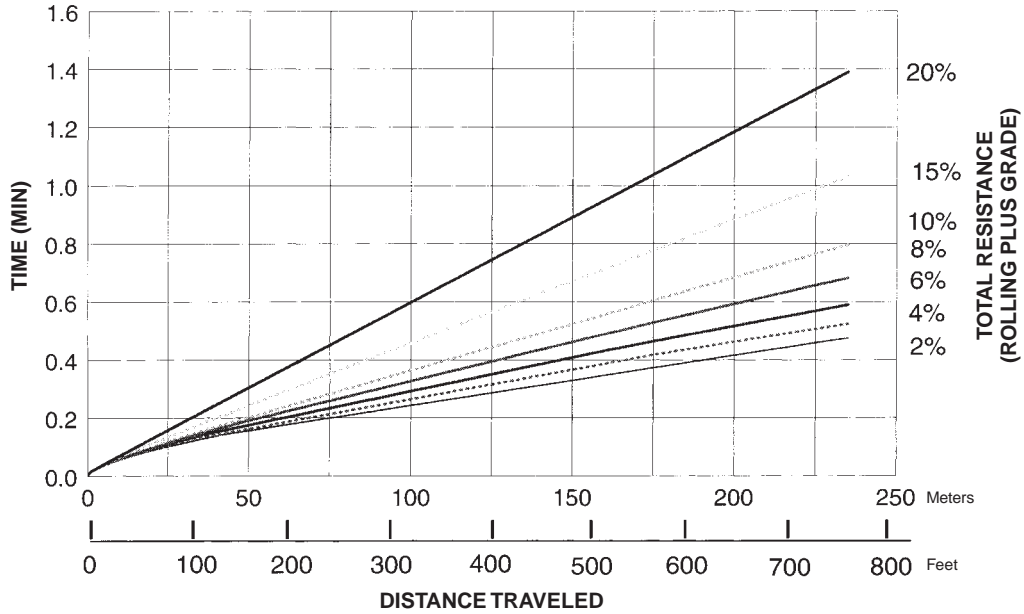

**NOTE:** Curves assume use of highest operating speed attainable:  
 4th gear for 2%-6% TR,  
 3rd gear for 8%-10% TR,  
 2nd gear for 15%-20% TR.



In load and carry applications it is important to consult the tire manufacturer on Ton-MPH ratings and pressure recommendations.

# Wheel Loaders

Travel Time — Loaded

- 950G
- 23.50-R25 Tires

## 950G TRAVEL TIME — LOADED

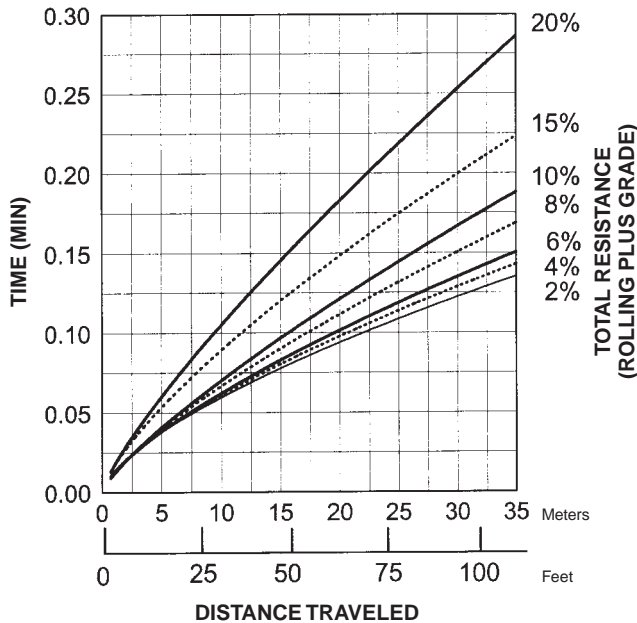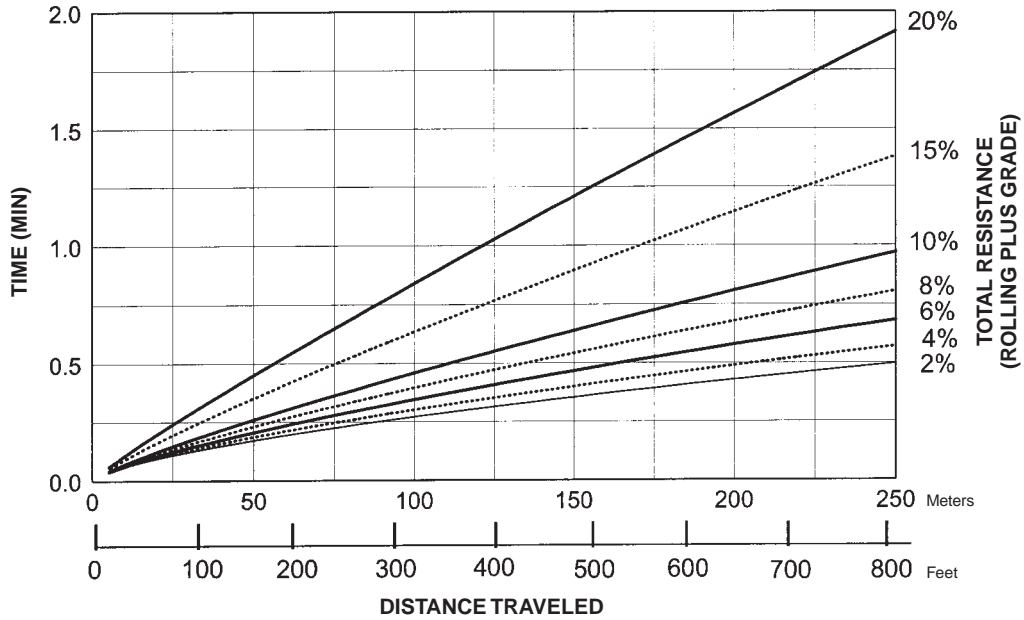



**NOTE:** Curves assume use of highest operating speed attainable:  
 4th gear for 2%-6% TR,  
 3rd gear for 8%-10% TR,  
 2nd gear for 15% TR and  
 1st gear for 20% TR.

In load and carry applications it is important to consult the tire manufacturer on Ton-MPH ratings and pressure recommendations.

Travel Time — Empty  
 ● 950G  
 ● 23.50-R25 Tires

## Wheel Loaders

### 950G TRAVEL TIME — EMPTY

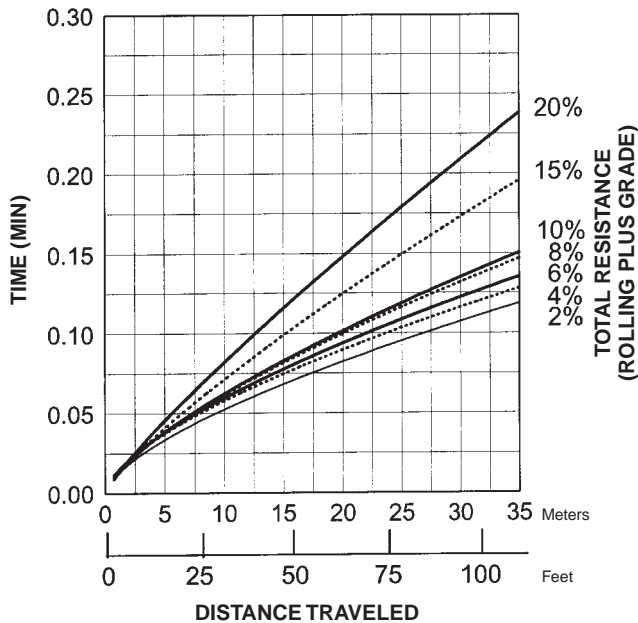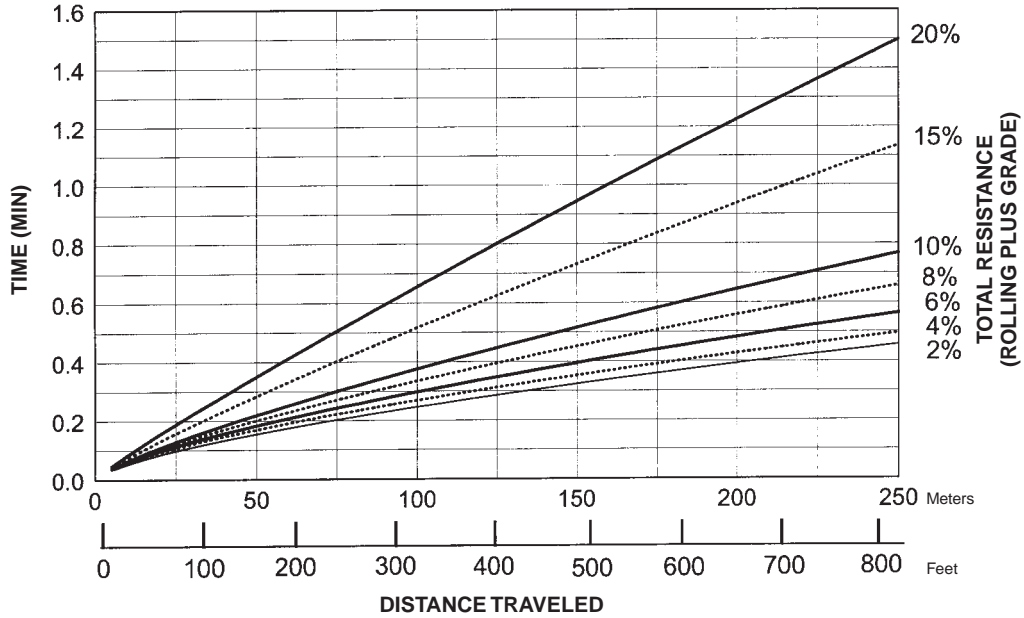

**NOTE:** Curves assume use of highest operating speed attainable:  
 4th gear for 2%-6% TR,  
 3rd gear for 8%-10% TR,  
 2nd gear for 15% TR and  
 1st gear for 20% TR.



In load and carry applications it is important to consult the tire manufacturer on Ton-MPH ratings and pressure recommendations.

# Wheel Loaders

Travel Time — Loaded

- 962G
- 23.5-R25 Tires

## 962G TRAVEL TIME — LOADED

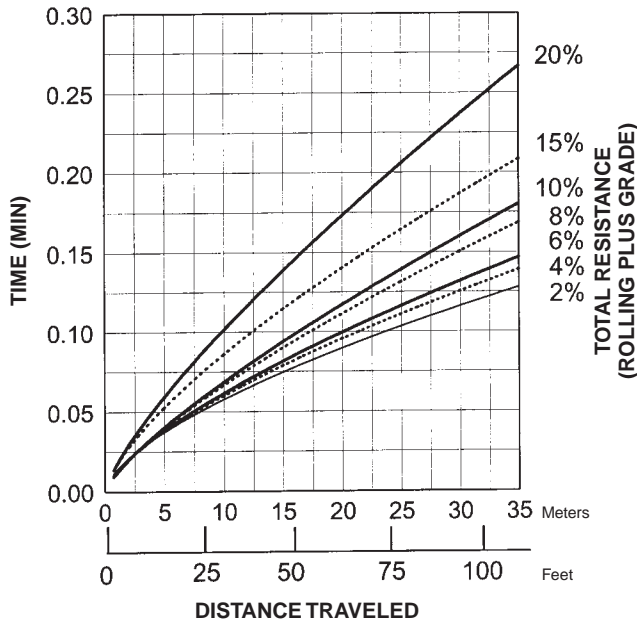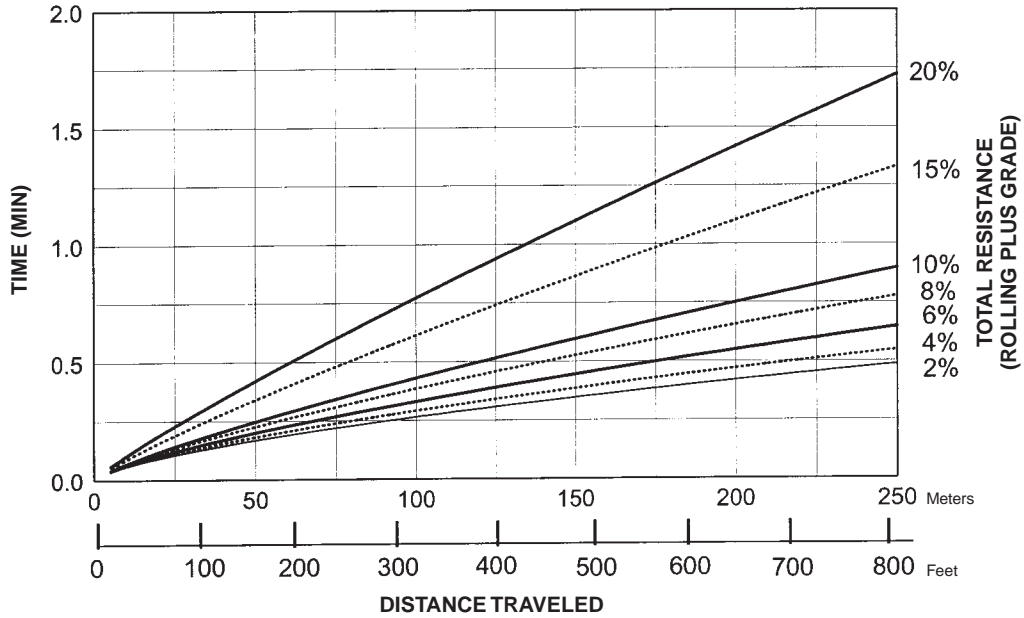



**NOTE:** Curves assume use of highest operating speed attainable:  
 4th gear for 2%-6% TR,  
 3rd gear for 8%-10% TR,  
 2nd gear for 15% TR and  
 1st gear for 20% TR.

In load and carry applications it is important to consult the tire manufacturer on Ton-MPH ratings and pressure recommendations.

Travel Time — Empty  
 ● 962G  
 ● 23.5-R25 Tires

## Wheel Loaders

### 962G TRAVEL TIME — EMPTY

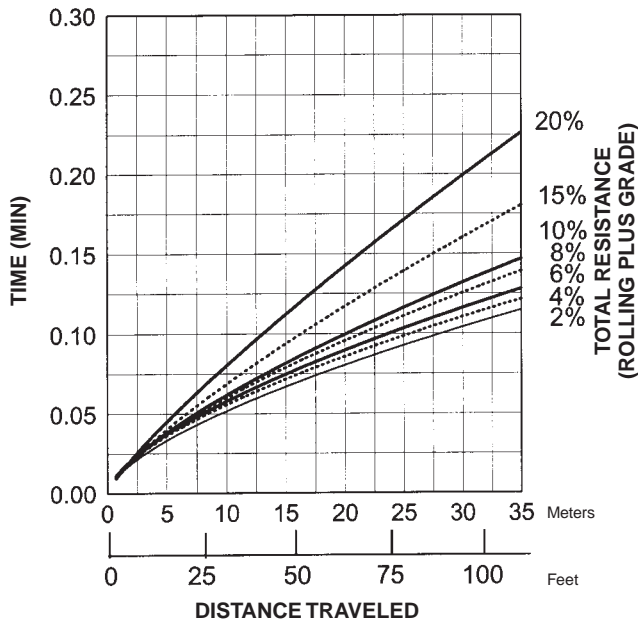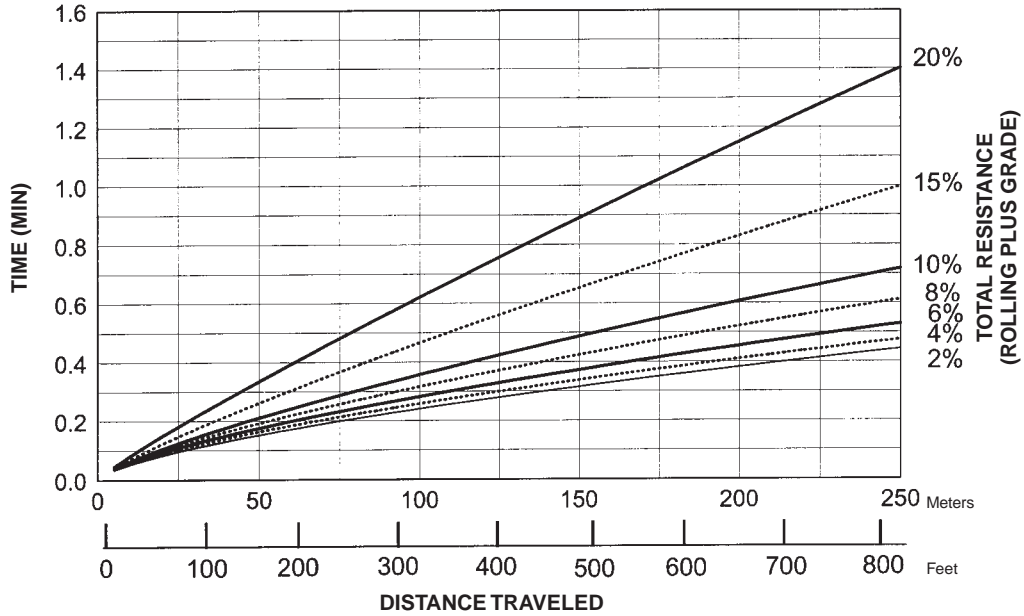

**NOTE:** Curves assume use of highest operating speed attainable: 4th gear for 2%-6% TR, 3rd gear for 8%-10% TR, 2nd gear for 15% TR and 1st gear for 20% TR.



In load and carry applications it is important to consult the tire manufacturer on Ton-MPH ratings and pressure recommendations.

# Wheel Loaders

Travel Time — Loaded

- 966G
- 26.5-25 Tires



## 966G TRAVEL TIME — LOADED

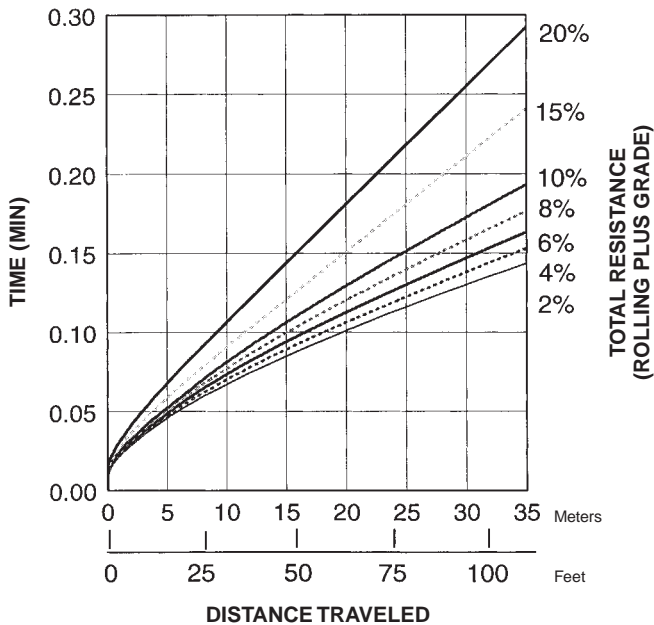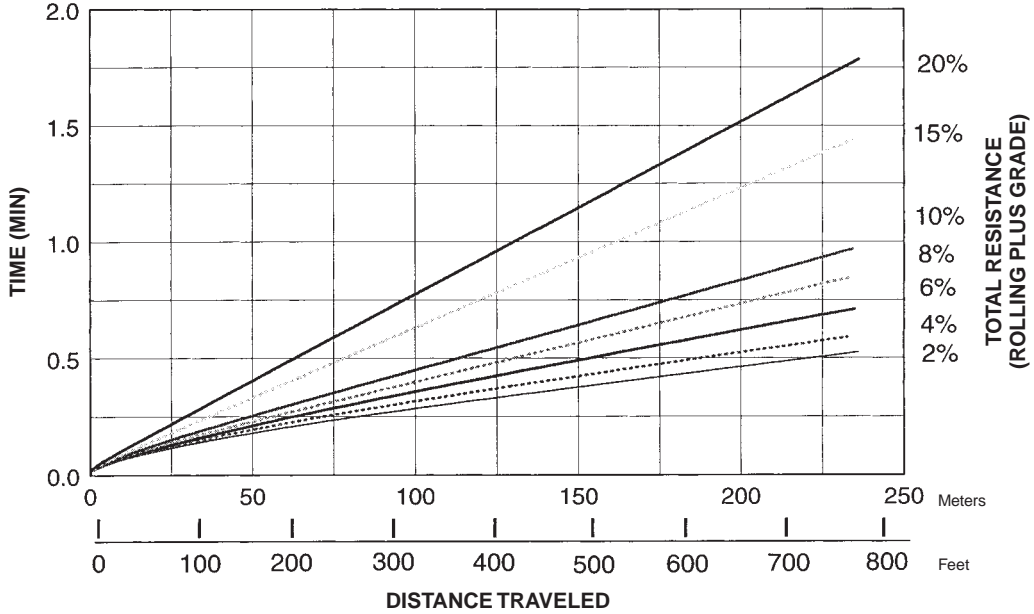

**NOTE:** Curves assume use of highest operating speed attainable: 4th gear for 2%-6% TR, 3rd gear for 8%-10% TR, 2nd gear for 15% TR and 1st gear for 20% TR.

In load and carry applications it is important to consult the tire manufacturer on Ton-MPH ratings and pressure recommendations.

966G TRAVEL TIME — EMPTY

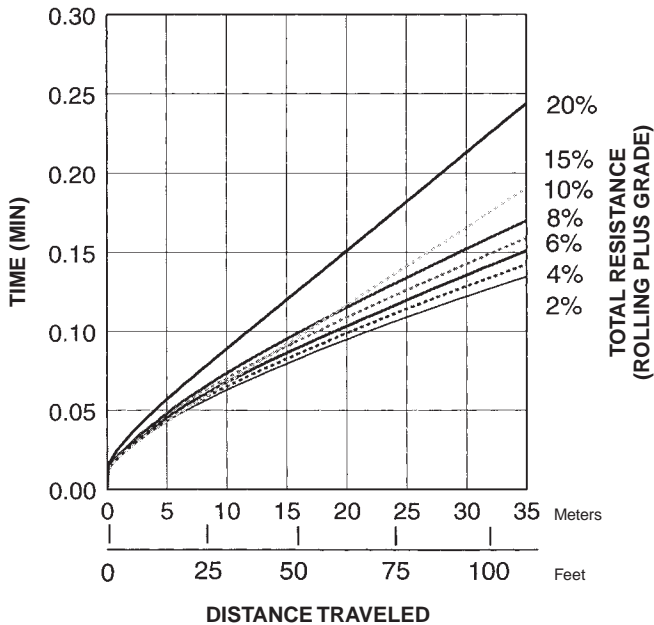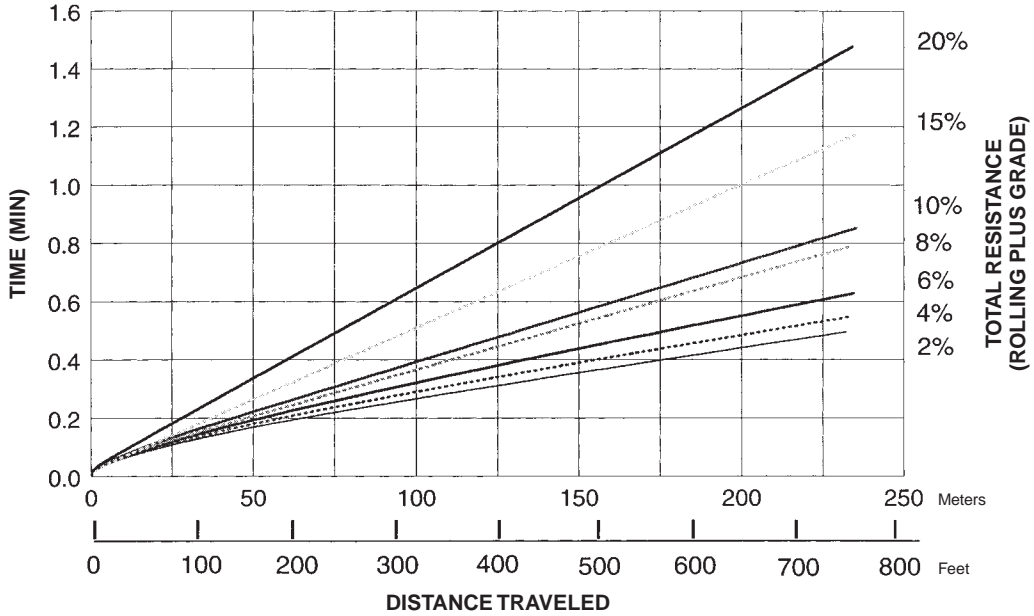

**NOTE:** Curves assume use of highest operating speed attainable:  
 4th gear for 2%-6% TR,  
 3rd gear for 8%-10% TR,  
 2nd gear for 15% TR and  
 1st gear for 20% TR.

In load and carry applications it is important to consult the tire manufacturer on Ton-MPH ratings and pressure recommendations.





# Wheel Loaders

Travel Time — Loaded

- 972G
- 26.5-25 Tires



## 972G TRAVEL TIME — LOADED

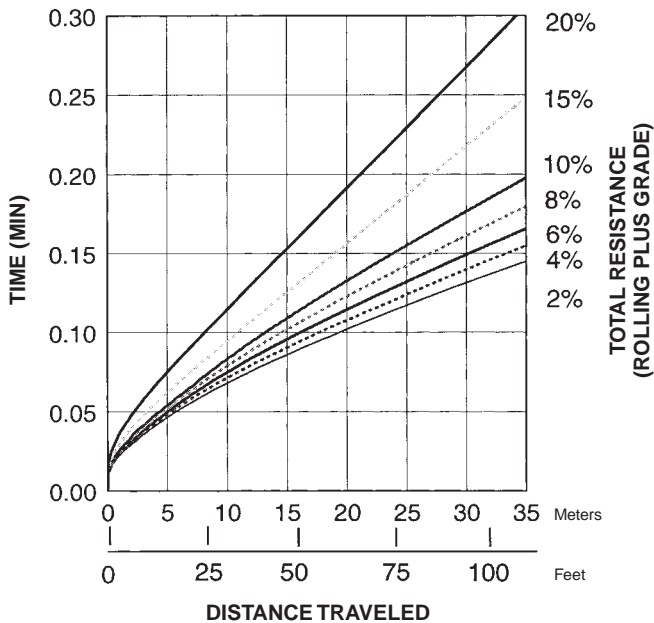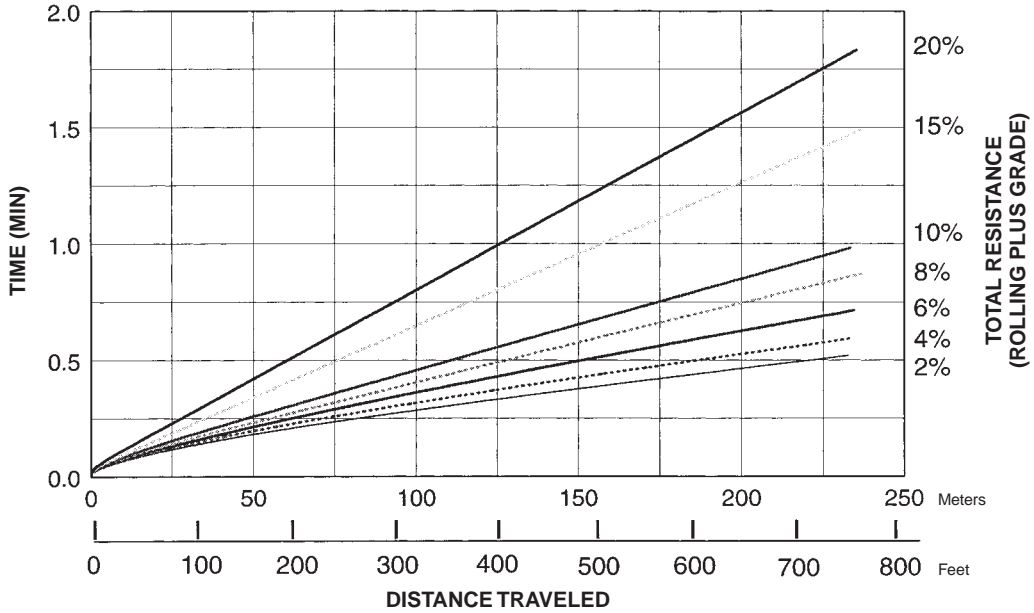

**NOTE:** Curves assume use of highest operating speed attainable:  
 4th gear for 2%-6% TR,  
 3rd gear for 8%-10% TR,  
 2nd gear for 15% TR and  
 1st gear for 20% TR.

In load and carry applications it is important to consult the tire manufacturer on Ton-MPH ratings and pressure recommendations.

972G TRAVEL TIME — EMPTY

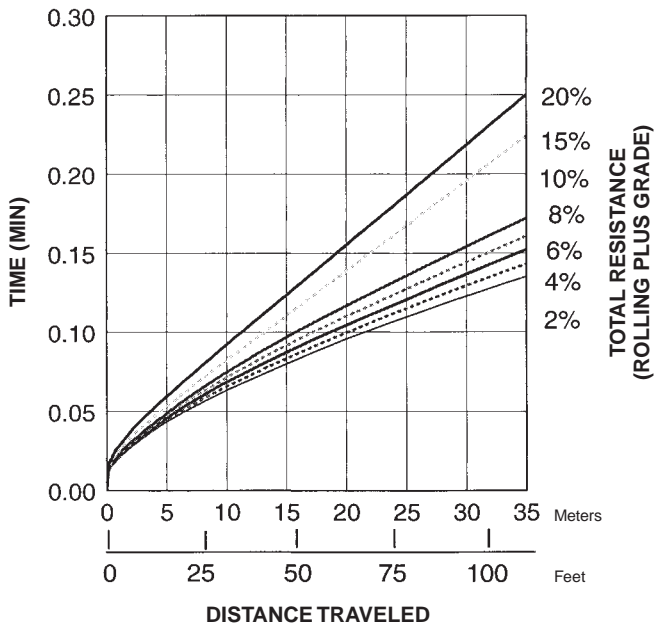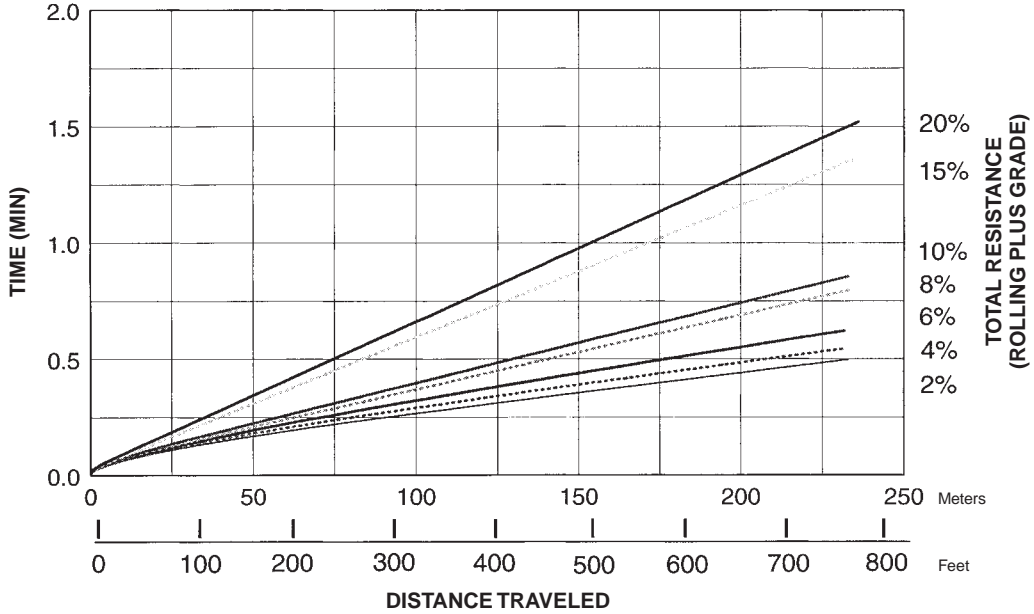

**NOTE:** Curves assume use of highest operating speed attainable:  
 4th gear for 2%-6% TR,  
 3rd gear for 8%-10% TR,  
 2nd gear for 15% TR and  
 1st gear for 20% TR.



In load and carry applications it is important to consult the tire manufacturer on Ton-MPH ratings and pressure recommendations.

# Wheel Loaders

Travel Time — Loaded

- 980G
- 29.5-25 Tires



## 980G TRAVEL TIME — LOADED

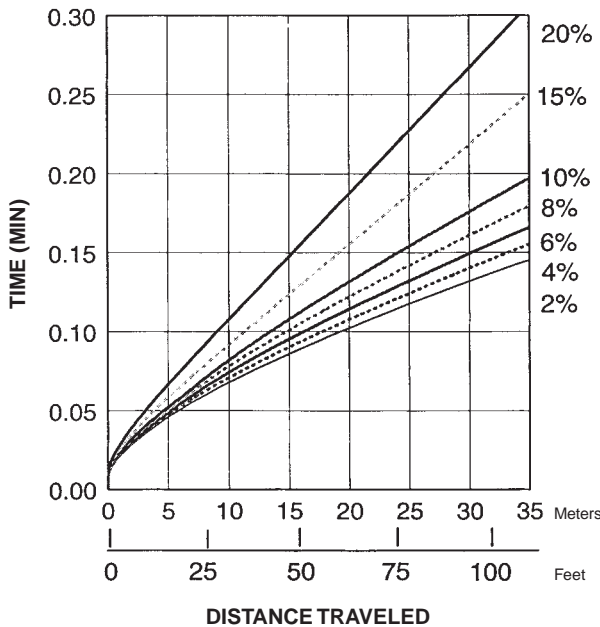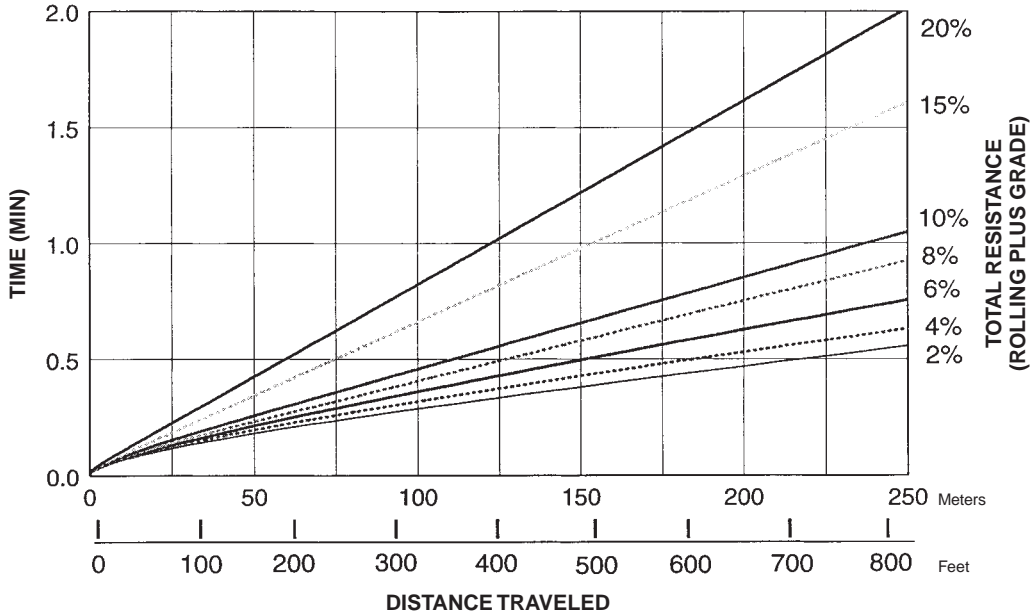

**NOTE:** Curves assume use of highest operating speed attainable:  
 4th gear for 2%-6% TR,  
 3rd gear for 8%-10% TR,  
 2nd gear for 15% TR and  
 1st gear for 20% TR.

In load and carry applications it is important to consult the tire manufacturer on Ton-MPH ratings and pressure recommendations.

980G TRAVEL TIME — EMPTY

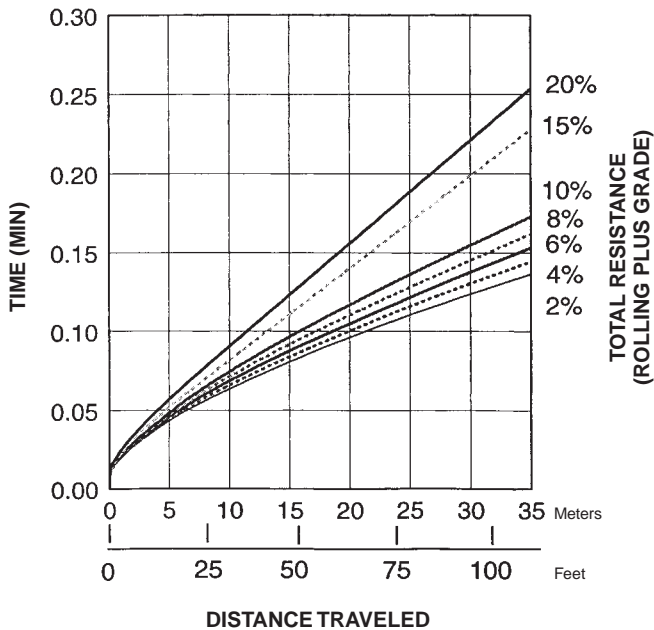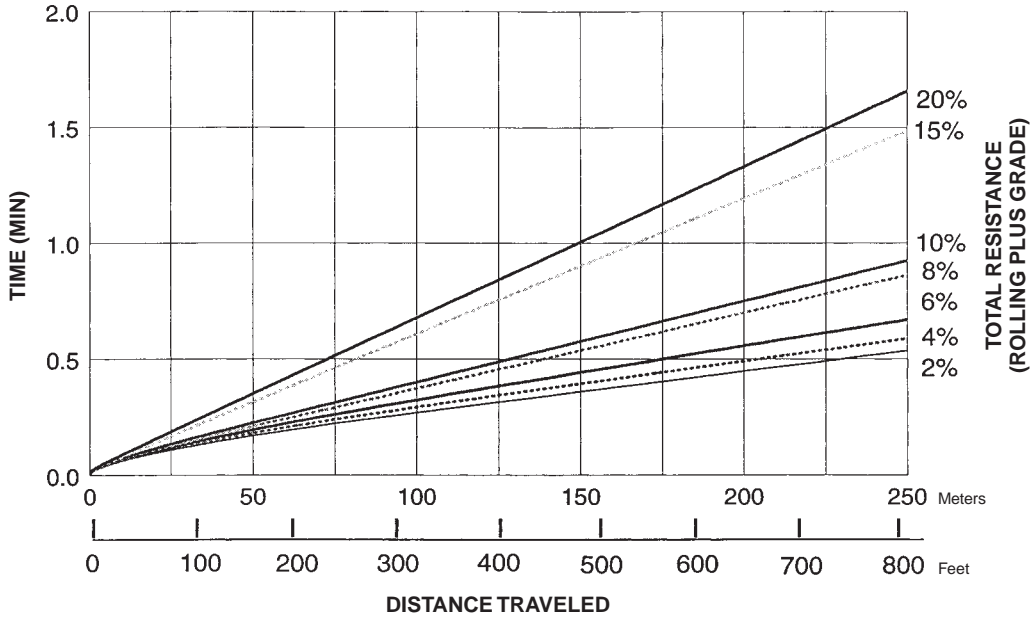

**NOTE:** Curves assume use of highest operating speed attainable:  
 4th gear for 2%-6% TR,  
 3rd gear for 8%-10% TR,  
 2nd gear for 15% TR and  
 1st gear for 20% TR.


In load and carry applications it is important to consult the tire manufacturer on Ton-MPH ratings and pressure recommendations.

# Wheel Loaders

Travel Time — Loaded

- 988G — No Lock-up
- 35/65-33 Tires

## 988G TRAVEL TIME — LOADED

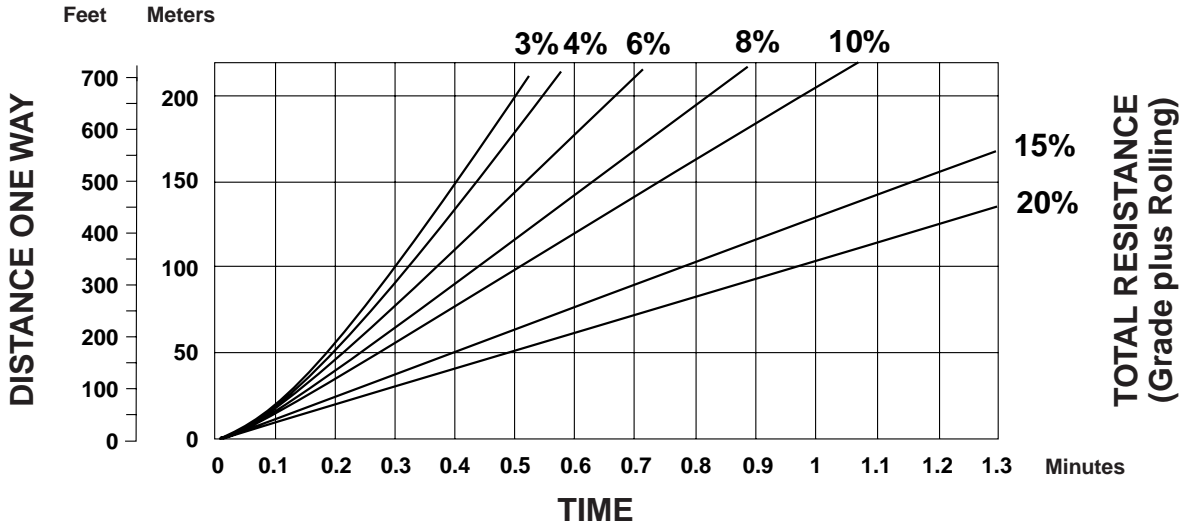


**NOTE:** Curves assume use of highest operating speed attainable: 4th gear for 2%-6% TR, 3rd gear for 8%-10% TR, 2nd gear for 15% and 20% TR.

In load-and-carry applications it is important to consult the tire manufacturer on Ton-MPH ratings and pressure recommendations.  
 Lock-up Clutch torque converter is available as an attachment.  
 Contact your Caterpillar Dealer for additional information.

- Travel Time — Empty
- 988G — No Lock-up
- 35/65-33 Tires

### 988G TRAVEL TIME — EMPTY


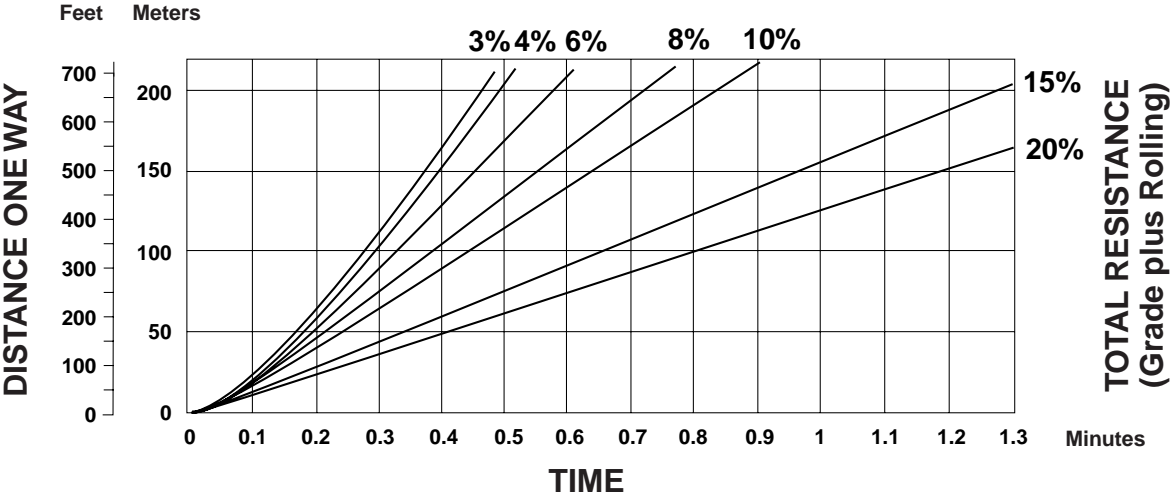


# Wheel Loaders

Travel Time — Loaded

- 990 Series II
- 41.25/70-39 Tires



## 990 SERIES II TRAVEL TIME — LOADED

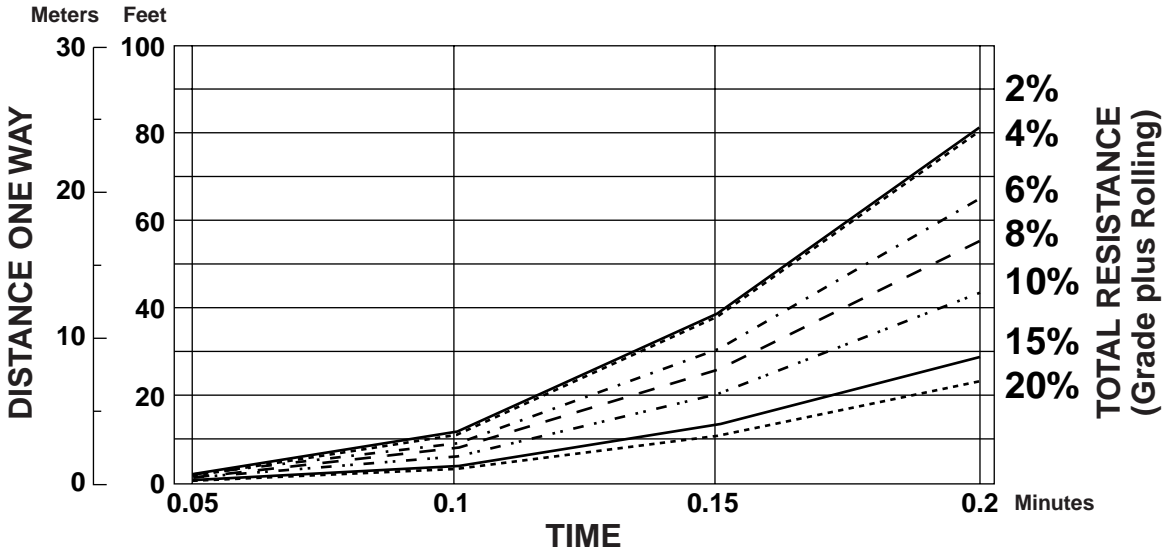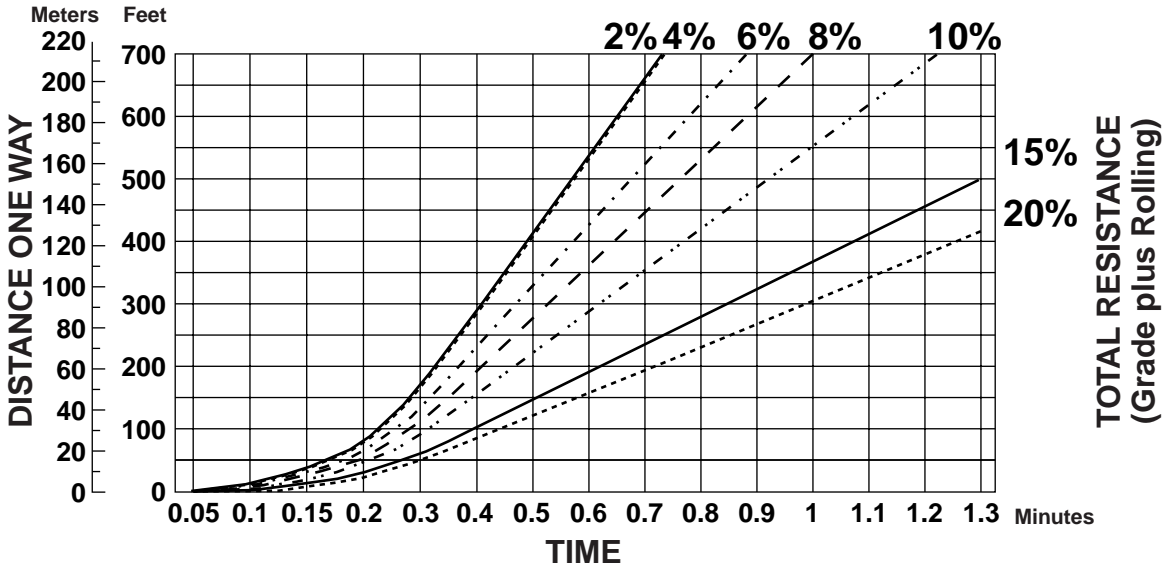

Travel Time — Empty  
 ● 990 Series II  
 ● 41.25/70-39 Tires

Wheel Loaders

**990 SERIES II TRAVEL TIME — EMPTY**

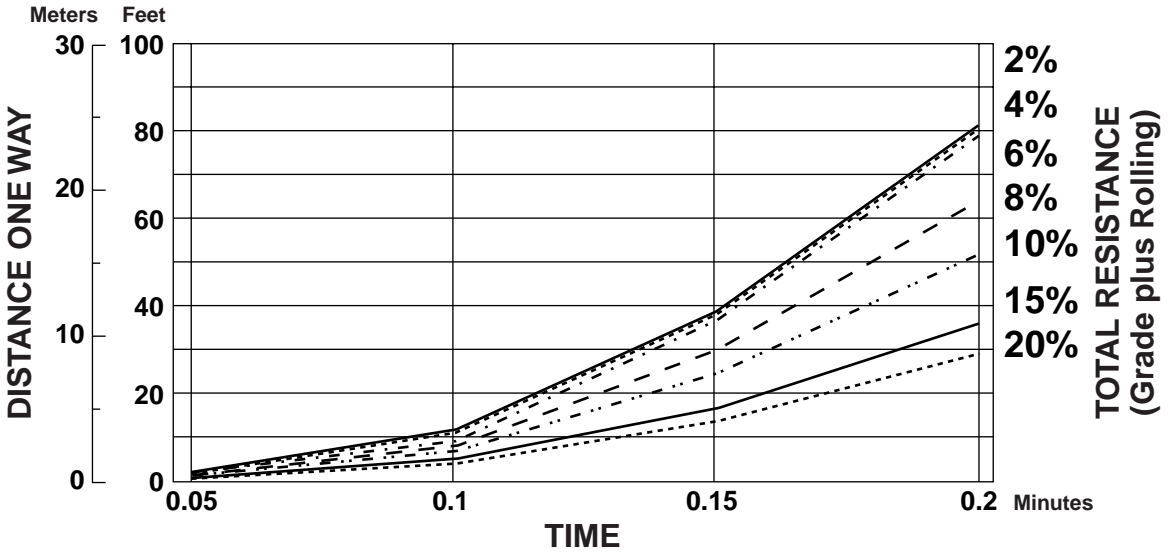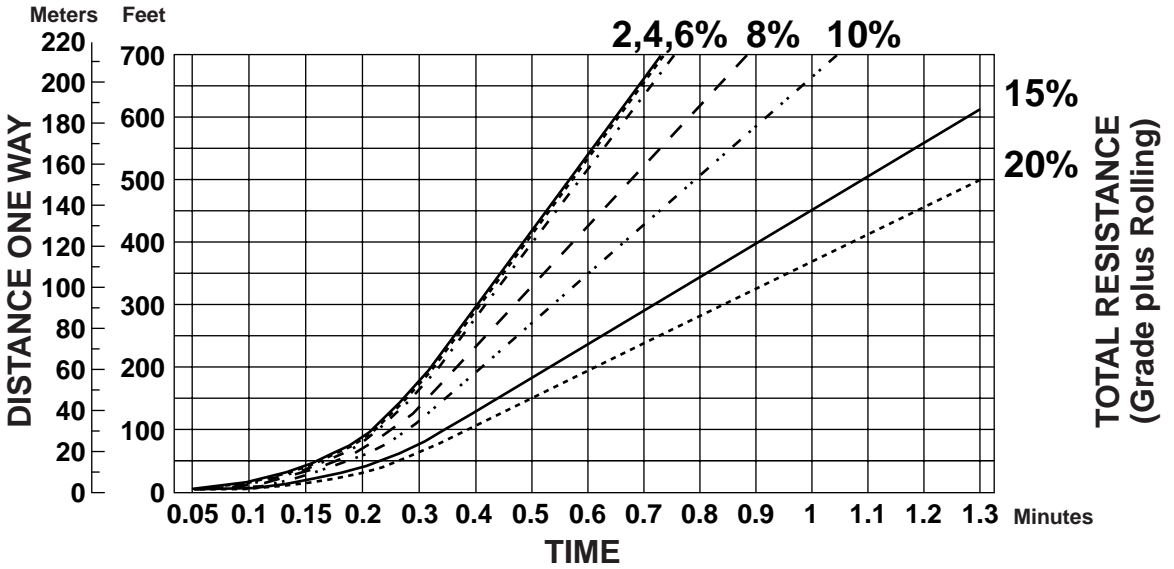





# Wheel Loaders

## Travel Time — Loaded

- 992G
- 45/65-45 Tires

### 992G TRAVEL TIME — LOADED

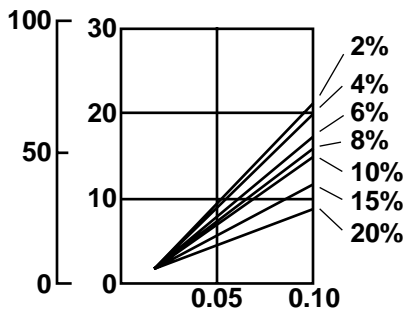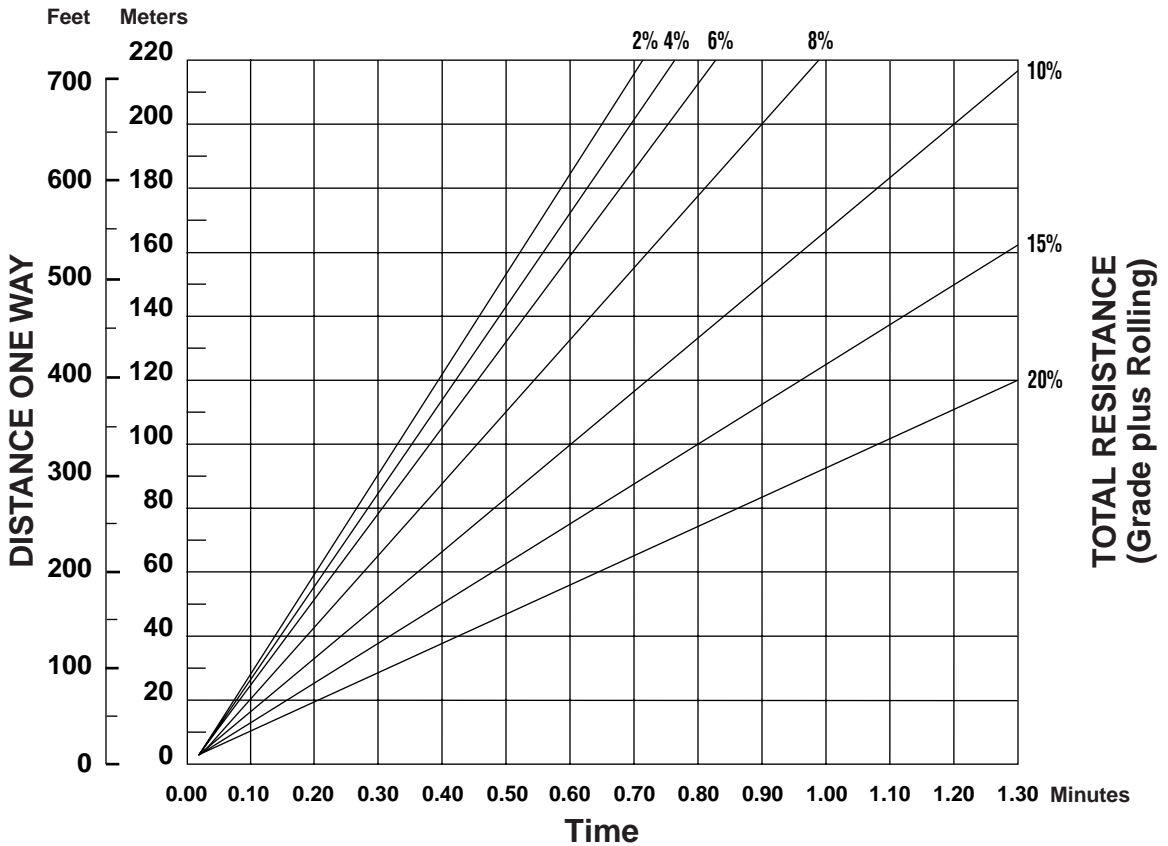



**NOTE:** Curves assume use of highest operating speed attainable: 3rd gear for 2%-10% TR, 2nd gear for 15% TR and 1st gear for 20% TR.

In load-and-carry applications it is important to consult the tire manufacturer on Ton-MPH ratings and pressure recommendations.

Travel Time — Empty  
 ● 992G  
 ● 45/65-45 Tires

Wheel Loaders

992G TRAVEL TIME — EMPTY

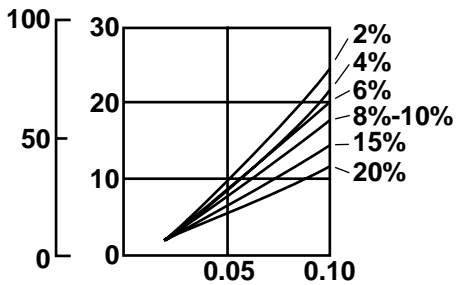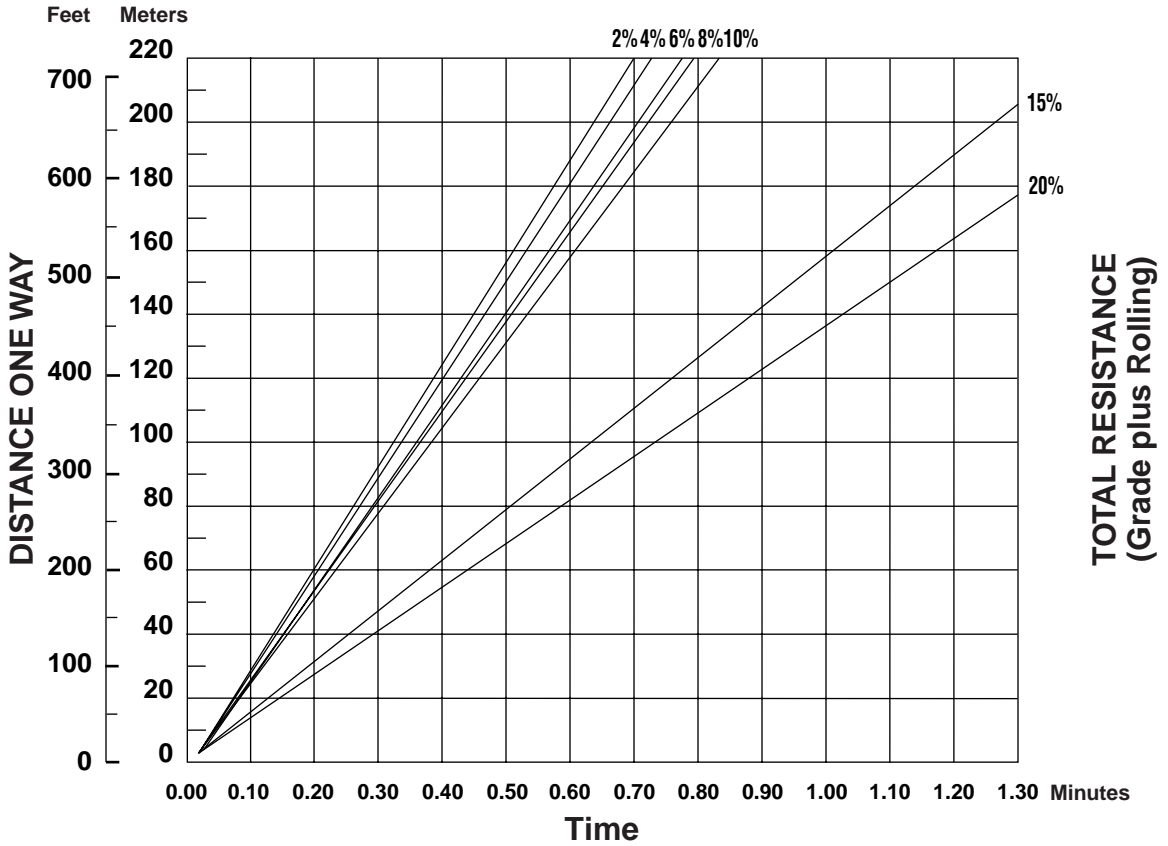



**NOTE:** Curves assume use of highest operating speed attainable: 3rd gear for 2%-10% TR, 2nd gear for 15% TR and 1st gear for 20% TR.

# Wheel Loaders

Travel Time — Loaded

- 994D
- 50/80-57 Tires



## 994D TRAVEL TIME — LOADED

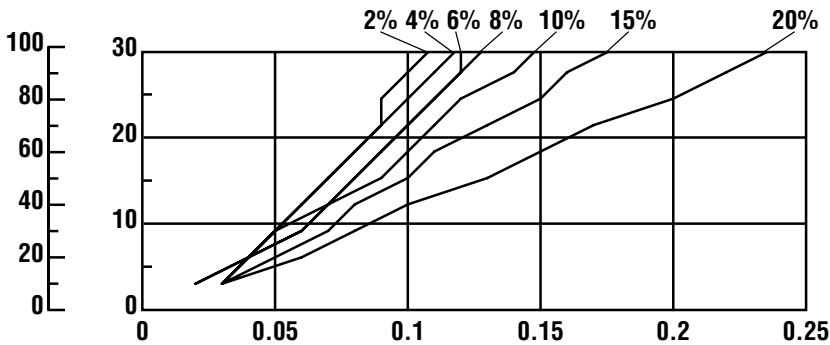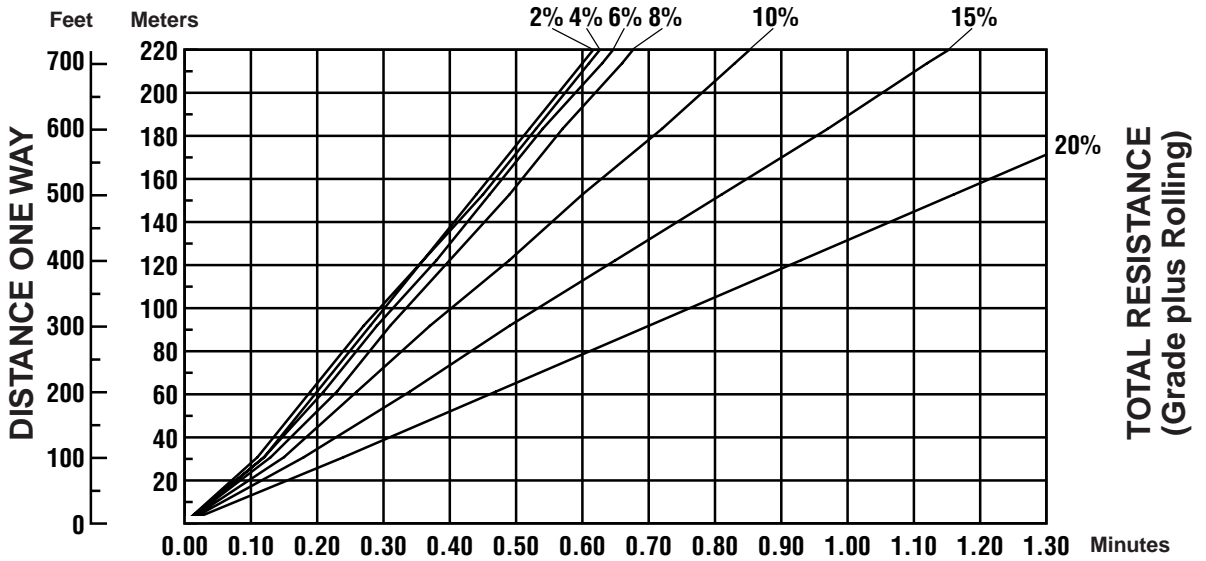

Travel Time — Empty  
 ● 994D  
 ● 50/80-57 Tires

Wheel Loaders

994D TRAVEL TIME — EMPTY

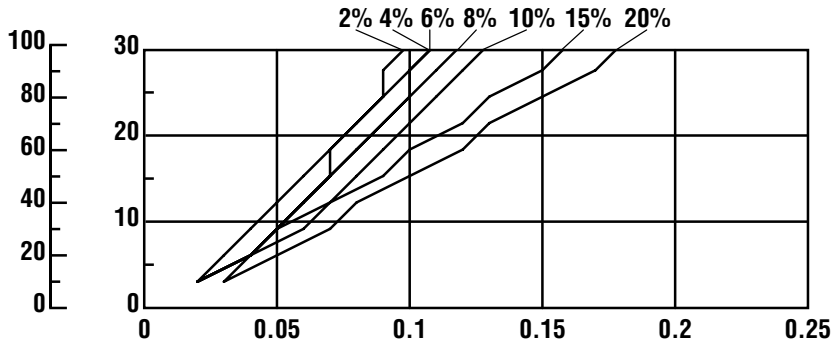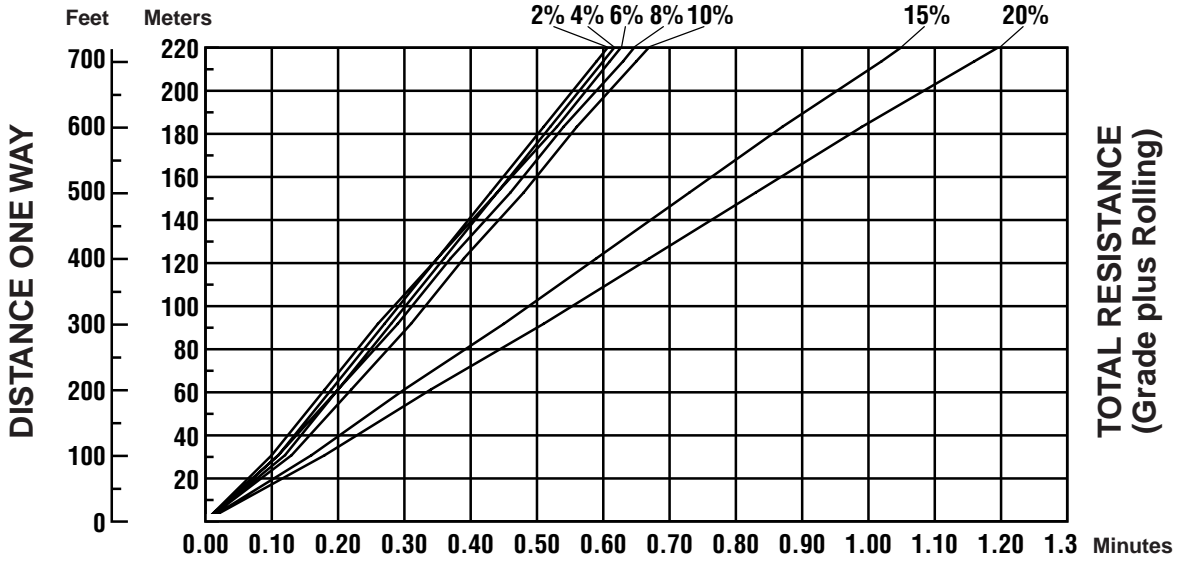

# Wheel Loaders

## Production Estimating Table

● m<sup>3</sup> or yd<sup>3</sup>/60 min. hour

Bucket Size (m <sup>3</sup> or yd <sup>3</sup> )		1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	9.0	9.5	10.0		
<b>Cycle Time</b>	<b>Cycles Per Hr</b>	Unshaded area indicates average production.																				
0.35	171																					
0.40	150	150	225	330	375	450	525															
0.45	133	135	200	268	332	400	466	530	600	665	730	800	865									
0.50	120	120	180	240	300	360	420	480	540	600	660	720	780	840	900	960	1003	1080	1140	1200		
0.55	109	109	164	218	272	328	382	436	490	545	600	655	705	765	820	870	925	980	1008	1090		
0.60	100	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000		
0.65	92	92	138	184	230	276	322	368	416	460	505	555	600	645	690	735	780	830	875	920		
0.70	86							342	386	430	474	515	560	600	645	690	730	775	815	860		
0.75	80												560	600	640	680	720	760	800			

Bucket Size (m <sup>3</sup> or yd <sup>3</sup> )		11.0	12.0	13.0	14.0	15.0	16.0	17.0	18.0	19.0	20.0	21.0	22.0	23.0	24.0	25.0	26.0
<b>Cycle Time</b>	<b>Cycles Per Hr</b>	Unshaded area indicates average production.															
0.35	171																
0.40	150																
0.45	133																
0.50	120	1320	1440														
0.55	109	1200	1310	1420	1520	1635	1740	1850	1960	2070	2180	2285	2395	2505	2615	2725	2830
0.60	100	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200	2300	2400	2500	2600
0.65	92	1010	1105	1195	1285	1380	1470	1560	1655	1745	1840	1930	2020	2115	2205	2300	2390
0.70	86	945	1030	1120	1200	1290	1375	1460	1545	1630	1720	1805	1890	1975	2060	2150	2235
0.75	80	880	960	1040	1120	1200	1280	1360	1440	1520	1600	1680	1760	1840	1920	2000	2080
0.80	75			975	1050	1125	1200	1275	1350	1425	1500	1575	1650	1725	1800	1875	1950

**Job Efficiency**  
Worktime/Hr

60 Min Hr

55

50

45

40

—

**Efficiency**  
Factor

100%

91%

83%

75%

69%

—

**Bucket Load Factor**

Bucket Size × 1.00

.95

.90

.85

.80

.75

Production Estimating Table  
 ● 60 min hour ● Shot Rock  
 ● Metric Tons

Wheel Loaders

**Metric Tons ● 1600 kg Lm<sup>3</sup> (1.6 t) density**

Bucket Size m <sup>3</sup>		1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	9.0	9.5
<b>Cycle Time</b>	<b>Cycles Per Hr</b>	Unshaded area indicates average production.																	
0.40	150	240	360	480	600	720													
0.45	133	213	319	426	532	638	745	851	958	1064	1170								
0.50	120	192	288	384	480	576	672	768	864	960	1056	1152	1248	1344	1440	1536	1632	1730	1825
0.55	109	174	262	349	436	523	610	698	785	872	959	1046	1134	1221	1308	1395	1482	1570	1655
0.60	100	160	240	320	400	480	560	640	720	800	880	960	1040	1120	1200	1280	1360	1440	1520
0.65	92	147	221	294	368	442	515	589	662	736	810	883	957	1030	1104	1178	1251	1325	1400
0.70	86						482	550	619	688	757	826	894	963	1032	1101	1170	1238	1310
0.75	80											768	832	896	960	1024	1088	1150	1215
<b>Bucket Payload Metric (Tons)</b>		1.6	2.4	3.2	4.0	4.8	5.6	6.4	7.2	8.0	8.8	9.6	10.4	11.2	12.0	12.8	13.6	14.4	15.2

Bucket Size m <sup>3</sup>		10.0	11.0	12.0	13.0	14.0	15.0	16.0	17.0	18.0	19.0	20.0
<b>Cycle Time</b>	<b>Cycles Per Hr</b>	Unshaded area indicates average production.										
0.40	150											
0.45	133											
0.50	120											
0.55	109	1744	1918	2092	2267	2441	2616	2790	2964	3139	3313	3488
0.60	100	1600	1760	1920	2080	2240	2400	2560	2720	2880	3040	3200
0.65	92	1472	1619	1766	1913	2060	2208	2355	2502	2649	2796	2944
0.70	86	1376	1513	1651	1788	1926	2064	2201	2339	2476	2614	2752
0.75	80	1280	1408	1536	1664	1792	1920	2048	2176	2304	2432	2560
0.80	75	1200	1320	1440	1560	1680	1800	1920	2040	2160	2280	2400
<b>Bucket Payload Metric (Tons)</b>		16	17.6	19.2	20.8	22.4	24.0	25.6	27.2	28.8	30.4	32.0

# Wheel Loaders

## Production Estimating Table

- Shot Rock
- 60 min hour
- U.S. Tons

### U.S. Tons ● 2700 lb/LCY (1.35 T) density

Bucket Size yd <sup>3</sup>		1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	9.0	9.5	10.0
<b>Cycle Time</b>	<b>Cycles Per Hr</b>	Unshaded area indicates average production.																		
0.40	150	203	330	420	510	615	705	810												
0.45	133	180	293	360	454	545	625	720	810	905	985	1080	1170							
0.50	120	162	254	324	408	492	565	650	730	815	890	970	1060	1140	1200	1300	1380	1470	1540	1620
0.55	109	147	240	294	370	448	515	590	665	740	805	885	960	1030	1090	1180	1250	1330	1400	1740
0.60	100	135	220	270	340	410	470	540	610	680	740	810	880	950	1000	1080	1150	1220	1280	1350
0.65	92	124	200	250	314	380	435	500	560	625	680	750	810	875	920	985	1060	1120	1180	1250
0.70	86								525	585	635	695	755	815	860	930	990	1050	1100	1160
0.75	80													760	800	865	920	975	1030	1080
<b>Bucket Payload (Tons)</b>		<b>1.35</b>	<b>2.2</b>	<b>2.7</b>	<b>3.4</b>	<b>4.1</b>	<b>4.7</b>	<b>5.4</b>	<b>6.1</b>	<b>6.8</b>	<b>7.4</b>	<b>8.1</b>	<b>8.8</b>	<b>9.5</b>	<b>10.0</b>	<b>10.8</b>	<b>11.5</b>	<b>12.2</b>	<b>12.8</b>	<b>13.5</b>

Bucket Size yd <sup>3</sup>		11.0	12.0	13.0	14.0	15.0	16.0	17.0	18.0	19.0	20.0	21.0	22.0	23.0	24.0	25.0	26.0
<b>Cycle Time</b>	<b>Cycles Per Hr</b>	Unshaded area indicates average production.															
0.40	150																
0.45	133																
0.50	120	1782	1945														
0.55	109	1620	1765	1905	2060	2200	2350	2495	2645	2790	2940	3080	3235	3375	3530	3670	3825
0.60	100	1485	1620	1750	1890	2020	2160	2290	2430	2560	2700	2830	2970	3100	3240	3370	3510
0.65	92	1365	1490	1610	1735	1855	1985	2105	2235	2355	2480	2600	2730	2850	2980	3100	3225
0.70	86	1275	1390	1505	1625	1735	1855	1965	2085	2200	2320	2430	2550	2665	2785	2895	3015
0.75	80	1190	1295	1400	1510	1615	1725	1830	1940	2045	2160	2260	2375	2480	2590	2695	2805
0.80	75			1310	1415	1515	1620	1715	1820	1920	2025	2120	2225	2325	2430	2525	2630
<b>Bucket Payload (Tons)</b>		<b>14.9</b>	<b>16.4</b>	<b>17.5</b>	<b>18.9</b>	<b>20.2</b>	<b>21.6</b>	<b>22.9</b>	<b>24.3</b>	<b>25.6</b>	<b>27.0</b>	<b>28.3</b>	<b>29.7</b>	<b>31.0</b>	<b>32.4</b>	<b>33.7</b>	<b>35.1</b>

Work Tools	994D	992G	990 Series II	988G	980G	972G	966G	962G	950G	938G	928G	924GZ	914G	908	906	902
Quick coupler		X		X	X	X	X	X	X	X	X	X	X	X	X	X
General purpose bucket		X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Coal bucket	X	X		X	X	X	X	X	X	X	X	X	X			
Coal seam bucket			X													
Woodchip bucket					X	X	X	X	X	X	X	X	X			
Refuse bucket					X	X	X	X	X	X		X				
Light material bucket						X	X	X	X	X	X	X	X	X	X	X
Fertilizer bucket											X	X	X			
Sand & gravel bucket					X	X	X	X	X							
Rock bucket	X	X		X	X											
Slag bucket		X		X	X											
Bonus bucket				X	X											
Multi-purpose bucket						X	X	X	X	X	X	X		X		
Side dump bucket						X	X	X	X	X	X			X	X	X
Bucket with top clamp											X	X				
Tire loader								X	X							
Material handling arm					X	X	X	X	X	X	X	X	X			
Pallet fork		X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Pallet fork with top clamp						X	X	X	X	X	X	X				
Millyard fork					X	X	X	X	X	X	X	X				
Log/lumber fork						X	X	X	X	X	X	X	X			
Logging fork					X	X	X	X	X							
Core fork						X	X	X	X		X					
Straight blade					X						X	X	X			
Manual angle blade								X	X		X					
Hydraulic angle blade								X	X		X					
V-plow								X	X	X	X		X			
Manual reverse plow						X	X	X	X	X	X	X	X			
Hydraulic reverse plow						X	X	X	X	X	X	X	X			
Loader rake						X	X	X	X	X	X	X	X			
Hydraulic angle broom								X	X	X	X*	X*	X	X	X	X
Block handling bucket					X											
Block handling fork					X											
Breaker tine					X											
Boom clearing rake				X	X											
Stone seive bucket										X				X	X	X
High dump bucket														X	X	X
Pickup sweeper												X*	X*	X	X	X

**NOTE:** List is not all-inclusive. Contact your Caterpillar Dealer for special attachment needs.

\*Requires IT compatible quick coupler.





# TRACK LOADERS

## CONTENTS

Features	14-1
Specifications	14-2
Performance data	14-4
Machine dimensions with general purpose bucket	14-12
Multi-purpose bucket dimensions	14-13
Rippers/Scarifiers	14-14
SAE loader ratings	14-15
Estimating cycle time	14-16
Bucket fill factors	14-17
Recommended operating capacities	14-17
Loader production	14-17
Estimating bucket load	14-17
Estimating production	14-18
Production and machine selection:	
Alternative method of selection	14-18
Nomographs	14-19
Travel time charts	14-21
Production estimating table	14-23
Waste handling track loaders	See Section 27
Work Tools	14-24

### Features of 933C and 939C:

- **Hydrostatic drive train** offers infinitely variable speeds, fast acceleration, dynamic hydrostatic braking, superior maneuverability and excellent controllability.

### Features of 953C-973C:

- **Rear engine location** provides natural stability as a “working” counterweight, excellent visibility and good weight to horsepower ratio.
- **Electronic hydrostatic drive train with pedal steering** offers independent control of each track. Power turns, counterrotation infinitely variable speeds, and fast acceleration for increased maneuverability and production.
- **Variable displacement pump and motors** provide excellent efficiency and controllability.
- **Z-bar linkage** provides increased breakout force, fewer grease points and fast dump speed.
- **Special arrangements** including S-LGP, Waste Handling and Steel Mill (973C) are available to tailor the machine to specific applications.

- **C-Series cab and controls** offer a high level of operator comfort. Low sound levels, large interior volume, two large storage compartments, fully adjustable arm rests, ergonomic controls, Cat contour seat and excellent visibility.
- **Computerized Monitoring System (CMS)** provides operator with gauges and other information, alerts of occurring or impending problems, registers fault codes and acts as an extended diagnostic system.
- **Pilot operated hydraulic controls** offer low lever forces for precise, consistent bucket control and reduces operator fatigue.
- **Implement power requirements** have priority over track requirements automatically ... full implement power available for maximum breakout force and simultaneous lift and dump capability results in fast loading and cycle times.
- **Oscillating track roller frames** decrease ground shock, increase machine stability and improve traction.

### Features common to all models:

- **Unmatched versatility** — excavates, loads, dozes, grades, clears, strips, backfills in all underfoot conditions including those that could damage tires.
- **Sound-suppressed, air-pressurized, resiliently mounted ROPS cab** for superior working environment.
- **Sealed and Lubricated Track** reduces wear and maintenance expense. Various track shoes and chains are available including Rotating Bushing Track on some models.
- **Sealed loader linkage** extends lubrication intervals and reduces maintenance time.
- **Automatic bucket controls** let bucket rise to pre-set dumping height and return to pre-set digging angle for fast cycle time.
- **General Purpose and Multi-Purpose** buckets, quick couplers and many other work tools are available to increase versatility.
- **Radial rippers** are Multishank with wide beam coverage for utility ripping close to walls, footings and embankments. Five shanks available for 933C and 939C. Three shanks for 953C, 963C and 973C.



MODEL	933C		939C	
Flywheel Power	52 kW	<b>70 hp</b>	67.1 kW	<b>90 hp</b>
Operating Weight*	8485 kg	<b>18,690 lb</b>	9480 kg	<b>20,900 lb</b>
Engine Model	<b>3046</b>		<b>3046T</b>	
Rated Engine RPM	<b>2400</b>		<b>2400</b>	
Bore	94 mm	<b>3.7"</b>	94 mm	<b>3.7"</b>
Stroke	120 mm	<b>4.7"</b>	120 mm	<b>4.7"</b>
No. Cylinders	<b>6</b>		<b>6</b>	
Displacement	5 L	<b>305 in<sup>3</sup></b>	5 L	<b>305 in<sup>3</sup></b>
Speeds Forward/Reverse	0-9 km/h	<b>0-5.6 mph</b>	0-9 km/h	<b>0-5.6 mph</b>
Hydraulic Cycle Time, Bucket Empty, in Seconds:				
Raise		<b>5.8</b>		<b>5.6</b>
Dump		<b>1.7</b>		<b>2.4</b>
Lower (Empty, Float Down)		<b>2</b>		<b>2.9</b>
Total		<b>9.5</b>		<b>10.9</b>
Track Rollers (Each Side)	<b>6</b>		<b>6</b>	
Width of Standard Track Shoe	356 mm	<b>14"</b>	406 mm	<b>16"</b>
Length of Track on Ground	2.05 m	<b>6'8.9"</b>	2.14 m	<b>7'0.4"</b>
Ground Contact Area (With Std. Shoe)	1.46 m <sup>2</sup>	<b>2265 in<sup>2</sup></b>	1.74 m <sup>2</sup>	<b>2700 in<sup>2</sup></b>
Ground Pressure	54 kPa	<b>7.8 psi</b>	53.7 kPa	<b>7.8 psi</b>
Ground Clearance	324 mm	<b>12.8"</b>	369 mm	<b>14.5"</b>
Track Gauge	1.45 m	<b>4'9"</b>	1.55 m	<b>5'1"</b>
Width Without Bucket	1.81 m	<b>5'11"</b>	1.96 m	<b>6'5"</b>
Fuel Tank Refill Capacity	157 L	<b>41.4 U.S. gal</b>	157 L	<b>41.4 U.S. gal</b>
Hydraulic System Refill Capacity	56.8 L	<b>15 U.S. gal</b>	56.8 L	<b>15 U.S. gal</b>
	<b>LGP</b>		<b>LGP</b>	
(Specs that differ from above)	<b>933C</b>		<b>939C</b>	
Operating Weight	8744 kg	<b>19,260 lb</b>	<b>No</b>	
Width of Track Shoe	635 mm	<b>2'1"</b>	<b>LGP</b>	
Ground Contact Area	2.60 m <sup>2</sup>	<b>4045 in<sup>2</sup></b>	<b>Model</b>	
Ground Pressure	32.8 kPa	<b>4.76 psi</b>		
Track Gauge	1.68 m	<b>5'6"</b>		
Width Without Bucket	2.31 m	<b>7'7"</b>		

\*933C weights for standard and LGP models include basic machine (General Arrangement Number), lubricants, coolant, full fuel tank, operator, general purpose bucket, bucket teeth, and OROPS.

939C weights include basic machine (General Arrangement Number), lubricants, coolants, full fuel tank, operator, general purpose bucket and bucket teeth and OROPS. See Wheel Loader section of this book for summary of S.A.E. Guidelines for Loader Specifications, to which Caterpillar adheres.



MODEL	953C		963C		973C	
Flywheel Power	90 kW	<b>121 hp</b>	119 kW	<b>160 hp</b>	157 kW	<b>210 hp</b>
Operating Weight*	14 680 kg	<b>32,360 lb</b>	19 020 kg	<b>41,940 lb</b>	27 000 kg	<b>59,550 lb</b>
Engine Model	<b>3116T</b>		<b>3116TA</b>		<b>3306T</b>	
Rated Engine RPM	<b>2200</b>		<b>2200</b>		<b>2200</b>	
Bore	105 mm	<b>4.13"</b>	105 mm	<b>4.13"</b>	121 mm	<b>4.75"</b>
Stroke	127 mm	<b>5"</b>	127 mm	<b>5"</b>	152 mm	<b>6"</b>
No. Cylinders	<b>6</b>		<b>6</b>		<b>6</b>	
Displacement	6.6 L	<b>403 in<sup>3</sup></b>	6.6 L	<b>403 in<sup>3</sup></b>	10.5 L	<b>638 in<sup>3</sup></b>
Speeds Forward/Reverse	km/h	<b>mph</b>	km/h	<b>mph</b>	km/h	<b>mph</b>
1st	0-9.7	<b>0-6.0</b>	0-9.5	<b>0-5.9</b>	0-9	<b>0-5.6</b>
2nd	<b>Infinitely</b>		<b>Infinitely</b>		<b>Infinitely</b>	
3rd	<b>Variable</b>		<b>Variable</b>		<b>Variable</b>	
Hydraulic Cycle Time, Bucket Empty, in Seconds:						
Raise	<b>6.7</b>		<b>5.3</b>		<b>6.4</b>	
Dump	<b>1.4</b>		<b>1.1</b>		<b>1.7</b>	
Lower (Empty, Float Down)	<b>3</b>		<b>2.3</b>		<b>2.5</b>	
Total**	<b>9.7</b>		<b>7.6</b>		<b>8.9</b>	
Track Rollers (Each Side)	<b>6</b>		<b>6</b>		<b>7</b>	
Width of Standard Track Shoe	380 mm	<b>15"</b>	450 mm	<b>17.7"</b>	500 mm	<b>20"</b>
Length of Track on Ground	2.295 m	<b>7'6"</b>	2.454 m	<b>8'1"</b>	2.917 m	<b>9'7"</b>
Ground Contact Area (With Std. Shoe)	1.74 m <sup>2</sup>	<b>2704 in<sup>2</sup></b>	2.21 m <sup>2</sup>	<b>3425 in<sup>2</sup></b>	2.92 m <sup>2</sup>	<b>4522 in<sup>2</sup></b>
Ground Pressure	82.5 kPa	<b>12 psi</b>	84.4 kPa	<b>12.2 psi</b>	88.9 kPa	<b>12.9 psi</b>
Ground Clearance	377 mm	<b>14.8"</b>	390 mm	<b>15.4"</b>	456 mm	<b>17.9"</b>
Track Gauge	1.8 m	<b>5'11"</b>	1.85 m	<b>6'1"</b>	2.08 m	<b>6'10"</b>
Width Without Bucket	2.18 m	<b>7'2"</b>	2.3 m	<b>7'7"</b>	2.58 m	<b>8'6"</b>
Fuel Tank Refill Capacity	241 L	<b>63.8 U.S. gal</b>	315 L	<b>83.2 U.S. gal</b>	415 L	<b>110 U.S. gal</b>
Hydraulic System Refill Capacity	104 L	<b>27.5 U.S. gal</b>	140 L	<b>37 U.S. gal</b>	159 L	<b>42 U.S. gal</b>
<b>Equipped With Wide Track Shoe Option</b>						
(Specs that differ from above)	<b>953C</b>		<b>963C</b>		<b>973C</b>	
Operating Weight	14 970 kg	<b>33,010 lb</b>	19 270 kg	<b>42,480 lb</b>	27 640 kg	<b>60,950 lb</b>
Width of Track Shoe	500 mm	<b>20"</b>	550 mm	<b>22"</b>	675 mm	<b>27"</b>
Ground Contact Area	2.3 m <sup>2</sup>	<b>3558 in<sup>2</sup></b>	2.7 m <sup>2</sup>	<b>4184 in<sup>2</sup></b>	3.94 m <sup>2</sup>	<b>6104 in<sup>2</sup></b>
Ground Pressure	63.9 kPa	<b>9.3 psi</b>	70 kPa	<b>10.2 psi</b>	65.9 kPa	<b>9.57 psi</b>
Track Gauge	1.8 m	<b>5'11"</b>	1.85 m	<b>6'1"</b>	2.08 m	<b>6'10"</b>
Width Without Bucket	2.3 m	<b>7'6"</b>	2.4 m	<b>7'10"</b>	2.755 m	<b>9'0"</b>

\*Includes GP bucket with bolt-on adapters, long tips and segments.

\*\*With simultaneous raise and dump, dump time is included in raise time.

See Track Loader section of this book for summary of S.A.E. Guidelines for Loader Specifications, to which Caterpillar adheres.

BUCKET	General Purpose		Multi-Purpose		LGP Arrangement	
Capacity, Rated (Nominal Heaped)	1 m <sup>3</sup>	<b>1.3 yd<sup>3</sup></b>	0.96 m <sup>3</sup>	<b>1.25 yd<sup>3</sup></b>	0.96 m <sup>3</sup>	<b>1.25 yd<sup>3</sup></b>
Struck	0.84 m <sup>3</sup>	<b>1.1 yd<sup>3</sup></b>	0.79 m <sup>3</sup>	<b>1.03 yd<sup>3</sup></b>	0.8 m <sup>3</sup>	<b>1.05 yd<sup>3</sup></b>
Bucket Width*	1969 mm	<b>6'5"</b>	1969 mm	<b>6'5"</b>	2330 mm	<b>7'8"</b>
Dump Clearance at Full Lift and 45° Discharge	2692 mm	<b>8'10"</b>	2642 mm	<b>8'8"</b>	2728 mm	<b>8'11"</b>
Maximum Reach at Full Lift and 45° Discharge	839 mm	<b>2'9"</b>	859 mm	<b>2'9.8"</b>	803 mm	<b>2'7.6"</b>
Digging Depth	148 mm	<b>5.8"</b>	160 mm	<b>6.3"</b>	148 mm	<b>5.8"</b>
Overall Length	4352 mm	<b>14'3"</b>	4352 mm	<b>14'3"</b>	4301 mm	<b>14'1"</b>
Overall Height	4426 mm	<b>14'6"</b>	4426 mm	<b>14'6"</b>	4203 mm	<b>13'9"</b>
Static Tipping Load	5827 kg	<b>12,830 lb</b>	5626 kg	<b>12,390 lb</b>	5630 kg	<b>12,400 lb</b>
Breakout Force**	77.4 kN	<b>17,390 lb</b>	71.3 kN	<b>16,000 lb</b>	83.6 kN	<b>18,790 lb</b>
Operating Weight***	8485 kg	<b>18,690 lb</b>	9010 kg	<b>19,870 lb</b>	8744 kg	<b>19,260 lb</b>

\*Bolt-on teeth increase bucket width by 42 mm (1.65"). Bolt-on cutting edge increases bucket width by 10 mm (0.39").

\*\*Breakout force is measured 102 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point.

\*\*\*Operating weight includes coolant, lubricants, full fuel tank, bottom guards (STD), bucket teeth, ROPS canopy and operator. 426 kg (940 lb) counterweight is also included with Multi-Purpose bucket.

Machine stability can be affected by the addition of other attachments. Add or subtract the following to/from machine operating weight and static tipping load:

	Change in Operating Weight		Change in Static Tipping Load	
	kg	lb	kg	lb
Cab, ROPS	+204	<b>+450</b>	+266	<b>+586</b>
Bucket teeth (long) & segments	+118	<b>+260</b>	-150	<b>-330</b>
Air Conditioner	+ 77	<b>+170</b>	+ 88	<b>+194</b>
457 mm (18") shoes	+108	<b>+238</b>	+ 76	<b>+168</b>
Ripper with 3 teeth (includes removal of 295 kg (650 lb) rear counterweight)	+ 17	<b>+ 37</b>	+ 49	<b>+108</b>
Rear counterweight (per plate)	+115	<b>+255</b>	+203	<b>+448</b>

BUCKET	General Purpose		Multi-Purpose	
Capacity, Rated (Nominal Heaped)	1.15 m <sup>3</sup>	1.5 yd <sup>3</sup>	1.15 m <sup>3</sup>	1.5 yd <sup>3</sup>
Struck	0.95 m <sup>3</sup>	1.25 yd <sup>3</sup>	0.95 m <sup>3</sup>	1.25 yd <sup>3</sup>
Bucket Width*	2160 mm	7'1"	2160 mm	7'1"
Dump Clearance at Full Lift and 45° Discharge	2667 mm	8'9"	2604 mm	8'6.5"
Maximum Reach at Full Lift and 45° Discharge	866 mm	2'10.1"	877 mm	2'10.5"
Digging Depth	127 mm	5"	165 mm	6.5"
Overall Length	4359 mm	14'3.6"	4359 mm	14'4"
Overall Height	4384 mm	14'4.6"	4384 mm	14'4.6"
Static Tipping Load	6607 kg	14,560 lb	6396 kg	14,100 lb
Breakout Force**	89.9 kN	20,200 lb	92 kN	20,690 lb
Operating Weight***	9484 kg	20,910 lb	10 030 kg	22,110 lb

\*Bolt-on teeth increase bucket width by 42 mm (1.65"). Bolt-on cutting edge increases bucket width by 10 mm (0.39").

\*\*Breakout force is measured 102 mm (4") behind tip of cutting edge with bucket hinge pin as pivot point.

\*\*\*Operating weight includes coolant, lubricants, full fuel tank, bottom guards (STD), bucket teeth, ROPS canopy and operator. 454 kg (1000 lb) rear counterweight is also removed while using Multi-Purpose bucket.

Machine stability can be affected by the addition of other attachments. Add or subtract the following to/from machine operating weight and static tipping load:

	Change in Operating Weight		Change in Static Tipping Load	
	kg	lb	kg	lb
Cab, ROPS	+204	+450	+266	+586
Bucket teeth (long) & segments	+118	+260	-150	-330
Air Conditioner	+ 77	+170	+ 88	+194
Ripper with 3 teeth (includes removal of 295 kg (650 lb) rear counterweight)	+ 17	+ 37	+ 49	+108
Rear counterweight (per plate)	+115	+255	+203	+448

BUCKET	1.75 m <sup>3</sup> /2.25 yd <sup>3</sup> General Purpose Bare		1.75 m <sup>3</sup> /2.25 yd <sup>3</sup> General Purpose Bolt-on Adapters, Long Tips & Segments		1.75 m <sup>3</sup> /2.25 yd <sup>3</sup> General Purpose Bolt-on Cutting Edge		1.75 m <sup>3</sup> /2.25 yd <sup>3</sup> General Purpose Flush Weld-on Adapters & Long Tips	
	1.75 m <sup>3</sup>	2.25 yd <sup>3</sup>	1.85 m <sup>3</sup>	2.4 yd <sup>3</sup>	1.85 m <sup>3</sup>	2.4 yd <sup>3</sup>	1.75 m <sup>3</sup>	2.25 yd <sup>3</sup>
Capacity, Rated (Nominal Heaped) Struck	1.45 m <sup>3</sup>	1.90 yd <sup>3</sup>	1.55 m <sup>3</sup>	2.05 yd <sup>3</sup>	1.55 m <sup>3</sup>	2.05 yd <sup>3</sup>	1.45 m <sup>3</sup>	1.90 yd <sup>3</sup>
Cutting Edge, Type	Straight		Straight		Straight		Straight	
Bucket Width ◀	2380 mm 7'10"		2380 mm 7'10"		2380 mm 7'10"		2380 mm 7'10"	
Teeth	None		8, bolt-on with replaceable tips		None		8, weld-on with replaceable tips	
Dump Clearance @ Full Lift and 45° Discharge	2899 mm	9'6"	2706 mm	8'10"	2834 mm	9'3"	2732 mm	8'11"
Reach at 45° Discharge Angle 2133 mm (7') Clearance	1554 mm	5'1"	1495 mm	4'10"	1563 mm	5'1"	1457 mm	4'9"
Reach @ Full Lift and 45° Discharge	1011 mm	3'4"	1051 mm	3'5"	1051 mm	3'5"	998 mm	3'3"
Digging Depth	107 mm	4.2"	132 mm	5.2"	132 mm	5.2"	107 mm	4.2"
Overall Length	5889 mm	19'4"	6133 mm	20'1"	5988 mm	19'7"	6134 mm	20'1"
Overall Height	4869 mm	16'0"	4869 mm	16'0"	4869 mm	16'0"	4869 mm	16'0"
Static Tipping Load	9931 kg	21,900 lb	9550 kg	21,060 lb	9672 kg	21,330 lb	9860 kg	21,740 lb
Breakout Force*	121 kN	27,220 lb	108.8 kN	24,460 lb	109.7 kN	24,680 lb	122.6 kN	27,580 lb
Operating Weight**	14 450 kg	31,870 lb	14 680 kg	32,360 lb	14 570 kg	32,140 lb	14 510 kg	32,000 lb

\* Breakout force is measured 100 mm (3.94") behind tip of cutting edge with bucket hinge pin as pivot point.

\*\* Operating weight includes coolant, lubricants, full fuel tank, ROPS cab, bucket, and 75 kg (165 lb) operator.

◀ Bolt-on teeth increase bucket width by 52 mm (2"). Bolt-on cutting edge increases bucket width by 17 mm (0.67").

Machine stability can be affected by the addition of other attachments. Add or subtract the following to/from machine operating weight and static tipping load:

	Change in Operating Weight		Change in Static Tipping Load for General Purpose Bucket	
	kg	lb	kg	lb
ROPS canopy only (cab removed) . . . . .	-221	- 487	- 280	- 617
Ripper (includes rear hydraulic arrangement and bumper removal) . . . . .	+ 20	+ 44	—	—
Air conditioner . . . . .	+ 95	+ 209	+ 135	+ 298
Wide track shoes, 500 mm (20") double grouser . . . . .	+291	+ 642	+ 189	+ 417
Rear bumper (removed) . . . . .	-564	-1243	-1180	-2601

BUCKET	Multi-Purpose Bare		Multi-Purpose Bolt-on Adapters, Long Tips & Segments		Multi-Purpose Bolt-on Cutting Edge	
Capacity, Rated (Nominal Heaped)	1.5 m <sup>3</sup>	2 yd <sup>3</sup>	1.6 m <sup>3</sup>	2.1 yd <sup>3</sup>	1.6 m <sup>3</sup>	2.1 yd <sup>3</sup>
Struck	1.25 m <sup>3</sup>	1.65 yd <sup>3</sup>	1.35 m <sup>3</sup>	1.75 yd <sup>3</sup>	1.35 m <sup>3</sup>	1.75 yd <sup>3</sup>
Cutting Edge, Type	Straight		Straight		Straight	
Bucket Width◀	2378 mm	7'10"	2378 mm	7'10"	2378 mm	7'10"
Teeth	None		8, bolt-on with replaceable tips		None	
Dump Clearance @ Full Lift and 45° Discharge	2724 mm	8'11"	2655 mm	8'8"	2655 mm	8'8"
Reach at 45° Discharge Angle 2133 mm (7') Clearance	1440 mm	4'9"	1363 mm	4'6"	1433 mm	4'8"
Reach @ Full Lift and 45° Discharge	986 mm	3'2.8"	1019 mm	3'4.1"	1019 mm	3'4.1"
Digging Depth	158 mm	6.2"	182 mm	7.2"	182 mm	7.2"
Overall Length	6046 mm	19'10"	6261 mm	20'6"	6118 mm	20'0"
Overall Height	4860 mm	16'0"	4860 mm	16'0"	4860 mm	16'0"
Static Tipping Load	8844 kg	19,500 lb	8490 kg	18,710 lb	8602 kg	18,970 lb
Breakout Force*	95.1 kN	21,400 lb	86.4 kN	19,440 lb	86.9 kN	19,550 lb
Operating Weight**	15 060 kg	33,200 lb	15 280 kg	33,690 lb	15 180 kg	33,470 lb

\* Breakout force is measured 100 mm (3.94") behind tip of cutting edge with bucket hinge pin as pivot point.

\*\* Operating weight includes coolant, lubricants, full fuel tank, ROPS cab, General Purpose bucket, and 80 kg (176 lb) operator.

◀ Bolt-on teeth increase bucket width by 52 mm (2"). Bolt-on cutting edge increases bucket width by 17 mm (0.67").

Machine stability can be affected by the addition of other attachments.



BUCKET	General Purpose Bare		General Purpose Bolt-on Cutting Edge		General Purpose Flush Weld-on Adapters & Long Tips		General Purpose Bolt-on Adapters, Long Tips & Segments	
Capacity, Rated (Nominal Heaped)	2.3 m <sup>3</sup>	<b>3 yd<sup>3</sup></b>	2.45 m <sup>3</sup>	<b>3.2 yd<sup>3</sup></b>	2.3 m <sup>3</sup>	<b>3 yd<sup>3</sup></b>	2.45 m <sup>3</sup>	<b>3.2 yd<sup>3</sup></b>
Struck	2 m <sup>3</sup>	<b>2.6 yd<sup>3</sup></b>	2.14 m <sup>3</sup>	<b>2.8 yd<sup>3</sup></b>	2 m <sup>3</sup>	<b>2.6 yd<sup>3</sup></b>	2.14 m <sup>3</sup>	<b>2.8 yd<sup>3</sup></b>
Cutting Edge, Type	<b>Straight</b>		<b>Straight</b>		<b>Straight</b>		<b>Straight</b>	
Bucket Width*	2508 mm	<b>8'3"</b>	2508 mm	<b>8'3"</b>	2508 mm	<b>8'3"</b>	2508 mm	<b>8'3"</b>
Teeth	<b>None</b>		<b>None</b>		<b>8, weld-on, flush mounted adapters with replaceable tips</b>		<b>8, bolt-on adapters with replaceable tips</b>	
Dump Clearance @ Full Lift and 45° Discharge	3145 mm	<b>10'4"</b>	3061 mm	<b>10'1"</b>	3037 mm	<b>10'0"</b>	2948 mm	<b>9'8"</b>
Reach at 45° Discharge Angle								
2133 mm (7') Clearance	1771 mm	<b>5'10"</b>	1797 mm	<b>5'11"</b>	1875 mm	<b>6'2"</b>	1856 mm	<b>6'1"</b>
Reach @ Full Lift and 45° Discharge	1152 mm	<b>3'9"</b>	1210 mm	<b>4'0"</b>	1298 mm	<b>4'3"</b>	1316 mm	<b>4'4"</b>
Digging Depth	88 mm	<b>3.5"</b>	118 mm	<b>4.6"</b>	88 mm	<b>3.5"</b>	141 mm	<b>5.6"</b>
Overall Length	6336 mm	<b>20'9"</b>	6455 mm	<b>21'2"</b>	6629 mm	<b>21'9"</b>	6628 mm	<b>21'9"</b>
Overall Height	5314 mm	<b>17'5"</b>	5314 mm	<b>17'5"</b>	5314 mm	<b>17'5"</b>	5314 mm	<b>17'5"</b>
Static Tipping Load	13 564 kg	<b>29,909 lb</b>	13 150 kg	<b>28,990 lb</b>	13 430 kg	<b>29,610 lb</b>	13 000 kg	<b>28,660 lb</b>
Breakout Force**	191.7 kN	<b>43,133 lb</b>	173.4 kN	<b>39,020 lb</b>	186.7 kN	<b>42,000 lb</b>	172.6 kN	<b>38,840 lb</b>
Operating Weight***	18 680 kg	<b>41,200 lb</b>	18 900 kg	<b>41,680 lb</b>	18 780 kg	<b>41,410 lb</b>	19 020 kg	<b>41,940 lb</b>

\*With bolt-on cutting edge add 17 mm (0.67"), with bolt-on teeth add 52 mm (2"), for flush weld-on teeth add 75 mm (3").

\*\*Breakout force is measured 100 mm (3.94") behind tip of cutting edge with bucket hinge pin as pivot point.

\*\*\*Operating weight includes coolant, lubricants, full fuel tank, ROPS cab, bucket, and 75 kg (165 lb) operator.

Machine stability can be affected by the addition of other attachments. Add or subtract the following to/from machine operating weight and static tipping load:

	Change in Operating Weight		Change in Static Tipping Load for General Purpose Bucket	
	kg	lb	kg	lb
ROPS canopy only (cab removed) .....	-221	-487	-260	- 573
Ripper (includes rear hydraulic arrangement and three shanks, bumper removed) .....	+229	+505	+506	+1116
Air conditioner .....	+ 95	+209	+152	+ 335
Wide track shoes, 550 mm (22") .....	+247	+545	+164	+ 362
Rear bumper (removal) .....	-540	-1191	-1190	-2624

BUCKET	Multi-Purpose Bare		Multi-Purpose Bolt-on Segments & Long Teeth		Multi-Purpose Bolt-on Cutting Edge	
Capacity, Rated (Nominal Heaped)	1.9 m <sup>3</sup>	2.5 yd <sup>3</sup>	2 m <sup>3</sup>	2.6 yd <sup>3</sup>	2 m <sup>3</sup>	2.6 yd <sup>3</sup>
Struck	1.6 m <sup>3</sup>	2.1 yd <sup>3</sup>	1.7 m <sup>3</sup>	2.2 yd <sup>3</sup>	1.7 m <sup>3</sup>	2.2 yd <sup>3</sup>
Cutting Edge, Type	Straight		Straight		Straight	
Bucket Width*	2482 mm	8'2"	2482 mm	8'2"	2482 mm	8'2"
Teeth	None		8, bolt-on with replaceable tips		None	
Dump Clearance @ Full Lift and 45° Discharge	2967 mm	9'9"	2769 mm	9'1"	2873 mm	9'5"
Reach at 45° Discharge Angle 2133 mm (7') Clearance	1579 mm	5'2"	1613 mm	5'4"	1588 mm	5'3"
Reach @ Full Lift and 45° Discharge	1032 mm	3'5"	1161 mm	3'10"	1084 mm	3'7"
Digging Depth	170 mm	6.5"	219 mm	9"	200 mm	8"
Overall Length	6449 mm	21'2"	6713 mm	22'0"	6572 mm	21'7"
Overall Height	5353 mm	17'7"	5353 mm	17'7"	5353 mm	17'7"
Static Tipping Load	12 780 kg	28,180 lb	12 511 kg	27,587 lb	12 500 kg	27,563 lb
Breakout Force**	178.6 kN	40,185 lb	167.6 kN	37,706 lb	176.5 kN	39,713 lb
Operating Weight***	19 330 kg	42,620 lb	19 560 kg	43,120 lb	19 530 kg	43,060 lb

\*With bolt-on cutting edge add 17 mm (0.67"), for bolt-on teeth add 52 mm (2").

\*\*Breakout force is measured 100 mm (3.94") behind tip of cutting edge with bucket hinge pin as pivot point.

\*\*\*Operating weight includes coolant, lubricants, full fuel tank, ROPS cab, bucket, and 75 kg (165 lb) operator.

Machine stability can be affected by the addition of other attachments.

BUCKET	General Purpose Bare		General Purpose Bolt-on Adapters, Long Tips & Segments		General Purpose Bolt-on Cutting Edge		Rock Weld-on Flush Adapters & Tips	
Capacity, Rated (Nominal Heaped)	2.8 m <sup>3</sup>	<b>3.75 yd<sup>3</sup></b>	3.2 m <sup>3</sup>	<b>4.2 yd<sup>3</sup></b>	3.2 m <sup>3</sup>	<b>4.2 yd<sup>3</sup></b>	2.8 m <sup>3</sup>	<b>3.75 yd<sup>3</sup></b>
Struck	2.41 m <sup>3</sup>	<b>3.16 yd<sup>3</sup></b>	2.77 m <sup>3</sup>	<b>3.62 yd<sup>3</sup></b>	2.77 m <sup>3</sup>	<b>3.62 yd<sup>3</sup></b>	2.46 m <sup>3</sup>	<b>3.21 yd<sup>3</sup></b>
Cutting Edge, Type	<b>Straight</b>		<b>Straight</b>		<b>Straight</b>		<b>Spade</b>	
Bucket Width ◀	2854 mm	<b>9'4"</b>	2854 mm	<b>9'4"</b>	2854 mm	<b>9'4"</b>	2705 mm	<b>8'11"</b>
Teeth	<b>None</b>		<b>8, optional, bolt-on with replaceable tips</b>		<b>None</b>		<b>8, standard, weld-on with replaceable J350 tips</b>	
Dump Clearance @ Full Lift and 45° Discharge	3340 mm	<b>10'11"</b>	3266 mm	<b>10'9"</b>	3266 mm	<b>10'9"</b>	3014 mm	<b>9'10"</b>
Reach @ 45° Discharge Angle, 2133 mm (7') Clearance	2006 mm	<b>6'7"</b>	2029 mm	<b>6'8"</b>	2029 mm	<b>6'8"</b>	2023 mm	<b>6'8"</b>
Reach @ Full Lift and 45° Discharge	1329 mm	<b>4'4"</b>	1375 mm	<b>4'6"</b>	1375 mm	<b>4'6"</b>	1464 mm	<b>4'9"</b>
Digging Depth	118 mm	<b>4.6"</b>	148 mm	<b>5.8"</b>	148 mm	<b>5.8"</b>	118 mm	<b>4.6"</b>
Overall Length	7078 mm	<b>23'3"</b>	7362 mm	<b>24'2"</b>	7182 mm	<b>23'6"</b>	7569 mm	<b>24'10"</b>
Overall Height	5785 mm	<b>19'0"</b>	5785 mm	<b>19'0"</b>	5785 mm	<b>19'0"</b>	5726 mm	<b>18'9"</b>
Static Tipping Load	19 770 kg	<b>43,600 lb</b>	19 270 kg	<b>42,490 lb</b>	19 470 kg	<b>42,930 lb</b>	19 540 kg	<b>43,080 lb</b>
Breakout Force*	216 kN	<b>48,510 lb</b>	197 kN	<b>44,180 lb</b>	198 kN	<b>44,500 lb</b>	183 kN	<b>41,220 lb</b>
Operating Weight**	26 650 kg	<b>58,760 lb</b>	27 010 kg	<b>59,550 lb</b>	26 860 kg	<b>59,230 lb</b>	26 880 kg	<b>59,270 lb</b>

\* Breakout force is measured 100 mm (3.94") behind tip of cutting edge with bucket hinge pin as pivot point.

\*\* Operating weight includes lubricants, full fuel tank, ROPS cab, General Purpose bucket, and 80 kg (176 lb) operator.

◀ Bolt-on teeth increase bucket width by 63.8 mm (2.5"). Bolt-on cutting edge increases bucket width by 19 mm (0.74").

Machine stability can be affected by the addition of other attachments. Add or subtract the following to/from machine operating weight and static tipping load:

	Change in Operating Weight		Change in Static Tipping Load	
	kg	lb	kg	lb
ROPS canopy only (cab removed)	-149	- 329	- 175	- 386
Ripper (includes 3 shanks and rear hydraulic arrangement)	+971	<b>+2141</b>	+2257	<b>+4977</b>
Air conditioner	+ 95	<b>+ 209</b>	+ 160	<b>+ 353</b>
Wide track shoes 675 mm (27")	+632	<b>+1394</b>	+ 476	<b>+1050</b>

BUCKET	Multi-Purpose Bare		Multi-Purpose Bolt-on Segments & Long Teeth		Multi-Purpose Bolt-on Cutting Edge		Steel Mill Arrangement Slag Bucket	
Capacity, Rated (Nominal Heaped)	2.6 m <sup>3</sup>	<b>3.40 yd<sup>3</sup></b>	2.9 m <sup>3</sup>	<b>3.8 yd<sup>3</sup></b>	2.9 m <sup>3</sup>	<b>3.8 yd<sup>3</sup></b>	2.5 m <sup>3</sup>	<b>3.25 yd<sup>3</sup></b>
Struck	2.19 m <sup>3</sup>	<b>2.87 yd<sup>3</sup></b>	2.56 m <sup>3</sup>	<b>3.34 yd<sup>3</sup></b>	2.56 m <sup>3</sup>	<b>3.34 yd<sup>3</sup></b>	2.03 m <sup>3</sup>	<b>2.65 yd<sup>3</sup></b>
Cutting Edge, Type	<b>Straight</b>		<b>Straight</b>		<b>Straight</b>		<b>Straight</b>	
Bucket Width◀	2710 mm	<b>8'11"</b>	2710 mm	<b>8'11"</b>	2710 mm	<b>8'11"</b>	2714 mm	<b>8'11"</b>
Teeth	—		<b>8, optional, bolt-on with replaceable tips</b>		<b>8, optional, weld-on with replaceable tips</b>		<b>6, standard, weld-on with replaceable tips</b>	
Dump Clearance @ Full Lift and 45° Discharge	3044 mm	<b>9'11"</b>	2965 mm	<b>9'9"</b>	2965 mm	<b>9'9"</b>	2986 mm	<b>9'10"</b>
Reach @ 45° Discharge Angle, 2133 mm (7') Clearance	1859 mm	<b>6'1"</b>	1861 mm	<b>6'1"</b>	1861 mm	<b>6'1"</b>	1784 mm	<b>5'10"</b>
Reach @ Full Lift and 45° Discharge	1287 mm	<b>4'2"</b>	1324 mm	<b>4'4"</b>	1324 mm	<b>4'4"</b>	1237 mm	<b>4'1"</b>
Digging Depth	211 mm	<b>8.3"</b>	241 mm	<b>9.5"</b>	241 mm	<b>9.5"</b>	118 mm	<b>4.6"</b>
Overall Length	7337 mm	<b>24'1"</b>	7619 mm	<b>25'0"</b>	7439 mm	<b>24'5"</b>	7600 mm	<b>24'11"</b>
Overall Height, Bucket @ Full Lift	5894 mm	<b>19'4"</b>	5894 mm	<b>19'4"</b>	5894 mm	<b>19'4"</b>	5825 mm	<b>19'1"</b>
Static Tipping Load	18 645 kg	<b>41,110 lb</b>	18 165 kg	<b>40,050 lb</b>	18 340 kg	<b>40,440 lb</b>	18 470 kg	<b>40,720 lb</b>
Breakout Force*	176 kN	<b>39,550 lb</b>	161 kN	<b>36,280 lb</b>	163 kN	<b>36,590 lb</b>	203 kN	<b>45,760 lb</b>
Operating Weight**	27 760 kg	<b>61,210 lb</b>	28 100 kg	<b>61,970 lb</b>	27 960 kg	<b>61,650 lb</b>	29 560 kg	<b>65,180 lb</b>


\* Breakout force is measured 100 mm (3.94") behind tip of cutting edge with bucket hinge pin as pivot point.

\*\* Operating weight includes lubricants, full fuel tank, ROPS cab, General Purpose bucket, and 80 kg (176 lb) operator.


◀ Bolt-on teeth increase bucket width by 63.8 mm (2.5"). Bolt-on cutting edge increases bucket width by 19 mm (0.74").

Machine stability can be affected by the addition of other attachments.

**933C-939C**

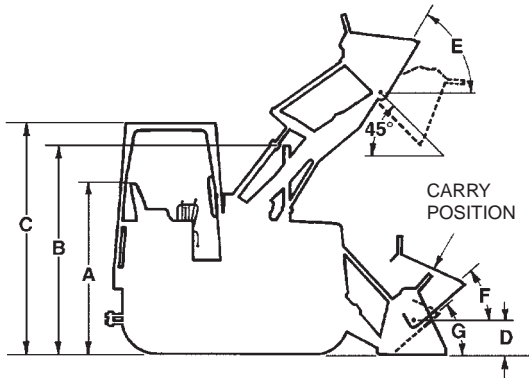


**953C-973C**

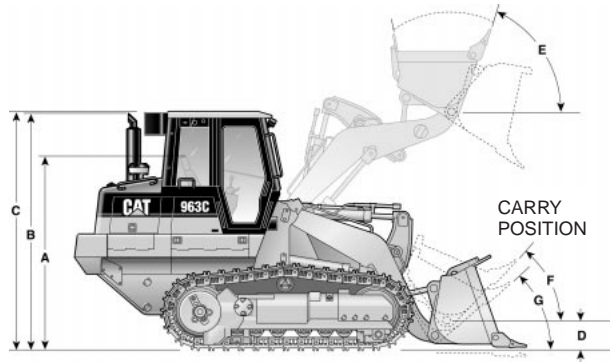

	<b>933C</b>		<b>939C</b>		<b>953C</b>	
<b>A</b> Height to Top of Seat	2 m	<b>6'7"</b>	2 m	<b>6'7"</b>	2.353 m	<b>7'9"</b>
<b>B</b> Height to Top of Stack	2.8 m	<b>9'2"</b>	2.81 m	<b>9'2"</b>	2.441 m	<b>8'0"</b>
<b>C</b> Height to Top of ROPS	2.74 m	<b>9'0"</b>	2.76 m	<b>9'0"</b>	3.084 m	<b>10'1"</b>
<b>D</b> Hinge Pin Height at Carry Position	402 mm	<b>15.8"</b>	414 mm	<b>16.3"</b>	424 mm	<b>16.7"</b>
<b>E</b> Rollback at Maximum Lift		<b>67.7°</b>		<b>67.7°</b>		<b>56°</b>
<b>F</b> Rollback at Carry Height		<b>51.2°</b>		<b>51.2°</b>		<b>48°</b>
<b>G</b> Rollback at Ground Level		<b>42.8°</b>		<b>42.6°</b>		<b>41°</b>
Grading Angle (Bare Edge)		—		—		<b>74°</b>
Width Without Bucket (std. track)	1.8 m	<b>5'11"</b>	1.96 m	<b>6'5"</b>	2.18 m	<b>7'2"</b>
(optional track)	2.31 m	<b>7'7"</b>	2.01 m	<b>6'7"</b>	2.3 m	<b>7'7"</b>
Weight of General Purpose Bucket w/Teeth & Segments		—		—	1142 kg	<b>2518 lb</b>
	<b>963C</b>		<b>973C</b>			
<b>A</b> Height to Top of Seat	2.796 m	<b>9'2"</b>	2.701 m	<b>8'10"</b>		
<b>B</b> Height to Top of Stack	3.307 m	<b>10'10"</b>	2.861 m	<b>9'5"</b>		
<b>C</b> Height to Top of ROPS	3.324 m	<b>10'11"</b>	3.45 m	<b>11'4"</b>		
<b>D</b> Hinge Pin Height at Carry Position	467 mm	<b>18.4"</b>	492 mm	<b>19.4"</b>		
<b>E</b> Rollback at Maximum Lift		<b>59°</b>		<b>59°</b>		
<b>F</b> Rollback at Carry Height		<b>50°</b>		<b>50°</b>		
<b>G</b> Rollback at Ground Level		<b>42°</b>		<b>42°</b>		
Grading Angle (Bare Edge)		<b>68°</b>		<b>69°</b>		
Width Without Bucket (std. track)	2.3 m	<b>7'7"</b>	2.58 m	<b>8'6"</b>		
(optional track)	2.4 m	<b>7'11"</b>	2.755 m	<b>9'0"</b>		
Weight of General Purpose Bucket w/Teeth & Segments	1610 kg	<b>3550 lb</b>	2077 kg	<b>4580 lb</b>		

Machine Dimensions  
● With Multi-Purpose Bucket

Track Loaders

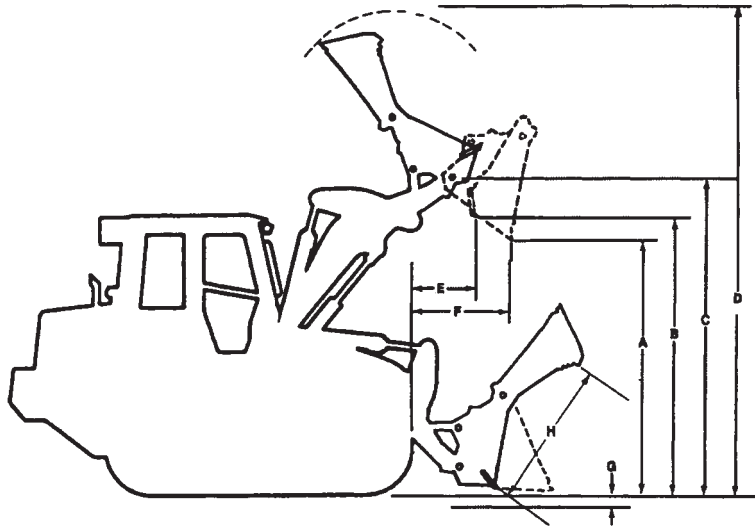


	933C		939C		953C	
A Forward Dump Clearance*	2.56 m	8'5"	2.57 m	8'5"	2.65 m	8'8"
B Bottom Dump Clearance*	2.62 m	8'7"	3.05 m	10'0"	3.16 m	10'5"
C Hinge Pin Height*	3.31 m	10'10"	3.32 m	10'11"	3.6 m	11'10"
D Overall Height	4.67 m	15'4"	4.68 m	15'4"	5.37 m	17'8"
E Bottom Dump Reach	453 mm	18"	453 mm	18"	540 mm	1'9.3"
F Forward Dump Reach*	859 mm	2'10"	776 mm	2'7"	1019 mm	3'4"
G Digging Depth	184 mm	7.2"	190 mm	7.5"	182 mm	7.2"
H Bucket Opening	1103 mm	3'7"	930 mm	3'0"	1140 mm	3'9"
Reach at 2133 mm (7'0") Height*	1200 mm	3'11"	1200 mm	3'11"	1440 mm	4'9"
Tilt Back at Ground Level	43°		43°		43°	
Closure Force, Clamp to Cutting Edge	50.7 kN	11,400 lb	56.8 kN	12,780 lb	71.8 kN	16,134 lb
Weight of Bucket with Teeth, Segments and Additional Hydraulics	754 kg	1663 lb	1005 kg	2216 lb	1640 kg	3616 lb
	963C		973C			
A Forward Dump Clearance*	2.77 m	9'11"	2.97 m	9'9"		
B Bottom Dump Clearance*	3.5 m	11'6"	3.65 m	12'0"		
C Hinge Pin Height*	3.93 m	12'11"	4.22 m	13'10"		
D Overall Height	5.89 m	19'4"	6.52 m	21'5"		
E Bottom Dump Reach	612 mm	2'0.1"	721 mm	2'4.4"		
F Forward Dump Reach*	1161 mm	3'10"	1324 mm	4'4"		
G Digging Depth	219 mm	9"	241 mm	9.5"		
H Bucket Opening	1260 mm	4'1"	1380 mm	4'6"		
Reach at 2133 mm (7'0") Height*	1590 mm	5'2"	1860 mm	6'1"		
Tilt Back at Ground Level	42°		45°			
Closure Force, Clamp to Cutting Edge	72.3 kN	16,250 lb	89 kN	20,000 lb		
Weight of Bucket with Teeth, Segments and Additional Hydraulics	2128 kg	4690 lb	3171 kg	6992 lb		

\*45° Discharge and full lift.  
Operator may prefer to tip bucket forward when bottom dumping.

TRACK LOADER	933C		939C		953C		963C		973C	
Ripper-Scarifier Type	Radial		Radial		Radial		Radial		Radial	
Dimensions:										
<b>Ripper Shank</b>										
Maximum penetration depth	276 mm	<b>10.9"</b>	193 mm	<b>7.6"</b>	271 mm	<b>10.7"</b>	295 mm	<b>11.6"</b>	428 mm	<b>16.8"</b>
Maximum reach at ground line	721 mm	<b>2'4.4"</b>	504 mm	<b>1'7.8"</b>	1092 mm	<b>3'7"</b>	1160 mm	<b>3'9.7"</b>	1295 mm	<b>4'3"</b>
Maximum ground clearance under tip (shank pinned in bottom hole)	520 mm	<b>20.5"</b>	604 mm	<b>23.8"</b>	523 mm	<b>20.6"</b>	660 mm	<b>26"</b>	670 mm	<b>26"</b>
Maximum ramp angle, ripper up (shank pinned in bottom hole)	<b>24°</b>		<b>30.5°</b>		<b>19°</b>		<b>19°</b>		<b>20°</b>	
Shank section	36 × 76 mm <b>1.4" × 3"</b>		36 × 76 mm <b>1.4" × 3"</b>		50 × 109 mm <b>2" × 4.3"</b> (Curved)		58 × 139 mm <b>2.3" × 5.5"</b> (Curved)		74 × 175 mm <b>2.9" × 6.9"</b> (Curved)	
<b>Ripper Beam</b>										
Overall width	1.58 m	<b>5'2"</b>	1.58 m	<b>5'2"</b>	1.95 m	<b>6'5"</b>	1.95 m	<b>6'5"</b>	2.2 m	<b>7'3"</b>
Height	130 mm	<b>5.1"</b>	130 mm	<b>5.1"</b>	165 mm	<b>6.5"</b>	165 mm	<b>6.5"</b>	216 mm	<b>8.5"</b>
Length	140 mm	<b>5.5"</b>	140 mm	<b>5.5"</b>	211 mm	<b>8.3"</b>	211 mm	<b>8.3"</b>	254 mm	<b>10"</b>
Number of Pockets	<b>5</b>		<b>5</b>		<b>3</b>		<b>3</b>		<b>3</b>	
Pocket Spacing	356 mm	<b>14"</b>	356 mm	<b>14"</b>	900 mm	<b>2'11.4"</b>	896 mm	<b>2'11.3"</b>	1000 mm	<b>3'3.4"</b>
Shank Gauge	1.42 m	<b>4'8"</b>	1.42 m	<b>4'8"</b>	1.8 m	<b>5'11"</b>	1.79 m	<b>5'11"</b>	2 m	<b>6'7"</b>
Track clearance with standard shoe	151 mm	<b>5.9"</b>	151 mm	<b>5.9"</b>	<b>NA</b>		<b>NA</b>		<b>NA</b>	
Installed weights:										
Ripper with standard shanks	250 kg	<b>550 lb</b>	250 kg	<b>550 lb</b>	428 kg	<b>944 lb</b>	563 kg	<b>1241 lb</b>	1228 kg	<b>2707 lb</b>
Each additional shank	11 kg	<b>24 lb</b>	11 kg	<b>24 lb</b>	<b>3 shanks std.</b>		<b>3 shanks std.</b>		<b>3 shanks std.</b>	
<b>Ripper Forces*:</b>										
Penetration Force	2650 kg	<b>5843 lb</b>	2687 kg	<b>5924 lb</b>	4707 kg	<b>10,380 lb</b>	6385 kg	<b>14,080 lb</b>	8820 kg	<b>19,450 lb</b>
Pryout Force	5265 kg	<b>11,610 lb</b>	5265 kg	<b>11,610 lb</b>	10 388 kg	<b>22,905 lb</b>	13 897 kg	<b>30,640 lb</b>	17 450 kg	<b>38,480 lb</b>

\*These values may vary slightly with different vehicle configurations.

NA – Not Applicable

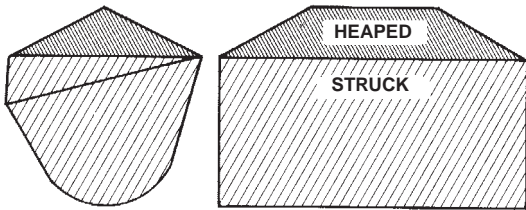**SAE BUCKET RATING****SAE Bucket Capacities**

*Struck capacity* is that volume contained in a bucket after a load is leveled by drawing a straight edge resting on the cutting edge and the back of the bucket.

*Heaped capacity* is a struck capacity *plus* that additional material that would heap on the struck load at a 2:1 angle of repose with the struck line parallel to the ground.

SAE J742 (Oct. 79) specifies that the addition of any auxiliary spill guard to protect against spillage of material which might injure the operator will not be included in bucket capacity ratings. Buckets with irregular shaped cutting edges (vee edge) the strike plane should be drawn at one-third the distance of the protruding portion of the cutting edge. Caterpillar rock buckets are built with integral see-through rock guards. Caterpillar light material buckets come standard with bolt-on edges. These features which add to actual bucket capacity are included in published ratings.

**Dump Height**

SAE J732 JUN92 specifies that dump height is the vertical distance from the ground to the lowest point of the cutting edge with the bucket hinge pin at maximum height and the bucket at a 45° dump angle. Dump angle is the angle in degrees that the longest flat section of the inside bottom of the bucket will rotate below horizontal.

**Static Tipping Load**

The minimum weight at center of gravity of “SAE Rated” load in bucket which will rotate rear of machine to a point where, on track loaders, front rollers are clear of the track under the following conditions:

- a. Loader on hard level surface and stationary.
- b. Unit at standard operating weight.
- c. Bucket at maximum rollback position.

- d. Load at maximum forward position during raising cycle.
- e. Unit with standard equipment as described in specifications unless otherwise noted under the heading.

**Operating Load**

In order to comply with SAE standard J818 MAY87, the operating load for track loaders should not exceed 35% of the Static Tipping load rating. See “Performance Data” of each machine in this handbook for increases to static tipping load by adding cab, counterweights, ripper-scarifier, etc.

**SELECTING A MACHINE****Steps in selecting the proper size loader:**

1. Determine production required or desired.
2. Determine loader cycle time and cycles per hour. A machine size must be assumed to select a basic cycle time.
3. Determine required payload per cycle in loose cubic yards and pounds (meters and kilograms).
4. Determine bucket size needed.
5. Make machine selection using bucket size and payload as criteria to meet production requirements.
6. Compare the loader cycle time used in calculations to the cycle time of the machine selected. If there is a difference, rework the process beginning at step 2.

**1. Production Required**

The production required of a track loader should be slightly greater than the production capability of the other critical units in the earth or material moving system. For example, if a hopper can handle 300 tons per hour, a loader capable of slightly more than 300 tons should be used. Required production should be carefully calculated so the proper machine and bucket selections are made.

**2. Loader Cycle Times**

Material type, pile height, and other factors may improve or reduce production, and should be added to or subtracted from the basic cycle time when applicable.

When hauls are involved, obtain haul and return portions of the cycle from the estimated travel chart (this section). Add the haul and return times to the estimated basic cycle time to obtain total cycle time.



**CYCLE TIME FACTORS**

A basic cycle time (Load, Dump, Maneuver) of 0.25-0.35 minutes is average for a track loader [the basic cycle for large track loaders, 2 m<sup>3</sup> (2.6 yd<sup>3</sup>) and up, can be slightly longer], but variations can be authenticated in the field. The following values for many variable elements are based on normal operations. Adding or subtracting any of the variable times will give the total basic cycle time.

**Estimating Cycle Time**

Cycle time of a track loader needs to be determined to find loads per hour. Total cycle time includes the following segments:

Load Time + Maneuver Time + Travel Time + Dump Time

**Load Time —**

<b>Material</b>	<b>Minutes</b>
Uniform aggregates	0.03-0.05
Moist mixed aggregates	0.03-0.06
Moist loam	0.03-0.07
Soil, boulders, roots	0.04-0.20
Cemented materials	0.05-0.20

**Maneuver Time** — includes basic travel, four changes of direction and turning time, and will be about 0.20 minutes with a competent operator.

**Travel Time** — in a load and carry operation is comprised of haul and return times which can be determined by the travel charts in this section.

**Dump Time** — is dictated by the size and strength of the dump target and varies from 0.00 to 0.10 minutes. Typical dump times into highway trucks are from 0.04 to 0.07 minutes.

**NOTE:** When comparing hydrostatic track loaders with former power shift models (using the production estimating method) two factors must be considered: (1) The hydrostatic track loaders on the average outcycle power shift models by up to 10 percent due to faster machine speed and easier operation. (2) Larger, rear engine hydrostatic track loaders incorporate Z-bar linkage, which provides substantially better bucket fill factors. The degree to which each factor affects estimated production should be left to the user's judgment depending on the particular job application and conditions.

Example: Moist loam is being excavated from a bank and loaded into trucks.

	<b>Minutes</b>
Load — moist loam	0.05
Maneuver Time	0.20
Travel — none required	0.00
Dump	<u>0.05</u>
Total Cycle	0.30 min. or 200 cycles per 60 min. hour

*Minutes added (+)  
or Subtracted (-)  
From Basic Cycle*

**Materials**

- Mixed . . . . .+0.02
- Up to 3 mm (1/8 in) . . . . .+0.02
- 3 mm (1/8 in) to 20 mm (3/4 in) . . . . .-0.02
- 20 mm (3/4 in) to 150 mm (6 in) . . . . . 0.00
- 150 mm (6 in) and over . . . . .+0.03 and Up
- Bank or broken . . . . .+0.04 and Up

**Pile**

- Conveyor or Dozer piled 3 m (10 ft) and up . . . . . 0.00
- Conveyor or Dozer piled 3 m (10 ft) or less . . . . .+0.01
- Dumped by truck . . . . .+0.02

**Miscellaneous**

- Common ownership of trucks and loaders . . . . .Up to -0.04
- Independently owned trucks . . . . .Up to +0.04
- Constant operation . . . . .Up to -0.04
- Inconsistent operation . . . . .Up to +0.04
- Small target . . . . .Up to +0.04
- Fragile target . . . . .Up to +0.05

Using actual job conditions and the above factors, total cycle time can be estimated. Convert total cycle time to cycles per hour.

$$\frac{\text{Cycles per hour at 100\% Efficiency}}{100\% \text{ Efficiency}} = \frac{60 \text{ Min}}{\text{Total Cycle Time in Minutes}}$$

Job efficiency is an important factor in machine selection. Efficiency is the actual number of minutes worked during an hour. Job efficiency accounts for operator breaks, and other work interruptions. See "Efficiency Considerations" page 14-18.

- Bucket Fill Factors
- Recommended Operating Capacities
- Loader Production

**Bucket Fill Factors**

The following indicates the approximate amounts of material as a percent of rated bucket capacity which will actually be delivered per bucket per cycle. This is known as “Bucket Fill Factor.”

<b>Loose Material</b>	<b>Fill Factor</b>
Mixed Moist Aggregates	95-110%
Uniform Aggregates	
up to 3 mm (1/8 in)	95-110
3 mm-9 mm (1/8 in-3/8 in)	90-110
12 mm-20 mm (1/2 in-3/4 in)	90-110
24 mm and over (1 in)	90-110
<b>Blasted Rock</b>	
Well	80-95%
Average	75-90
Poor	60-75
<b>Other</b>	
Rock Dirt Mixtures	100-120%
Moist Loam	100-120
Soil, Boulders, Roots	80-100
Cemented Materials	85-100

Fill factors on track loaders are affected by bucket penetration, breakout force, rackback angle, bucket profile and ground engaging tools such as bucket teeth and segments or bolt-on replaceable cutting edges.

**GENERAL PURPOSE BUCKET  
W/TEETH & SEGMENTS  
MAXIMUM OPERATING CAPACITIES**

MODEL	GENERAL PURPOSE BUCKET SIZE		MAXIMUM OPERATING CAPACITY	
	m <sup>3</sup>	yd <sup>3</sup>	kg	lb
933C	1.0	1.3	1770	3900
939C	1.15	1.5	2040	4500
953C	1.85	2.4	3340	7370
963C	2.45	3.2	4550	10,030
973C	3.2	4.2	6750	14,870

**LOADER PRODUCTION**

Loader production equals quantity of material the bucket carries per load × number of bucket loads per hour.

**Estimating Bucket Load**

The quantity of material in a loader bucket is estimated by two methods, depending on whether the material being loaded is in a loose or bank state.

1. When the material is loose, as in stockpile loading, the bucket load is estimated in loose meters (or cubic yards) by a Bucket Fill Factor (see Tables Section or chart following this discussion). The quantity of material is determined as follows:

$$\text{Rated Bucket Capacity} \times \text{Bucket Fill Factor} = \text{Bucket Payload in Loose m}^3 \text{ (yd}^3\text{)}$$

For example, a 973 with a 3.2 m<sup>3</sup> (4.2 yd<sup>3</sup>) General Purpose bucket loading moist loam material will carry:

$$3.2 \text{ m}^3 \times 1.15 = 3.68 \text{ loose cubic meters}$$

$$(4.2 \text{ yd}^3 \times 1.15 = 4.83 \text{ loose cubic yards})$$

Once the potential bucket load has been determined, check the static tipping load ratings on the specific machine to determine if bucket load is in fact a safe operating load. (*Safe operating load as defined by SAE for track loaders should not exceed 35% of static tipping load.*)

Productivity in many applications is measured in tons. See Tables Section for material densities if conversion to tons is desired.

2. When material is in the bank state, as in excavation, productivity is measured in bank meters (cubic yards). Bucket load in Bm<sup>3</sup> (BCY) is estimated by applying one of the load factors from the Tables section to convert the excavated material in the bucket from Bm<sup>3</sup> (BCY) to Lm<sup>3</sup> (LCY) to allow for the digging and carrying characteristics of the material. The quantity of excavated material a bucket carries is then determined as follows:

$$\text{Rated Bucket Capacity} \times \text{Load Factor} \times \text{Bucket Fill Factor} = \text{Bucket Payload in Bm}^3 \text{ (BCY)}$$

Example: a 953C with a 1.85 m<sup>3</sup> (2.4 yd<sup>3</sup>) General Purpose bucket loading wet loam earth from bank:

$$1.85 \text{ m}^3 \times 0.79 \times 1.15 = 1.68 \text{ Bm}^3$$

$$(2.4 \text{ yd}^3 \times 0.79 \times 1.15 = 2.18 \text{ BCY})$$

- Estimating Production
- Alternative Machine Selection Method

### Estimating Production

Machine and job considerations include:

- Machine model and bucket size
- Material type, particle size, density and load factor (see Tables Section)
- Bucket fill factor
- Haul distance
- Underfoot conditions
- Altitude
- Dump target size, height, and type

#### Example:

##### Conditions —

Machine	953C
Bucket size	1.85 m <sup>3</sup> (2.4 yd <sup>3</sup> )
Material	Moist Loam
Bucket fill factor	1.15
Haul length	30 m (100 ft)
Dump target	Pile
Travel in forward speed	

##### Cycle Time

##### Minutes

Load time	0.15
Maneuver time	0.20
Travel time (from curves)	0.40
Dump time	0.05
Total	0.80

##### Loads Per Hour —

$$\frac{60 \text{ min/hr}}{0.90 \text{ min/cycle}} = 75 \text{ cycles per hour @ 100\% efficiency}$$

##### Load Per Cycle —

$$1.85 \text{ m}^3 \times 1.15 \text{ BFF} = 2.13 \text{ Lm}^3 \times 0.81 \text{ LF} = 1.72 \text{ Bm}^3$$

$$(2.4 \text{ yd}^3 \times 1.15 \text{ BFF} = 2.76 \text{ LCY} \times 0.81 \text{ LF} = 2.24 \text{ BCY})$$

##### Hourly Production —

$$1.72 \text{ Bm}^3 \times 75 \text{ cycles/h} = 129 \text{ Bm}^3/\text{h}$$

$$(2.24 \text{ BCY} \times 75 \text{ cycles/hr} = 168 \text{ BCY/hr})$$

More accurate production estimates can be made by recording actual machine cycle times in the same or similar application. Then visually verify the approximate bucket fill factor.

### Efficiency Considerations

Loader capacity should always be matched to peak production requirements of the job. Actual “on-the-job” loader productivity will be influenced by factors such as operator skill, personal delays, job layout and other delays. Experience and knowledge of local conditions will be the best indicators of actual job efficiency.

Operation	Working Hour	Efficiency Factor
Day	50 min/Hr	0.83

### An Alternative Machine Selection Method

Another method of selecting the right Track Loader and bucket to meet production requirements is by use of the nomographs on the following pages. The method is quicker and easier than the preceding example because it does not require as many calculations, yet the accuracy is about the same within the normal limits of input data.

Be careful when entering and reading data from the nomographs because some scales increase from bottom to top, while others are the reverse. Do not be overly concerned with the precision as affected by pencil line width or reading to the hundredth of a m<sup>3</sup> (yd<sup>3</sup>). Remember that bucket fill factor, material density, and cycle time are at best close estimates.

#### Example problem

A track loader must produce 200 Lm<sup>3</sup> (262 LCY) per hour. Estimated cycle time is 0.5 minutes, working 50 minutes per hour. Bucket fill factor is 110% and the material density is 1600 kg/Lm<sup>3</sup> (2700 lb/LCY).

Determine bucket size, machine model and hourly production in tons and yards.

#### Solution:

At full efficiency, it will cycle 120 times per hour. Since only an average 50 minutes are available, only 100 cycles will be completed per hour.

Starting on Scale A at 100 cycles per hour draw a straight line intersecting 200 m<sup>3</sup>/hr (262 yd<sup>3</sup>/hr) on Scale B and continuing the line on to Scale C giving 2.0 m<sup>3</sup> (2.62 yd<sup>3</sup>) required payload.

Follow steps 1 through 7 on the next two pages.




# Production and Machine Selection Nomograph

- To find required bucket payload and bucket size

## Track Loaders

- 1) Enter Scale A cycles per hour (100) and B hourly production 200 m<sup>3</sup>/hr (262 yd<sup>3</sup>/hr).
- 2) Connect A and B and extend to C to find required payload 2.0 m<sup>3</sup> (2.62 yd<sup>3</sup>).
- 3) Connect C to bucket fill factor on Scale D (110%) and extend to E to find required bucket size 1.8 m<sup>3</sup> (2.35 yd<sup>3</sup>).
- 4) Transfer Scale A and C readings to nomograph on following page.

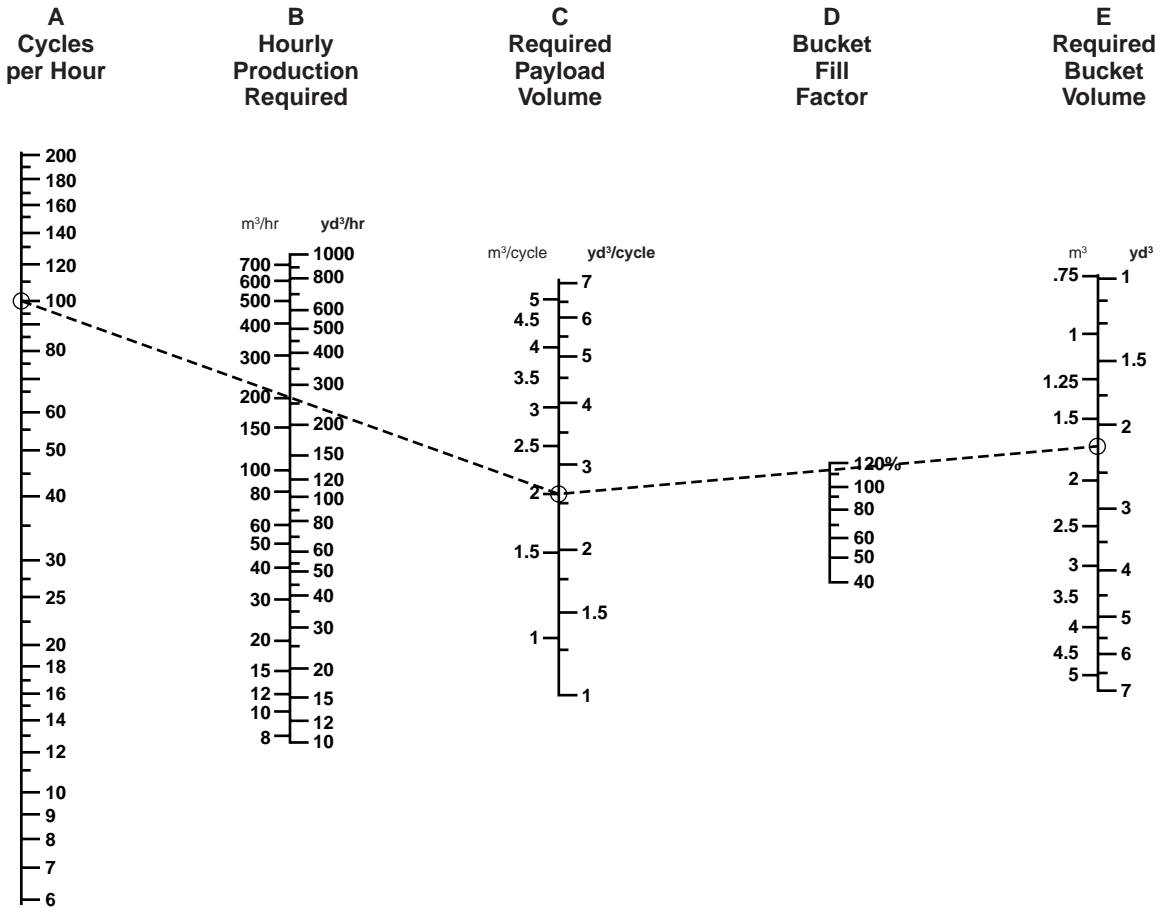

# Track Loaders


## Production and Machine Selection Nomograph

- To find payload weight for stability and output in tons per hour

- 5) Connect C 1.8 m<sup>3</sup> (2.35 yd<sup>3</sup>) to F 1600 kg/m<sup>3</sup> (2700 lb/yd<sup>3</sup>) and extend to G to find payload weight 2880 kg (6345 lb).
- 6) Compare G bucket payload weight 2880 kg (6345 lb) with maximum operating capacities table in this section to see if the 1.85 m<sup>3</sup> (2.4 yd<sup>3</sup>) bucket can handle the desired payload. Table indicates the

953C with a 1.85 m<sup>3</sup> (2.4 yd<sup>3</sup>) bucket equipped with bolt-on cutting edge or teeth and segments has a greater operating capacity of 3343 kg (7370 lb), therefore stability is okay.

- 7) Extend Scale G reading 2880 kg (6345 lb) through Scale A (100) to Scale I to find tons per hour 288 metric ton/hr (317 U.S. ton/hr).

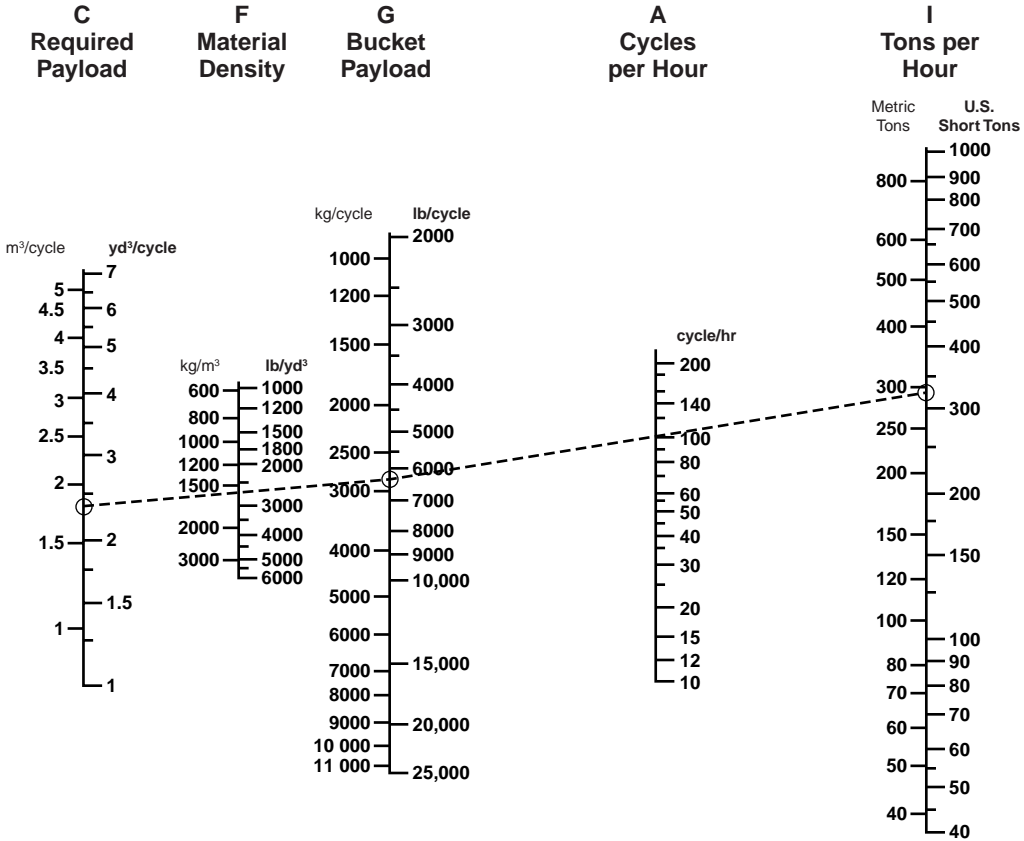

## TRAVEL TIME CHARTS

### Conditions:

- No grades.
- Speeds loaded and empty essentially the same.
- Bucket position constant during travel.
- Travel encountered in maneuver time portion of cycle not included.
- Acceleration time accounted for in maneuver time.


Travel Time (in minutes) =

$$\text{Metric} - \frac{\text{number of meters traveled}}{\text{speed (in km/h)} \times 16.67}$$


$$\text{English} - \frac{\text{number of feet traveled}}{\text{speed (in mph)} \times 88}$$

Hydrostatic top speed both forward and reverse 9 km/h (5.6 mph).


933C

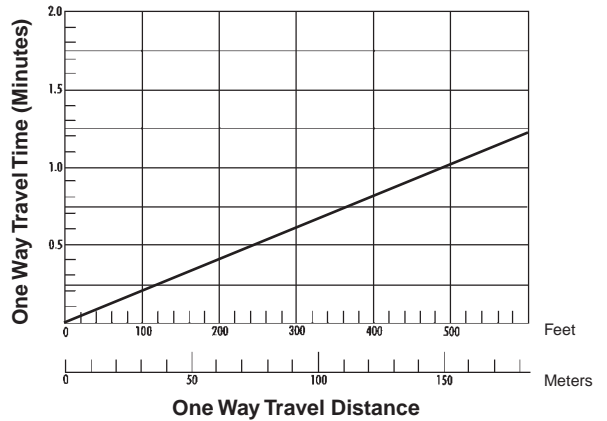


939C

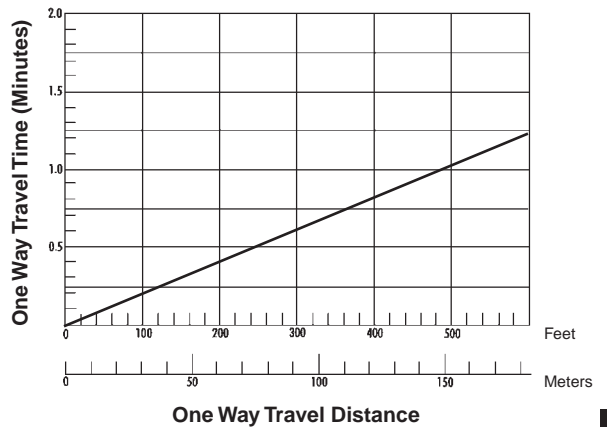


953C

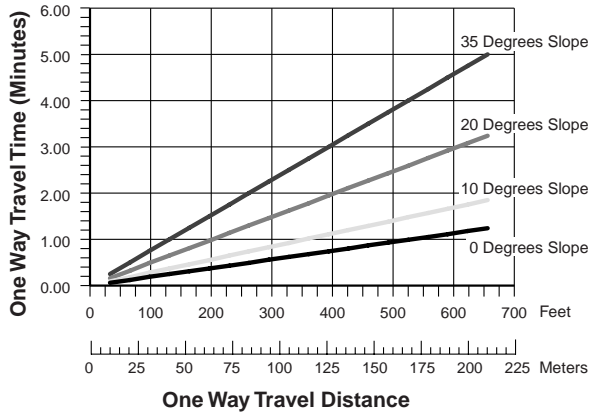

963C

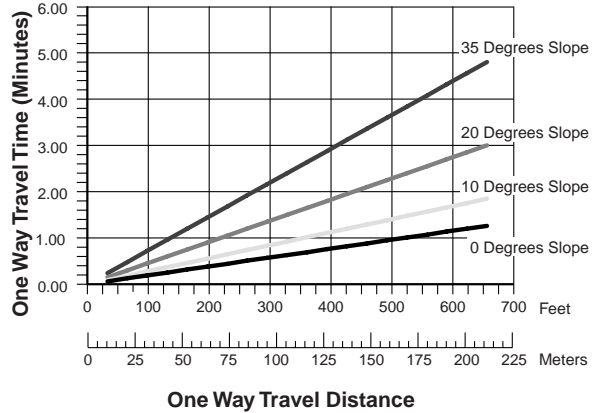

973C

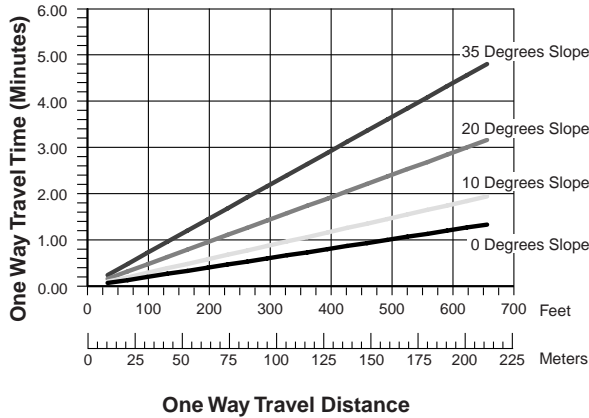

TRAVEL TIME CHARTS

Conditions:

- No grades.
- Speeds loaded and empty essentially the same.
- Bucket position constant during travel.
- Travel encountered in maneuver portion of cycle not included.
- Acceleration time accounted for in maneuver time.

Travel Time (in minutes) =

$$Metric - \frac{\text{number of meters traveled}}{\text{speed (in km/h)} \times 16.67}$$

$$English - \frac{\text{number of feet traveled}}{\text{speed (in mph)} \times 88}$$

KEY

953C — Hydrostatic top speed both forward and reverse 9.7 km/h (6.0 mph)

963C — Hydrostatic top speed both forward and reverse 9.5 km/h (5.9 mph)

973C — Hydrostatic top speed both forward and reverse 9.0 km/h (5.6 mph)

Production Estimating Table  
 ● m<sup>3</sup> or yd<sup>3</sup>/60 min. hour  
 ● Estimated bucket payload in bank m<sup>3</sup> or yd<sup>3</sup>

**Track Loaders**

Bucket Size (m <sup>3</sup> or yd <sup>3</sup> )		1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0
Cycle Time Hundredths of a minute	Cycles Per Hr	Unshaded area indicates average work range								
		0.25	240	240	360	480	600	720	840	960
0.30	200	200	300	400	500	600	700	800		
0.35	171	171	257	342	428	513	599	684	769	
0.40	150	150	225	300	375	450	525	600	675	750
0.45	133	133	200	268	332	400	466	530	600	665
0.50	120	120	180	240	300	360	420	480	540	600
0.55	109	109	164	218	272	328	382	436	490	545
0.60	100	100	150	200	250	300	350	400	450	600
0.65	92	92	138	184	230	276	322	368	416	460



Work Tools	973C	963C	953C	939C*	933C*
Quick coupler	X	X	X		
General purpose (GP) bucket	X	X	X		
GP bucket with trash rack	X	X	X		
MP bucket with trash rack	X	X	X		
MP ES bucket	X	X			
Landfill bucket	X	X	X		
Landfill Multi-purpose	X	X	X		
Skeleton rock bucket		X			
Coal bucket			X		
Woodchip bucket					
Fertilizer bucket				X	
Multi-purpose (MP) bucket	X	X	X	X	X
MP bucket with trash rack	X	X	X		
MP ES bucket	X	X			
Side dump bucket	X	X			
Demolition bucket	X				
Rock bucket	X				
Flat bottom bucket		X	X		
High dump bucket	X	X	X		
2-way dozer trim blade	X	X	X		
Straight blade			X		
Manual angle blade			X		
Hydraulic angle blade			X		
Forks (for QC or bucket)	X	X	X		
Material handling arm	X	X	X		
Loader rake		X	X		

\*This list is not all-inclusive. Contact your Caterpillar Dealer for specific attachment needs.

## SHOE OPTIONS



① **Double Grouser Shoes**



② **Trapezoidal Center Hole Shoes**



③ **Single Grouser Shoes**



④ **Chopper Shoes**

- **Extreme service shoes** are available which have more hardened wear material for longer wear life and higher impact applications.

- **Wider shoes** are also available to reduce ground pressure in soft underfoot conditions.

Other shoe options are available. Consult a Caterpillar Dealer for more information.

# INTEGRATED TOOLCARRIERS

## CONTENTS

Features	15-1
Specifications	15-2
Special attachments	15-4
Performance Data:	
General purpose buckets	15-5
Pallet forks	15-7
Material handling arm	15-8
Machine Dimensions:	
General purpose buckets	15-9
Pallet forks	15-10
Material handling arm	15-11
Bucket selection guide	15-13
Machine/Attachment selection	15-14

## Features:

- **Integral quick coupler** for fast tool changes.
- **Wide range of tools** available to meet many jobs.
- **Increased lift height and reach** over conventional loaders.
- **Parallel lift** from ground level to maximum height.
- **High tilt force** throughout lift cycle provides exceptional load control.
- **Pressure compensating valves** provide precise hydraulic “feel” on the IT28G.
- **Transmission neutralizer lockout switch** for low speed maneuverability is standard. (IT14G-IT62G)
- **Positive carry position** for load stability and retention.
- **Standard third valve and optional fourth function** for multiple tool functions.
- **Work tool interchangeability.** IT14G thru IT28G share the same tools. IT38G and IT62G can share the same tools.
- **Excellent center visibility** to quick coupler and work tool.
- **Two position return** to work kickouts.
- **Several quick-coupler work tools** for IT38G and IT62G are available from the factory and ship with the machine. Contact your Caterpillar Dealer for details.



<b>MODEL</b>	<b>IT14G</b>		<b>924G Hook On</b>	
Flywheel Power	67 kW	<b>90 hp</b>	82 kW	<b>110 hp</b>
Engine Model	<b>3054T</b>		<b>3056T</b>	
Rated Engine RPM	<b>2200</b>		<b>2300</b>	
Bore	100 mm	<b>3.94"</b>	100 mm	<b>3.94"</b>
Stroke	127 mm	<b>5"</b>	127 mm	<b>5"</b>
No. Cylinders	<b>4</b>		<b>6</b>	
Displacement	4 L	<b>244 in<sup>3</sup></b>	6 L	<b>366 in<sup>3</sup></b>
Speeds Forward:	km/h	<b>mph</b>	km/h	<b>mph</b>
1st	9.0	<b>5.6</b>	6.7	<b>4.2</b>
2nd	32.0	<b>19.9</b>	12.2	<b>7.6</b>
3rd	—		21.8	<b>13.5</b>
4th	—		38.5	<b>23.9</b>
Speeds Reverse:				
1st	9.0	<b>5.6</b>	6.5	<b>4.0</b>
2nd	32.0	<b>19.9</b>	11.9	<b>7.4</b>
3rd	—		21.6	<b>13.4</b>
Hydraulic Cycle Time, rated load in bucket:	<b>Seconds</b>		<b>Seconds</b>	
Raise	<b>6.9</b>		<b>5.1</b>	
Dump	<b>2.5</b>		<b>1.4</b>	
Lower (empty, float down)	<b>3.1</b>		<b>2.4</b>	
Total	<b>12.5</b>		<b>8.9</b>	
Fuel tank capacity	150 L	<b>39.6 U.S. gal</b>	198 L	<b>51.5 U.S. gal</b>
Hydraulic tank capacity	70 L	<b>18.5 U.S. gal</b>	73 L	<b>19.3 U.S. gal</b>
Hydraulic system capacity (includes tank)	100 L	<b>26.4 U.S. gal</b>	150 L	<b>39 U.S. gal</b>



MODEL	IT28G		IT38G		IT62G	
Flywheel Power: Net	93 kW	125 hp	119 kW	160 hp	149 kW	200 hp
Max	—		128 kW	172 hp	154 kW	207 hp
Engine Model	3116T		3126DITA		3126DITA	
Rated Engine RPM	2300		2200		2200	
Bore	105 mm	4.13"	110 mm	4.3"	110 mm	4.3"
Stroke	127 mm	5"	127 mm	5"	127 mm	5"
No. Cylinders	6		6		6	
Displacement	6.6 L	403 in <sup>3</sup>	7.2 L	439 in <sup>3</sup>	7.2 L	439 in <sup>3</sup>
Speeds Forward:	km/h	mph	km/h	mph	km/h	mph
1st	7.6	4.7	7.6	4.7	6.9	4.3
2nd	12.0	7.5	13.9	8.6	12.7	7.9
3rd	24.6	15.3	23.9	14.8	22.3	13.9
4th	36.7	22.8	39.2	24.3	37.0	23.0
Speeds Reverse:						
1st	7.6	4.7	7.6	4.7	7.6	4.7
2nd	12.0	7.5	13.9	8.6	13.9	8.7
3rd	24.6	15.3	23.9	14.8	24.5	15.3
4th	—		—		40.5	25.3
Hydraulic Cycle Time, rated load in bucket:	Seconds		Seconds		Seconds	
Raise	6.1		5.8		6.1	
Dump	1.4		2.0		2.1	
Lower (empty, float down)	2.8		2.9		2.8	
Total	10.3		10.7		11.0	
Fuel tank capacity	230 L	60.8 U.S. gal	254 L	67 U.S. gal	295 L	78 U.S. gal
Hydraulic tank capacity	70 L	18.5 U.S. gal	55 L	14.5 U.S. gal	88 L	23.3 U.S. gal
Hydraulic system capacity (includes tank)	125 L	33 U.S. gal	90 L	23.8 U.S. gal	153 L	40.4 U.S. gal

**BUCKETS**

**General Purpose** — for most material types with choice of cutting edges and teeth.

**Loose Material** — designed for snow, woodchips, hay, coal, etc. Add independently controlled top clamp for materials like hay, brush, silage or compost.

**Multi-purpose** — versatile ... loads, strips top-soil, bulldozes, clamps pipe, cleans up debris, plus many other tasks.

**High dump or “roll-out”** — for extended dump height of light materials.

**Side dump** — dump forward or to the left ... ideal in close quarters or to reduce turning time.

**Grading** — long, flat floor and straight edge for finish work in housing developments, concrete pours, landscaping and light dozing.

**FORKS**

**Log or lumber forks** — with optional clamps, single, double or full-width.

**Wide frame forks** — adjustable for control of long pipes, culverts, etc.

**Stinger fork** — with long single shaft to penetrate salvage autos or round hay bales.

**Utility pallet forks** — for a variety of tasks, with three different tine sizes.

**Pulpwood** — choice of single or double top clamp for positive control of material.

**Sorting** — designed for durability and efficiency in stacking operations.

**BLADES**

**Angling dozer** — choice of manual or hydraulic angling 25° left or right.

**Straight blade** — for spreading, leveling and other utility dozing.

**One-way snow blade** — economical snow clearing with minimal machine effort.

**V-plow** — excellent for breaking up large drifts or high speed clearing operations.

**Material Handling arm** — carries and places pipe, prefabricated building panels and handles bulky, nonpalletized material ... two telescopic sections extend for three position operation.

**AND MORE ...**

**Rotary broom** — for street cleanup, snow removal, jobsite clean-up, clearing runways ... angles left or right 30°.

**Asphalt cutter** — aids repair work on roads, pavements, water and sewer mains ... cuts clean to 125 mm (5").

**Hooks** — for attachment to dumpsters, bins, troughs, etc., to permit quick, easy, instant movement from place to place.

These products are available through your Caterpillar dealer.

**Work Tools**

Work Tools	IT62G	IT38G	IT28G	924G	IT14G
Light Material Bucket		X	X	X	X
Fertilizer Bucket		X		X	X
Bucket With Top Clamp		X	X	X	X
Multi-Purpose Bucket	X	X	X	X	X
Side Dump Bucket	X	X	X	X	X
High Dump Bucket		X	X	X	X
Coal Bucket	X	X	X	X	
MH Bucket	X	X			
Clean-up Bucket	X				
Pallet Fork	X	X	X	X	X
Log/Lumber Fork	X	X	X	X	X
Core Fork			X	X	X
Straight Blade			X	X	X
Manual Angle Blade	X	X	X	X	X
Hydraulic Angle Blade			X	X	X
Manual Reversible Plow	X	X	X	X	X
Hydr. Reversible Plow	X	X	X	X	X
V-Plow			X	X	X
One Way Plow			X	X	X
Asphalt Cutter			X	X	X
Hydraulic Angle Broom	X	X	X	X	X
Pick-up Broom			X	X	X
Hydraulic Hammers			X	X	X
Tire Loader	X		X	X	X
Loader Rake	X	X	X	X	X
Woodchip	X	X	X	X	X
Refuse		X	X	X	X
Millyard Fork	X	X			
Logging Fork	X				
Grapple	X				

This list not all inclusive. Contact your Caterpillar dealer for special attachment needs.

Operating Specifications — Buckets

Cutting Edge	IT14G		IT14G		924G Hook On		924G Hook On		IT28G	
	Bolt-on Teeth		Corner Guard or Bolt-on Edge		Bolt-on Teeth		Corner Guard or Bolt-on Edge		Bolt-on Teeth	
Capacity, heaped	1.2 m <sup>3</sup>	<b>1.6 yd<sup>3</sup></b>	1.3 m <sup>3</sup>	<b>1.7 yd<sup>3</sup></b>	1.8 m <sup>3</sup>	<b>2.3 yd<sup>3</sup></b>	1.8 m <sup>3</sup>	<b>2.3 yd<sup>3</sup></b>	1.9 m <sup>3</sup>	<b>2.5 yd<sup>3</sup></b>
Capacity, struck	1 m <sup>3</sup>	<b>1.3 yd<sup>3</sup></b>	1.1 m <sup>3</sup>	<b>1.4 yd<sup>3</sup></b>	1.5 m <sup>3</sup>	<b>2 yd<sup>3</sup></b>	1.5 m <sup>3</sup>	<b>2 yd<sup>3</sup></b>	1.6 m <sup>3</sup>	<b>2.1 yd<sup>3</sup></b>
Width	2424 mm	<b>7'11.4"</b>	2401 mm	<b>7'10.5"</b>	2585 mm	<b>8'6"</b>	2550 mm	<b>8'4"</b>	2532 mm	<b>8'4"</b>
Dump clearance @ full lift and 45° discharge	2975 mm	<b>9'9"</b>	2920 mm	<b>9'7"</b>	2656 mm	<b>8'9"</b>	2760 mm	<b>9'1"</b>	2799 mm	<b>9'2"</b>
Reach at 45° discharge angle, 2130 mm/ <b>7'0"</b> clearance	1351 mm	<b>4'5"</b>	1425 mm	<b>4'8"</b>	1597 mm	<b>5'3"</b>	1554 mm	<b>5'1"</b>	1605 mm	<b>5'3"</b>
Reach at full lift and 45° discharge	757 mm	<b>2'6"</b>	787 mm	<b>2'7"</b>	1170 mm	<b>3'10"</b>	1067 mm	<b>3'6"</b>	1109 mm	<b>3'8"</b>
Reach with arms horizontal and bucket level	2090 mm	<b>6'10"</b>	2150 mm	<b>7'1"</b>	2516 mm	<b>8'3"</b>	2370 mm	<b>7'9"</b>	2529 mm	<b>8'4"</b>
Digging depth	156 mm	<b>6.1"</b>	175 mm	<b>6.9"</b>	132 mm	<b>5"</b>	132 mm	<b>5"</b>	122 mm	<b>4.8"</b>
Overall length	6506 mm	<b>21'4"</b>	6424 mm	<b>21'1"</b>	7325 mm	<b>24'0"</b>	7179 mm	<b>23'7"</b>	7442 mm	<b>24'5"</b>
Overall height (bucket @ full raise)	4801 mm	<b>15'9"</b>	4801 mm	<b>15'9"</b>	5110 mm	<b>16'9"</b>	5110 mm	<b>16'9"</b>	5080 mm	<b>16'8"</b>
Loader clearance circle (bucket in carry position)	10.47 m	<b>34'4"</b>	10.4 m	<b>34'1"</b>	11.32 m	<b>37'2"</b>	11.21 m	<b>36'9"</b>	11.46 m	<b>37'6"</b>
Static tipping load**										
Straight	5400 kg	<b>11,880 lb</b>	5307 kg	<b>11,670 lb</b>	7305 kg	<b>16,700 lb</b>	7470 kg	<b>16,430 lb</b>	8567 kg	<b>18,890 lb</b>
Full turn	4675 kg	<b>10,280 lb</b>	4588 kg	<b>10,090 lb</b>	6342 kg	<b>13,950 lb</b>	6507 kg	<b>14,310 lb</b>	7423 kg	<b>16,370 lb</b>
Breakout force*	82.6 kN	<b>18,560 lb</b>	76.8 kN	<b>17,270 lb</b>	96.2 kN	<b>21,630 lb</b>	97.4 kN	<b>21,900 lb</b>	111.2 kN	<b>25,000 lb</b>
Operating weight**	7819 kg	<b>17,200 lb</b>	7860 kg	<b>17,290 lb</b>	—	—	—	—	—	—
4 forward, 3 reverse	—	—	—	—	10 490 kg	<b>23,090 lb</b>	10 360 kg	<b>22,790 lb</b>	11 940 kg	<b>26,340 lb</b>
4 forward, 4 reverse	—	—	—	—	—	—	—	—	—	—

\*Breakout force is measured 102 mm (4") behind tip of cutting edge with bucket hinge pin as pivot in accordance with SAE J732 JUN92.

\*\*Operating Weight and static tipping load include lubricants, full fuel tank, ROPS cab and 80 kg (176 lb) operator.

— IT14G includes high speed version, standard counterweight and 17.5R25 tires.

— 924G includes 17.5-25, 12 PR (L-2) tires.

— IT28G includes 20.5-25, 12 PR tires and optional counterweight.

Machine stability is affected by the tire size, tire ballast and attachments.

**Operating Specifications — Buckets**

Cutting Edge	IT28G		IT38G		IT38G		IT62G		IT62G	
	Corner Guard or Bolt-on Edge		Bolt-on Teeth		Corner Guard or Bolt-on Edge		Bolt-on Edge		Corner Guard or Bolt-on Edge	
Capacity, heaped	2 m <sup>3</sup>	<b>2.6 yd<sup>3</sup></b>	2.4 m <sup>3</sup>	<b>3.1 yd<sup>3</sup></b>	2.5 m <sup>3</sup>	<b>3.25 yd<sup>3</sup></b>	3.3 m <sup>3</sup>	<b>4.25 yd<sup>3</sup></b>	3.3 m <sup>3</sup>	<b>4.25 yd<sup>3</sup></b>
Capacity, struck	1.7 m <sup>3</sup>	<b>2.25 yd<sup>3</sup></b>	2 m <sup>3</sup>	<b>2.6 yd<sup>3</sup></b>	2.1 m <sup>3</sup>	<b>2.7 yd<sup>3</sup></b>	2.6 m <sup>3</sup>	<b>3.4 yd<sup>3</sup></b>	2.6 m <sup>3</sup>	<b>3.4 yd<sup>3</sup></b>
Width	2549 mm	<b>8'4"</b>	2735 mm	<b>8'11"</b>	2708 mm	<b>8'10"</b>	2925 mm	<b>9'7"</b>	2925 mm	<b>9'7"</b>
Dump clearance @ full lift and 45° discharge	2911 mm	<b>9'7"</b>	2720 mm	<b>8'11"</b>	2800 mm	<b>9'2"</b>	2810 mm	<b>9'3"</b>	2810 mm	<b>9'3"</b>
Reach at 45° discharge angle, 2130 mm/7'0" clearance	1567 mm	<b>5'2"</b>	1704 mm	<b>5'7"</b>	1657 mm	<b>5'5"</b>	1780 mm	<b>5'10"</b>	1780 mm	<b>5'10"</b>
Reach at full lift and 45° discharge	1014 mm	<b>3'4"</b>	1288 mm	<b>4'3"</b>	1200 mm	<b>3'11"</b>	1275 mm	<b>4'2"</b>	1275 mm	<b>4'2"</b>
Reach with arms horizontal and bucket level	2383 mm	<b>7'10"</b>	2640 mm	<b>8'8"</b>	2521 mm	<b>8'3"</b>	2820 mm	<b>9'3"</b>	2820 mm	<b>9'3"</b>
Digging depth	108 mm	<b>4.3"</b>	45 mm	<b>1.8"</b>	70 mm	<b>2.8"</b>	90 mm	<b>3.5"</b>	90 mm	<b>3.5"</b>
Overall length	7318 mm	<b>24'0"</b>	7601 mm	<b>24'11"</b>	7487 mm	<b>24'7"</b>	8310 mm	<b>27'3"</b>	8310 mm	<b>27'3"</b>
Overall height (bucket @ full raise)	5080 mm	<b>16'8"</b>	5237 mm	<b>17'2"</b>	5237 mm	<b>17'2"</b>	5485 mm	<b>18'0"</b>	5485 mm	<b>18'0"</b>
Loader clearance circle (bucket in carry position)	11.36 m	<b>37'4"</b>	12.23 m	<b>40'1"</b>	12.13 m	<b>39'10"</b>	13.41 m	<b>44'0"</b>	13.41 m	<b>44'0"</b>
Static tipping load**										
Straight	8469 kg	<b>18,670 lb</b>	9059 kg	<b>20,030 lb</b>	8861 kg	<b>19,530 lb</b>	12 961 kg	<b>28,580 lb</b>	12 960 kg	<b>28,580 lb</b>
Full turn	7335 kg	<b>16,120 lb</b>	7806 kg	<b>17,200 lb</b>	7621 kg	<b>16,800 lb</b>	11 226 kg	<b>24,750 lb</b>	11 220 kg	<b>24,750 lb</b>
Breakout force*	104.3 kN	<b>23,440 lb</b>	124.7 kN	<b>28,020 lb</b>	123.8 kN	<b>27,830 lb</b>	125.5 kN	<b>28,210 lb</b>	125.5 kN	<b>28,210 lb</b>
Operating weight**	—	—	—	—	—	—	—	—	—	—
4 forward, 3 reverse	11 970 kg	<b>26,390 lb</b>	12 970 kg	<b>28,530 lb</b>	13 060 kg	<b>28,710 lb</b>	—	—	—	—
4 forward, 4 reverse	—	—	—	—	—	—	18 314 kg	<b>40,380 lb</b>	18 310 kg	<b>40,380 lb</b>

\*Breakout force is measured 102 mm (4") behind tip of cutting edge with bucket hinge pin as pivot in accordance with SAE J732 JUN92.

\*\*Operating Weight and static tipping load include lubricants, full fuel tank, ROPS cab and 80 kg (176 lb) operator.

— IT28G includes 20.5-25, 12 PR (L-2) tires and optional counterweight.

— IT38G includes 20.5R25, XTLA (L-2) tires.

— IT62G includes 23.5R25, XHA (L-3) tires, air conditioning, crankcase guard, power train guard and material handling bucket.

Machine stability is affected by the tire size, tire ballast and attachments.

Operating Specifications — Pallet Forks

**IT14G**

Fork tine length	1050 mm	<b>3'5"</b>
Ground to top of tine clearance	3708 mm	<b>12'2"</b>
Reach with arms horizontal and forks level	1490 mm	<b>4'11"</b>
Overall length	6723 mm	<b>22'1"</b>
Static tipping load*		
Straight	4267 kg	<b>9387 lb</b>
Full turn	3700 kg	<b>8140 lb</b>
Operating weight*		
4 forward, 3 reverse	7715 kg	<b>16,973 lb</b>

The rated operating load for a machine with pallet fork is: SAE J1197 FEB91; 50% of full turn static tipping load, or hydraulic/structural limit. CEN 474-3: 60% of full turn static tipping load on rough terrain: 80% of full turn static tipping load on firm and level ground, or the hydraulic/structural limit.

**924G**

	<b>IT14G</b>		<b>924G Hook On</b>		<b>IT28G</b>		<b>IT38G</b>		<b>IT62G</b>	
Fork tine length	1200 mm	<b>3'11"</b>	1200 mm	<b>3'11"</b>	1200 mm	<b>3'11"</b>	1220 mm	<b>4'0"</b>	1220 mm	<b>4'0"</b>
Ground to top of tine clearance	3708 mm	<b>12'2"</b>	3569 mm	<b>11'8"</b>	3843 mm	<b>12'7"</b>	3716 mm	<b>12'2"</b>	3790 mm	<b>12'5"</b>
Reach with arms horizontal and forks level	1490 mm	<b>4'11"</b>	1636 mm	<b>5'4"</b>	1513 mm	<b>5'0"</b>	2891 mm	<b>9'6"</b>	3195 mm	<b>10'6"</b>
Overall length	6873 mm	<b>22'7"</b>	7618 mm	<b>25'0"</b>	7557 mm	<b>24'10"</b>	7826 mm	<b>25'8"</b>	8755 mm	<b>28'9"</b>
Static tipping load*										
Straight	4133 kg	<b>9090 lb</b>	5268 kg	<b>12,380 lb</b>	6922 kg	<b>15,260 lb</b>	7196 kg	<b>15,830 lb</b>	8927 kg	<b>19,680 lb</b>
Full turn	3582 kg	<b>7880 lb</b>	4923 kg	<b>10,830 lb</b>	6032 kg	<b>13,300 lb</b>	6218 kg	<b>13,680 lb</b>	7752 kg	<b>17,090 lb</b>
Operating weight*										
4 forward, 3 reverse	7732 kg	<b>17,010 lb</b>	10 067 kg	<b>22,150 lb</b>	11 570 kg	<b>25,510 lb</b>	12 470 kg	<b>27,390 lb</b>	—	—
4 forward, 4 reverse	—	—	—	—	—	—	—	—	17 663 kg	<b>38,940 lb</b>

**924G**

	<b>IT14G</b>		<b>924G Hook On</b>		<b>IT28G</b>	
Fork tine length	1350 mm	<b>4'5"</b>	1350 mm	<b>4'5"</b>	1350 mm	<b>4'5"</b>
Ground to top of tine clearance	3708 mm	<b>12'2"</b>	3584 mm	<b>11'9"</b>	3843 mm	<b>12'7"</b>
Reach with arms horizontal and forks level	1490 mm	<b>4'11"</b>	1651 mm	<b>5'5"</b>	1513 mm	<b>5'0"</b>
Overall length	7023 mm	<b>23'1"</b>	7783 mm	<b>25'6"</b>	7707 mm	<b>25'3"</b>
Static tipping load*						
Straight	4000 kg	<b>8818 lb</b>	5400 kg	<b>11,890 lb</b>	6720 kg	<b>14,830 lb</b>
Full turn	3470 kg	<b>7636 lb</b>	4720 kg	<b>10,380 lb</b>	5860 kg	<b>12,290 lb</b>
Operating weight*						
4 forward, 3 reverse	7745 kg	<b>17,010 lb</b>	10 130 kg	<b>22,280 lb</b>	11 580 kg	<b>25,580 lb</b>

\*Static tipping load and operating weight include lubricants, full fuel tank, ROPS cab and 80 kg (176 lb) operator.

— IT14G includes high speed version, standard counterweight and 17.5R25 tires.

— 924G includes 17.5-25, 12 PR (L-2) tires.

— IT28G includes 20.5-25, 12 PR tires and optional counterweight.

— IT38G includes 20.5R25, XTLA (L-2) tires.

— IT62G includes 23.5R25, XHA (L-3) tires, air conditioning, crankcase and power train guards.

Machine stability and operating weight are affected by tire size, tire ballast and other attachments.



**Operating Specifications — Material Handling Arm** The rated operating load for a machine with material handling arm is 50% of full turn static tipping load, or the hydraulic/structural limit.

	<b>IT14G</b>		<b>924G Hook On</b>		<b>IT28G</b>		<b>IT38G</b>		<b>IT62G</b>	
<b>Handling Arm Position</b>	<b>Retracted</b>									
Operating load — Full articulation	1292 kg	<b>2842 lb</b>	1790 kg	<b>3938 lb</b>	2528 kg	<b>5574 lb</b>	2049 kg	<b>4508 lb</b>	3085 kg	<b>6800 lb</b>
Static tipping load* Straight	2981 kg	<b>6558 lb</b>	4097 kg	<b>9013 lb</b>	5055 kg	<b>11,146 lb</b>	4746 kg	<b>10,441 lb</b>	7059 kg	<b>15,560 lb</b>
Full turn	2585 kg	<b>5678 lb</b>	3580 kg	<b>7876 lb</b>	4407 kg	<b>9717 lb</b>	4098 kg	<b>9016 lb</b>	6170 kg	<b>13,600 lb</b>
Operating weight* 4 forward, 3 reverse	7600 kg	<b>16,720 lb</b>	10 025 kg	<b>22,055 lb</b>	11 440 kg	<b>25,220 lb</b>	12 380 kg	<b>27,200 lb</b>	—	
4 forward, 4 reverse	—		—		—		—		17 510 kg	<b>38,600 lb</b>

	<b>IT14G</b>		<b>924G Hook On</b>		<b>IT28G</b>		<b>IT38G</b>		<b>IT62G</b>	
<b>Handling Arm Position</b>	<b>Mid-position</b>									
Operating load — Full articulation	1015 kg	<b>2233 lb</b>	1419 kg	<b>3122 lb</b>	1747 kg	<b>3852 lb</b>	1729 kg	<b>3804 lb</b>	2626 kg	<b>5790 lb</b>
Static tipping load* Straight	2345 kg	<b>5159 lb</b>	3251 kg	<b>7152 lb</b>	4011 kg	<b>8844 lb</b>	4009 kg	<b>8820 lb</b>	6015 kg	<b>13,260 lb</b>
Full turn	2031 kg	<b>4486 lb</b>	2838 kg	<b>6244 lb</b>	3494 kg	<b>7704 lb</b>	3457 kg	<b>7605 lb</b>	5248 kg	<b>11,570 lb</b>
Operating weight* 4 forward, 3 reverse	7600 kg	<b>16,720 lb</b>	10 025 kg	<b>22,055 lb</b>	11 440 kg	<b>25,220 lb</b>	12 380 kg	<b>27,200 lb</b>	—	
4 forward, 4 reverse	—		—		—		—		17 510 kg	<b>38,600 lb</b>


	<b>IT14G</b>		<b>924G Hook On</b>		<b>IT28G</b>		<b>IT38G</b>		<b>IT62G</b>	
<b>Handling Arm Position</b>	<b>Extended</b>									
Operating load — Full articulation	837 kg	<b>1841 lb</b>	1178 kg	<b>2592 lb</b>	1449 kg	<b>3195 lb</b>	1492 kg	<b>3282 lb</b>	2288 kg	<b>5040 lb</b>
Static tipping load* Straight	1936 kg	<b>4259 lb</b>	2698 kg	<b>5936 lb</b>	3327 kg	<b>7336 lb</b>	3463 kg	<b>7619 lb</b>	5240 kg	<b>11,550 lb</b>
Full turn	1675 kg	<b>3685 lb</b>	2355 kg	<b>5181 lb</b>	2898 kg	<b>6390 lb</b>	2983 kg	<b>6563 lb</b>	4576 kg	<b>10,090 lb</b>
Operating weight* 4 forward, 3 reverse	7600 kg	<b>16,720 lb</b>	10 025 kg	<b>22,055 lb</b>	11 440 kg	<b>25,220 lb</b>	12 380 kg	<b>27,200 lb</b>	—	
4 forward, 4 reverse	—		—		—		—		17 510 kg	<b>38,600 lb</b>

\*Static tipping load and operating weight include lubricants, full fuel tank, ROPS cab and 80 kg (176 lb) operator.


- IT14G includes high speed version, standard counterweight and 17.5R25 tires.
  - 924G includes 17.5-25, 12 PR (L-2) tires.
  - IT28G includes 20.5-25, 12 PR tires and optional counterweight.
  - IT38G includes 20.5R25, XTLA (L-2) tires.
  - IT62G includes 23.5R25, XHA (L-3) tires, air conditioning, crankcase and power train guards.
- Machine stability and operating weight are affected by tire size, tire ballast and other attachments.

- with General Purpose Buckets and Bolt-on Cutting Edge

See rating plate on each tool. Plate shows the effect of using the same tools on different size machines and aids in machine tool selection. Each plate states capabilities of standard machine in terms of capacity. Any significant weight change of attachments can adversely affect these ratings.

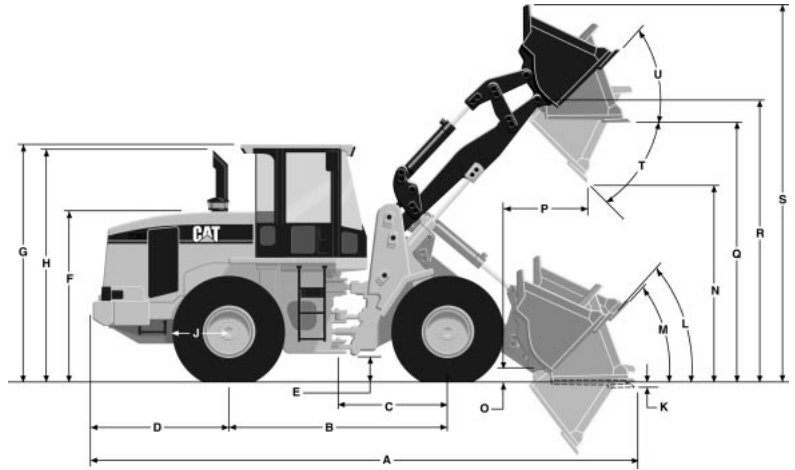


MODEL	924G									
	IT14G	Hook On	IT28G	IT38G	IT62G					
Bucket	1.3 m <sup>3</sup>	1.7 yd <sup>3</sup>	1.8 m <sup>3</sup>	2.3 yd <sup>3</sup>	2 m <sup>3</sup>	2.6 yd <sup>3</sup>	2.5 m <sup>3</sup>	3.25 yd <sup>3</sup>	3.1 m <sup>3</sup>	4 yd <sup>3</sup>
A Maximum Overall Length	6424 mm	21'1"	7179 mm	23'7"	7318 mm	24'0"	7487 mm	24'7"	8265 mm	27'1"
B Wheel base	2600 mm	8'6"	2800 mm	9'1"	2900 mm	9'6"	3020 mm	9'11"	3350 mm	11'0"
C Machine center point to front axle	1300 mm	4'3"	1400 mm	4'7"	1450 mm	4'9"	1510 mm	4'11"	1675 mm	5'6"
D Rear axle to counterweight	1658 mm	5'5"	1934 mm	6'4"	1955 mm	6'7"	1907 mm	6'3"	1940 mm	6'4"
E Ground clearance	456 mm	18"	368 mm	14"	407 mm	16"	400 mm	16"	400 mm	16"
F Height to top of engine compartment	2080 mm	6'10"	2061 mm	6'9"	2149 mm	7'1"	2215 mm	7'3"	2255 mm	7'5"
G Height to top of ROPS	3100 mm	10'2"	3159 mm	10'5"	3268 mm	10'8"	3300 mm	10'10"	3375 mm	11'1"
H Height to top of stack	2255 mm	7'5"	2895 mm	9'6"	3184 mm	10'5"	3210 mm	10'6"	3225 mm	10'7"
J Tire radius (empty machine)	620 mm	2'0"	622 mm	2'0"	684 mm	2'3"	688 mm	2'3"	728 mm	2'5"
K Maximum Digging Depth (bucket level)	175 mm	6.9"	132 mm	5"	108 mm	4.3"	70 mm	2.8"	90 mm	3.5"
L Maximum rollback at carry height	54°		51°		56°		46.6°		50°	
M Maximum rollback at ground	49°		50°		53°		48.8°		44°	
N Dump Clearance at full lift and 45° Discharge Angle	2920 mm	9'7"	2760 mm	9'1"	2911 mm	9'7"	2800 mm	9'2"	2841 mm	9'4"
O Hinge pin Height at carry position	374 mm	15"	367 mm	14"	382 mm	15"	455 mm	18"	495 mm	19"
P Reach at full lift and 45° Dump	787 mm	2'7"	1067 mm	3'6"	1014 mm	3'4"	1200 mm	3'11"	1240 mm	4'1"
Q Clearance Level Bucket at full height	3565 mm	11'8"	3488 mm	11'5"	3694 mm	12'1"	3625 mm	11'11"	3740 mm	12'3"
R Maximum Hinge Pin Height	3798 mm	12'6"	3813 mm	12'6"	3980 mm	13'1"	3930 mm	12'11"	4105 mm	13'6"
S Maximum Overall Height	4801 mm	15'9"	5110 mm	16'9"	5080 mm	16'8"	5237 mm	17'2"	5435 mm	17'10"
T Full Dump at Maximum Lift	48°		45°		48°		45°		45°	
U Maximum roll back at Maximum Lift	57°		58°		55°		44.6°		58°	
Tires	17.5R25		17.5-25 (L-2)		20.5-25		20.5R25		23.5R25	

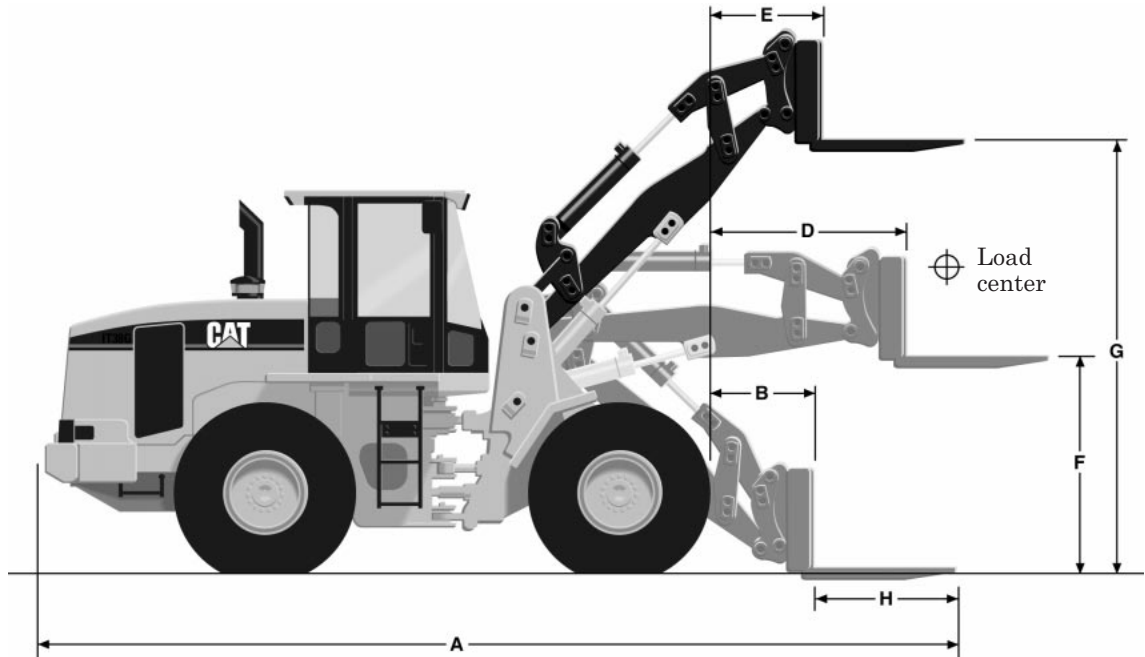


MODEL	IT14G		924G Hook On		IT28G		IT38G		IT62G	
Rated Operating Load										
Per SAE J1197	1791 kg	<b>3940 lb</b>	2462 kg	<b>5416 lb</b>	3016 kg	<b>6650 lb</b>	3109 kg	<b>6855 lb</b>	3877 kg	<b>8545 lb</b>
Per CEN 474-3 Rough Terrain	2149 kg	<b>4728 lb</b>	2954 kg	<b>6499 lb</b>	3619 kg	<b>7980 lb</b>	3731 kg	<b>8220 lb</b>	4652 kg	<b>10,250 lb</b>
Per CEN 474-3 Firm level ground	2865 kg	<b>6303 lb</b>	3938 kg	<b>8664 lb</b>	4826 kg	<b>10,640 lb</b>	4974 kg	<b>10,960 lb</b>	6202 kg	<b>13,670 lb</b>
A Maximum Overall Length	6873 mm	<b>22'7"</b>	7618 mm	<b>25'0"</b>	7557 mm	<b>24'10"</b>	7826 mm	<b>25'8"</b>	8755 mm	<b>28'9"</b>
B Reach with forks at ground level	745 mm	<b>2'5"</b>	1007 mm	<b>3'4"</b>	750 mm	<b>2'6"</b>	955 mm	<b>3'2"</b>	1445 mm	<b>4'9"</b>
C Load center	600 mm	<b>24"</b>	600 mm	<b>24"</b>	600 mm	<b>24"</b>	610 mm	<b>24"</b>	610 mm	<b>24"</b>
D Reach with arms horizontal and forks level	1490 mm	<b>4'11"</b>	1636 mm	<b>5'4"</b>	1513 mm	<b>5'0"</b>	1672 mm	<b>5'6"</b>	1975 mm	<b>6'6"</b>
E Reach with fork at maximum height	586 mm	<b>1'11"</b>	837 mm	<b>2'9"</b>	703 mm	<b>2'4"</b>	946 mm	<b>3'1"</b>	1115 mm	<b>3'8"</b>
F Arms horizontal & forks level	1808 mm	<b>5'11"</b>	1722 mm	<b>5'8"</b>	1923 mm	<b>6'4"</b>	1864 mm	<b>6'1"</b>	1740 mm	<b>5'8"</b>
G Ground to top of tine at maximum height	3708 mm	<b>12'2"</b>	3569 mm	<b>11'8"</b>	3843 mm	<b>12'7"</b>	3716 mm	<b>12'2"</b>	3790 mm	<b>12'5"</b>
H Fork Tine Length	1200 mm	<b>3'11"</b>	1200 mm	<b>3'11"</b>	1200 mm	<b>3'11"</b>	1220 mm	<b>4'0"</b>	1220 mm	<b>4'0"</b>
Tires	<b>17.5R25</b>		<b>17.5-25 (L-2)</b>		<b>20.5-25</b>		<b>20.5R25</b>		<b>23.5R25</b>	

For IT14G, 924G and IT28G machines equipped with 15.5-25 L-2 tires subtract 39 mm (1.5") from lift height — add 39 mm (1.5") for below ground measurements — add 42 mm (1.7") for all reach measurements.

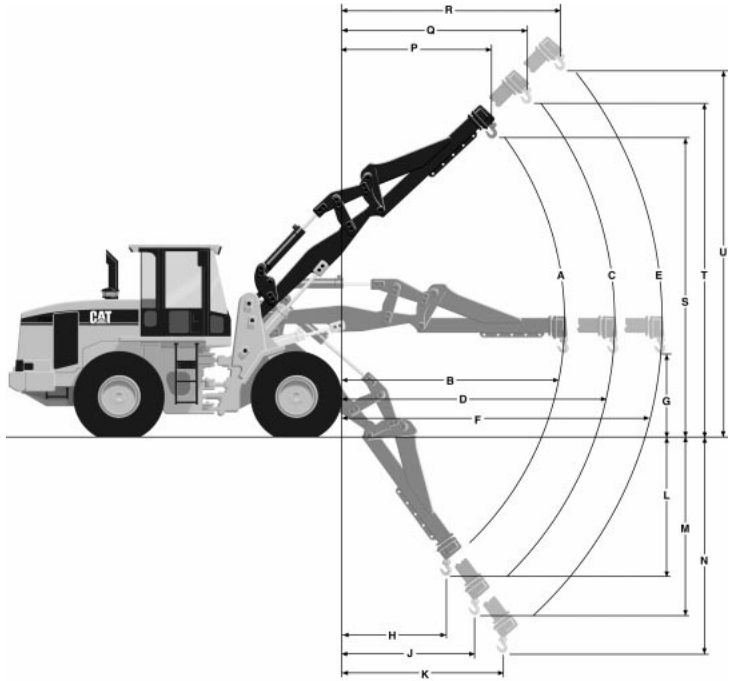

MODEL	IT14G		924G Hook On		IT28G	
A Operating load (retracted) @ full articulation	1292 kg	<b>2842 lb</b>	1790 kg	<b>3938 lb</b>	2528 kg	<b>5574 lb</b>
B Reach horizontal (retracted)	3179 mm	<b>10'5"</b>	3296 mm	<b>10'8"</b>	3187 mm	<b>10'5"</b>
C Operating load (mid-position) @ full articulation	1015 kg	<b>2233 lb</b>	1419 kg	<b>3122 lb</b>	1747 kg	<b>3852 lb</b>
D Reach horizontal (mid-position)	4178 mm	<b>13'8"</b>	4295 mm	<b>14'0"</b>	4986 mm	<b>13'9"</b>
E Operating load (extended) @ full articulation	837 kg	<b>1841 lb</b>	1178 kg	<b>2592 lb</b>	1449 kg	<b>3195 lb</b>
F Reach horizontal (extended)	5178 mm	<b>17'0"</b>	5295 mm	<b>17'3"</b>	5186 mm	<b>17'0"</b>
G Clearance horizontal	1585 mm	<b>5'2"</b>	1534 mm	<b>5'0"</b>	1983 mm	<b>6'6"</b>
H Reach full down (retracted)	1514 mm	<b>4'11"</b>	933 mm	<b>3'0"</b>	1529 mm	<b>5'0"</b>
J Reach full down (mid-position)	2116 mm	<b>6'11"</b>	1241 mm	<b>4'0"</b>	2122 mm	<b>7'0"</b>
K Reach full down (extended)	2719 mm	<b>8'11"</b>	1550 mm	<b>5'0"</b>	2715 mm	<b>8'11"</b>
L Clearance full down (retracted)	1874 mm	<b>6'2"</b>	2206 mm	<b>7'2"</b>	1502 mm	<b>4'11"</b>
M Clearance full down (mid-position)	2670 mm	<b>8'9"</b>	3156 mm	<b>10'3"</b>	2306 mm	<b>7'8"</b>
N Clearance full down (extended)	3468 mm	<b>11'5"</b>	4107 mm	<b>13'4"</b>	3111 mm	<b>10'2"</b>
P Reach at maximum height (retracted)	1402 mm	<b>4'7"</b>	1482 mm	<b>4'8"</b>	1608 mm	<b>5'3"</b>
Q Reach at maximum height (mid-position)	1962 mm	<b>6'5"</b>	1956 mm	<b>6'4"</b>	2199 mm	<b>7'3"</b>
R Reach at maximum height (extended)	2522 mm	<b>8'2"</b>	2430 mm	<b>7'9"</b>	2791 mm	<b>9'2"</b>
S Clearance at maximum height (retracted)	5185 mm	<b>17'0"</b>	5370 mm	<b>17'6"</b>	5578 mm	<b>18'3"</b>
T Clearance at maximum height (mid-position)	6012 mm	<b>19'9"</b>	6249 mm	<b>20'5"</b>	6379 mm	<b>20'11"</b>
U Clearance at maximum height (extended)	6840 mm	<b>22'5"</b>	7129 mm	<b>23'3"</b>	7185 mm	<b>23'7"</b>
Tires	<b>17.5R25</b>		<b>17.5-25 (L-2)</b>		<b>20.5-25</b>	

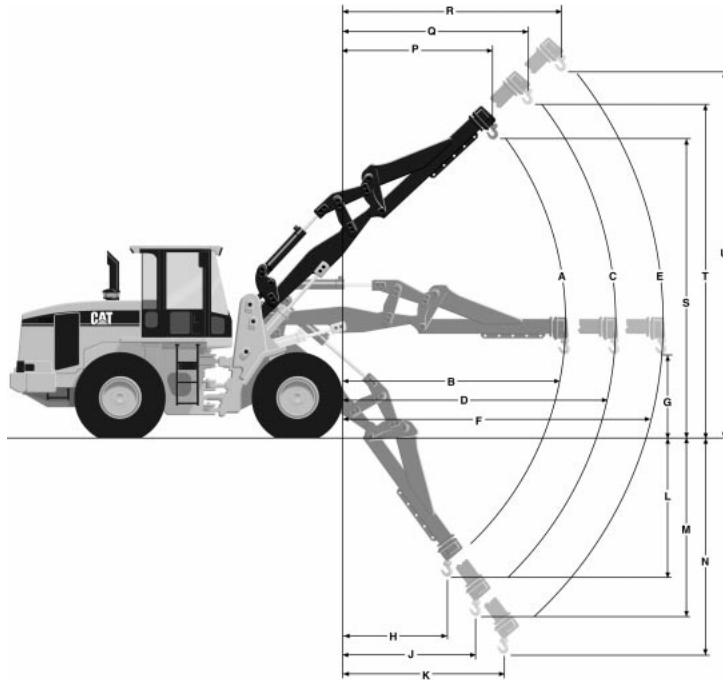


<b>MODEL</b>	<b>IT38G</b>		<b>IT62G*</b>	
A Operating load (retracted) @ full articulation	2049 kg	<b>4508 lb</b>	3085 kg	<b>6800 lb</b>
B Reach horizontal (retracted)	3816 mm	<b>12'6"</b>	4000 mm	<b>13'2"</b>
C Operating load (mid-position) @ full articulation	1729 kg	<b>3804 lb</b>	2626 kg	<b>5790 lb</b>
D Reach horizontal (mid-position)	4616 mm	<b>15'2"</b>	4800 mm	<b>15'9"</b>
E Operating load (extended) @ full articulation	1492 kg	<b>3282 lb</b>	2288 kg	<b>5040 lb</b>
F Reach horizontal (extended)	5416 mm	<b>17'9"</b>	5600 mm	<b>18'5"</b>
G Clearance horizontal	1562 mm	<b>5'1"</b>	1820 mm	<b>6'0"</b>
H Reach full down (retracted)	1840 mm	<b>6'0"</b>	2720 mm	<b>8'11"</b>
J Reach full down (mid-position)	2309 mm	<b>7'7"</b>	3355 mm	<b>11'0"</b>
K Reach full down (extended)	2777 mm	<b>9'1"</b>	3990 mm	<b>13'1"</b>
L Clearance full down (retracted)	2282 mm	<b>7'6"</b>	1485 mm	<b>4'10"</b>
M Clearance full down (mid-position)	2930 mm	<b>9'7"</b>	1970 mm	<b>6'6"</b>
N Clearance full down (extended)	3580 mm	<b>11'9"</b>	2460 mm	<b>8'1"</b>
P Reach at maximum height (retracted)	2506 mm	<b>8'3"</b>	2545 mm	<b>8'4"</b>
Q Reach at maximum height (mid-position)	3076 mm	<b>10'1"</b>	3110 mm	<b>10'2"</b>
R Reach at maximum height (extended)	3646 mm	<b>11'11"</b>	3670 mm	<b>12'1"</b>
S Clearance at maximum height (retracted)	5296 mm	<b>17'5"</b>	5775 mm	<b>18'11"</b>
T Clearance at maximum height (mid-position)	5857 mm	<b>19'3"</b>	6340 mm	<b>20'10"</b>
U Clearance at maximum height (extended)	6419 mm	<b>21'1"</b>	6910 mm	<b>22'8"</b>
Tires	<b>20.5R25</b>		<b>23.5R25</b>	

\*All dimensions are to lift eye.

BUCKET  
CAPACITY  
m<sup>3</sup> (yd)<sup>3</sup>

**BUCKET SELECTION BASED ON MATERIAL DENSITY**

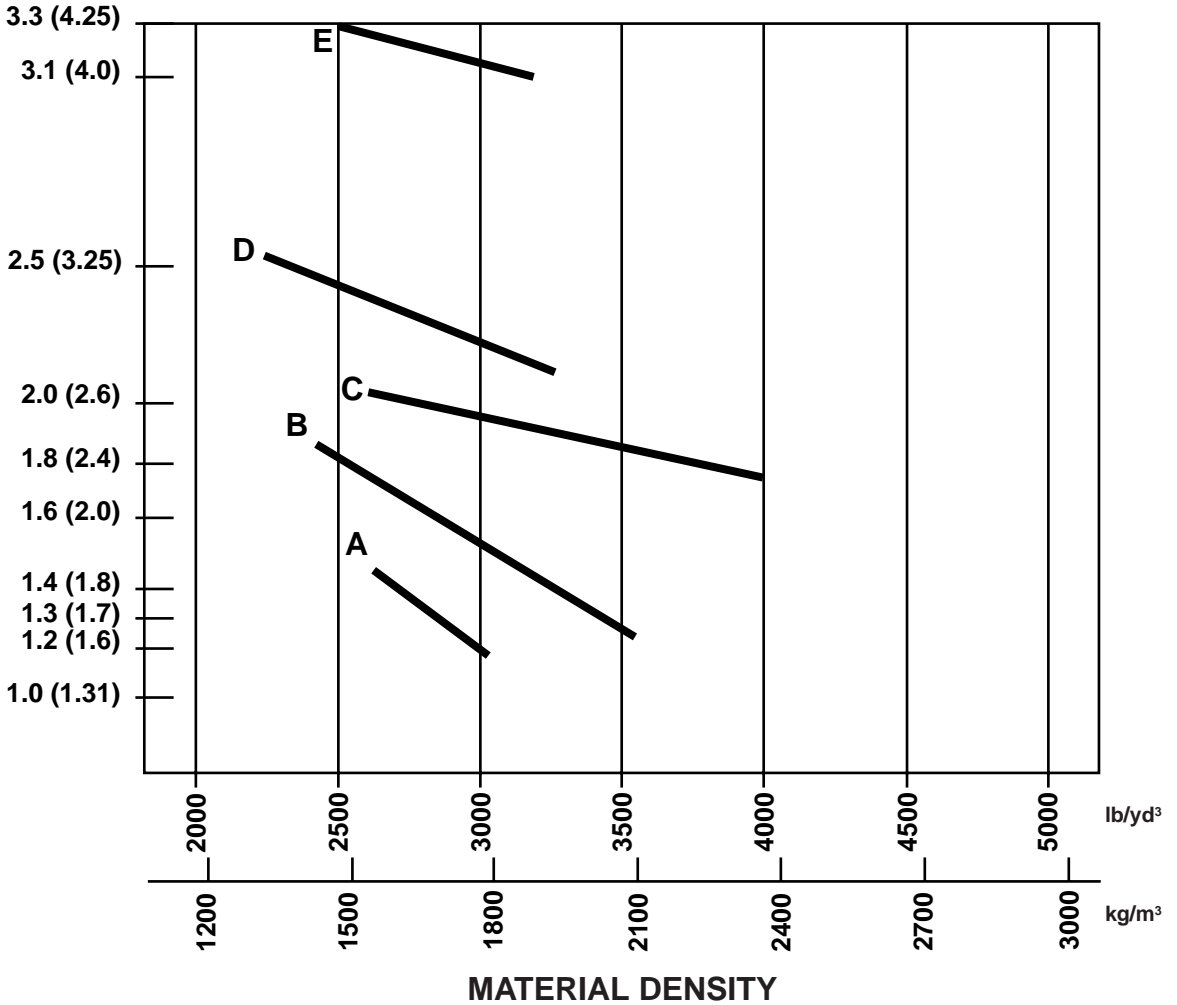

NOTE: Machines equipped same as those on Performance Data pages.

KEY


- A — IT14G
- B — 924G
- C — IT28G
- D — IT38G
- E — IT62G

**MACHINE/ATTACHMENT SELECTION**

The Integrated Toolcarrier’s versatility and the wide range of attachments makes the “single machine fleet” concept highly attractive to an increasing number of users.

A Job Analysis helps identify applications, work requirements, material handling parameters and the current working method. Thoroughly research each element in the following chart, the gathered information will help select the proper Integrated Toolcarrier System.

**JOB ANALYSIS METHOD**

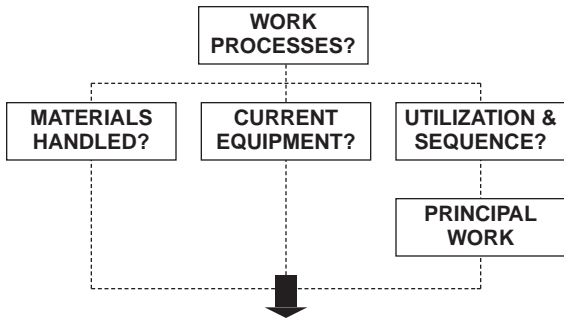

- **APPROPRIATE INTEGRATED TOOLCARRIER MODEL SIZE**
- **NECESSARY ATTACHMENTS**

**Work Processes:**

The first step in the job analysis is to identify all work processes from start to finish. Key questions outlined below will begin to indicate the required attachments and potential Integrated Toolcarrier applications.

- What kinds of work are performed: (e.g., dozing, loading, stacking, digging, sweeping, handling special materials, etc.)
  - ... in site preparation?
  - ... below ground level?
  - ... at ground level?
  - ... above ground level?
  - ... in landscaping?
  - ... in maintenance equipment yard?
  - etc.
- What work is done manually that could be done with an Integrated Toolcarrier?
- What are the work conditions?:
  - ... underfoot?
  - ... grades?
  - ... tight quarters?
  - ... time restraints?
  - ... climate?
  - etc.

**Materials Handled:**

Examining the materials handled will assist in determining necessary attachments. Sizes and weights of material(s) handled will indicate the appropriate Integrated Toolcarrier model by defining lift and reach requirements. Concentrate on the material flow at the job site — the point of origin as well as the final destination for the various materials will undoubtedly have material handling requirements.

- What kinds of materials are handled (e.g. snow, earth, bricks, chemicals, pipe, logs, etc.)
- What form are the materials handled in: bulk? palletized?
- How much does each weigh?
- What are the dimensions of each?
- What are the... movement parameters:
  - ... dozed what distance?
  - ... load and carried what distance?
  - ... lifted how high?
  - ... placed below ground level?
  - ... placed what distance from machine?

**Current Equipment:**

If determining material weight is not possible, much information can be determined from looking at the current equipment fleet. This will suggest required performance capabilities such as lifting capacity.

- Machines currently doing the work (e.g. wheel loaders, lift trucks, sweepers, light capacity cranes, snow plows, etc.)?
- What special (maximum) capabilities does each machine have (production, lift height, load capacity, width/height dimensions, reach, turning radius, travel speed, etc.)?
- To what extent are each machine's maximum capabilities used?
- What are owning/operating costs of each?

**Utilization & Sequence:**

Utilization implies how often the current machines are used and what will be the utilization factors for the Integrated Toolcarrier with each individual attachment. Sequence implies what order these tasks are accomplished in and if two or more machines operate at the same time. This portion of the job analysis should assist in comparing economies of various systems. Other important considerations may be the number of operators needed, storage space, reduced maintenance requirements, etc.

- How often (what percent) is each machine used?
- How often and when does it sit idle?
- How often and when do two or more machines work at the same time?
- Can the operation be changed to permit single machine operation?

**Principal Work:**

Utilization and sequence will indicate the principal work the Integrated Toolcarrier will do, further assisting in attachment and model sizing and selection. The basic machine/tool package should be able to handle the toughest, most frequently performed jobs for the primary application. Secondary tools can have a little more "give and take" in their performance capabilities than the primary tool.

- What work can be accomplished by an Integrated Toolcarrier?
- What work will take up the majority of Integrated Toolcarrier time?
- What work will use the maximum static tipping capabilities of the Integrated Toolcarrier?
- What high cost (owning and operating) and/or low utilization machines can be replaced by an Integrated Toolcarrier?

**Additional Tips for Tool Sizing and Selection**


Tool selection will principally concern hydraulic power requirements and static tipping load considerations. The standard tools offered by Caterpillar can be used on any Integrated Toolcarrier machine with little difficulty. However, tools such as the hydraulic broom, claws, blades and asphalt cutter will require additional consideration before proposing a system to the customer.



**Rating Plates**

The Caterpillar tools have rating plates showing rated or recommended load limits for each machine in standard configuration. These rated loads are determined by structural limitations on the tool and/or hydraulic and stability criteria established for each machine. The IT14G thru IT28G share common attachment points and can share attachments. The IT38G and IT62G can share the same attachments. This ability to interchange tools necessitates the need for rating plates.

Shown below are examples of the rating plates that will be found on each Caterpillar tool. Beginning with the IT14G, the rating plate on each tool will refer the user to the Operation and Maintenance Manual for the rated operating load for that tool on a specific machine model.

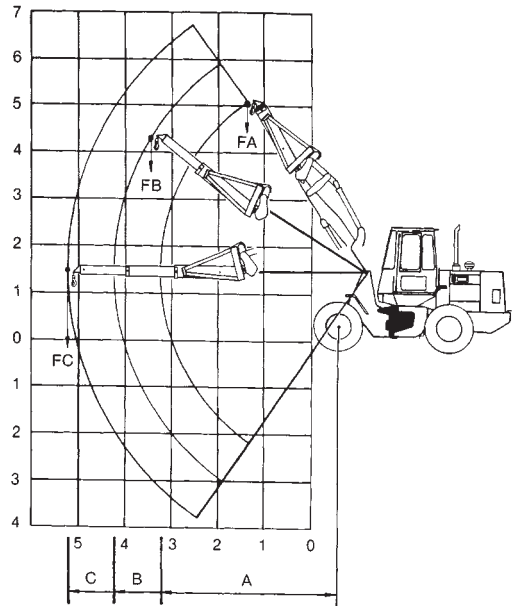

Material Handling Arm

Part No. 9V1795

Table indicates rated load at standard vehicle configuration. See operator's manual to determine rated load for vehicle configuration being used.

Model	Load Radius						Rated Load					
	A		FA		B		FB		C		FC	
	m	ft	kg	lb	m	ft	kg	lb	m	ft	kg	lb
IT14G	3.85	12.6	1292	2842	4.85	15.9	1015	2233	5.85	19.2	837	1841
924G	3.97	13.0	1790	3938	4.97	16.3	1419	3122	5.97	19.6	1178	2592
IT28G	3.93	12.9	2528	5574	4.97	16.3	1747	3852	5.94	19.5	1449	3195
IT38G	4.57	15.0	4098	9016	5.37	17.7	3457	7605	6.17	20.3	2983	6563
IT62G	4.81	15.8	6170	13,590	5.61	18.4	5251	11,565	6.41	21.0	4576	10,080

### Fork Rating Plate

(Located on back of carriage, left side)

Table indicates rated pallet fork load at standard machine configuration, 600 mm (24") load center, 1200 mm (3'11") fork on IT14G-IT28G and 1220 mm (4'0") fork on IT38G-IT62G, see operator manual to determine rated load for vehicle configuration being used.

Model	kg	lb	Model	kg	lb
IT14G	1791	3940	IT38G	3109	6855
924G	2462	5416	IT62G	3877	8548
IT28G	2867	6321			

### Bucket Rating Plate

(Located left rear of buckets)

Bucket capacity, SAE J742 FEB85 (nominally heaped)

Table indicates rated load at vehicle configuration noted by the asterisks. See operator manual to determine rated load for vehicle configuration being used.

Part No. 112-3121 — 1.4 m<sup>3</sup> (1.75 yd<sup>3</sup>) w/Bolt-On Cutting Edge

IT14G*	2273 kg	5000 lb
924G**	2680 kg	5909 lb

Part No. 132-2257 — 1.6 m<sup>3</sup> (2.1 yd<sup>3</sup>) w/Bolt-On Cutting Edge

924G**	2642 kg	5825 lb
--------	---------	---------

Part No. 132-2256 — 1.8 m<sup>3</sup> (2.35 yd<sup>3</sup>) w/Bolt-On Cutting Edge

924G**	3253 kg	7156 lb
IT28G***	3708 kg	8176 lb

Part No. 132-2258 — 2.0 m<sup>3</sup> (2.6 yd<sup>3</sup>) w/Bolt-On Cutting Edge

IT28G***	3667 kg	8087 lb
----------	---------	---------

Part No. 123-8978 — 2.3 m<sup>3</sup> (3.0 yd<sup>3</sup>) w/Bolt-On Cutting Edge

IT38G†	3815 kg	8410 lb
--------	---------	---------

Part No. 123-8977 — 2.5 m<sup>3</sup> (3.25 yd<sup>3</sup>) w/Bolt-On Cutting Edge

IT38G†	3810 kg	8400 lb
--------	---------	---------

Part No. 166-8114 — 3.1 m<sup>3</sup> (4.0 yd<sup>3</sup>) w/Bolt-On Cutting Edge

IT62G††	5644 kg	12,440 lb
---------	---------	-----------

Part No. 166-8115 — 3.3 m<sup>3</sup> (4.25 yd<sup>3</sup>) w/Bolt-On Cutting Edge

IT62G††	5613 kg	12,370 lb
---------	---------	-----------

\*Specifications shown are for high-speed version IT14G and include lubricants, full fuel tank, ROPS cab, 80 kg (176 lb) operator, standard 250 kg (550 lb) counterweight and 17.5-R25 (L-2 equivalent) tires.

\*\*Specifications shown include lubricants, full fuel tank, ROPS cab, 80 kg (176 lb) operator and 17.5 x 25, 12 PR (L-2) tires.

\*\*\*Specifications shown include optional counterweight, standard lubricants, full fuel tank, ROPS cab, 80 kg (176 lb) operator and 20.5-25, 12 PR (L-2) tires.

†Std. machine with sound suppressed cab, ROPS, 20.5R25, XTLA (L-2) tires, full fuel tank, coolant, lubricants and operator.

††Std. machine with 23.5R25, XHA (L-3) tires, air conditioning, crank case and power train guards, full fuel tank, coolant, lubricants and operator.

The bucket rating plate can be used to illustrate the attachment sizing and selection process. The charts explain each machine's maximum payload. The maximum material density would be determined by dividing the payload by the bucket capacity. If the actual material density exceeds the recommended material density, the process should be repeated to select the properly sized bucket.

A similar procedure would be used with the forks and material handling arm to determine maximum recommended lifting capacity and/or required IT model size.

### Pallet Fork

The pallet fork will fulfill many material handling needs. A modified Class 3 fork carriage provides visibility to the tines for precision pallet work. This carriage with non-standard spacing accepts many Class 3 lift truck attachments.

Pallet fork rated operating loads are based on the following:

SAE J1197 FEB91: 50% of the full turn static tipping load or the hydraulic/structural limitations.

CEN 474-3 (European standard): 60% of the full static tipping load on rough terrain or the hydraulic/structural limitations. 80% of the full turn static tipping load on firm, level ground or the structural/hydraulic limitation. Other local, regional or international guidelines may also apply.

If operation is on rough ground these criteria may need modification. In this instance, the size and rating of existing equipment should be considered.

Sizing for pallet work generally consists of answering the following questions.

1. What are the average loaded pallet dimensions?
2. Lift Capacity — what capacity is required to lift and move the average pallet load? The maximum pallet load?
3. Lift Height — can the machine reach the top level of the standard pallet stack? What are the maximum reach, lift and height requirements?
4. Maneuverability — can the machine work around the current aisle configuration? In the stacking aisles? Main aisles? Intersecting aisles? Are 90° turns required in any aisle for material placement?
5. Length — what tine length is required to fit the commonly used pallets? (1219 mm [4'0"] tines are standard length for most palletized material.)
6. Any machine height restrictions?
7. Any special fork configurations required?

Lift capacity, lift height, aisle configuration and tine length are the most important considerations in recommending a pallet handling machine.

Example problem:

The following example applies the job analysis method to a work situation.

**Sewer & Water Contractor**

Sets water lines (152 mm-610 mm [6 in-24 in] iron pipe), sanitary sewer lines (152 mm-457 mm [6 in-18 in] PVC) and storm sewer lines (610 mm-1067 mm [24 in-42 in] concrete pipe) primarily in urban areas ... often-times across or down existing streets.

**Materials**

- Loam/Clay: 1600 kg/m<sup>3</sup> (2700 lb/yd<sup>3</sup>) loose density Bedding (Gravel): 1900 kg/m<sup>3</sup> (3200 lb/yd<sup>3</sup>) loose density
- Water Pipe: 610 mm (24 in) push-on joint ductile iron, 6.1 m (20 ft) sections, 1309 kg (2885 lb) 215 kg/m (144.3 lb/ft) × 6.1 m (20 ft) See trenching pages in the Excavator backhoe section.
- Storm Sewer: 1067 mm (42 in), Wall B, concrete pipe, 1.5 m (5 ft) sections, 1556 kg (3430 lb) 1021 kg/m (686 lb/ft × 5 ft) See trenching pages in the Excavator backhoe section.
- Manhole Boxes: 1361 kg (3000 lb)

**WHAT INTEGRATED TOOLCARRIER MODEL SHOULD BE RECOMMENDED?  
WHICH ATTACHMENTS?**

**Work Processes**

- Bundled PVC and individual concrete/iron pipe-loaded/unloaded (yardsite) and strung along trench
- Unload, handle, set manhole boxes
- Excess excavated material truck loaded
- Bedding material handled/placed
- Trench backfilled
- Trench compaction
- Rough and finish grading
- Street cleanup
- Pavement removal

**Integrated Toolcarrier Attachment Possibilities**

- Forks/Material Handling Arm
- Material Handling Arm
- Bucket
- Bucket
- Bucket/Blade
- Compactor Wheel
- Bucket/Blade
- Bucket/Broom
- Rebar Snips/Asphalt Cutter

**Current Equipment**

	<b>Utilization</b>
Cat 225 .....	.90%
Champ CB607 lift truck, 3175 kg (7000 lb) capacity .....	.15%
Deere 444 with 1.1 m <sup>3</sup> (1.5 yd <sup>3</sup> ) G.P. bucket .....	.60%
Rosco D-50 sweeper .....	one half hour/day
Rammax 1361 kg (3000 lb) self-propelled trench compactor .....	.25%

**Machine sizing**

1350 mm (53 in) Forks

**Operating Load at Full Turn\***

Model	kg	lb
<b>IT14G</b>	1735	<b>3817</b>
<b>924G</b>	2361	<b>5194</b>
<b>IT28G</b>	2931	<b>6463</b>
Water pipes: 1309 kg (2885 lb)		IT14G ... 1 pipe — no problem 924G ... 1 pipe — no problem IT28G ... 1 pipe — no problem
Storm sewer pipes: 1556 kg (3430 lb)		IT14G ... 1 pipe — no problem 924G ... 1 pipe — no problem IT28G ... 1 pipe — no problem

\*Note that the most conservative operating load (SAE J1197 FEB91) is used here. The rated operating load for some competitive machines with pallet forks will be based upon European standard CEN 474-3, **assuming operation on firm and level ground** (i.e. using 80% of full turn static tipping load).

### Material Handling Arm (MHA)

The rated load for the MHA is 50% of the full turn static tipping load in each position or hydraulic or structural limitations. Manually extendable telescopic sections enable maximum lifting capacity at the full retracted position, and maximum lift height and reach in the fully extended position.

#### Operating Load at Full Turn

Model	Retracted	Mid	Extended
<b>IT14G</b>	1292 kg <b>2542 lb</b>	1015 kg <b>2233 lb</b>	837 kg <b>1841 lb</b>
<b>924G*</b>	1790 kg	1419 kg	1178 kg
<b>Hook On</b>	<b>3938 lb</b>	<b>3122 lb</b>	<b>2592 lb</b>
<b>IT28G</b>	2528 kg <b>5574 lb</b>	1747 kg <b>3852 lb</b>	1449 kg <b>3195 lb</b>

Storm sewer pipes:  
1556 kg (3430 lb)

IT14G ... no  
924G ... yes in  
retracted  
IT28G ... yes in  
retracted and mid  
IT14G ... no  
924G ... yes in  
retracted and mid  
IT28G ... yes in  
retracted, mid and  
extended

Manhole boxes:  
1361 kg (3000 lb)

### Buckets

All general purpose buckets are interchangeable on 924G-IT28G due to common attachment points on the quick couplers. Bucket selection will depend on the material density in your application. Offering multiple sized buckets allows the user the flexibility to closely match material density and bucket size with machine capability. Equipping a machine with too large a bucket will result in unacceptable stability — too small a bucket may provide inadequate tire coverage.

**Bucket 1900 kg/m<sup>3</sup> (3200 lb/yd<sup>3</sup>) ... 100% fill factor**

Model	Bucket	Payload	50% Full Turn Static Tipping
<b>924G*</b>	1.8 m <sup>3</sup>	3420 kg	3253 kg
<b>Hook On</b>	<b>2.3 yd<sup>3</sup></b>	<b>7524 lb</b>	<b>7156 lb</b>
	2.1 m <sup>3</sup>	3990 kg	3210 kg
	<b>2.7 yd<sup>3</sup></b>	<b>8778 lb</b>	<b>7062 lb</b>
<b>IT28G</b>	1.8 m <sup>3</sup>	3420 kg	3708 kg
	<b>2.3 yd<sup>3</sup></b>	<b>7524 lb</b>	<b>8176 lb</b>
	2.0 m <sup>3</sup>	3800 kg	3668 kg
	<b>2.6 yd<sup>3</sup></b>	<b>8360 lb</b>	<b>8087 lb</b>
<b>IT38G</b>	2.3 m <sup>3</sup>	3856 kg	3850 kg
	<b>3.0 yd<sup>3</sup></b>	<b>8500 lb</b>	<b>8488 lb</b>

**NOTE:** Metric numbers are a product of conversion.  
\*924G and IT28G equipped with 17.5 × 25 tires.

### Machine/Attachment Recommendation

**IT28G** — The greater static tipping load capabilities allow it to do a greater portion of the contractor's total work processes. With the following attachments, the IT28G could replace part or all of the specialty units, such as the wheel loader, rough terrain lift truck, street sweeper, and/or the trench compactor.

1.8 m<sup>3</sup> (2.3 yd<sup>3</sup>), or 2.0 m<sup>3</sup> (2.6 yd<sup>3</sup>) General Purpose Bucket

1350 mm (53 in) forks (handles all pipes)

Material Handling Arm — (handles pipe sizes under 1067 mm (42 in) concrete and manhole boxes ... 225 would have to set 1219 mm (48 in) and larger concrete pipe

Broom

### Optional Attachments to Consider:

24-LH compactor wheel

Rebar snips

Asphalt cutter



# TELESCOPIC HANDLERS



## CONTENTS

Features .....	16-1
Specifications .....	16-1
Performance Data .....	16-3
Dimensions .....	16-11
Tire Selection .....	16-11
Attachments .....	16-12

### Features:

- **Tough, reliable machine components** — Cat 3054 turbocharged engines, powershift transmission, enclosed oil immersed brakes, differential lock on front axle and mechanical driveline. Variable displacement axial piston pump. Proven components and well protected from the perils of the jobsite.
- **High visibility factors** — include low boom pivot point, side mounted power module and close fitting fenders. Carefully profiled engine hood allows front wheel visibility. Low profile stabilizer option on 3-section machines provides excellent forward visibility.
- **Excellent Operator Comfort** — with large spacious operator station. Open cab or deluxe closed cab with large glazed glass area. Single lever pilot operated boom control. Powershift transmission with 4 forward speeds, 3 reverse and transmission disconnect. Power assisted brakes and steering. Easy engine access for daily maintenance.
- **Superior Performance** — with low center of gravity, maximized wheel base. Fast, responsive hydraulic system with variable displacement axial piston pump. Front and rear overhang is minimized. Four wheel drive and steer with three steering modes, 2-wheel steer, circle steer and crab steer.

## MODEL

## TH62

Flywheel Power (Gross)	78 kW	105 hp
Operating Weight	6840 kg	15,080 lb
Engine Model	3054T	
Rated Engine RPM	2200	
No. of Cylinders	4	
Bore	100 mm	3.94 in
Stroke	127 mm	5.00 in
Displacement	4 L	243 in <sup>3</sup>
Speeds Forward:	<b>km/h</b>	<b>mph</b>
1st	6	4
2nd	11	7
3rd	22	14
4th	32	20
Speeds Reverse:		
1st	6	4
2nd	11	7
3rd	22	14
Turning Circle Radius		
Over Tires	3.63 m	11'11"
Over Forks	4.5 m	14'9"
Over Bucket	4.64 m	15'3"
Track	3.43 m	11'3"
Aisle Width		
Over Forks	3.84 m	12'7"
Over Bucket @ carry	3.94 m	12'11"
Tires	15.5-25	
Service Refill Cap:		
Fuel Tank @ 90% fill	120 L	32 U.S. gal
Hydraulic Tank	150 L	40 U.S. gal




MODEL	TH63		TH82		TH83		TH103	
Flywheel Power (Gross)	78 kW	<b>105 hp</b>	78 kW	<b>105 hp</b>	78 kW	<b>105 hp</b>	78 kW	<b>105 hp</b>
Operating Weight	9260 kg	<b>20,420 lb</b>	7470 kg	<b>16,470 lb</b>	10 000 kg	<b>22,050 lb</b>	11 360 kg	<b>25,050 lb</b>
Engine Model	<b>3054T</b>		<b>3054T</b>		<b>3054T</b>		<b>3054T</b>	
Rated Engine RPM	<b>2200</b>		<b>2200</b>		<b>2200</b>		<b>2200</b>	
No. of Cylinders	<b>4</b>		<b>4</b>		<b>4</b>		<b>4</b>	
Bore	100 mm	<b>3.94 in</b>	100 mm	<b>3.94 in</b>	100 mm	<b>3.94 in</b>	100 mm	<b>3.94 in</b>
Stroke	127 mm	<b>5.00 in</b>	127 mm	<b>5.00 in</b>	127 mm	<b>5.00 in</b>	127 mm	<b>5.00 in</b>
Displacement	4 L	<b>243 in<sup>3</sup></b>	4 L	<b>243 in<sup>3</sup></b>	4 L	<b>243 in<sup>3</sup></b>	4 L	<b>243 in<sup>3</sup></b>
Speeds Forward:	<b>km/h</b>	<b>mph</b>	<b>km/h</b>	<b>mph</b>	<b>km/h</b>	<b>mph</b>	<b>km/h</b>	<b>mph</b>
1st	6	<b>4</b>	6	<b>4</b>	6	<b>4</b>	6	<b>4</b>
2nd	11	<b>7</b>	11	<b>7</b>	11	<b>7</b>	11	<b>7</b>
3rd	22	<b>14</b>	22	<b>14</b>	22	<b>14</b>	22	<b>14</b>
4th	32	<b>20</b>	32	<b>20</b>	32	<b>20</b>	32	<b>20</b>
Speeds Reverse:								
1st	6	<b>4</b>	6	<b>4</b>	6	<b>4</b>	6	<b>4</b>
2nd	11	<b>7</b>	11	<b>7</b>	11	<b>7</b>	11	<b>7</b>
3rd	22	<b>14</b>	22	<b>14</b>	22	<b>14</b>	22	<b>14</b>
Turning Circle Radius								
Over Tires	3.79 m	<b>12'5"</b>	3.79 m	<b>12'5"</b>	3.79 m	<b>12'5"</b>	3.97 m	<b>13'0"</b>
Over Forks	5.07 m	<b>16'8"</b>	4.62 m	<b>15'2"</b>	5.07 m	<b>16'8"</b>	5.48 m	<b>18'0"</b>
Over Bucket	5.24 m	<b>17'3"</b>	4.71 m	<b>15'5"</b>	5.24 m	<b>17'3"</b>	5.52 m	<b>18'1"</b>
Track	3.59 m	<b>11'9"</b>	3.59 m	<b>11'9"</b>	3.59 m	<b>11'9"</b>	3.79 m	<b>12'5"</b>
Aisle Width								
Over Forks	4.28 m	<b>14'1"</b>	3.84 m	<b>12'7"</b>	4.28 m	<b>14'1"</b>	4.75 m	<b>15'7"</b>
Over Bucket @ carry	4.45 m	<b>14'7"</b>	3.94 m	<b>12'11"</b>	4.45 m	<b>14'7"</b>	4.75 m	<b>15'7"</b>
Tires	15.5 x 25		15.5 x 24		14.0 x 25		14.0 x 24	
Service Refill Cap:								
Fuel Tank @ 90% fill	120 L	<b>32 U.S. gal</b>	120 L	<b>32 U.S. gal</b>	120 L	<b>32 U.S. gal</b>	140 L	<b>37 U.S. gal</b>
Hydraulic Tank	150 L	<b>40 U.S. gal</b>	150 L	<b>40 U.S. gal</b>	150 L	<b>40 U.S. gal</b>	170 L	<b>45 U.S. gal</b>

- Performance Data
- Standard Forks and Carriage
- No Stabilizers

## Telescopic Handlers


**TH62**  
Non-U.S. Version

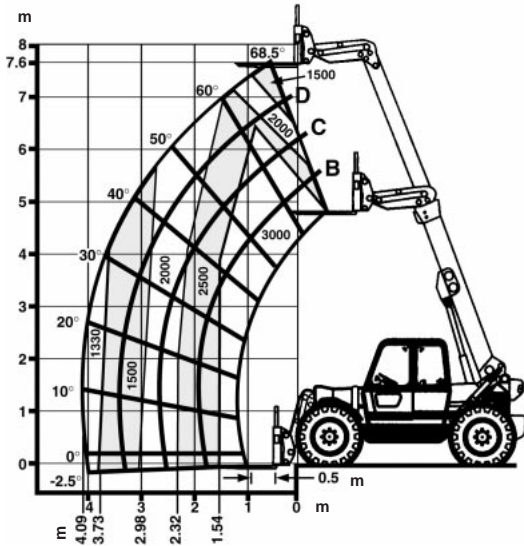

Numbers in chart measured in kilograms.

Maximum lift capacity	3000 kg	<b>6615 lb</b>
Maximum lift height	7.6 m	<b>24'11"</b>
Load at maximum height	1500 kg	<b>3307 lb</b>
Max. height at maximum load	6.5 m	<b>21'4"</b>
Max. reach at maximum load	1.54 m	<b>5'1"</b>
Maximum forward reach	4.09 m	<b>13'5"</b>
Load at maximum reach	1330 kg	<b>2932 lb</b>

**TH62**  
North American Version

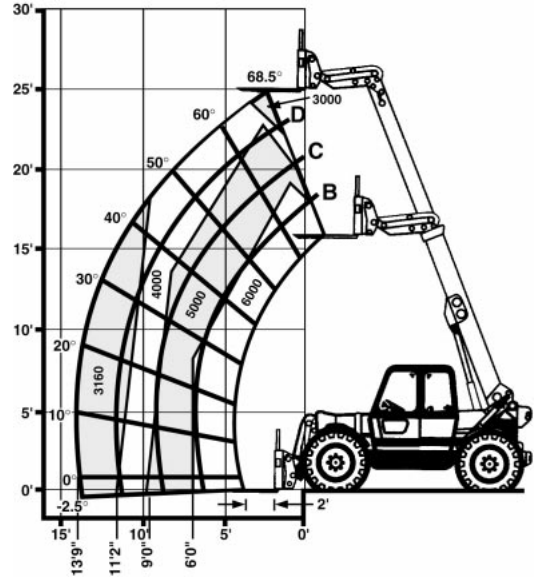

Numbers in chart measured in pounds.

Maximum lift capacity	2725 kg	<b>6000 lb</b>
Maximum lift height	7.6 m	<b>25'0"</b>
Load at maximum height	1365 kg	<b>3000 lb</b>
Maximum forward reach	4.2 m	<b>13'9"</b>
Load at maximum reach	1435 kg	<b>3160 lb</b>




# Telescopic Handlers

## Performance Data

- Standard Forks and Carriage
- Non-U.S. Version


**TH63**  
**Stabilizers Up**

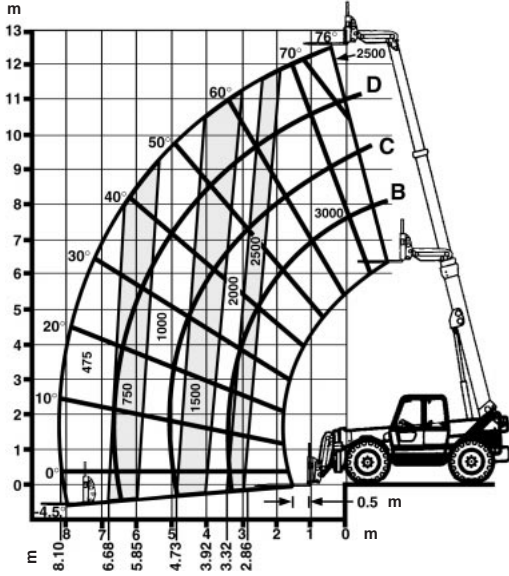

Numbers in chart measured in kilograms.

Maximum lift capacity	3000 kg	<b>6615 lb</b>
Maximum lift height	12.5 m	<b>41'0"</b>
Load at maximum height	2500 kg	<b>5512 lb</b>
Max. height at maximum load	12 m	<b>39'4"</b>
Max. reach at maximum load	2.86 m	<b>9'5"</b>
Maximum forward reach	8.1 m	<b>26'7"</b>
Load at maximum reach	475 kg	<b>1047 lb</b>

**TH63**  
**Stabilizers Down**

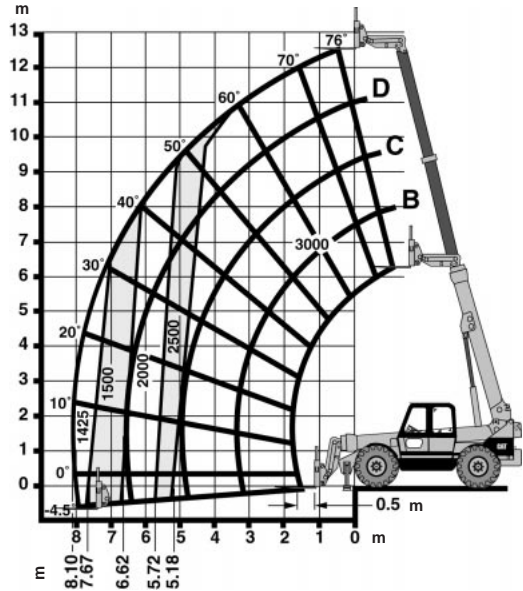


Numbers in chart measured in kilograms.

Maximum lift capacity	3000 kg	<b>6615 lb</b>
Maximum lift height	12.5 m	<b>41'0"</b>
Load at maximum height	3000 kg	<b>6515 lb</b>
Max. height at maximum load	12.5 m	<b>41'0"</b>
Max. reach at maximum load	5.18 m	<b>17'0"</b>
Maximum forward reach	8.1 m	<b>26'7"</b>
Load at maximum reach	1425 kg	<b>3142 lb</b>

- Performance Data
- Standard Forks and Carriage
- North American Version

## Telescopic Handlers


**TH63**  
**No Stabilizers**

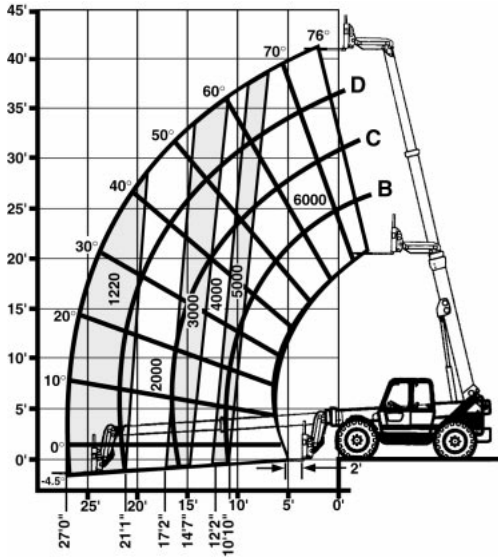

Numbers in chart measured in pounds.

Maximum lift capacity	2725 kg	<b>6000 lb</b>
Maximum lift height	12.5 m	<b>41'0"</b>
Load at maximum height	2725 kg	<b>6000 lb</b>
Maximum forward reach	8.2 m	<b>27'0"</b>
Load at maximum reach	554 kg	<b>1220 lb</b>

**TH63**  
**Stabilizers Down**

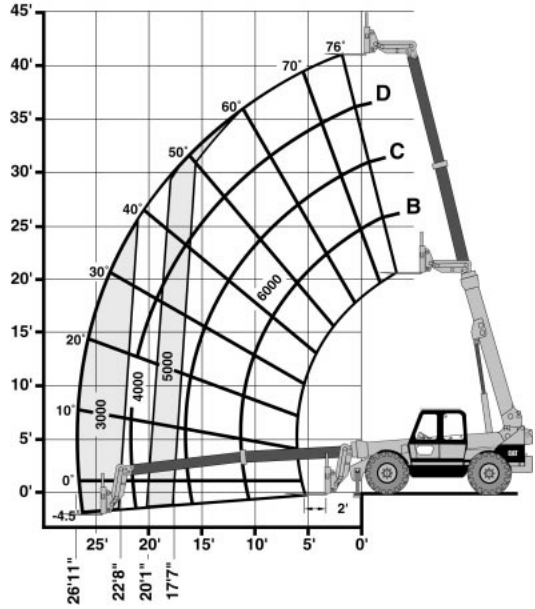

Numbers in chart measured in pounds.

Maximum lift capacity	2725 kg	<b>6000 lb</b>
Maximum lift height	12.5 m	<b>41'0"</b>
Load at maximum height	2725 kg	<b>6000 lb</b>
Maximum forward reach	8.2 m	<b>27'0"</b>
Load at maximum reach	1365 kg	<b>3000 lb</b>


# Telescopic Handlers

## Performance Data

- Standard Forks and Carriage
- No Stabilizers

### TH82

#### Non-U.S. Version

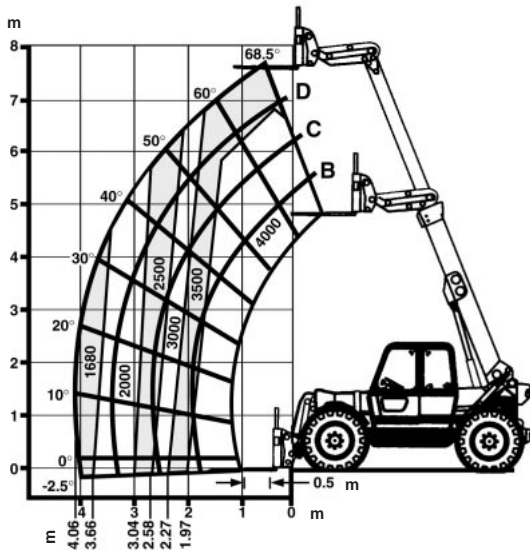


Numbers in chart measured in kilograms.

Maximum lift capacity	4000 kg	<b>8820 lb</b>
Maximum lift height	7.6 m	<b>25'0"</b>
Load at maximum height	3500 kg	<b>7717 lb</b>
Max. height at maximum load	7 m	<b>23'0"</b>
Max. reach at maximum load	1.97 m	<b>6'6"</b>
Maximum forward reach	4.06 m	<b>13'4"</b>
Load at maximum reach	1680 kg	<b>3704 lb</b>

### TH82

#### North American Version

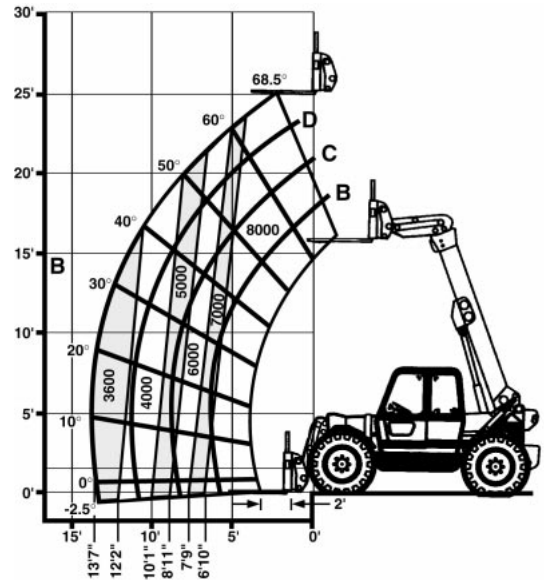


Numbers in chart measured in pounds.

Maximum lift capacity	3635 kg	<b>8000 lb</b>
Maximum lift height	7.6 m	<b>25'0"</b>
Load at maximum height	3182 kg	<b>7000 lb</b>
Maximum forward reach	4.2 m	<b>13'9"</b>
Load at maximum reach	1635 kg	<b>3600 lb</b>

- Performance Data
- Standard Forks and Carriage
- Non-U.S. Version

## Telescopic Handlers


**TH83**  
**Stabilizers Up**

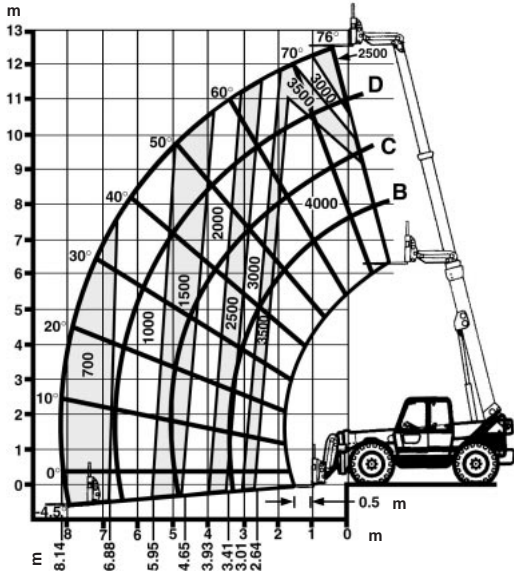

Numbers in chart measured in kilograms.

Maximum lift capacity	4000 kg	<b>8820 lb</b>
Maximum lift height	12.5 m	<b>41'0"</b>
Load at maximum height	2500 kg	<b>5512 lb</b>
Max. height at maximum load	11 m	<b>36'1"</b>
Max. reach at maximum load	2.64 m	<b>8'8"</b>
Maximum forward reach	8.14 m	<b>26'8"</b>
Load at maximum reach	700 kg	<b>1543 lb</b>

**TH83**  
**Stabilizers Down**

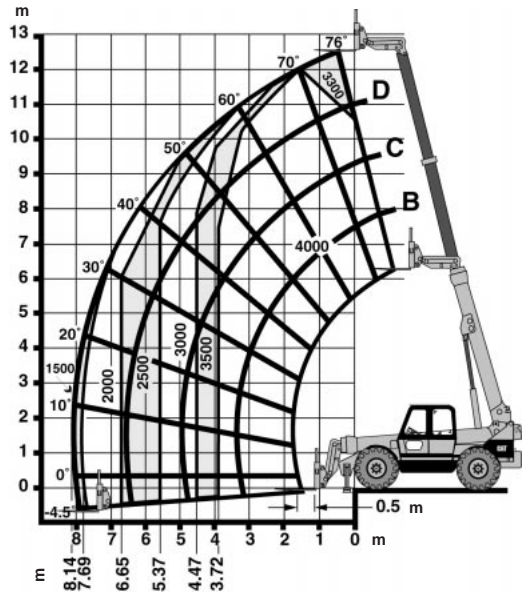

Numbers in chart measured in kilograms.

Maximum lift capacity	4000 kg	<b>8820 lb</b>
Maximum lift height	12.5 m	<b>41'0"</b>
Load at maximum height	3300 kg	<b>7276 lb</b>
Max. height at maximum load	12.25 m	<b>40'2"</b>
Max. reach at maximum load	3.72 m	<b>12'2"</b>
Maximum forward reach	8.14 m	<b>26'8"</b>
Load at maximum reach	1500 kg	<b>3307 lb</b>


# Telescopic Handlers

## Performance Data

- Standard Forks and Carriage
- North American Version

### TH83


#### No Stabilizers

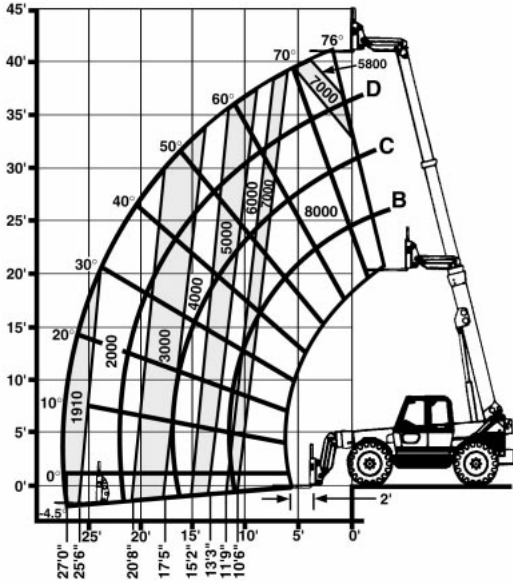

Numbers in chart measured in pounds.

### TH83

#### Stabilizers Down

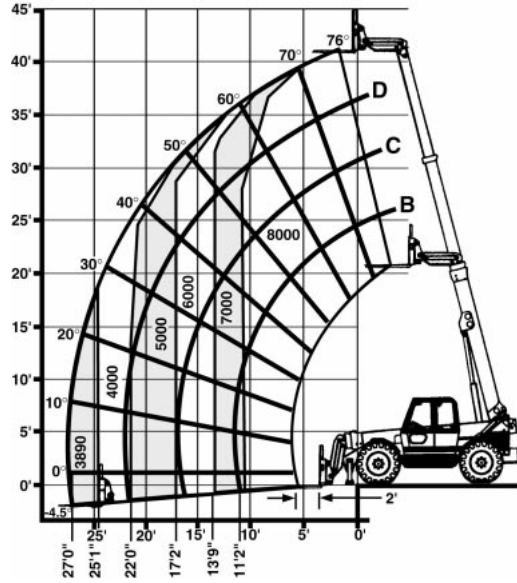


Numbers in chart measured in pounds.

Maximum lift capacity	3635 kg	<b>8000 lb</b>
Maximum lift height	12.5 m	<b>41'0"</b>
Load at maximum height	2725 kg	<b>6000 lb</b>
Maximum forward reach	8.2 m	<b>27'0"</b>
Load at maximum reach	870 kg	<b>1910 lb</b>

Maximum lift capacity	3635 kg	<b>8000 lb</b>
Maximum lift height	12.5 m	<b>41'0"</b>
Load at maximum height	3635 kg	<b>8000 lb</b>
Maximum forward reach	8.2 m	<b>27'0"</b>
Load at maximum reach	1770 kg	<b>3890 lb</b>

- Performance Data
- Standard Forks and Carriage
- Non-U.S. Version


**TH103**  
**Stabilizers Up**

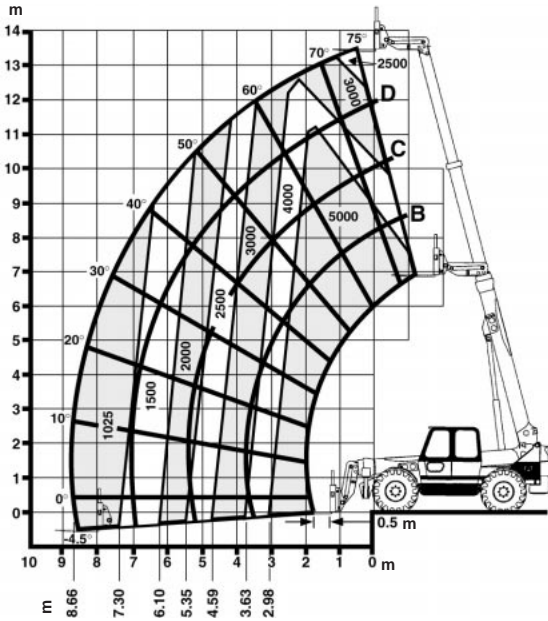

Numbers in chart measured in kilograms.

Maximum lift capacity	5000 kg	<b>11,025 lb</b>
Maximum lift height	13.5 m	<b>44'0"</b>
Load at maximum height	2500 kg	<b>5513 lb</b>
Maximum forward reach	8.66 m	<b>28'4"</b>
Load at maximum reach	1025 kg	<b>2260 lb</b>

**TH103**  
**Stabilizers Down**

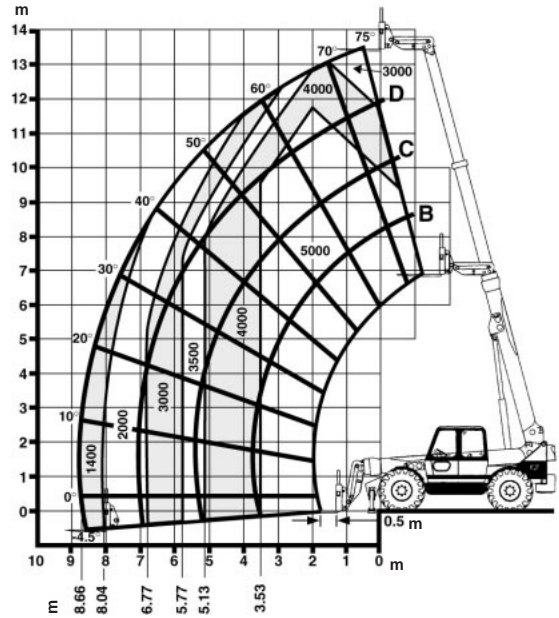

Numbers in chart measured in kilograms.

Maximum lift capacity	5000 kg	<b>11,025 lb</b>
Maximum lift height	13.5 m	<b>44'0"</b>
Load at maximum height	3000 kg	<b>6615 lb</b>
Maximum forward reach	8.66 m	<b>28'4"</b>
Load at maximum reach	1400 kg	<b>3087 lb</b>


# Telescopic Handlers

## Performance Data

- Standard Forks and Carriage
- North American Version

### TH103


#### No Stabilizers

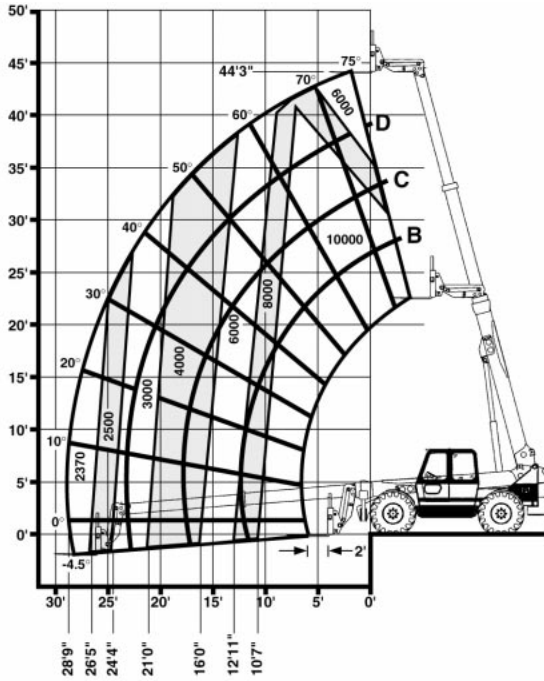

Numbers in chart measured in pounds.

### TH103


#### Stabilizers Down

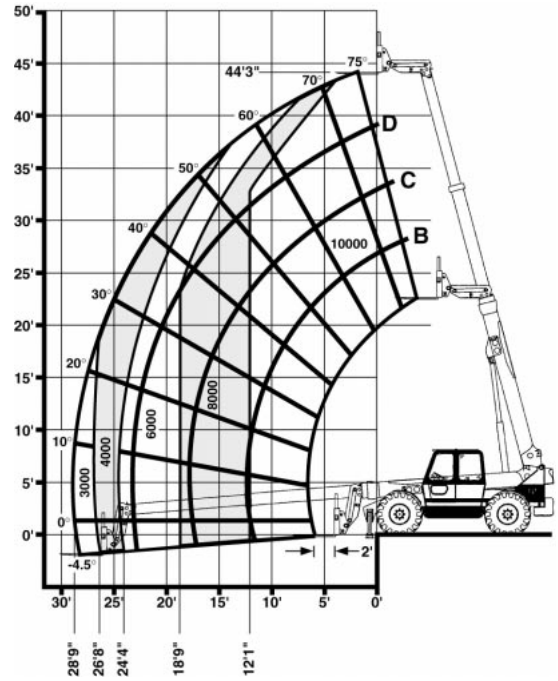

Numbers in chart measured in pounds.

Maximum lift capacity	4536 kg	<b>10,000 lb</b>
Maximum lift height	13.5 m	<b>44'0"</b>
Load at maximum height	2725 kg	<b>6000 lb</b>
Maximum forward reach	8.8 m	<b>28'9"</b>
Load at maximum reach	1075 kg	<b>2370 lb</b>

Maximum lift capacity	4536 kg	<b>10,000 lb</b>
Maximum lift height	13.5 m	<b>44'0"</b>
Load at maximum height	4536 kg	<b>10,000 lb</b>
Maximum forward reach	8.8 m	<b>28'9"</b>
Load at maximum reach	1365 kg	<b>3000 lb</b>

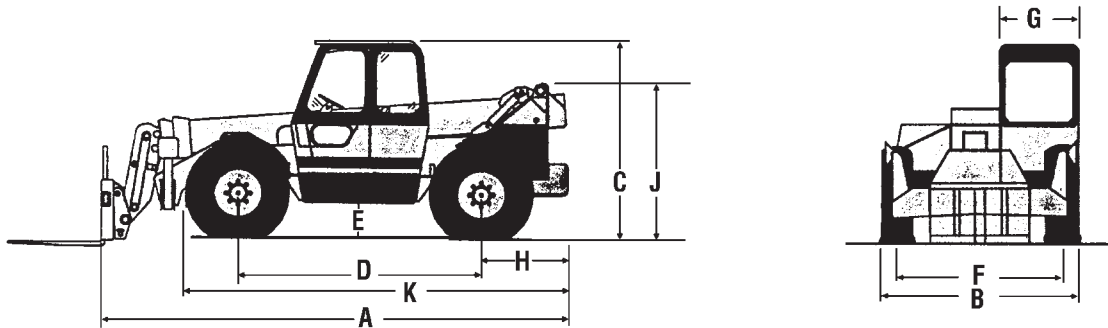

**Dimensions (approx.)**

Model	TH62		TH63		TH82		TH83		TH103	
	mm	ft	mm	ft	mm	ft	mm	ft	mm	ft
A) Length to fork face	4760	15'7"	5720	18'9"	4760	15'7"	5720	18'9"	6332	20'9"
B) Width	2230	7'4"	2450	8'0"	2450	8'0"	2450	8'0"	2440	8'0"
C) Height	2430	8'0"	2450	8'0"	2450	8'0"	2450	8'0"	2675	8'9"
D) Wheel base	2900	9'6"	2970	9'9"	2970	9'9"	2970	9'9"	3175	10'5"
E) Ground clearance	450	18"	450	18"	450	18"	450	18"	496	19.5"
F) Wheel track	1850	6'1"	2080	6'10"	2080	6'10"	2080	6'10"	2074	6'10"
G) Cab width (inside)	900	2'11"	955	3'2"	955	3'2"	955	3'2"	955	3'2"
H)	777	2'7"	1085	3'7"	772	2'6"	1060	3'6"	1318	4'4"
J)	1770	5'10"	1932	6'4"	1770	5'10"	1990	6'6"	2058	6'9"
K)	4316	14'2"	4688	15'5"	4374	14'4"	4662	15'4"	*	*

\*Unavailable at time of printing.

**Tire Selection**

Non-U.S. Models			North American Models		
Model	Tire Size	Tire Type	Model	Tire Size	Tire Type
TH62	15.5 x 24 10PR*	Agricultural	TH62	13.0 x 24 12PR*	Construction
	17.5LR24	Agricultural		15.0 x 25 12PR	Construction
	13.0 x 24 12PR	Construction		17.5LR24	Agricultural
	15.5 x 25 12PR	Construction			
TH63	15.5 x 25 12PR*	Construction	TH63	13.0 x 24 12PR*	Construction <sup>(a)</sup>
	15.5 x 80-24	Agricultural		13.0 x 24 12PR	Construction <sup>(b)</sup>
				15.5 x 25 12PR	Construction <sup>(a)</sup>
TH82	15.5 x 25 12PR*	Construction	TH82	15.5 x 25 12PR	Construction <sup>(b)</sup>
	13.0 x 24	Construction		13.0 x 24 12PR*	Construction
	15.5 x 80-24	Agricultural		15.5 x 25 12PR	Construction
	17.5LR24	Agricultural		17.5LR24	Agricultural
	495/70R24	Agricultural			
TH83	14.0 x 24 12PR*	Construction	TH83	14.0 x 24 12PR*	Construction <sup>(a)</sup>
	17.5 x 25 12PR	Construction		14.0 x 24 12PR*	Construction <sup>(b)</sup>
				17.5 x 25 12PR	Construction <sup>(a)</sup>
TH103	14.0 x 24 16PR*	Construction	TH103	17.5 x 25 12 PR	Construction <sup>(b)</sup>
	17.5R25	Construction		14.0 x 24 16PR*	Construction
			17.5R25	Construction	

\*Standard tire.  
<sup>(a)</sup>No stabilizers.  
<sup>(b)</sup>With stabilizers.



- Carriages
- Forks

All carriages are bar type with load backrest to support bulky loads.  
 Widespread carriages provide added stability for lifting larger loads.  
 Standard and widespread carriages are also available in rotating mode.

**Carriage Type**

Model	Standard		Wide		Rotate		Wide/Rotate	
<b>TH62 &amp; TH63</b>								
Capacity	3000 kg	<b>6615 lb</b>	2920 kg	<b>6440 lb</b>	2865 kg	<b>6320 lb</b>	2785 kg	<b>6140 lb</b>
Weight w/1220 mm (4'0") fork	240 kg	<b>529 lb</b>	320 kg	<b>706 lb</b>	375 kg	<b>827 lb</b>	455 kg	<b>1003 lb</b>
Width	1220 mm	<b>4'0"</b>	1880 mm	<b>6'2"</b>	1220 mm	<b>4'0"</b>	1880 mm	<b>6'2"</b>
Height	1155 mm	<b>3'9"</b>	1155 mm	<b>3'9"</b>	1155 mm	<b>3'9"</b>	1155 mm	<b>3'9"</b>
Max. fork spread	1200 mm	<b>3'11"</b>	1850 mm	<b>6'1"</b>	1200 mm	<b>3'11"</b>	1850 mm	<b>6'1"</b>
Floating fork movement	70 mm	<b>3"</b>	70 mm	<b>3"</b>	70 mm	<b>3"</b>	70 mm	<b>3"</b>
Rotation	—		—		12°		12°	
<b>TH82/TH83</b>								
Capacity	4000 kg	<b>8820 lb</b>	3920 kg	<b>8640 lb</b>	3890 kg	<b>8580 lb</b>	3810 kg	<b>8400 lb</b>
Weight w/1220 mm (4'0") fork	286 kg	<b>631 lb</b>	366 kg	<b>807 lb</b>	395 kg	<b>871 lb</b>	475 kg	<b>1047 lb</b>
Width	1220 mm	<b>4'0"</b>	1880 mm	<b>6'2"</b>	1220 mm	<b>4'0"</b>	1880 mm	<b>6'2"</b>
Height	1155 mm	<b>3'9"</b>	1155 mm	<b>3'9"</b>	1155 mm	<b>3'9"</b>	1155 mm	<b>3'9"</b>
Max. fork spread	1200 mm	<b>3'11"</b>	1850 mm	<b>6'1"</b>	1200 mm	<b>3'11"</b>	1850 mm	<b>6'1"</b>
Floating fork movement	70 mm	<b>3"</b>	70 mm	<b>3"</b>	70 mm	<b>3"</b>	70 mm	<b>3"</b>
Rotation	—		—		12°		12°	
<b>TH103</b>								
Capacity	5000 kg	<b>11,025 lb</b>	4920 kg	<b>10,850 lb</b>	4850 kg	<b>10,690 lb</b>	4680 kg	<b>10,320 lb</b>
Weight w/1220 mm (4'0") fork	318 kg	<b>701 lb</b>	398 kg	<b>878 lb</b>	468 kg	<b>1032 lb</b>	548 kg	<b>1208 lb</b>
Width	1220 mm	<b>4'0"</b>	1880 mm	<b>6'2"</b>	1220 mm	<b>4'0"</b>	1880 mm	<b>6'2"</b>
Height	1155 mm	<b>3'9"</b>	1155 mm	<b>3'9"</b>	1155 mm	<b>3'9"</b>	1155 mm	<b>3'9"</b>
Max. fork spread	1200 mm	<b>3'11"</b>	1850 mm	<b>6'1"</b>	1200 mm	<b>3'11"</b>	1850 mm	<b>6'1"</b>
Floating fork movement	70 mm	<b>3"</b>	70 mm	<b>3"</b>	70 mm	<b>3"</b>	70 mm	<b>3"</b>
Rotation	—		—		12°		12°	

Fork Type			Pallet			Block		
Model	Forks/Set	Size	Model	Forks/Set	Size	Model	Forks/Set	Size
TH62/TH63	2	50 x 100 x 1097 mm	TH62/TH63	4	50 x 50 x 1220 mm	TH62/TH63	4	50 x 50 x 1220 mm
	2	50 x 100 x 1220 mm		6	50 x 50 x 1220 mm		6	50 x 50 x 1220 mm
TH82/TH83	2	50 x 100 x 1220 mm	TH82/TH83	4	50 x 50 x 1220 mm	TH82/TH83	4	50 x 50 x 1220 mm
TH103	2	50 x 125 x 1220 mm	TH103	6	50 x 50 x 1220 mm	TH103	6	50 x 50 x 1220 mm

**HEAVY DUTY BUCKET** • Cutting Edge Included

Model	TH62		TH63/TH82/TH83/TH103	
Capacity (heaped)*	1 m <sup>3</sup>	1.3 yd <sup>3</sup>	1.07 m <sup>3</sup>	1.4 yd <sup>3</sup>
Width	2190 mm	7'2"	2438 mm	8'0"
Weight	444 kg	979 lb	446 kg	983 lb

**LOOSE MATERIAL BUCKET** • Cutting Edge Included

Model	TH62		TH63/TH82/TH83/TH103	
Capacity (heaped)*	1.5 m <sup>3</sup>	2 yd <sup>3</sup>	1.61 m <sup>3</sup>	2.1 yd <sup>3</sup>
Width	2290 mm	7'6"	2438 mm	8'0"
Weight	550 kg	1212 lb	590 kg	1300 lb

**4 IN 1 BUCKET** • Hydraulic Gripping Jaw Included

Model	TH62		TH63/TH82/TH83/TH103	
Capacity (heaped)*	0.75 m <sup>3</sup>	1 yd <sup>3</sup>	0.78 m <sup>3</sup>	1.02 yd <sup>3</sup>
Width	2290 mm	7'6"	2440 mm	8'0"
Weight	440 kg	970 lb	480 kg	1058 lb

**ROOT CROP BUCKET**

Model	TH62 & TH82		
Capacity (heaped)*	1.5 m <sup>3</sup>		2 yd <sup>3</sup>
Width	2290 mm		7'6"
Weight	410 kg		904 lb

**EXTENSION BOOM**

Model	TH62/TH63/TH82/TH83/TH103		
Length	3660 mm		12'0"
Weight	310 kg		683 lb
Capacity	650 kg		1433 lb

**MANURE FORK**

Model	TH62 & TH82		Model	TH62 & TH82	
Capacity (heaped)*	1.9 m <sup>3</sup>	2.5 yd <sup>3</sup>	Capacity (heaped)*	1.9 m <sup>3</sup>	2.5 yd <sup>3</sup>
Width	2290 mm	7'6"	Width	2290 mm	7'6"
No. of tines	9		No. of tines	9	
Tine length	1060 mm	3'6"	Tine length	1060 mm	3'6"
Weight	375 kg	827 lb	Weight	595 kg	1312 lb

**MANURE GRAB** • Hydraulic Top Grab Included**MANURE FORK WITH PUSHOFF** • Includes Hydraulic Top Grab and Push Off

Model	TH62 & TH82		
Capacity (heaped)*	1.73 m <sup>3</sup>		2.26 yd <sup>3</sup>
Width	2290 mm		7'6"
No. of tines		9	
Tine length	1060 mm		3'6"
Weight	575 kg		1268 lb

\*SAE Ratings.

## GRAIN PUSHER

## BALE SPIKE

Model	TH62 & TH82		Model	TH62 & TH82	
Blade width	2110 mm	6'11"	Width	1820 mm	6'0"
Forward reach	2110 mm	6'11"	No. of Tines	6	
Weight	320 kg	706 lb	Tine length	1370 mm	4'6"
			Weight	130 kg	287 lb

AVAILABLE ATTACHMENTS	TH62	TH63	TH82	TH83	TH103
Standard Carriage	●	●	●	●	●
Rotate Carriage*	●	●	●	●	●
Carriage, Wide/Framers	●	●	●	●	●
Carriage, Wide/Framers, Rotate*	●	●	●	●	●
Forks, Pallet — 2 of (50 x 100 x 1097 mm)	●	●	N/A	N/A	N/A
Forks, Pallet — 2 of (50 x 100 x 1220 mm)	●	●	●	●	N/A
Forks, Pallet — 2 of (50 x 125 x 1220 mm)	N/A	N/A	N/A	N/A	●
Forks, Block — 4 of (50 x 50 x 1220 mm)	●	●	●	●	●
Forks, Block — 6 of (50 x 50 x 1220 mm)	●	●	●	●	●
1.0 m <sup>3</sup> , Heavy Duty Bucket	●	N/A	N/A	N/A	N/A
1.07 m <sup>3</sup> , Heavy Duty Bucket	N/A	●	●	●	●
1.5 m <sup>3</sup> , Root Crop Ag Bucket	●	N/A	●	N/A	N/A
1.5 m <sup>3</sup> , Loose Material Bucket	●	N/A	N/A	N/A	N/A
1.61 m <sup>3</sup> , Loose Material Bucket	N/A	●	●	●	●
4 In 1, 0.75 m <sup>3</sup> , Bucket*	●	N/A	N/A	N/A	N/A
4 In 1, 0.78 m <sup>3</sup> , Bucket*	N/A	●	●	●	●
Manure Fork	●	N/A	●	N/A	N/A
Manure Grab*	●	N/A	●	N/A	N/A
Manure Fork and Push Off*	●	N/A	●	N/A	N/A
Extension Boom (3.66 m)	●	●	●	●	●
Blade, Grain Pusher	●	N/A	●	N/A	N/A
Bale Spike — 2 Bales	●	N/A	●	N/A	N/A
Quick Coupler, Hydraulic*	●	●	●	●	●
Hitch, Hydraulic Rear Tow	●	N/A	N/A	N/A	N/A

\*Additional Hydraulics Required.

# PAVING PRODUCTS

## CONTENTS

### COLD PLANERS

Features	17-1
Specifications	17-2
Production estimating	17-3
Machine selection	17-4
Cold planing fundamentals	17-4
Applications	17-5
Cold Planer use by project type	17-6

### RECLAIMER/SOIL STABILIZERS

Features	17-7
Specifications	17-8
Optional equipment	17-8
Production estimating	17-9
Weight of materials	17-10
Stabilization/Reclamation production	17-10

### ASPHALT PAVERS

Features and Specifications	17-11
Barber-Greene	17-14
Production table	17-18

### ROAD WIDENERS

Barber-Greene	17-19
---------------	-------

### WINDROW ELEVATORS

Barber-Greene	17-20
---------------	-------

### VIBRATORY AND PNEUMATIC TIRE COMPACTORS

Features	17-21
Specifications; Vibratory Compactors	17-22
Pneumatic Tire Compactors	17-28
Production estimating; Vibratory Compactors	17-30
Pneumatic Tire Compactors	17-33

### Cold Planer Features:

- **Cat Diesel Engines** with large piston displacement and individual adjustment-free fuel pumps and valves.
- **Up-cutting mandrels** provide cutting efficiency and improved bit life.
- **Grade and slope system** produces  $\pm 3$  mm (0.125 in) tolerance.
- **Non-contact sensors** speed set-up on PM-565B and PM-465.
- **Short turning radii** for productivity and jobsite flexibility.
- **Front-discharge conveyor on PM-565B and PM-465** facilitates haul unit movement in congested urban applications.
- **Optimum weight-to-horsepower balance** for delivering maximum available horsepower to the cutter.
- **Computerized Monitoring System (CMS)** provides three warning levels for abnormal operating conditions on PM-565B and PM-465.
- **Load control system** on PM-565B and PM-465 keeps machine operating at peak efficiency.
- **Variable width cutter** available for PM-565B and PM-465.
- **Water spray system** for dust control and bit cooling.



MODEL	PM-465		PM-565B	
Flywheel Power	373 kW	500 hp	466 kW	625 hp
Operating Weight	26 290 kg	57,960 lb	38 000 kg	83,600 lb
Engine Model	3406CTA		3408ETA	
Rated Engine RPM	2100		2100	
No. of Cylinders	6		8	
Bore	137 mm	5.4"	137 mm	5.4"
Stroke	165 mm	6.5"	152 mm	6"
Displacement	14.6 L	893 in <sup>3</sup>	18 L	1099 in <sup>3</sup>
Drive Systems: Rotor	<b>Mechanical</b>		<b>Mechanical</b>	
Ground				
	<b>Hydrostatic with 4 track design</b>		<b>Hydrostatic with 4 track design</b>	
Discharge Conveyor Width	762 mm	2'6"	762 mm	2'6"
Width of Standard Track Shoe	250 mm	10"	348 mm	13.7"
Track Length on Ground	1242 mm	4'1"	2045 mm	6'8.5"
Ground Contact Area (w/std. shoe)	0.29 m <sup>2</sup>	450 in <sup>2</sup>	0.43 m <sup>2</sup>	672 in <sup>2</sup>
Operating Dimensions:				
Height	4.6 m	15'0"	4835 mm	14'11"
Width	2.5 m	8'2"	3151 mm	10'7"
Length	13.1 m	42'11"	14.5 m	47'6"
Standard Mandrel (Width of Cut)	2000 mm	6'7"	2100 mm	6'11"
No. of Teeth	144		117	
Depth of Cut (max.)	305 mm	12"	305 mm	12"
Optional Mandrel Widths	2000 mm	6'7"	—	—
Speeds: Operating (max.)	0-37 m/min	0-120 ft/min	0-40 m/min	0-132 fpm
Speeds: Travel (max.)	0-5.2 km/h	0-3.2 mph	0-6 km/h	0-3.7 mph
Inside Turning Radius: Right	3.62 m	11'10"	4674 mm	15'4"
Left	4.12 m	13'6"	—	—
Grade Control	<b>Contacting and Non Contacting Electric Over Hydraulic</b>		<b>Standard Non Contact Electric Over Hydraulic</b>	
	<b>Optional</b>		<b>Standard</b>	
Slope Control				
Fuel Capacity	796 L	210 U.S. gal	946 L	250 U.S. gal
Water Capacity	2275 L	600 U.S. gal	3790 L	1000 U.S. gal

Speed		Cutter/Drum Width — m <sup>2</sup> /min (yd <sup>2</sup> /min)															
		1220 mm 4'0"		1900 mm 6'3"		2010 mm 6'7"		2100 mm 6'11"		2210 mm 7'3"		3050 mm 10'0"		3500 mm 11'6"		3810 mm 12'6"	
		m <sup>2</sup>	yd <sup>2</sup>	m <sup>2</sup>	yd <sup>2</sup>	m <sup>2</sup>	yd <sup>2</sup>	m <sup>2</sup>	yd <sup>2</sup>	m <sup>2</sup>	yd <sup>2</sup>	m <sup>2</sup>	yd <sup>2</sup>	m <sup>2</sup>	yd <sup>2</sup>	m <sup>2</sup>	yd <sup>2</sup>
3.0	10	3.7	4.4	5.8	6.9	6.1	7.3	6.4	7.7	6.7	8.0	9.3	11.1	10.7	12.8	11.6	13.9
4.6	15	5.6	6.6	8.7	10.4	9.3	11.0	9.7	11.5	10.0	12.1	13.9	16.7	16.1	19.2	17.4	20.8
6.1	20	7.5	8.8	11.6	13.9	12.3	14.6	12.8	15.4	13.4	16.1	18.6	22.2	21.4	25.5	23.3	27.8
7.6	25	9.3	11.1	14.5	17.4	15.4	18.3	16.1	19.2	16.7	20.1	23.2	27.8	26.8	31.9	29.1	34.7
9.1	30	11.1	13.3	17.4	20.8	18.4	22.0	19.2	23.1	20.1	24.2	27.9	33.3	32.1	38.3	34.9	41.7
10.7	35	13.1	15.5	20.3	24.3	21.6	25.6	22.6	26.9	23.4	28.2	32.5	38.9	37.5	44.7	40.7	48.6
12.2	40	15.0	17.8	23.2	27.8	24.6	29.3	25.7	30.7	26.8	32.2	37.1	44.4	42.8	51.1	46.5	55.5
13.7	45	16.8	20.0	26.1	31.2	27.7	33.0	28.9	34.6	30.1	36.2	41.8	50.0	48.2	57.5	52.3	62.5
15.2	50	18.7	22.2	29.0	34.7	30.7	36.6	32.1	38.4	33.5	40.3	46.4	55.5	53.5	63.9	58.1	69.4
16.8	55	20.6	24.4	31.9	38.2	33.9	40.2	35.4	42.3	36.8	44.3	51.1	61.1	58.9	70.3	63.9	76.4
18.3	60	22.5	26.7	34.9	41.7	37.0	43.9	38.7	46.1	40.1	48.3	55.7	66.7	64.2	76.7	69.8	83.3

Speed		Cutter/Drum Width — metric tons/min (U.S. tons/min)															
		1220 mm 4'0"		1900 mm 6'3"		2010 mm 6'7"		2100 mm 6'11"		2210 mm 7'3"		3050 mm 10'0"		3500 mm 11'6"		3810 mm 12'6"	
		Metric tons	U.S. tons	Metric tons	U.S. tons	Metric tons	U.S. tons	Metric tons	U.S. tons	Metric tons	U.S. tons	Metric tons	U.S. tons	Metric tons	U.S. tons	Metric tons	U.S. tons
3.0	10	0.23	0.26	0.36	0.40	0.38	0.42	0.41	0.44	0.44	0.46	0.58	0.64	0.67	0.74	0.73	0.80
4.6	15	0.35	0.38	0.54	0.60	0.57	0.63	0.61	0.66	0.66	0.69	0.87	0.96	1.00	1.10	1.09	1.20
6.1	20	0.46	0.51	0.72	0.80	0.76	0.84	0.82	0.88	0.88	0.92	1.16	1.28	1.34	1.47	1.46	1.79
7.6	25	0.58	0.64	0.91	1.00	0.94	1.04	1.02	1.10	1.10	1.15	1.45	1.60	1.67	1.83	1.82	1.99
9.1	30	0.69	0.77	1.09	1.20	1.14	1.26	1.23	1.33	1.32	1.39	1.74	1.91	2.01	2.20	2.19	2.40
10.7	35	0.81	0.89	1.27	1.40	1.34	1.47	1.44	1.55	1.54	1.62	2.03	2.24	2.34	2.57	2.56	2.79
12.2	40	0.92	1.02	1.45	1.60	1.53	1.68	1.65	1.76	1.76	1.85	2.32	2.55	2.68	2.94	2.92	3.19
13.7	45	1.04	1.15	1.63	1.80	1.71	1.88	1.84	1.99	1.98	2.08	2.61	2.87	3.01	3.31	3.28	3.59
15.2	50	1.16	1.28	1.81	2.00	1.91	2.10	2.05	2.21	2.20	2.32	2.90	3.19	3.35	3.67	3.65	3.99
16.8	55	1.27	1.41	1.99	2.20	2.09	2.31	2.25	2.43	2.42	2.55	3.19	3.51	3.68	4.04	4.01	4.39
18.3	60	1.39	1.53	2.18	2.40	2.28	2.51	2.46	2.65	2.64	2.78	3.48	3.83	4.02	4.41	4.38	4.79

NOTE: Above figures are based on a one-inch depth of cut. For greater depths of cut, multiply the production rate by cutting depth. Based on asphalt density of 115 lb/yd<sup>3</sup>, one inch thick.

## MACHINE SELECTION

Prime considerations in selecting the proper cold planer model are:

- specifics of work to be done
- type of projects generally done by the contractor
  - City/Urban or Highway/Airport
- desired production capacities

### Cold Planer Characteristics (Highway/Airport)

Highway/Airport work requires high-volume cold planers. The PM-565B and other high horsepower half-lane cold planers are being used more on Highway/Airport projects. Users like to have one machine that can work successfully on high production jobs then switch to city/urban applications. The PM-565B has proven to be a true cross-over cold planer.

### Cold Planer Characteristics (City/Urban)

The PM-465 is a four track, front discharge cold planer designed primarily for the Urban/City environment. The PM-465, with its tight turning radius and easy set up, makes it suitable for many applications. The PM-465 has the productive capacity to perform effectively on highway applications as well. Machine dimensions and weight allow transport on one truck, often no special weight permits are required.

The PM-565B is a four-track, front discharge model. Front discharge cold planers make traffic control easier in congested quarters. The trucks travel forward in the same direction as the cold planer. The trucks move in and out of traffic faster increasing production.

## COLD PLANING FUNDAMENTALS

### Definition

Cold planing is automatically controlled cold milling to restore the pavement surface to a specified grade and slope; remove bumps, ruts, and other imperfections; and leave a textured surface which can be opened immediately to traffic or overlaid with new pavement materials.

### Production and Tooth Wear

Because pavement materials vary, so do production and tooth wear. While predicting the exact production rate and tooth wear on a particular job is difficult, general guidelines are available.

Production depends on the milling rate (the speed at which the cold planer moves forward). The machine's forward speed is determined, primarily, by aggregate type, asphalt bond strength and depth of cut. When milling asphalt pavement, the cold planer's teeth essentially are breaking the bond between asphalt-coated aggregate, not actually fracturing the aggregate itself. A pavement made with a mix containing a high percentage of fine aggregate and a high asphalt content is more difficult to mill than a pavement with a high percentage of coarse aggregate.

A dense or fine mix usually requires more power at the cutting drum, limiting the cold planer's forward speed. Decreased speed lowers production, and the tough bond between the small aggregate particles causes increased cutting-tooth wear. Lower production and higher tooth wear result in increased unit costs.

Cutting depth affects power demand at the drum and helps determine the cold planer's forward speed. However, production increases, to a point, as the depth of cut increases. For example, changing from a 25 mm (1 in) cut to a 51 mm (2 in) cut slows the machine only slightly but doubles the amount of material produced.

As the cut increases beyond the machine's peak-production depth, the reduced forward speed begins to offset the production gains of the deeper cut. For example, production at a 152 mm (6 in) cutting depth and slow speed may be no greater than cutting at a 76 mm (3 in) depth and a much faster speed.

As long as the cold planer maintains a productive forward speed, deeper cuts will yield greater production and tend to lower tooth cost. Tooth wear does not increase in direct proportion to production when the machine is working in an efficient range.

Tooth wear at various depths for a given material is affected by how long the tooth remains in the cut. Because the teeth are mounted on a circular drum, each tooth cuts through the pavement in an arc. The tooth arc at a 102 mm (4 in) cutting depth, however, is not four times longer than at a 25 mm (1 in) cutting depth, even though production may be four times greater. The cutting arc at 102 mm (4 in) is approximately twice as long as that at 25 mm (1 in).

The peak cutting depth for a particular cold planer on a specific job is best determined by examining production, and subsequent costs, of a single deep cut versus multiple passes at a shallow depth.

## APPLICATIONS

Although new applications for cold planers are being discovered, most work can be classified in seven general categories:

### Leveling and Bonding

This application removes a layer of pavement to eliminate potholes, ruts, bumps and other surface imperfections. The cold planer leaves a level, textured surface ideal for bonding to a new, thin overlay of asphalt or concrete. The surface has an interlocking texture with double the bonding area of a conventional smooth pavement. The textured surface and overlay form a monolithic bond, eliminating the shear plane that causes pavement layers to move and separate. Thinner overlays can be used, making the technique more economical than traditional overlay methods.

### Surface Refinishing

Rough pavement can also be cold planed to specified grade and slope, providing a new riding surface without adding new paving materials. This application is particularly useful when base and sub-base are in good shape, or when several layers have been added to the roadway over the years. Roads can be cold planed during cold, wet months and reopened immediately. New overlays can be added whenever weather permits. This lengthens the practical working season for many contractors. The cold planer can also be used to correct expansion joint faults and pavement cracks.

### Surface Repair

This category generally requires deeper cutting than leveling. It consists of removing isolated distressed pavement sections down to subbase, if necessary, prior to adding new overlay materials. Since the cutter mandrel on Caterpillar cold planers cuts forward and upward, there's no damaging impact to the underlying base.

### Pavement Removal

Pavement buildup is a problem that plagues most older streets, roads and highways. As overlays are added, curbs and drains are buried — creating drainage problems. Overhead clearances are dangerously reduced ... and additional weight is added to overpasses and bridges. Cold planing is an economical method of curing all these problems.

### Surface Texturing

Serious accidents increase when pavement becomes slick from wear. The textured surface produced by cold planing is highly skid-resistant and has dramatically reduced hydroplaning characteristics.

### Pavement Mining

Cold milling has made it practical to actually “mine” deteriorated pavement materials from existing roads and streets. The cold planer produces an ideally-sized asphalt or concrete material which can be recycled in a variety of ways. Depending on type, age and condition of pavement, the largest cold planer can reclaim up to 900 tons of material per hour.



**COLD PLANER USE BY PROJECT TYPE**

<b>Applications</b>	<b>Highway/Airport</b>	<b>City/Urban</b>
Planing (Milling)	<ul style="list-style-type: none"> <li>● To establish grade and slope.</li> <li>● Remove excess pavement.</li> </ul>	<ul style="list-style-type: none"> <li>● To establish proper grade and slope.</li> <li>● To establish new grade and slope.</li> </ul>
Partial Removal	<ul style="list-style-type: none"> <li>● For use with hot mix recycle.</li> <li>● Remove pavement irregularities.</li> <li>● Texture for skid resistance.</li> </ul>	<ul style="list-style-type: none"> <li>● To correct drainage and curb reveal.</li> <li>● To lower elevation at overpass.</li> <li>● For use with hot recycle.</li> <li>● Eliminate leveling course.</li> </ul>
Full Depth Removal	<ul style="list-style-type: none"> <li>● Total rebuild. RAP used for base or hot recycle.</li> <li>● Cold recycle. This requires additional surface treatment.</li> </ul>	<ul style="list-style-type: none"> <li>● Total rebuild. RAP used for base or hot recycle.</li> <li>● Cold recycle. Requires additional surface treatment.</li> </ul>
Texturing	<ul style="list-style-type: none"> <li>● For skid resistance and improved bond when overlay is applied.</li> </ul>	<ul style="list-style-type: none"> <li>● For skid resistance and improved bond when overlay is applied.</li> </ul>
Leveling		<ul style="list-style-type: none"> <li>● At intersections to remove bumps, shoving and improve drainage.</li> </ul>
Special	<ul style="list-style-type: none"> <li>● Joint and crack repair.</li> <li>● Cut rumble grooves on shoulders of bridge approaches.</li> </ul>	<ul style="list-style-type: none"> <li>● Intersection defect repair.</li> <li>● Pothole repair.</li> <li>● Railroad crossing repair.</li> <li>● Tight radius profiling around manhole covers, etc.</li> <li>● Pavement adjustments (transitions from existing pavements to new overlays).</li> </ul>

**RR-250B:**

The RR-250B is a single rotor full depth reclaiming machine. It uses a cutting mandrel to pulverize and mix asphaltic pavement and base materials. The machine is utilized to mechanically stabilize deteriorated asphalt structures and complete reclamation with the addition of asphaltic emulsions or other binding agents. The RR-250B can be equipped with attachments that accurately inject liquid additives directly into the mixing hood. Optional rotors can be installed to convert the RR-250B into a soil stabilizer. The internally mounted breaker bar aids in material sizing.

**SS-250B:**

The SS-250B is a single rotor soil stabilization machine. The machine cuts, mixes and pulverizes native in-place soils or select materials, with or without additives. It modifies and stabilizes the soil obtaining a strong base.

Both the RR & SS-250B feature automatic depth control, engine load sensing, and rear steering.

**RM-350B:**

The RM-350B is a heavy-duty reclaimer/mixer, that can perform either full depth reclamation, or soil stabilization. Rotor options allow the RM-350B to perform the pulverization of asphalt pavement, or the mixing of stabilizing agents with soils to produce a strong base material.

The RM-350B features microprocessor control of major machine systems, including propel speed, rotor depth, and steering modes.

**RR-250B/SS-250B Features:**

- **Maximum Production** ... rotor driven by Cat turbocharged Diesel Engine through mechanical drive system.
- **Highly Efficient** ... load-sensing propel system helps prevent overloading while allowing continuous work near rated horsepower.
- **Extremely Versatile** ... interchangeable rotors provide both reclamation and stabilization capabilities.
- **Consistent Blending** ... automatic depth control, mid-mounted mixing chamber and multi-speed rotor drive combine for optimum blending and increased production.

**RM-350B Features:**

- **Maximum Production** ... mechanical rotor drive, with deep cutting and mixing capability, via Cat turbocharged Diesel Engine and Cat three-speed transmission.
- **Efficient Operation** ... Cat Electronic Control Module provides microprocessor control of major machine systems.
- **Highly Maneuverable** ... four steering modes with automatic rear wheel alignment simplify work in congested areas.
- **Versatility** ... choice of three rotors for full depth reclamation or soil stabilization.
- **Reliability** ... field proven Cat components maximize machine availability.



<b>MODEL</b>	<b>RR-250B</b>			<b>SS-250B</b>			<b>RM-350B</b>		
Flywheel Power	250 kW	<b>335 hp</b>		250 kW	<b>335 hp</b>		373 kW	<b>500 hp</b>	
Operating Weight	19 264 kg	<b>42,470 lb</b>		14 343 kg	<b>31,620 lb</b>		24 040 kg	<b>53,000 lb</b>	
Engine Model	<b>3406CTA</b>			<b>3406CTA</b>			<b>3406D DITA</b>		
Rated Engine RPM	<b>2100</b>			<b>2100</b>			<b>2100</b>		
No. Cylinders	<b>6</b>			<b>6</b>			<b>6</b>		
Bore	137 mm	<b>5.4"</b>		137 mm	<b>5.4"</b>		137 mm	<b>5.4"</b>	
Stroke	165 mm	<b>6.5"</b>		165 mm	<b>6.5"</b>		165 mm	<b>6.5"</b>	
Displacement	14.6 L	<b>893 in<sup>3</sup></b>		14.6 L	<b>893 in<sup>3</sup></b>		14.6 L	<b>893 in<sup>3</sup></b>	
Drive Systems: Rotor	<b>3 speed Mechanical</b>			<b>3 speed Mechanical</b>			<b>3 speed Mechanical</b>		
Ground	<b>4 speed Hydrostatic</b>			<b>4 speed Hydrostatic</b>			<b>4 speed Hydrostatic</b>		
Operating Dimensions: Height	2600 mm	<b>8'6.5"</b>		2600 mm	<b>8'6.5"</b>		3404 mm	<b>11'2"</b>	
Width	2921 mm	<b>9'7"</b>		2921 mm	<b>9'7"</b>		2997 mm	<b>9'10"</b>	
Length	8560 mm	<b>28'1"</b>		8560 mm	<b>28'1"</b>		9595 mm	<b>31'6"</b>	
Width of Cut	2438 mm	<b>8'0"</b>		2438 mm	<b>8'0"</b>		2438 mm	<b>8'0"</b>	
Depth of Cut (Max.)	330 mm	<b>13"</b>		457 mm	<b>18"</b>		508 mm	<b>20"</b>	
Rotor Speed	<b>Trans</b>	<b>Drive</b>	<b>Speed</b>	<b>Trans</b>	<b>Drive</b>	<b>Speed</b>	<b>Trans</b>	<b>Drive</b>	<b>Speed</b>
	Low	Low	123 rpm	Low	Low	123 rpm	Low	Low	115 rpm
	Low	High	168 rpm	Low	High	168 rpm	Low	High	160 rpm
	High	Low	284 rpm	High	Low	284 rpm	High	Low	215 rpm
Minimum Turning Radius:									
Standard	5.5 m	<b>18'0"</b>		5.5 m	<b>18'0"</b>		5.48 m	<b>18'0"</b>	
Travel Speed (Max.)	19.3 km/h	<b>12 mph</b>		19.3 km/h	<b>12 mph</b>		16.8 km/h	<b>10.5 mph</b>	
Standard Tires: Front	<b>23.5 × 25-16 ply Lug Type E-2</b>			<b>28.1 × 26-10 PR Lug</b>			<b>23.5R25, L-2 Loader/Dozer</b>		
Rear	<b>15.5 × 25-8 ply Lug Type L-2</b>			<b>14.9 × 24-6 PR Lug</b>			<b>19.5L × 24-12 R-4 Lug All</b>		
Fuel Capacity	416 L	<b>110 U.S. gal</b>		416 L	<b>110 U.S. gal</b>		779 L	<b>206 U.S. gal</b>	
Cooling System	61 L	<b>16 U.S. gal</b>		61 L	<b>16 U.S. gal</b>		61 L	<b>16 U.S. gal</b>	
Crankcase	34 L	<b>9 U.S. gal</b>		34 L	<b>9 U.S. gal</b>		34 L	<b>9 U.S. gal</b>	

**OPTIONAL EQUIPMENT — RR-250B/SS-250B**

- Roll Over Protective Structure (ROPS).
- Foot per minute indicator (available in metric).
- Working light package.
- Cab with heater, defroster and air conditioner.
- Liquid additive system (emulsion or water) (English or Metric).
- Water spray system with in-line flow meter.
- Rear wheel power.
- Sound suppression package.
- Torque limiter.
- Mirror package.
- Various rotor options.

**OPTIONAL EQUIPMENT — RM-350B**

- Roll Over Protective Structure (ROPS).
- Working light package.
- Rooding light package.
- Deluxe cab.
- Liquid additive system (emulsion or water).
- Water spray system.
- Sound suppression package.
- Rear wheel power.
- Mirror package.
- Various rotor options.

**Rotor Options for SS-250B**

Rotor	Maximum Depth of Work	No. of Bits/Tools	Direction of Cut
Quick Change Tool	381 mm 15"	58	Up
Deep Mix Quick Change	457 mm 18"	58	Down
Combination	381 mm 15"	108	Up

**Rotor Options for RR-250B**

Rotor	Maximum Depth of Work	No. of Bits/Tools	Direction of Cut
Cone Tool Milldrum	330 mm 13"	188	Up
Breakaway Holder Rotor	330 mm 13"	188	Up
Quick Change	381 mm 15"	58	Up
Combination	381 mm 15"	108	Up

**Rotor Options for RM-350B**

Rotor	Maximum Depth of Work	No. of Bits/Tools	Direction of Cut
Reclamation	381 mm 15"	190	Up
Quick Change	508 mm 20"	58	Up
Combination	457 mm 18"	108	Up

Other rotors available by custom order.

**PRODUCTION ESTIMATING**

The maximum cutting depth is 381 mm (15 in) for the RR-250B and 457 mm (18 in) for the RM-350B. The SS-250B can mix up to 457 mm (18 in). In addition, the cutting width of their rotors is 8 feet. The following formulas allow you to determine the production in square yards (yd<sup>2</sup>)/minute or cubic yards (yd<sup>3</sup>)/minute.

Production in square yards (yd<sup>2</sup>) per minute

$$\begin{aligned}
 \text{yd}^2/\text{min} &= \frac{\text{FPM of travel speed}}{1.125} \\
 \frac{9 \text{ ft}^2/\text{yd}^2}{8 \text{ ft Cutting width}} &= 1.125 \text{ (This is a constant value for an eight foot wide rotor)}
 \end{aligned}$$

Gallons of additive (for units with pump and metering additive system)

$$\frac{\text{GPM}}{\text{yd}^2/\text{min}} = \text{gal/yd}^2$$

Or, if required additive amounts are known, you can determine necessary travel speed as shown:

$$\frac{\text{GPM}}{\text{gal/yd}^2} = \text{yd}^2/\text{min}; \text{yd}^2/\text{min} \times 1.125 = \text{ft}/\text{min}$$

Production in Cubic Yards (yd<sup>3</sup>) per minute

$$\frac{\text{FPM of travel speed}}{1.125} \times \frac{\text{Cutting or mixing depth in inches}}{36} = \frac{\text{yd}^3}{\text{min}}$$

Production in Tons per Minute

$$\text{yd}^3/\text{min} \times \frac{\text{Wt. of Material per yd in lbs}}{2000 \text{ lb/ton}} = \text{tons}/\text{min}$$

**Abbreviations**

FPM = Feet Per Minute  
GPM = Gallons Per Minute

**WEIGHT OF MATERIALS**

Material	LOOSE		IN-PLACE		
	kg/m <sup>3</sup>	lbs/yd <sup>3</sup>	kg/m <sup>3</sup>	lbs/yd <sup>3</sup>	
Clay	— Dry	1480	2500	1840	3100
	— Wet	1660	2800	2080	3500
Clay and Gravel	— Dry	1420	2400	1660	2800
	— Wet	1540	2600	1840	3100
Sand and Gravel	— Dry	1720	2900	1930	3250
	— Wet	2020	3400	2220	3750
Sand	— Dry	1420	2400	1600	2700
	— Damp	1690	2850	1900	3200
	— Wet	1840	3100	2080	3500
Earth	— Dry Packed	1510	2550	1900	3200
	— Wet Excavated	1600	2700	2020	3400
	— Top Soil	950	1600	1360	2300
	— Loam	1250	2100	1540	2600
Bituminous Concrete	— Windrowed Chunks (25% Voids)	1740	2925		
	— Compacted			2310	3900

**STABILIZATION/RECLAMATION PRODUCTION**

The following charts list production in square meters per minute, square yards per minute, cubic meters per minute, and cubic yards per minute. The information is based on various travel speeds and cutting depths for the Caterpillar RM-350B, RR-250B and SS-250B equipped with a 2438 mm (8 ft) cutting rotor.

**PRODUCTION RATES**

Travel Speed m/min	m <sup>2</sup> / min	m <sup>3</sup> /Minute																
		Cutting Depth — mm																
		100	125	150	175	200	225	250	275	300	325	350	375	400	425	450	475	500
3	7.3	0.73	0.9	1.1	1.3	1.5	1.6	1.8	2.0	2.2	2.4	2.6	2.7	2.9	3.1	3.3	3.5	3.7
6	14.6	1.46	1.8	2.2	2.6	2.9	3.3	3.7	4.0	4.4	4.8	5.1	5.5	5.9	6.2	6.6	6.9	7.3
9	21.9	2.2	2.7	3.3	3.8	4.4	4.9	5.5	6.0	6.6	7.1	7.7	8.2	8.8	9.3	9.9	10.4	11.0
12	29.3	2.9	3.7	4.4	5.1	5.9	6.6	7.3	8.0	8.8	9.5	10.2	11.0	11.7	12.4	13.2	13.9	14.6
15	36.6	3.6	4.6	5.5	6.4	7.3	8.2	9.1	10.0	11.0	11.9	12.8	13.7	14.6	15.5	16.5	17.4	18.3
18	43.9	4.4	5.5	6.6	7.7	8.8	9.9	11.0	12.1	13.2	14.3	15.4	16.5	17.6	18.7	19.7	20.8	21.9
21	51.2	5.1	6.4	7.7	9.0	10.2	11.5	12.8	14.1	15.4	16.6	17.9	19.2	20.5	21.8	23.0	24.3	25.6
24	58.5	5.9	7.3	8.8	10.2	11.7	13.2	14.6	16.1	17.6	19.0	20.5	21.9	23.4	24.9	26.3	27.8	29.3
27	65.8	6.6	8.2	9.9	11.5	13.2	14.8	16.4	18.1	19.7	21.4	23.0	24.7	26.3	28.0	29.6	31.3	32.9

**PRODUCTION RATES**

Travel Speed ft/min	yd <sup>2</sup> / min	yd <sup>3</sup> /Minute																	
		Cutting Depth — inches																	
		4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
10	8.9	0.98	1.2	1.5	1.7	2.0	2.2	2.5	2.7	3.0	3.2	3.5	3.7	4.0	4.2	4.5	4.7	4.9	
20	17.8	1.96	2.5	3.0	3.4	4.0	4.4	4.9	5.5	5.9	6.4	6.9	7.4	7.9	8.4	8.9	9.4	9.9	
30	26.7	2.9	3.7	4.5	5.2	5.9	6.7	7.4	8.2	8.9	9.6	10.4	11.1	11.9	12.6	13.4	14.0	14.8	
40	35.6	3.9	4.9	5.9	6.9	7.9	8.9	9.9	10.9	11.9	12.8	13.9	14.8	15.8	16.8	17.8	18.7	19.8	
50	44.5	4.9	6.2	7.4	8.6	9.9	11.1	12.4	13.6	14.8	16.0	17.3	18.5	19.8	21.0	22.3	23.4	24.7	
60	53.4	5.9	7.4	8.9	10.3	11.9	13.3	14.8	16.4	17.8	19.2	20.8	22.2	23.7	25.2	26.7	28.1	29.7	
70	62.3	6.8	8.6	10.4	12.0	13.8	15.6	17.3	19.1	20.8	22.4	24.3	25.9	27.7	29.5	31.2	32.8	34.6	
80	71.2	7.8	9.9	11.9	13.7	15.8	17.8	19.8	21.8	23.7	25.6	27.7	29.6	31.6	33.7	35.6	37.5	39.6	
90	80.1	8.8	11.1	13.4	15.5	17.8	20.0	22.4	24.5	26.7	28.8	31.2	33.3	35.6	37.9	40.1	42.1	44.5	



**Features:**

- **Patented variable speed hydraulic augers on AP-200B** extend with wings to ensure proper material distribution.
- **Self-cleaning all-steel tracks on AP-200B** assure long life with virtually no maintenance required.
- **Variable width Extend-A-Mat B screeds or Pavemaster B fixed screeds** available for AP-650B, AP-800C, AP-900B, AP-1000B, AP-1050B and AP-1055B.
- **Single sliding operator's station** can be positioned on either side of paver for excellent visibility.
- **Hydrostatic pumps** provide infinitely variable speed ranges.
- **Direct hydrostatic drives** eliminate gear boxes, differentials, final drive chains etc.
- **Self-dumping hydraulic hoppers** are heavy-duty and high capacity.
- **Soldered and molded** electrical connections.
- **Feeder system** designed to eliminate power segregation and manual hand work.
- **Self diagnostics** on propel and feeder systems.

MODEL	AP-200B	
Flywheel Power	26 kW	35 hp
Rated Engine RPM	<b>2650</b>	
No. Cylinders	<b>2</b>	
Displacement	1.716 L	104.7 in <sup>3</sup>
Engine Model	<b>Hatz 2M40 Air-Cooled Diesel</b>	
Operating Weight (empty)	4080 kg	<b>9000 lb</b>
Speeds	0-54 m/min	<b>0-176 ft/min</b>
Maximum theoretical capacity	609.6 (t)/hr	<b>600 TPH</b>
Track Assemblies:		
Width	381 mm	<b>15"</b>
Length on Ground	760 mm	<b>2'6"</b>
Outside to Outside	2440 mm	<b>8'0"</b>
General Dimensions:		
Basic Width	3000 mm	<b>9'10"</b>
Length	2440 mm	<b>8'0"</b>
Height (less exhaust stack)	1730 mm	<b>6'8"</b>
Wheelbase	—	
Hopper Capacity	5.4 metric ton	<b>6 standard tons</b>
Screed (extendable)	2743 to 3658 mm	<b>9'0" to 12'0"</b>
Paving Width:		
Minimum	914 mm	<b>3'0"</b>
Maximum	3658 mm	<b>12'0"</b>
Service Refill Capacities:		
Cooling system	<b>Air-cooled</b>	
Fuel tank	39.8 L	<b>10.5 U.S. gal</b>
Hydraulic oil tank	75.8 L	<b>20 U.S. gal</b>



MODEL	AP-800C		AP-900B		AP-1000B	
Flywheel Power	80 kW	107 hp	115 kW	154 hp	130 kW	174 hp
Rated Engine RPM	2200		2200		2200	
No. Cylinders	4		6		6	
Displacement	4 L	243 in <sup>3</sup>	6.6 L	403 in <sup>3</sup>	6.6 L	403 in <sup>3</sup>
Engine Model	3054DIT		3116T		3116TA	
Operating Weight:						
Tractor	12 202 kg	26,900 lb	14 830 kg	32,700 lb	16 190 kg	35,700 lb
Pavemaster B Screed 2.4 m (8 ft)	1374 kg	3030 lb	—	—	—	—
3.0 m (10 ft)	1656 kg	3650 lb	1656 kg	3650 lb	1656 kg	3650 lb
Extend-A-Mat B Screed 2.4 m (8 ft)	2994 kg	6600 lb	—	—	—	—
3.0 m (10 ft)	3266 kg	7200 lb	3266 kg	7200 lb	3266 kg	7200 lb
Extend-A-Mat B (wide plates) 3.0 m (10 ft)	—	—	—	—	3760 kg	8300 lb
Speeds: Paving	0-76 m/min	0-250 ft/min	0-76 m/min	0-250 ft/min	0-114 m/min	0-374 ft/min
Travel	0-19 km/h	0-12 mph	0-16 km/h	0-10 mph	0-23.5 km/h	0-14.5 mph
Maximum theoretical capacity	1801 (t)/hr	1773 TPH	2134 (t)/hr	2100 TPH	2177 (t)/hr	2400 TPH
Tires:						
Front (4)	13 × 22 Solid Rubber		16 × 22 Solid Rubber		16 × 22 Solid Rubber	
Rear (2)	16.00 × 24		18.00 × 25 PR sand rib		18.00 × 25-16 PR sand rib	
Dimensions:						
Operating Width 2.4 m (8 ft) Screed	3269 mm	10'9"	—	—	—	—
3.0 m (10 ft) Screed	3327 mm	10'11"	3327 mm	10'11"	3327 mm	10'11"
Shipping Width* 2.4 m (8 ft) Screed	2438 mm	8'0"	—	—	—	—
3.0 m (10 ft) Screed	3048 mm	10'0"	3048 mm	10'0"	3048 mm	10'0"
Height (less exhaust)	2620 mm	8'7"	2769 mm	9'1"	2769 mm	9'1"
Length (Extend-A-Mat B, push roller)	6477 mm	21'3"	6783 mm	22'3"	6783 mm	22'3"
Turning Radius	2896 mm	9'6"	3048 mm	10'0"	2900 mm	9'6"
Wheelbase	2336 mm	7'8"	2540 mm	8'4"	2540 mm	8'4"
Hopper Capacity	5.5 m <sup>3</sup>	195 ft <sup>3</sup>	6.1 m <sup>3</sup>	215 ft <sup>3</sup>	6.1 m <sup>3</sup>	215 ft <sup>3</sup>
Auger Diameter	406 mm	16"	406 mm	16"	406 mm	16"
Paving Widths:						
8 ft Pavemaster B Screed						
Minimum w/cutoff shoes	1828 mm	6'0"	—	—	—	—
Maximum w/extensions	6096 mm	20'0"	—	—	—	—
10 ft Pavemaster B Screed						
Minimum w/cutoff shoes	2438 mm	8'0"	2438 mm	8'0"	2438 mm	8'0"
Maximum w/extensions	6096 mm	20'0"	7315 mm	24'0"	9147 mm	30'0"
8 ft Extend-A-Mat B Screed						
Minimum w/cutoff shoes	1828 mm	6'0"	—	—	—	—
Maximum w/extensions	4724 mm	15'6"	—	—	—	—
10 ft Extend-A-Mat B Screed						
Minimum w/cutoff shoes	2438 mm	8'0"	2438 mm	8'0"	2438 mm	8'0"
Maximum w/extensions	6147 mm	20'2"	7290 mm	24'2"	7290 mm	24'2"
Service Refill Capacities:						
Cooling system	19 L	5 U.S. gal	37 L	9.78 U.S. gal	37 L	9.78 U.S. gal
Fuel tank	189 L	50 U.S. gal	265 L	70 U.S. gal	265 L	70 U.S. gal
Hydraulic oil tank	189 L	50 U.S. gal	189 L	50 U.S. gal	189 L	50 U.S. gal

\*Transport width — hoppers raised without end gates.



MODEL	AP-650B		AP-1050B		AP-1055B	
Flywheel Power	70 kW	121 hp	130 kW	174 hp	130 kW	174 hp
Rated Engine RPM	2200		2200		2200	
No. Cylinders	4		6		6	
Displacement	4 L	243 in <sup>3</sup>	6.6 L	403 in <sup>3</sup>	6.6 L	403 in <sup>3</sup>
Engine Model	3054TA		3116T		3116TA	
Operating Weight:						
Tractor	11 790 kg	25,990 lb	15 785 kg	34,800 lb	16 103 kg	35,500 lb
Pavemaster B Screed 2.4 m (8 ft)	1374 kg	3030 lb	—	—	—	—
3.0 m (10 ft)	—	—	1656 kg	3650 lb	1656 kg	3650 lb
Extend-A-Mat B Screed 2.4 m (8 ft)	2944 kg	6600 lb	—	—	—	—
3.0 m (10 ft)	—	—	3266 kg	7200 lb	3266 kg	7200 lb
Extend-A-Mat B (wide plates) 3.0 m (10 ft)	—	—	3760 kg	8300 lb	3760 kg	8300 lb
Speeds: Paving: 1st	0-67 m/min	0-220 ft/min	0-65.6 m/min	0-215 ft/min	0-61 m/min	0-200 ft/min
Travel: 2nd	8 km/h	5 mph	8 km/h	5 mph	0-14.9 km/h	0-9.3 mph
Maximum theoretical capacity	1300 (t)/hr	1435 TPH	2177 (t)/hr	2400 TPH	2177 (t)/hr	2400 TPH
Tracks Assemblies:						
Width	356 mm	14"	356 mm	14"	457 mm	18"
Length on Ground	2249 mm	7'5"	2718 mm	8'11"	2718 mm	8'11"
Total Number of Track Pads	42		100		—	—
Dimensions:						
Operating Width 2.4 m (8 ft) Screed	3269 mm	10'9"	—	—	—	—
3.0 m (10 ft) Screed	—	—	3327 mm	10'11"	3327 mm	10'11"
Shipping Width* 2.4 m (8 ft) Screed	3269 mm	10'9"	—	—	—	—
3.0 m (10 ft) Screed	—	—	3048 mm	10'0"	3048 mm	10'0"
Height (less exhaust)	2623 mm	8'7"	2769 mm	9'1"	2769 mm	9'1"
Length (Screed**, Osc. pushroller)	5613 mm	18'5"	6579 mm	21'7"	6579 mm	21'7"
Turning Radius***	—	—	—	—	—	—
Hopper Capacity	5 m <sup>3</sup>	177 ft <sup>3</sup>	6.1 m <sup>3</sup>	215 ft <sup>3</sup>	6.1 m <sup>3</sup>	215 ft <sup>3</sup>
Auger Diameter	406 mm	16"	406 mm	16"	406 mm	16"
Paving Widths:						
8 ft Pavemaster B Screed						
Minimum w/cutoff shoes	1828 mm	6'0"	—	—	—	—
Maximum w/extensions	6096 mm	20'0"	—	—	—	—
10 ft Pavemaster B Screed						
Minimum w/cutoff shoes	—	—	2438 mm	8'0"	2438 mm	8'0"
Maximum w/extensions	—	—	9144 mm	30'0"	9144 mm	30'0"
8 ft Extend-A-Mat B Screed						
Minimum w/cutoff shoes	1828 mm	6'0"	—	—	—	—
Maximum w/extensions	4724 mm	15'6"	—	—	—	—
10 ft Extend-A-Mat B Screed						
Minimum w/cutoff shoes	—	—	2438 mm	8'0"	2438 mm	8'0"
Maximum w/extensions	—	—	7366 mm	24'2"	7366 mm	24'2"
Service Refill Capacities:						
Cooling system	31.5 L	8.3 U.S. gal	31.5 L	8.3 U.S. gal	31.5 L	8.3 U.S. gal
Fuel tank	227 L	60 U.S. gal	284 L	75 U.S. gal	284 L	75 U.S. gal
Hydraulic oil tank	189 L	50 U.S. gal	151.4 L	40 U.S. gal	151.4 L	40 U.S. gal

\*Transport width hopper folded, no end gates.

\*\*Pavemaster B on AP-1050B, Extend-A-Mat B on AP-1055B.

\*\*\*Counter-rotates within own track length.



- Barber-Greene

#### Features:

- **New variable width Extend-A-Mat B Screeds** or Pavemaster B fixed screeds available for all Barber-Greene paver models.
- **Designed With the Crew In Mind ...** for simplified, more efficient operation and unmatched access to operational controls and service areas.
- **Simplified Drive System ...** variable pump/motor propel system that covers all machine speed ranges required to increase paver productivity.
- **Material Handling System ...** fully hydrostatic drive provides smooth efficient operation with the capability to handle today's varied paving requirements.
- **Complete Range of Models ...** both rubber tired and crawler mounted pavers to meet any paving requirement.
- **Dependable Operation ...** job proven Barber-Greene design and engineering for mile after mile performance.
- **Service Accessibility ...** swing-out panels and decks provide generous access.
- **Complete Customer Support ...** unmatched in the paving industry.

Specifications  
 ● Barber-Greene  
 ● Rubber Tired Models

Asphalt Pavers



MODEL	BG-210B		BG-230	
Flywheel Power	80 kW	107 hp	80 kW	107 hp
Rated Engine RPM	2200		2200	
No. Cylinders	4		4	
Displacement	4 L	243 in <sup>3</sup>	4 L	243 in <sup>3</sup>
Engine Model	3054DIT		3054DIT	
Operating Weight:				
Tractor	8786 kg	19,395 lb	12 202 kg	26,900 lb
Pavemaster B Screed				
2.4 m (8 ft)	1374 kg	3030 lb	1374 kg	3030 lb
3.0 m (10 ft)	1656 kg	3650 lb	1656 kg	3650 lb
Extend-A-Mat B				
2.4 m (8 ft)	2994 kg	6600 lb	2994 kg	6600 lb
3.0 m (10 ft)	—	—	—	—
Extend-A-Mat B (wide plates)	3.0 m (10 ft)	—	—	—
Speeds: Paving	0-83.9 m/min	0-275 fpm	0-76 m/min	0-250 fpm
Travel	0-21.7 km/h	0-13.5 mph	0-19 km/h	0-12 mph
Maximum theoretical capacity	1222 (t)/hr	1203 TPH	1801 (t)/hr	1773 TPH
Tires:				
Front (4) (Solid Rubber)	305 mm × 559 mm	12" × 22"	330 mm × 559 mm	13" × 22"
Rear (2)	14.00 × 24		16.00 × 24 sand rib	
Dimensions:				
Operating Width				
2.4 m (8 ft) Screed	3226 mm	10'7"	3269 mm	10'9"
3.0 m (10 ft) Screed	—	—	3327 mm	10'11"
Shipping Width*				
2.4 m (8 ft) Screed	2502 mm	8'2.5"	2438 mm	8'0"
3.0 m (10 ft) Screed	—	—	3048 mm	10'0"
Height (less exhaust)	2578 mm	8'5.5"	2620 mm	8'7 <sup>1</sup> / <sub>8</sub> "
Length (Extend-A-Mat B, pushroller)	5842 mm	19'2"	6477 mm	21'3"
Turning Radius	3048 mm	10'0"	2896 mm	9'6"
Wheelbase	2007 mm	6'7"	2336 mm	7'8"
Hopper Capacity	4.8 m <sup>3</sup>	170 ft <sup>3</sup>	5.5 m <sup>3</sup>	195 ft <sup>3</sup>
Auger Diameter	357 mm	14"	406 mm	16"
Paving Widths:				
8 ft Pavemaster B Screed				
Minimum w/cutoff shoes	1828 mm	6'0"	1828 mm	6'0"
Maximum w/extensions	4877 mm	16'0"	6096 mm	20'0"
10 ft Pavemaster B Screed				
Minimum w/cutoff shoes	—	—	—	—
Maximum w/extensions	—	—	—	—
8 ft Extend-A-Mat B Screed				
Minimum w/cutoff shoes	1828 mm	6'0"	1828 mm	6'0"
Maximum w/extensions	4724 mm	15'6"	4724 mm	15'6"
10 ft Extend-A-Mat B Screed				
Minimum w/cutoff shoes	—	—	2438 mm	8'0"
Maximum w/extensions	—	—	6147 mm	20'2"
Service Refill Capacities:				
Cooling system	19 L	5 U.S. gal	19 L	5 U.S. gal
Fuel tank	189 L	50 U.S. gal	189 L	50 U.S. gal
Hydraulic oil tank	178 L	47 U.S. gal	189 L	50 U.S. gal

\*Shipping width with hoppers raised and without end gates.

# Asphalt Pavers

## Specifications

- Barber-Greene
- Rubber Tired Models



MODEL	BG-240C		BG-260C	
Flywheel Power	115 kW	154 hp	130 kW	174 hp
Rated Engine RPM	2200		2200	
No. Cylinders	6		6	
Displacement	6.6 L	403 in <sup>3</sup>	6.6 L	403 in <sup>3</sup>
Engine Model	3116T		3116TA	
Operating Weight:				
Tractor	14 830 kg	32,700 lb	16 170 kg	35,700 lb
Pavemaster B Screed	2.4 m (8 ft)	—	—	—
3.0 m (10 ft)	1656 kg	3650 lb	1656 kg	3650 lb
Extend-A-Mat B	2.4 m (8 ft)	—	—	—
3.0 m (10 ft)	3266 kg	7200 lb	3266 kg	7200 lb
Extend-A-Mat B (wide plates)	3.0 m (10 ft)	—	3760 kg	8300 lb
Speeds: Paving	0-76 m/min	0-250 fpm	0-114 m/min	0-374 fpm
Travel	0-16 km/h	0-10 mph	0-23.5 km/h	0-14.5 mph
Maximum theoretical capacity	2134 (t)/hr	2100 TPH	2177 (t)/hr	2400 TPH
Tires:				
Front (4) (Solid Rubber)	16 × 22 Solid Rubber		16 × 22 Solid Rubber	
Rear (2)	18.00 × 25 PR sand rib		18.00 × 25-16 ply sand rib	
Dimensions:				
Operating Width	2.4 m (8 ft) Screed	—	—	—
3.0 m (10 ft) Screed	3327 mm	10'11"	3327 mm	10'11"
Shipping Width*	2.4 m (8 ft) Screed	—	—	—
3.0 m (10 ft) Screed	3048 mm	10'0"	3048 mm	10'0"
Height (less exhaust)	2769 mm	9'1"	2769 mm	9'1"
Length (Extend-A-Mat B, pushroller)	6783 mm	22'3"	6783 mm	22'3"
Turning Radius	3048 mm	10'0"	2900 mm	9'6"
Wheelbase	2540 mm	8'4"	2540 mm	8'4"
Hopper Capacity	6.1 m <sup>3</sup>	215 ft <sup>3</sup>	5.8 m <sup>3</sup>	230 ft <sup>3</sup>
Auger Diameter	406 mm	16"	406 mm	16"
Paving Widths:				
8 ft Pavemaster B Screed				
Minimum w/cutoff shoes	—	—	—	—
Maximum w/extensions	—	—	—	—
10 ft Pavemaster B Screed				
Minimum w/cutoff shoes	2438 mm	8'0"	2438 mm	8'0"
Maximum w/extensions	7315 mm	24'0"	7925 mm	26'0"
8 ft Extend-A-Mat B Screed				
Minimum w/cutoff shoes	—	—	—	—
Maximum w/extensions	—	—	—	—
10 ft Extend-A-Mat B Screed				
Minimum w/cutoff shoes	2438 mm	8'0"	2438 mm	8'0"
Maximum w/extensions	7290 mm	24'2"	7290 mm	24'2"
Service Refill Capacities:				
Cooling system	37 L	9.78 U.S. gal	37 L	9.78 U.S. gal
Fuel tank	265 L	70 U.S. gal	265 L	70 U.S. gal
Hydraulic oil tank	189 L	50 U.S. gal	189 L	50 U.S. gal

\*Shipping width with hoppers raised and without end gates.

Specifications  
 ● Barber-Greene  
 ● Track Models

Asphalt Pavers



MODEL	BG-225C		BG-245C		BG-2455C	
Flywheel Power	90 kW	121 hp	130 kW	174 hp	130 kW	174 hp
Rated Engine RPM	2200		2200		2200	
No. Cylinders	4		6		6	
Displacement	4 L	243 in <sup>3</sup>	6.6 L	403 in <sup>3</sup>	6.6 L	403 in <sup>3</sup>
Engine Model	3054DIT		3116TA		3116TA	
Operating Weight:						
Tractor	11 790 kg	25,990 lb	15 560 kg	34,300 lb	16 103 kg	35,500 lb
Pavemaster B Screed	2.4 m (8 ft)	1374 kg	—	—	—	—
	3.0 m (10 ft)	—	1472 kg	3650 lb	1656 kg	3650 lb
Extend-A-Mat B	2.4 m (8 ft)	2994 kg	—	—	—	—
	3.0 m (10 ft)	—	3266 kg	7200 lb	3266 kg	7200 lb
Extend-A-Mat B (wide plates)	3.0 m (10 ft)	—	3760 kg	8300 lb	3760 kg	8300 lb
Speeds: Paving	0-67 m/min	0-220 fpm	0-65.6 m/min	0-215 fpm	0-61 m/min	0-200 fpm
Travel	0-8 km/h	0-5 mph	0-8 km/h	0-5 mph	0-14.9 km/h	0-9.3 mph
Maximum theoretical capacity	1300 (t)/hr	1435 TPH	2177 (t)/hr	2400 TPH	2177 (t)/hr	2400 TPH
Track Assemblies:						
Width	356 mm	14"	356 mm	14"	457 mm	18"
Length on ground	2244 mm	7'5"	2718 mm	8'11"	2718 mm	107"
Total Number of Track Pads	92		100		—	—
Dimensions:						
Operating Width	2.4 m (8 ft) Screed	3269 mm	10'9"	—	—	—
	3.0 m (10 ft) Screed	—	—	3327 mm	10'11"	10'11"
Shipping Width*	2.4 m (8 ft) Screed	2623 mm	8'7"	—	—	—
	3.0 m (10 ft) Screed	—	—	3048 mm	10'0"	10'0"
Height (less exhaust)	2623 mm	8'7"	2769 mm	9'1"	2769 mm	9'1"
Length (Extend-A-Mat B Screed, pushroller)	5613 mm	18'5"	6579 mm	21'7"	6579 mm	21'7"
Turning Radius**	—	—	—	—	—	—
Hopper Capacity	5 m <sup>3</sup>	177 ft <sup>3</sup>	6.1 m <sup>3</sup>	215 ft <sup>3</sup>	6.1 m <sup>3</sup>	215 ft <sup>3</sup>
Auger Diameter	406 mm	16"	446 mm	16"	406 mm	16"
Paving Widths:						
8 ft Pavemaster B Screed						
Minimum w/cutoff shoes	1828 mm	6'0"	—	—	—	—
Maximum w/extensions	6096 mm	20'0"	—	—	—	—
10 ft Pavemaster B Screed						
Minimum w/cutoff shoes	—	—	2438 mm	8'0"	2438 mm	8'0"
Maximum w/extensions	—	—	9144 mm	30'0"	9144 mm	30'0"
8 ft Extend-A-Mat B Screed						
Minimum w/cutoff shoes	1828 mm	6'0"	—	—	—	—
Maximum w/extensions	4724 mm	15'6"	—	—	—	—
10 ft Extend-A-Mat B Screed						
Minimum w/cutoff shoes	—	—	2438 mm	8'0"	2438 mm	8'0"
Maximum w/extensions	—	—	7366 mm	24'2"	7366 mm	24'2"
Service Refill Capacities:						
Cooling system	31.5 L	8.3 U.S. gal	31.5 L	8.3 U.S. gal	31.5 L	8.3 U.S. gal
Fuel tank	227 L	60 U.S. gal	227 L	60 U.S. gal	284 L	75 U.S. gal
Hydraulic oil tank	189 L	50 U.S. gal	151.4 L	40 U.S. gal	151.4 L	40 U.S. gal

\*Shipping width with hoppers raised and without end gates.

\*\*Counter rotates within own track length.

**ASPHALT PAVING CHARTS**

These charts will assist you when trying to match plant output with paving speeds. Keep in mind when using these charts, it will be at 100% efficiency. If you know efficiency, multiply T.P. hour  $\times$  efficiency. (Example: 75% efficiency at 300 T.P.H. –  $300 \times 0.75 = 225$  T.P.H.)

**Production in tons/hr with 1" compacted mat**

Speed		Paving Widths					
fpm	6'0"	7'0"	8'0"	9'0"	10'0"	11'0"	12'0"
10	22	26	29	33	37	40	44
20	44	51	58	66	73	80	88
30	66	77	87	99	110	120	131
40	88	102	116	131	146	161	175
50	110	129	145	164	183	201	219

**Production in tons/hr with 2" compacted mat**

Speed		Paving Widths					
fpm	6'0"	7'0"	8'0"	9'0"	10'0"	11'0"	12'0"
10	44	52	58	66	74	80	88
20	88	176	116	132	146	160	176
30	132	154	174	198	220	240	262
40	176	204	232	262	292	322	350
50	220	258	290	328	366	402	438

**Production in tons/hr with 3" compacted mat**

Speed		Paving Widths					
fpm	6'0"	7'0"	8'0"	9'0"	10'0"	11'0"	12'0"
10	66	78	87	99	111	120	132
20	132	153	174	198	219	240	284
30	198	231	261	297	330	360	393
40	264	306	348	393	438	483	525
50	330	387	435	492	549	603	657

**Production in tons/hr with 4" compacted mat**

Speed		Paving Widths					
fpm	6'0"	7'0"	8'0"	9'0"	10'0"	11'0"	12'0"
10	88	104	116	132	148	160	176
20	176	204	232	264	292	320	352
30	264	308	348	396	440	480	524
40	352	408	464	524	584	644	700
50	440	516	580	656	732	804	876



**Features:**

- **Superior maneuverability.** The BG-730 is equipped with four wheel steering and three steering modes which provide unmatched maneuverability on the job ... turn radius under 4267 mm (14 ft).
- **Unmatched traction.** Four wheel drive on the BG-730, with differential locks on the drive axles combined with engine horsepower and weight distribution make the toughest widening jobs easy.
- **High capacity conveyors.** High capacity 762 mm (30 in). wide belt conveyors for handling large projects.
- **Quick shift conveyor.** The BG-730 conveyor is equipped with a dual drive system allowing rapid change of direction. Conveyor shifts hydraulically from side to side.
- **Power dump front hopper lip.** Front lip on hopper hydraulically lifts to clean out material after truck dumps, reducing hand work.
- **Sliding operator's console.** Operator's console slides from side to side providing rapid change of station location.

MODEL	BG-730	
Flywheel Power	114 kW	153 hp
Rated Engine RPM	2200	
No. Cylinders	6	
Displacement	6 L	365 in <sup>3</sup>
Engine Model	3116T	
Operating Weight	14 062 kg	31,000 lb
Speeds: Paving	0-98 m/min	0-320 fpm
Travel	0-24.1 km/h	0-15 mph
Maximum theoretical capacity	3658 (t)/hr	3600 TPH
Tires	15.00 × 22.5	
Dimensions:		
Length with pushroller	7820 mm	25'8"
Operating height	2921 mm	9'7"
Shipping height	2578 mm	8'5.5"
Shipping width	3048 mm	10'0"
Turning Radius	3962 mm	13'0"
Wheelbase	4572 mm	15'0"
Hopper Capacity	10 m <sup>3</sup>	80 ft <sup>3</sup>
Truck entry width	2845 mm	9'4"
Laydown widths	to 3048 mm	to 10'
Service Refill Capacities:		
Cooling system	28.4 L	7.7 U.S. gal
Fuel tank	151.4 L	40 U.S. gal
Hydraulic oil tank	151.4 L	40 U.S. gal

- Barber-Greene

### Features:

- **Attaches easily to most pavers.**
- **Allows for continuous paving operations.**
- **High capacity conveyor** with 1905 mm (75") discharge height provides full power hopper loading.
- **Foot shaft combining augers** provide a wide throat for pick up off-center and extra wide windrows.
- **Wide throat** allows machine to pickup windrows from bottom dump trailers, end dump trailers or trucks.
- **Height adjustable scraper** mounted behind combining augers maintains a clean path for paver.
- **Three point suspension** allows machine to closely follow road contours.



MODEL	BG-650		
Flywheel Power	80 kW		107 hp
Engine RPM		2100	
Operating Weight	7973 kg		17,600 lb
Engine		3054DIT	
Displacement	4 L		243 in <sup>3</sup>
General Dimensions:			
Operating height	2946 mm		9'8"
Shipping height	2946 mm		9'8"
Length	4267 mm		14'0"
Conveyor:			
Maximum theoretical capacity	1829 (t)/hr		1800 TPH
Discharge height	1905 mm		6'2"
Width	1524 mm		5'0"
Lift	178 mm		7"
Tires:			
Front (2)	178 mm × 559 mm		7" × 22" Solid Rubber
Rear (2)	8.25 × 15		8.25 × 15
Service Refill Capacities:			
Fuel	151.4 L		40 U.S. gal

**General Compactor Features:**

- **Routine maintenance** simplified by grouped service points and easy access to service areas.
- **Operator stations** designed for maximum comfort, easy control, and optimal visibility.
- **Direct hydrostatic drive to front (drums or wheels) and rear (drums or wheels)** provides dependable, responsive, propulsion effort and maximum gradeability. (Does not include pneumatic tire compactors.)

**Vibratory Compactor Features:****Single Drum**

- **Hydraulic flow divider valve (CS/CP-323C) or dual pump system** delivers positive tractive effort to both drum and rear wheels, regardless of underfooting. This increases the machine's ability to maneuver in a wide variety of soil types and conditions and improves gross gradeability.
- **NoSPIN high traction differential** is standard on all units (except CS/CP-533C) for best traction of rear tires.
- **Optional heavy-duty front-mounted blade** with reversible cutting edge is available to allow backfilling and leveling during compaction.
- **ROPS (Roll Over Protective Structure)** standard on all units. Enclosed cabs with EROPS rating available as an option (except for CS/CP-323C).
- **Adjustable jaw-type cleaner bar** keeps drums clean between pads during forward and reverse movement.

**Double Drum and Combi**

- **Vibration automatically ceases before machine comes to a stop (CB-434D and larger)** to help produce a smooth, flawless mat surface.
- **Close side clearances** allow compactors to work close to curbs, walls and other obstructions.

- **Large, rust-proof water tanks and pressure spray system** provide hours of reliable operation between fill-ups.
- **Emulsion system** available for combi compactor rear tires to prevent materials sticking to tires.
- **ROPS (Roll Over Protective Structure)** available on all models. Enclosed cabs with EROPS rating available on some models.

**Pneumatic Tire Compactor Features:**

- **All wheel oscillation.** Front and rear tires provide even wheel loads regardless of evenness underfoot. PF models have front oscillation only.
- **High drive propel system (PS-150B, PS-200B, PF-290B, PS-360B).** Completely hydrostatic with drive motors and brakes located in main-frame away from contamination and damage.
- **Ballast compartments** are easily accessible for quick loading and are located to provide balanced wheel/weight ratio.
- **Single-lever hand control** of forward and reverse movement makes smooth rolling easy.
- **Adjustable wheel suspension (PF/PS-300B and PS-500)** adjusts ride to terrain and helps minimize bridging over gaps in base. PF models have rear suspension only.
- **Heavy-duty 3-speed powershift transmission (PF/PS-300B and PS-500)** provides forward or reverse propelling.
- **Steer wheels swivel individually (PF/PS-300B and PS-500)** preventing scuffing of material during turns, similar to automotive style steering.
- **Optional on-the-run tire inflation device** allows changing tire pressure during compaction.

**NOTE: All models and options are not available in all markets.**



# Vibratory Compactors

## Specifications

- Single Drum, Smooth



MODEL	CS-323C <sup>1,2</sup>		CS-431C <sup>4,5</sup>		CS-433C <sup>1,2,3,5</sup>		CS-531D <sup>5,6</sup>	
Flywheel Power	52 kW	70 hp	78 kW	105 hp	78 kW	105 hp	108 kW	145 hp
Rated Engine RPM	2200		2200		2200		2200	
No. Cylinders	4		4		4		6	
Displacement	4 L	243 in <sup>3</sup>	4 L	243 in <sup>3</sup>	4 L	243 in <sup>3</sup>	6.6 L	403 in <sup>3</sup>
Engine Model	3054 DINA		3054T		3054T		3116T	
Speeds	1 forward/1 reverse		2 forward/2 reverse		2 forward/2 reverse		2 forward/2 reverse	
Max. Speed (For./Rev.)	8.9 km/h	5.5 mph	12.8 km/h	8.0 mph	12.8 km/h	8.0 mph	12.8 km/h	8.0 mph
Working Speed	8.9 km/h	5.5 mph	6.0 km/h	4.0 mph	6.0 km/h	4.0 mph	6.0 km/h	4.0 mph
Operating Weight	4540 kg	9985 lb	6509 kg	14,349 lb	6773 kg	14,931 lb	9190 kg	20,196 lb
Shipping Weight	4395 kg	9670 lb	6243 kg	13,750 lb	6379 kg	14,080 lb	8880 kg	19,536 lb
Drive	Drum/Rear Wheel		Rear Wheel		Drum/Rear Wheel		Rear Wheel	
Steering:								
Inside radius	2625 mm	8'6"	3008 mm	9'10"	3008 mm	9'10"	3530 mm	11'7"
Outside radius	3895 mm	12'8"	4684 mm	15'4"	4684 mm	15'4"	5660 mm	18'7"
Steering angle	±38°		±37°		±37°		±35°	
Vibratory System:								
Ecc. Weight Drive	Hydraulic		Hydraulic		Hydraulic		Hydraulic	
Frequency	35 Hz	2100 vpm	30 Hz	1800 vpm	30 Hz	1800 vpm	31.9 Hz	1914 vpm
Amplitude	1		2		2		2	
High amplitude	1.30 mm	0.05"	1.67 mm	0.066"	1.67 mm	0.066"	1.70 mm	0.067"
Low amplitude	—	—	0.84 mm	0.033"	0.84 mm	0.033"	0.85 mm	0.033"
Centrifugal Force								
High amplitude	66.8 kN	15,000 lb	133.5 kN	30,000 lb	133.5 kN	30,000 lb	266 kN	60,000 lb
Low amplitude	—	—	66.8 kN	15,000 lb	66.8 kN	15,000 lb	133 kN	30,000 lb
General Dimensions:								
Overall width w/blade	1575 mm	5'2"	—	—	1981 mm	6'6"	—	—
Overall width w/o blade	1393 mm	4'6"	1905 mm	6'3"	1905 mm	6'3"	2286 mm	7'6"
Drum width	1270 mm	4'2"	1680 mm	5'6"	1680 mm	5'6"	2130 mm	7'0"
Drum diameter	1016 mm	3'4"	1220 mm	4'0"	1220 mm	4'0"	1520 mm	5'0"
Tires	11.2 × 24-6 ply		14.9 × 24-6 ply		14.9 × 24-6 ply		23.1 × 26-8 ply	
Overall height	2514 mm	8'3"	2900 mm	9'6"	2900 mm	9'6"	2770 mm	9'1"
Wheel to drum	2240 mm	7'4"	2583 mm	8'6"	2583 mm	8'6"	2900 mm	9'6"
Overall length	4095 mm	13'4"	4825 mm	15'10"	4825 mm	15'10"	5510 mm	18'1"
Curb clearance	347 mm	13.7"	380 mm	15"	380 mm	15"	483 mm	1'7"
Service Refill Capacities:								
Fuel tank	144 L	38 U.S. gal	158 L	41.4 U.S. gal	158 L	41.4 U.S. gal	265 L	70 U.S. gal
Crankcase	7.6 L	2 U.S. gal	6.8 L	1.8 U.S. gal	6.8 L	1.8 U.S. gal	30 L	8 U.S. gal
Hydraulic fluid	49.2 L	13 U.S. gal	71 L	18.7 U.S. gal	71 L	18.7 U.S. gal	80 L	21 U.S. gal

<sup>1</sup>Leveling blade available.

<sup>2</sup>Padded drum conversion kit available.

<sup>3</sup>Padded shell kit available.

<sup>4</sup>Asphalt configuration available, including CB-534C front end and smooth tires.

<sup>5</sup>Variable frequency vibration available, 23.3-30 Hz (1400-1800 vpm).

<sup>6</sup>Tire ballast available, adding 1135 kg (2500 lb) to rear wheels.

Specifications  
● Single Drum, Smooth

Vibratory Compactors



MODEL	CS-533D <sup>1,2</sup>		CS-563D <sup>1,2,3,4</sup>		CS-583D <sup>4</sup>	
Flywheel Power	108 kW	145 hp	114 kW	153 hp	114 kW	153 hp
Rated Engine RPM	2200		2200		2200	
No. Cylinders	6		6		6	
Displacement	6.6 L	403 in <sup>3</sup>	6.6 L	403 in <sup>3</sup>	6.6 L	403 in <sup>3</sup>
Engine Model	3116T		3116T		3116T	
Speeds	2 forward/2 reverse		2 forward/2 reverse		2 forward/2 reverse	
Max. Speed (For./Rev.)	12.8 km/h	8.0 mph	12.7 km/h	7.8 mph	12.7 km/h	7.8 mph
Working Speed	6.0 km/h	4.0 mph	6.4 km/h	4.0 mph	6.4 km/h	4.0 mph
Operating Weight	9390 kg	20,658 lb	10 875 kg	23,975 lb	15 200 kg	33,510 lb
Shipping Weight	9080 kg	19,976 lb	10 565 kg	23,243 lb	14 890 kg	32,758 lb
Drive	Drum/Rear Wheel		Drum/Rear Wheel		Drum/Rear Wheel	
Steering:						
Inside radius	3530 mm	11'7"	3530 mm	11'7"	3530 mm	11'7"
Outside radius	5660 mm	18'7"	5660 mm	18'7"	5660 mm	18'7"
Steering angle	±35°		±35°		±35°	
Vibratory System:						
Ecc. Weight Drive	Hydraulic		Hydraulic		Hydraulic	
Frequency	31.9 Hz	1914 vpm	31.9 Hz	1914 vpm	30 Hz	1800 vpm
Amplitude	2		2		2	
High amplitude	1.70 mm	0.067"	1.70 mm	0.067"	1.70 mm	0.067"
Low amplitude	0.85 mm	0.033"	0.85 mm	0.033"	0.85 mm	0.033"
Centrifugal Force						
High amplitude	266 kN	60,000 lb	266 kN	60,000 lb	311 kN	70,000 lb
Low amplitude	133 kN	30,000 lb	133 kN	30,000 lb	156 kN	35,000 lb
General Dimensions:						
Overall width w/blade	2740 mm	9'0"	2430 mm	8'0"	—	—
Overall width w/o blade	2438 mm	8'0"	2286 mm	7'6"	2290 mm	7'6"
Drum width	2130 mm	7'0"	2130 mm	7'0"	2130 mm	7'0"
Drum diameter	1520 mm	5'0"	1520 mm	5'0"	1520 mm	5'0"
Tires	23.1 × 26-8 ply		23.1 × 26-8 ply		23.1 × 26-8 ply	
Overall height	2770 mm	9'1"	3040 mm	9'11"	3040 mm	9'11"
Wheel to drum	2900 mm	9'6"	2900 mm	9'6"	2900 mm	9'6"
Overall length	5510 mm	18'1"	5510 mm	18'1"	5510 mm	18'1"
Curb clearance	483 mm	1'7"	483 mm	1'7"	483 mm	1'7"
Service Refill Capacities:						
Fuel tank	265 L	70 U.S. gal	265 L	70 U.S. gal	265 L	70 U.S. gal
Crankcase	20 L	5.3 U.S. gal	20 L	5.3 U.S. gal	20 L	5.3 U.S. gal
Hydraulic fluid	80 L	21 U.S. gal	80 L	21 U.S. gal	80 L	21 U.S. gal

<sup>1</sup>Leveling blade available.

<sup>2</sup>Padded drum conversion kit available.

<sup>3</sup>Padded shell kit available.

<sup>4</sup>Variable frequency vibration available, 23.3-31.9 Hz (1400-1914 vpm) for CS-563D, 23.3-30 Hz (1400-1800 vpm) for CS-583D.

# Vibratory Compactors

## Specifications ● Single Drum, Padded



MODEL	CP-323C <sup>1,2</sup>		CP-433C <sup>1,2</sup>		CP-533D <sup>1,2</sup>		CP-563D <sup>1,2,3</sup>	
Flywheel Power	52 kW	70 hp	78 kW	105 hp	108 kW	145 hp	114 kW	153 hp
Rated Engine RPM	2200		2200		2200		2200	
No. Cylinders	4		4		6		6	
Displacement	4 L	243 in <sup>3</sup>	4 L	243 in <sup>3</sup>	6.6 L	403 in <sup>3</sup>	6.6 L	403 in <sup>3</sup>
Engine Model	3054 DINA		3054T		3116T		3116T	
Speeds	1 forward/1 reverse		2 forward/2 reverse		2 forward/2 reverse		2 forward/2 reverse	
Max. Speed (For./Rev.)	8.9 km/h	5.5 mph	12.8 km/h	8.0 mph	12.8 km/h	8.0 mph	13.2 km/h	8.1 mph
Working Speed	8.9 km/h	5.5 mph	6.0 km/h	4.0 mph	6.0 km/h	4.0 mph	6.5 km/h	4.0 mph
Operating Weight	4745 kg	10,440 lb	6912 kg	15,225 lb	9790 kg	21,538 lb	11 275 kg	24,856 lb
Shipping Weight	4600 kg	10,125 lb	6628 kg	14,600 lb	9480 kg	20,856 lb	10 965 kg	24,123 lb
Drive	Drum/Rear Wheel		Drum/Rear Wheel		Drum/Rear Wheel		Drum/Rear Wheel	
Gradeability	>50%		>50%		>50%		>50%	
Steering:								
Inside radius	2625 mm	8'7.3"	3008 mm	9'10"	3530 mm	11'7"	3530 mm	11'7"
Outside radius	3895 mm	12'9.3"	4684 mm	15'4"	5660 mm	18'7"	5660 mm	18'7"
Steering angle	+38°		+37°		+35°		+35°	
Vibratory System:								
Ecc. Weight Drive	Hydraulic		Hydraulic		Hydraulic		Hydraulic	
Frequency	35 Hz	2100 vpm	30 Hz	1800 vpm	31.9 Hz	1914 vpm	31.9 Hz	1914 vpm
Amplitude	1		2		2		2	
High amplitude	1.30 mm	0.05"	1.55 mm	0.061"	1.70 mm	0.067"	1.70 mm	0.067"
Low amplitude	—	—	0.76 mm	0.030"	0.85 mm	0.033"	0.85 mm	0.033"
Centrifugal Force (Max.)								
High amplitude	66.8 kN	15,000 lb	127.3 kN	28,000 lb	266 kN	60,000 lb	266 kN	60,000 lb
Low amplitude	—	—	62.7 kN	13,800 lb	133 kN	30,000 lb	133 kN	30,000 lb
General Dimensions:								
Overall width w/blade	1575 mm	5'2"	2108 mm	6'11"	2430 mm	8'0"	2430 mm	8'0"
Overall width w/o blade	1393 mm	4'7"	1800 mm	5'10"	2286 mm	7'6"	2440 mm	7'6"
Drum width	1270 mm	4'2"	1680 mm	5'6"	2130 mm	7'0"	2130 mm	7'0"
Drum diameter over pads	1016 mm	3'4"	1220 mm	4'0"	1549 mm	5'1"	1549 mm	5'1"
Tires	11.2 × 24-6 ply		14.9 × 24-6 ply		23.1 × 26-8 ply		23.1 × 26-8 ply	
Overall height	2514 mm	8'3"	2900 mm	9'6"	2770 mm	9'1"	3040 mm	9'11"
Wheel to drum	2240 mm	7'4.2"	2583 mm	8'6"	2900 mm	9'6"	2900 mm	9'6"
Overall length	4095 mm	13'5.2"	4825 mm	15'10"	5510 mm	18'1"	5510 mm	18'1"
Curb clearance	347 mm	13.7"	380 mm	15"	483 mm	1'7"	483 mm	1'7"
Service Refill Capacities:								
Fuel tank	144 L	38 U.S. gal	158 L	41.4 U.S. gal	265 L	70 U.S. gal	265 L	70 U.S. gal
Crankcase	7.6 L	2 U.S. gal	6.8 L	1.8 U.S. gal	30 L	8 U.S. gal	30 L	8 U.S. gal
Hydraulic fluid	49.2 L	13 U.S. gal	71 L	18.7 U.S. gal	80 L	21 U.S. gal	80 L	21 U.S. gal

<sup>1</sup>Leveling blade available.

<sup>2</sup>Smooth drum conversion kit available.

<sup>3</sup>Variable frequency vibration available, 23.3-31.9 Hz (1400-1914 vpm).

Specifications  
 ● Double Drum and Combi

Vibratory Compactors



MODEL	CB-214D		CB-224D		CB-225D		CB-334D <sup>1</sup>	
Flywheel Power	23.5 kW	31.5 hp	23.5 kW	31.5 hp	23.5 kW	31.5 hp	32 kW	43 hp
Rated Engine RPM	2800		2800		2800		2800	
No. Cylinders	3		3		3		4	
Displacement	1.5 L	91 in <sup>3</sup>	1.5 L	91 in <sup>3</sup>	1.5 L	91 in <sup>3</sup>	2 L	122 in <sup>3</sup>
Engine Model	3013		3013		3013		3014	
Speeds	2 forward/2 reverse		2 forward/2 reverse		2 forward/2 reverse		1 forward/1 reverse	
Max. Speed (For./Rev.)	10 km/h	6.2 mph	10 km/h	6.2 mph	10 km/h	6.2 mph	11 km/h	7 mph
Working Speed	6.5 km/h	4.0 mph	6.5 km/h	4.0 mph	6.5 km/h	4.0 mph	11 km/h	7 mph
Operating Weight	2430 kg	5355 lb	2610 kg	5750 lb	2390 kg	5265 lb	3850 kg	8470 lb
Shipping Weight	2270 kg	4994 lb	2450 kg	5390 lb	2230 kg	4906 lb	3630 kg	7986 lb
Drive	Hydraulic		Hydraulic		Hydraulic		Hydraulic	
Operatory Position(s)	Sliding/bucket seat		Sliding/bucket seat		Sliding/bucket seat		Sliding/bucket seat	
Steering:								
Inside radius	2510 mm	8'3"	2410 mm	7'11"	2410 mm	7'11"	3000 mm	9'10"
Outside radius	3510 mm	11'6"	3610 mm	11'10"	3610 mm	11'10"	4300 mm	14'1"
Steering angle	±32°		±32°		±32°		±35°	
Vibratory System:								
Ecc. Weight Drive	Hydraulic		Hydraulic		Hydraulic		Hydraulic	
Frequency (Max.)	60 Hz	3600 vpm	60 Hz	3600 vpm	60 Hz	3600 vpm	68 Hz	4100 vpm
Amplitude Settings	1		1		1		1	
Max. Amplitude	0.5 mm	0.02"	0.5 mm	0.02"	0.5 mm	0.02"	0.37 mm	0.015"
Min. Amplitude	—	—	—	—	—	—	—	—
Centrifugal Force								
Max. Amplitude	25.4 kN	5710 lb	29.8 kN	6700 lb	29.8 kN	6700 lb	32 kN	7250 lb
Min. Amplitude	—	—	—	—	—	—	—	—
General Dimensions:								
Overall width	1100 mm	3'7"	1300 mm	4'3"	1300 mm	4'3"	1390 mm	4'7"
Drum width	1000 mm	3'3.4"	1200 mm	3'11.2"	1200 mm	3'11.2"	1300 mm	4'3"
Drum diameter	700 mm	2'3.5"	700 mm	2'3.5"	700 mm	2'3.5"	800 mm	31"
Tires	—		—		9.5/65-15 (6-ply)		—	
Overall height (ROPS)	2585 mm	8'6"	2585 mm	8'6"	2585 mm	8'6"	2550 mm	8'4"
Wheelbase	1730 mm	5'8"	1730 mm	5'8"	1730 mm	5'8"	2321 mm	7'11"
Overall length	2430 mm	7'11.5"	2430 mm	7'11.5"	2430 mm	7'11.5"	3120 mm	10'3"
Curb clearance	530 mm	1'9"	530 mm	1'9"	530 mm	1'9"	585 mm	25"
Ground clearance	250 mm	10"	250 mm	10"	250 mm	10"	260 mm	10"
Service Refill Capacities:								
Fuel tank	36 L	9.5 U.S. gal	36 L	9.5 U.S. gal	36 L	9.5 U.S. gal	48 L	12.7 U.S. gal
Crankcase	7.1 L	1.9 U.S. gal	7.1 L	1.9 U.S. gal	7.1 L	1.9 U.S. gal	7.1 L	1.9 U.S. gal
Hydraulic tank	26 L	6.9 U.S. gal	26 L	6.9 U.S. gal	26 L	6.9 U.S. gal	35 L	9.3 U.S. gal
Sprinkler water	160 L	42 U.S. gal	160 L	42 U.S. gal	160 L	42 U.S. gal	300 L	79 U.S. gal

<sup>1</sup>3-cylinder configuration available with Cat 3013 engine, 23.5 kW (31.5 hp) @ 2800 rpm.

# Vibratory Compactors

## Specifications

### • Double Drum and Combi



MODEL	CB-335D <sup>1</sup>		CB-434C <sup>2</sup>		CB-534C <sup>2,3,4</sup>		CB-535B <sup>2</sup>	
Flywheel Power	32 kW	43 hp	52 kW	70 hp	78 kW	105 hp	79 kW	107 hp
Rated Engine RPM	2800		2200		2200		2200	
No. Cylinders	4		4		4		4	
Displacement	2 L	122 in <sup>3</sup>	4 L	243 in <sup>3</sup>	4 L	243 in <sup>3</sup>	4 L	243 in <sup>3</sup>
Engine Model	3014		3054		3054T		3054DIT	
Speeds	1 forward/1 reverse		1 forward/1 reverse		2 forward/2 reverse		3 forward/3 reverse	
Max. Speed (For./Rev.)	11 km/h	7 mph	11.6 km/h	7.2 mph	11.3 km/h	7 mph	12.7 km/h	7.9 mph
Working Speed	11 km/h	7 mph	11.6 km/h	7.2 mph	7.2 km/h	4.5 mph	7.2 km/h	4.5 mph
Operating Weight	3530 kg	7766 lb	6485 kg	14,300 lb	9195 kg	20,270 lb	14 080 kg	31,040 lb
Shipping Weight	3305 kg	7271 lb	5950 kg	13,120 lb	8495 kg	18,728 lb	13 710 kg	30,224 lb
Drive	Hydraulic		Hydraulic		Hydraulic		Hydraulic	
Operator Position(s)	Sliding/bucket seat		Sliding/bucket seat		Sliding/bucket seat		Sliding/4-pos.	
Steering:								
Inside radius	3000 mm	9'10"	3404 mm	11'2"	4165 mm	13'8"	4350 mm	14'3"
Outside radius	4300 mm	14'1"	4832 mm	15'10"	5865 mm	19'3"	6335 mm	20'9"
Steering angle	±35°		±35°		±35°		±35°	
Vibratory System:								
Ecc. Weight Drive	Hydraulic		Hydraulic		Hydraulic		Hydraulic	
Frequency (Max.)	68 Hz	4100 vpm	48 Hz	2900 vpm	42 Hz	2520 vpm	42 Hz	2520 vpm
Amplitude Settings	1		3		3		3	
Max. Amplitude	0.37 mm	0.015"	0.69 mm	0.027"	1.05 mm	0.043"	1.05 mm	0.043"
Min. Amplitude	—	—	0.34 mm	0.013"	0.36 mm	0.014"	0.36 mm	0.014"
Centrifugal Force								
Max. Amplitude	32 kN	7250 lb	74.7 kN	16,800 lb	118.1 kN	26,550 lb	118.1 kN	26,550 lb
Min. Amplitude	—	—	37.4 kN	8400 lb	39.4 kN	8865 lb	39.4 kN	8865 lb
General Dimensions:								
Overall width	1390 mm	4'7"	1613 mm	5'4"	1850 mm	6'1"	1900 mm	6'3"
Drum width	1300 mm	4'3"	1422 mm	4'8"	1700 mm	5'7"	1700 mm	5'7"
Drum diameter	800 mm	31"	1100 mm	3'7.5"	1300 mm	4'3"	1300 mm	4'3"
Tires	7.5 × 16 (6-ply)		—		—		15.00R	
Overall height (ROPS)	2550 mm	8'4"	2261 mm	7'5"	2410 mm	7'11"	3000 mm	9'10"
Wheelbase	2321 mm	7'11"	2616 mm	8'7"	3150 mm	10'4"	3516 mm	11'6"
Overall length	3120 mm	10'3"	4191 mm	13'9"	4940 mm	16'2"	5300 mm	17'5"
Curb clearance	585 mm	25"	381 mm	15"	416 mm	16"	416 mm	16"
Ground clearance	260 mm	10"	381 mm	15"	416 mm	16"	416 mm	16"
Service Refill Capacities:								
Fuel tank	48 L	12.7 U.S. gal	144 L	38 U.S. gal	208 L	55 U.S. gal	208 L	55 U.S. gal
Crankcase	7.1 L	1.9 U.S. gal	7.6 L	2 U.S. gal	7.6 L	2 U.S. gal	7.6 L	2 U.S. gal
Hydraulic tank	35 L	9.3 U.S. gal	49.2 L	13 U.S. gal	60 L	15 U.S. gal	55 L	14.5 U.S. gal
Sprinkler water	300 L	79 U.S. gal	666 L	176 U.S. gal	950 L	264 U.S. gal	440 L	116 U.S. gal

<sup>1</sup>3-cylinder configuration available with Cat 3013 engine, 23.5 kW (31.5 hp) @ 2800 rpm.

<sup>2</sup>2-amplitude vibratory system configuration available: for the CB-434C, 0.38 mm (0.015 in) in low and 0.69 mm (0.027 in) in high setting; for the CB-534C and CB-535B, 0.56 mm (0.022 in) in low and 1.09 mm (0.043 in) in high setting.

<sup>3</sup>High frequency vibratory system configuration available with 53 hz (3200 vpm).

<sup>4</sup>Split drum configuration available.

Specifications  
• Double Drum and Combi

Vibratory Compactors



MODEL	CB-544 <sup>1</sup>		CB-545 <sup>1</sup>		CB-634C <sup>2</sup>	
Flywheel Power	60 kW	80 hp	60 kW	80 hp	108 kW	145 hp
Rated Engine RPM	2200		2200		2200	
No. Cylinders	4		4		6	
Displacement	4 L	243 in <sup>3</sup>	4 L	243 in <sup>3</sup>	6.6 L	403 in <sup>3</sup>
Engine Model	3054		3054 DINA		3116T	
Speeds	1 forward/1 reverse		1 forward/1 reverse		2 forward/2 reverse	
Max. Speed (For./Rev.)	8.9 km/h	5.5 mph	8.9 km/h	5.5 mph	12.2 km/h	7.6 mph
Working Speed	8.9 km/h	5.5 mph	8.9 km/h	5.5 mph	6.5 km/h	4.0 mph
Operating Weight	10 700 kg	23,593 lb	9410 kg	20,750 lb	11 680 kg	25,750 lb
Shipping Weight	9777 kg	21,558 lb	8910 kg	19,645 lb	10 855 kg	23,931 lb
Drive	Hydraulic		Hydraulic		Hydraulic	
Operatory Position(s)	Sliding/4-pos.		Sliding/4-pos.		Sliding/bucket seat	
Steering:						
Inside radius	3005 mm	9'10"	3005 mm	9'10"	4318 mm	14'2"
Outside radius	4837 mm	15'10"	4837 mm	15'10"	6655 mm	21'10"
Steering angle	±25°		±25°		±32°	
Vibratory System:						
Ecc. Weight Drive	Hydraulic		Hydraulic		Hydraulic	
Frequency (Max.)	50 Hz	3000 vpm	50 Hz	3000 vpm	42 Hz	2520 vpm
Amplitude Settings	3		3		3	
Max. Amplitude	0.58 mm	0.023"	0.58 mm	0.023"	0.89 mm	0.035"
Min. Amplitude	0.33 mm	0.013"	0.33 mm	0.013"	0.30 mm	0.012"
Centrifugal Force						
Max. Amplitude	86.8 kN	19,510 lb	86.8 kN	19,510 lb	118.1 kN	26,550 lb
Min. Amplitude	69.5 kN	15,620 lb	69.5 kN	15,620 lb	39.4 kN	8865 lb
General Dimensions:						
Overall width	1810 mm	5'11"	1810 mm	5'11"	2311 mm	7'7"
Drum width	1700 mm	5'7"	1700 mm	5'7"	2130 mm	7'0"
Drum diameter	1200 mm	3'11"	1200 mm	3'11"	1300 mm	4'3"
Tires	—		15.00R		—	
Overall height (ROPS)	3000 mm	9'10"	3000 mm	9'10"	2362 mm	7'9"
Wheelbase	3000 mm	9'10"	3000 mm	9'10"	3150 mm	10'4"
Overall length	4200 mm	13'9"	4200 mm	13'9"	4953 mm	16'3"
Curb clearance	855 mm	2'10"	855 mm	2'10"	416 mm	16"
Ground clearance	296 mm	12"	296 mm	12"	416 mm	16"
Service Refill Capacities:						
Fuel tank	208 L	55 U.S. gal	208 L	55 U.S. gal	208 L	55 U.S. gal
Crankcase	9 L	2.4 U.S. gal	9 L	2.4 U.S. gal	17 L	4.5 U.S. gal
Hydraulic tank	55 L	14.5 U.S. gal	55 L	14.5 U.S. gal	60 L	15 U.S. gal
Sprinkler water	850 L	225 U.S. gal	850 L	225 U.S. gal	1200 L	317 U.S. gal

<sup>1</sup>Split drum configuration available.

<sup>2</sup>2-amplitude vibratory system configuration available with a 0.46 mm (0.018 in) low setting and a 0.91 mm (0.036 in) high setting.



MODEL	PS-150B <sup>1</sup>		PS-200B <sup>2</sup>		PF-290B/PS-360B <sup>2,3</sup>	
Flywheel Power	52 kW	<b>70 hp</b>	78 kW	<b>105 hp</b>	78 kW	<b>105 hp</b>
Rated Engine RPM	<b>2200</b>		<b>2200</b>		<b>2200</b>	
No. Cylinders	<b>4</b>		<b>4</b>		<b>4</b>	
Displacement	3.9 L	<b>243 in<sup>3</sup></b>	3.9 L	<b>243 in<sup>3</sup></b>	3.9 L	<b>243 in<sup>3</sup></b>
Engine Model	<b>3054T</b>		<b>3054T</b>		<b>3054T</b>	
Speeds:	<b>2 forward/2 reverse</b>		<b>2 forward/2 reverse</b>		<b>2 forward/2 reverse</b>	
Max. Speed (For./Rev.)	25.6 km/h	<b>15.9 mph</b>	19.3 km/h	<b>12 mph</b>	18 km/h	<b>11.2 mph</b>
Working Speed	11 km/h	<b>6.8 mph</b>	11 km/h	<b>6.8 mph</b>	8 km/h	<b>5 mph</b>
Wheel Configuration	<b>5 front/4 rear</b>		<b>5 front/4 rear</b>		<b>3 front/4 rear</b>	
Tires	<b>7.5 × 15-6 ply</b>		<b>7.5 × 15-6 ply</b>		<b>14/70 × 20</b>	
Operating Weight Empty (no ballast)	4885 kg	<b>10,775 lb</b>	4955 kg	<b>10,925 lb</b>	8500 kg	<b>18,740 lb</b>
Operating Weight Full (max. ballast)	12 940 kg	<b>28,535 lb</b>	18 145 kg	<b>40,000 lb</b>	25 000 kg	<b>55,115 lb</b>
Maximum Weight per Wheel	1438 kg	<b>3173 lb</b>	2016 kg	<b>4444 lb</b>	3570 kg	<b>7870 lb</b>
Shipping Weight	4625 kg	<b>10,200 lb</b>	4695 kg	<b>10,350 lb</b>	8500 kg	<b>18,740 lb</b>
Drive	<b>Hydraulic</b>		<b>Hydraulic</b>		<b>Hydraulic</b>	
Steering:						
Inside radius	4648 mm	<b>15'3"</b>	4648 mm	<b>15'3"</b>	3470 mm	<b>11'5"</b>
Outside radius	6375 mm	<b>20'11"</b>	6375 mm	<b>20'11"</b>	6700 mm	<b>22'0"</b>
General Dimensions:						
Overall width:	1750 mm	<b>5'9"</b>	1750 mm	<b>5'9"</b>	2150 mm	<b>7'1"</b>
Rolling width	1727 mm	<b>5'8"</b>	1727 mm	<b>5'8"</b>	2275 mm	<b>7'6"</b>
Tire width	197 mm	<b>7.75"</b>	197 mm	<b>7.75"</b>	368 mm	<b>14.5"</b>
Tire overlap	12.7 mm	<b>0.5"</b>	12.7 mm	<b>0.5"</b>	57 mm	<b>2.25"</b>
Overall height (ROPS)	3000 mm	<b>9'10"</b>	3000 mm	<b>9'10"</b>	2530 mm	<b>8'4"</b>
Wheelbase	3352 mm	<b>11'0"</b>	3352 mm	<b>11'0"</b>	3650 mm	<b>12'0"</b>
Overall length	4299 mm	<b>14'1"</b>	4299 mm	<b>14'1"</b>	4850 mm	<b>15'11"</b>
Ground clearance	267 mm	<b>10.5"</b>	267 mm	<b>10.5"</b>	252 mm	<b>10"</b>
Service Refill Capacities:						
Fuel tank	173 L	<b>45.7 U.S. gal</b>	173 L	<b>45.7 U.S. gal</b>	200 L	<b>53 U.S. gal</b>
Crankcase	7.3 L	<b>1.9 U.S. gal</b>	7.3 L	<b>1.9 U.S. gal</b>	7.3 L	<b>1.9 U.S. gal</b>
Hydraulic fluid	54.9 L	<b>14.5 U.S. gal</b>	54.9 L	<b>14.5 U.S. gal</b>	90 L	<b>23.7 U.S. gal</b>
Sprinkler water	394 L	<b>104 U.S. gal</b>	394 L	<b>104 U.S. gal</b>	394 L	<b>104 U.S. gal</b>

<sup>1</sup>11-wheel configuration available.

<sup>2</sup>Steel ballast available.

<sup>3</sup>The PF-290B when fully ballasted with steel and water achieves a maximum weight of 20 256 kg (44,563 lb) and a maximum wheel load of 2894 kg (6366 lb).



**PF-300B/PS-300B<sup>1</sup>**

**PS-500<sup>1</sup>**

<b>MODEL</b>	<b>PF-300B/PS-300B<sup>1</sup></b>		<b>PS-500<sup>1</sup></b>	
Flywheel Power	78 kW	105 hp	112 kW	150 hp
Rated Engine RPM	<b>2200</b>		<b>2300</b>	
No. Cylinders	<b>4</b>		<b>8</b>	
Displacement	4 L	243 in <sup>3</sup>	10.4 L	636 in <sup>3</sup>
Engine Mode	<b>3054DIT</b>		<b>3208T</b>	
Speeds:	<b>3 forward/3 reverse</b>		<b>3 forward/3 reverse</b>	
Max. Speed (For./Rev.)	20 km/h	12.4 mph	26.5 km/h	16.5 mph
Working Speed	10 km/h	6 mph	9 km/h	5.4 mph
Wheel Configuration	<b>3 front/4 rear</b>		<b>3 front/4 rear</b>	
Tires	<b>13 80 × 20 × 20</b>		<b>15.00 R 24</b>	
Operating Weight Empty (no ballast)	14 000 kg	<b>30,860 lb</b>	19 000 kg	<b>41,875 lb</b>
Operating Weight Full (max. ballast)	23 050 kg	<b>50,820 lb</b>	35 000 kg	<b>77,140 lb</b>
Maximum Weight per Wheel	3300 kg	<b>7260 lb</b>	5000 kg	<b>11,020 lb</b>
Shipping Weight	14 000 kg	<b>30,860 lb</b>	15 600 kg	<b>34,320 lb</b>
Drive	<b>Mechanical</b>		<b>Mechanical</b>	
Steering:				
Inside radius	5800 mm	<b>19'0"</b>	5150 mm	<b>16'11"</b>
Outside radius	7700 mm	<b>25'3"</b>	8550 mm	<b>28'1"</b>
General Dimensions:				
Overall width:	2000 mm	<b>6'7"</b>	2500 mm	<b>8'2"</b>
Rolling width	1900 mm	<b>6'3"</b>	2420 mm	<b>7'11"</b>
Tire width	315 mm	<b>12"</b>	315 mm	<b>12"</b>
Tire overlap	48 mm	<b>1.9"</b>	57.5 mm	<b>2.3"</b>
Overall height (ROPS)	3000 mm	<b>9'10"</b>	3630 mm	<b>11'11"</b>
Wheelbase	4030 mm	<b>13'3"</b>	4465 mm	<b>14'8"</b>
Overall length	5300 mm	<b>17'5"</b>	6270 mm	<b>20'7"</b>
Ground clearance	250 mm	<b>9.8"</b>	360 mm	<b>14.2"</b>
Service Refill Capacities:				
Fuel tank	189 L	<b>50 U.S. gal</b>	310 L	<b>82 U.S. gal</b>
Crankcase	7 L	<b>1.8 U.S. gal</b>	12.5 L	<b>3.3 U.S. gal</b>
Hydraulic fluid	10 L	<b>2.6 U.S. gal</b>	18 L	<b>4.7 U.S. gal</b>
Sprinkler water	447 L	<b>118 U.S. gal</b>	350 L	<b>92 U.S. gal</b>

<sup>1</sup>Steel ballast available.




The tables in this section give production estimates for the following assumed conditions:

Nominal machine travel speed: 6.4 kph (4.0 mph)  
 Overlap of rolling width: 15.2 cm (6.0 inches)

Table values give **representative** production rates for three common construction conditions: trenches, roads, and wide areas (> 15 m, or 50 ft).

Model	Drum Width		Lift Thickness		Passes Required	Production Estimates			
	cm	in	cm	in			3.7 m (12 ft) Trench	9.15 m (30 ft) Road Base	Wide Areas
CS-323C	127	50	10.2	4	6	m <sup>3</sup> /hr yds <sup>3</sup> /hr	80 104	111 145	122 159
CS-431C, CS-433C	167.6	66	10.2	4	4	m <sup>3</sup> /hr yds <sup>3</sup> /hr	159 209	249 326	249 326
CS-531D, CS-533D	213.4	84	15.2	6	6	m <sup>3</sup> /hr yds <sup>3</sup> /hr	239 313	299 391	324 424
CS-583D	213.4	84	15.2	6	4	m <sup>3</sup> /hr yds <sup>3</sup> /hr	— —	448 587	486 636
CP-323C	127	50	15.2	6	6	m <sup>3</sup> /hr yds <sup>3</sup> /hr	120 156	133 174	183 239
CP-433C	167.6	66	15.2	6	6	m <sup>3</sup> /hr yds <sup>3</sup> /hr	159 209	199 261	249 326
CP-533D, CP-563D	213.4	84	30.5	12	6	m <sup>3</sup> /hr yds <sup>3</sup> /hr	478 626	478 626	647 847

### Travel Speed Efficiency

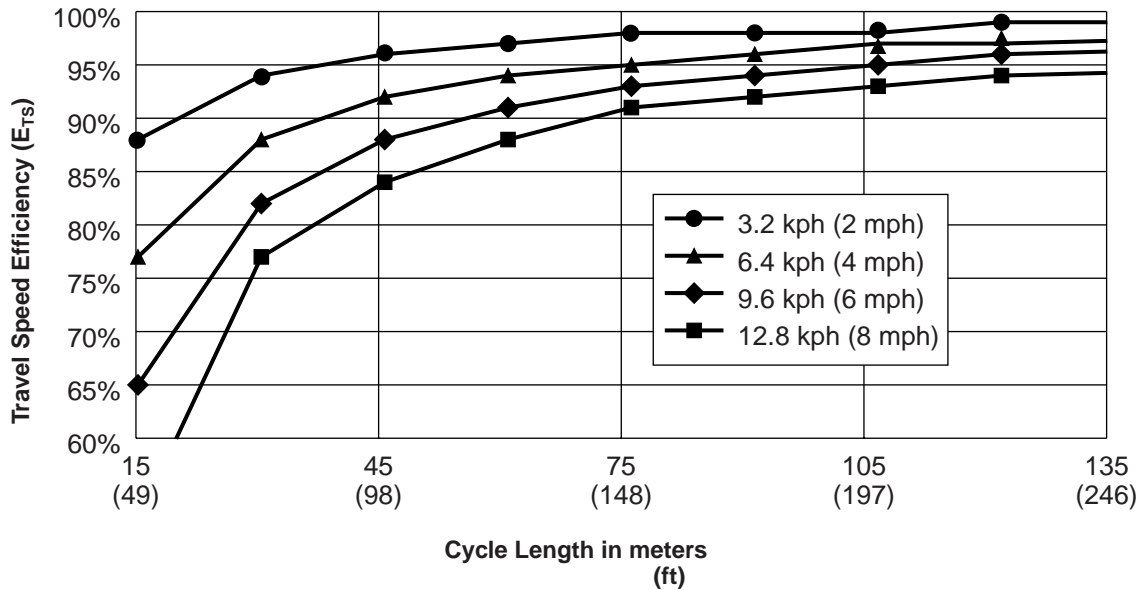

### Adjusting the Production Estimate

If the assumed conditions are not close to the actual construction conditions, the production estimates should be corrected. The production estimate from the table can be adjusted for 'actual' construction conditions by applying adjustment factors:

$$Q \text{ (actual)} = Q \text{ (assumed)} \times F_s \times F_t \times F_p$$

Where:  $Q \text{ (actual)}$  = adjusted productivity

$Q \text{ (assumed)}$  = productivity from table based on assumed conditions

$F_s$  = adjustment for machine speed

$F_t$  = adjustment for layer thickness

$F_p$  = adjustment for no. of passes

The adjustment factors are determined by comparing the 'actual' conditions to the 'assumed' ones:

$F_s$  = actual speed/assumed speed

$F_t$  = actual thickness/assumed thickness

$F_p$  = assumed passes/actual passes

#### Metric example

**Actual Conditions** — An 9.15-meter (full road width) base aggregate job is being completed with a compacted thickness of 15 cm. A CS-433C is being used, operating at 4.0 kph, and making 6 passes to achieve the desired compaction. The roller is overlapping its passes 6 inches.

For a 9.15-meter road base the table gives a CS-433C productivity of 249 m<sup>3</sup>/hr. Since the speed, thickness, and passes are *different* from the assumed conditions, we should adjust this estimate:

	Assumed	Actual
Speed	6.4 kph	4.0 kph
Thickness	10.2 mm	15 mm
Passes	4 passes	6 passes

$$F_s = 4.0 \text{ kph}/6.4 \text{ kph} = 0.6$$

$$F_t = 15 \text{ cm}/10.2 \text{ cm} = 1.5$$

$$F_p = 4 \text{ passes}/6 \text{ passes} = 0.7$$

The estimated production is adjusted using these factors:

$$Q \text{ (actual)} = 249 \text{ m}^3/\text{hr} \times 0.6 \times 1.7 \times 0.7 \\ = 178 \text{ m}^3/\text{hr} \text{ (233 yds}^3/\text{hr)}$$

#### English example

**Actual Conditions** — An wide area commercial site development job is being compacted in lifts of 8 inches. A CP-563D is being used, operating at 4.0 mph, and making 4 passes to achieve the target density.

First, the table gives a CP-563D productivity of 847 yds<sup>3</sup>/hr. Since lift thickness and passes required are *different* from the assumed conditions, we should adjust this estimate:

	Assumed	Actual
Speed	4.0 mph	4.0 mph
Thickness	12 inches	8 inches
Passes	6 passes	4 passes

$F_s$  = no correction necessary

$F_t = 8 \text{ inches}/12 \text{ inches} = 0.7$

$F_p = 6 \text{ passes}/4 \text{ passes} = 1.5$

The estimated production is adjusted using these factors:

$$Q \text{ (actual)} = 847 \text{ yds}^3/\text{hr} \times 0.7 \times 1.5 \\ = 890 \text{ yds}^3/\text{hr} \text{ (680 m}^3/\text{hr)}$$

#### Notes on Productivity:

- For jobs that are relatively narrow, especially road construction jobs, it is important to understand that certain widths of construction will be more productive than others for a given compactor. A productive construction width will make the most use of each side by side pass required by the compactor in order to cover the width.
- Production estimates should be adjusted further if the length of the compaction cycles are shorter than 75 m (250 ft). Refer to the Travel Speed Efficiency chart to determine efficiency  $E_{TS}$ . For example, a compactor traveling at 6.4 kph (4 mph) operating at cycle lengths of 150 ft has an  $E_{TS}$  of 0.91. Multiply  $Q \text{ (actual)}$  by  $E_{TS}$ .

The table in this section gives production estimates for the following assumed conditions:

Compacted Layer Thickness	51 mm	<b>2 in</b>
Max. Propelling Speed	5.6 kph	<b>2.8 mph</b>
Passes per Machine Width	2	
Compacted Material Density	2486 kg/cm <sup>3</sup>	<b>155 pcf</b>
Overlap of Rolling Width	152 mm	<b>6 in</b>
Overhang at Lane Edge	76 mm	<b>3 in</b>
Cycle Time (2 passes)	<b>120 seconds</b>	

Table values give **representative** production rates for common construction widths. If the actual width falls between two assumed widths, use the higher number to estimate production. Minor adjustments can normally be made in the rolling method to reach this higher production: reduce overlap or overhang, increase speed, or increase the cycle time.

Model	Units	PAVING WIDTH						
		1.8 m 6 ft	2.4 m 8 ft	3.0 m 10 ft	3.7 m 12 ft	4.3 m 14 ft	4.9 m 16 ft	5.5 m 18 ft
CB-214D	Tonnes/hr tons/hr	138.4 152.5	184.5 203.4	179.4 197.7	176.1 194.1	173.9 191.6	198.7 219.0	193.7 213.6
CB-224D & CB-225D	Tonnes/hr tons/hr	193.7 213.6	184.5 203.4	230.6 254.2	215.3 237.3	205.5 226.5	234.8 258.9	223.5 246.4
CB-334D & CB-335D	Tonnes/hr tons/hr	193.7 213.6	184.5 203.4	230.6 254.2	215.3 237.3	251.1 276.8	234.8 258.9	264.2 291.2
CB-434C	Tonnes/hr tons/hr	193.7 213.6	258.3 284.7	230.6 254.2	276.8 305.1	251.1 276.8	287.0 316.4	264.2 291.2
CB-534C	Tonnes/hr tons/hr	193.7 213.6	258.3 284.7	322.9 355.9	276.8 305.1	322.9 355.9	287.0 316.4	322.9 355.9
CB-634C	Tonnes/hr tons/hr	322.9 355.9	258.3 284.7	322.9 355.9	387.5 427.1	322.9 355.9	369.0 406.8	415.1 457.6

English example

*Actual Conditions* — A 12-foot lane is being paved with a compacted asphalt thickness of 4 inches. A CB-534C is being used, operating at 3.4 mph, and making 4 passes to achieve the target density. The roller is overlapping its passes 6 inches and is overhanging the edges by 3 inches.

First, the table gives a CB-534C productivity of 305.1 tons/hr for a 12 foot paving width. Since the actual speed, thickness, and passes are *different* from the assumed conditions, the estimate should be adjusted:

	Assumed	Actual
Speed	2.8 mph	3.4 mph
Thickness	2 inches	4 inches
Passes	2 passes	4 passes

$$F_s = 3.4 \text{ mph} / 2.8 \text{ mph} = 1.2$$

$$F_t = 4 \text{ inches} / 2 \text{ inches} = 2.0$$

$$F_p = 2 \text{ passes} / 4 \text{ passes} = 0.5$$

The actual, or adjusted, production estimate can then be determined from the following:

$$Q \text{ (actual)} = 305.1 \text{ tons/hr} \times 1.2 \times 2.0 \times 0.5$$

$$= 366.1 \text{ tons/hr (332.1 tonnes/hr)}$$

**Notes on Productivity:**

- Higher speed usually results in lower density achieved per pass.
- Productivity on uphill slopes may be reduced.
- Tabulated production estimates assume that 1 pass is used for re-positioning the machine at the beginning of the next run.

The tables in this section give production estimates for the following assumed conditions:

	Hot Mix Asphalt		Soil and Aggregate		Cold In-Place Recycled Asphalt	
Compacted Layer Thickness	51 mm	<b>2 in</b>	152 mm	<b>6 in</b>	203 mm	<b>8 in</b>
Max. Propelling Speed	8 kph	<b>5 mph</b>	8 kph	<b>5 mph</b>	4.8 kph	<b>3 mph</b>
Passes per Machine Width	<b>4</b>		<b>4</b>		<b>6</b>	
Compacted Material Density	2486 kg/cm <sup>2</sup>	<b>155 lb/ft<sup>2</sup></b>	2085 kg/cm <sup>2</sup>	<b>130 lb/ft<sup>2</sup></b>	2246 kg/cm <sup>2</sup>	<b>140 lb/ft<sup>2</sup></b>
Overlap of Rolling Width	152 mm	<b>6 in</b>	152 mm	<b>6 in</b>	152 mm	<b>6 in</b>
Overhang at Lane Edge	76 mm	<b>3 in</b>	76 mm	<b>3 in</b>	76 mm	<b>3 in</b>
Cycle Time (2 passes)	<b>120 seconds</b>		<b>120 seconds</b>		<b>120 seconds</b>	

Table values give **representative** production rates for common construction widths. If the actual width falls between two assumed widths, use the higher number to estimate production. Minor adjustments can normally be made in the rolling method to reach this higher production: reduce overlap or overhang, increase speed, or increase the cycle time.

<b>Hot Mix Asphalt</b>		<b>PAVING WIDTH</b>						
<b>Model</b>	<b>Units</b>	1.8 m <b>6 ft</b>	2.4 m <b>8 ft</b>	3.0 m <b>10 ft</b>	3.7 m <b>12 ft</b>	4.3 m <b>14 ft</b>	4.9 m <b>16 ft</b>	5.5 m <b>18 ft</b>
PS-150B & PS-200B	tonnes/hr <b>tons/hr</b>	195.2 <b>215.1</b>	260.2 <b>286.8</b>	325.3 <b>358.6</b>	270.2 <b>297.9</b>	315.3 <b>347.5</b>	275.5 <b>303.7</b>	310.0 <b>341.7</b>
PF-300B & PS-300B	tonnes/hr <b>tons/hr</b>	195.2 <b>215.1</b>	260.2 <b>286.8</b>	325.3 <b>358.6</b>	270.2 <b>297.9</b>	315.3 <b>347.5</b>	360.3 <b>397.2</b>	310.0 <b>341.7</b>
PF-290B & PS-360B	tonnes/hr <b>tons/hr</b>	351.3 <b>387.2</b>	260.2 <b>286.8</b>	325.3 <b>358.6</b>	390.3 <b>430.3</b>	455.4 <b>502.0</b>	360.3 <b>397.2</b>	405.3 <b>446.8</b>

<b>Soil and Aggregate</b>		1.8 m	2.4 m	3.0 m	3.7 m	4.3 m	4.9 m	5.5 m
PS-150B & PS-200B	tonnes/hr <b>tons/hr</b>	490.1 <b>540.2</b>	653.4 <b>720.3</b>	816.8 <b>900.4</b>	678.6 <b>748.0</b>	791.7 <b>872.7</b>	691.9 <b>762.7</b>	778.4 <b>858.0</b>
PF-300B & PS-300B	tonnes/hr <b>tons/hr</b>	490.1 <b>540.2</b>	653.4 <b>720.3</b>	816.8 <b>900.4</b>	678.6 <b>748.0</b>	791.7 <b>872.7</b>	904.8 <b>997.3</b>	778.4 <b>858.0</b>
PF-290B & PS-360B	tonnes/hr <b>tons/hr</b>	882.2 <b>972.4</b>	653.4 <b>720.3</b>	816.8 <b>900.4</b>	980.2 <b>1080.4</b>	1143.5 <b>1260.5</b>	904.8 <b>997.3</b>	1017.9 <b>1122.0</b>

<b>Cold In-Place Recycled Asphalt</b>		1.8 m	2.4 m	3.0 m	3.7 m	4.3 m	4.9 m	5.5 m
PS-150B & PS-200B	tonnes/hr <b>tons/hr</b>	288.0 <b>317.5</b>	384.0 <b>423.3</b>	480.0 <b>529.2</b>	394.1 <b>434.5</b>	459.8 <b>506.9</b>	399.4 <b>440.3</b>	449.3 <b>495.3</b>
PF-300B & PS-300B	tonnes/hr <b>tons/hr</b>	288.0 <b>317.5</b>	384.0 <b>423.3</b>	480.0 <b>529.2</b>	394.1 <b>434.5</b>	459.8 <b>506.9</b>	525.5 <b>579.3</b>	449.3 <b>495.3</b>
PF-290B & PS-360B	tonnes/hr <b>tons/hr</b>	534.9 <b>589.6</b>	384.0 <b>423.3</b>	480.0 <b>529.2</b>	576.1 <b>635.0</b>	672.1 <b>740.8</b>	525.5 <b>579.3</b>	591.2 <b>651.7</b>

Metric example

*Actual Conditions* — An 7.3-meter (full road width) base aggregate job is being completed with a compacted thickness of 200 mm. A PS-200B is being used, operating at 6.5 kph, and making 6 passes achieve the desired compaction. The roller is overlapping its passes 6 inches.

First, the table does not show production for 7.3 meters so use the greatest width on the table: 5.5 meters. The table gives a PS-200B productivity of 778.4 tonnes/hr for this paving width. We can expect that the actual productivity for 7.3 meters will be slightly higher than that. Since the speed, thickness, and passes are *different* from the assumed conditions, we should adjust this estimate:

	<b>Assumed</b>	<b>Actual</b>
<b>Speed</b>	8 kph	6.5 kph
<b>Thickness</b>	152 mm	200 mm
<b>Passes</b>	4 passes	6 passes

$$F_s = 6.5 \text{ kph} / 8 \text{ kph} = 0.8$$

$$F_t = 200 \text{ mm} / 152 \text{ mm} = 1.3$$

$$F_p = 4 \text{ passes} / 6 \text{ passes} = 0.7$$

The estimated production is adjusted using these factors:

$$Q (\text{actual}) = 778.4 \text{ tonnes/hr} \times 0.8 \times 1.3 \times 0.7 \\ = 567 \text{ tonnes/hr (625 ton/hr)}$$

**Notes on Productivity:**

- Ballast weight and tire pressure can significantly affect performance of a pneumatic tire compactor. Refer to machine selection guide to choose the best configuration.
- Productivity on uphill grades and very thick layers (>127 mm, or 5 in) may be reduced due to a necessary reduction in speed.
- The 11-tire configuration for the PS-150B is designed only for chip-and-seal applications. It is not recommended in other applications.

# ELPHINSTONE UNDERGROUND MACHINES

## Loaders and Haulers for Hard Rock Mining

### CONTENTS

Features .....	18-1
Load-Haul-Dumps (LHDs):	
Specifications .....	18-2
Dimensions and capacities .....	18-4
Bucket selection .....	18-5
Turning dimensions .....	18-5
Trucks:	
Articulated specifications .....	18-6
Rigid frame specifications .....	18-7
Dimensions and capacities .....	18-8
LHD and Truck Systems .....	18-10

### Elphinstone machines:

- Produced by a fully owned Caterpillar Inc. subsidiary.
- Manufactured in Burnie, Tasmania (Australia).
- Supported by the worldwide Caterpillar parts and dealer network.

### Features, all models:

- Rugged design for underground application.
- Caterpillar diesel engines and power trains.
- High proportion of Caterpillar parts.
- Extensive use of steel castings and forgings.
- Engineered for productivity, reliability, safety, and machine rebuildability.
- Remote control options on loaders.

### Elphinstone product line:

- Six models of Load-Haul-Dump (LHD) machines, with rated bucket payloads ranging from 6.5-20 tonnes (7 to 22 tons).
- Dump and ejector versions of articulated trucks, with payload capacities of 40-55 tonnes (44-60 tons).
- Three models of rigid frame trucks; dump versions with 38 tonne (42 tons) and 52 tonne (58 tons) payload capacity; ejector version with 36 tonne (40 tons) payload capacity.



<b>MODEL</b>	<b>R1300</b>		<b>R1600</b>	
Bucket Size Minimum	2.8 m <sup>3</sup>	3.7 yd <sup>3</sup>	4.2 m <sup>3</sup>	5.5 yd <sup>3</sup>
Bucket Size Maximum	3.4 m <sup>3</sup>	4.4 yd <sup>3</sup>	5.9 m <sup>3</sup>	7.7 yd <sup>3</sup>
Tramming Capacity	6500 kg	<b>14,330 lb</b>	10 200 kg	<b>22,490 lb</b>
Length	8650 mm	<b>28'5"</b>	9710 mm	<b>31'10"</b>
Width Bucket	2000 mm	<b>6'7"</b>	2600 mm	<b>8'6"</b>
Width over Tires	1900 mm	<b>6'3"</b>	2400 mm	<b>7'10"</b>
Height	2000 mm	<b>6'7"</b>	2400 mm	<b>7'10"</b>
Operating Weight	20 150 kg	<b>44,430 lb</b>	29 800 kg	<b>65,710 lb</b>
Engine Power	123 kW	<b>165 hp</b>	201 kW	<b>270 hp</b>
Engine Model	<b>3306 DITA (SWIRL)</b>		<b>3176C EUI ATAAC</b>	
Tire Size	<b>17.5x25 20 Ply L5 STMS</b>		<b>18x25 28 Ply STMS</b>	
Outer Turning Radius	5575 mm	<b>18'3"</b>	6450 mm	<b>21'2"</b>
Inner Turning Radius	2972 mm	<b>9'9"</b>	3300 mm	<b>10'10"</b>
Articulation Angle	<b>42.5°</b>		<b>42.5°</b>	
Oscillation Angle	<b>±10°</b>		<b>±10°</b>	
Bucket Raise Time	<b>5 Sec.</b>		<b>7.6 Sec.</b>	
Bucket Lower Time	<b>2.3 Sec.</b>		<b>1.6 Sec.</b>	
Bucket Tip Time	<b>2 Sec.</b>		<b>2 Sec.</b>	
Bucket Total Time	<b>9.3 Sec.</b>		<b>11.2 Sec.</b>	
Travel Speeds	<b>km/h</b>	<b>mph</b>	<b>km/h</b>	<b>mph</b>
Forward 1	4.9	3.1	5.5	3.4
2	8.8	5.5	9.8	6.1
3	15.3	9.5	17.5	10.9
4	26.1	16.2	30.6	19
Reverse 1	4.5	2.8	6.2	3.9
2	8	5	11.2	7
3	14	8.7	19.8	12.3
4	23.8	14.8	34	21.1
Maximum Bucket Pin Height	2900 mm	<b>9'6"</b>	3752 mm	<b>12'4"</b>
Maximum Bucket Dump Angle	<b>43°</b>		<b>45°</b>	
Break Out Force Tilt SAE	12 020 kg	<b>26,500 lb</b>	19 280 kg	<b>42,510 lb</b>
Static Tipping (Tramming)	22 615 kg	<b>49,870 lb</b>	32 800 kg	<b>72,320 lb</b>
Emergency Brake	<b>S.A.F.R. Inboard spring applied fluid released, enclosed wet disc @ all wheels, front and rear circuits</b>		<b>S.A.F.R. Inboard spring applied fluid released, enclosed wet disc @ all wheels, front and rear circuits</b>	
Service Brake	<b>Hydraulically applied spring released, fully enclosed wet disc @ all wheels, front and rear circuits</b>		<b>Fluid applied spring released, wet disc all wheels</b>	
Park Brake	<b>S.A.F.R. Inboard spring applied fluid released, enclosed wet disc @ all wheels, front and rear circuits</b>		<b>S.A.F.R. Inboard spring applied fluid released, enclosed wet disc @ all wheels, front and rear circuits</b>	
Fuel Capacity	260 L	<b>69 U.S. gal</b>	400 L	<b>106 U.S. gal</b>










MODEL	R1700G		R1700G SUPA 14		R2900		R2900 SUPA 20	
Bucket Size Minimum	5 m <sup>3</sup>	6.5 yd <sup>3</sup>	5 m <sup>3</sup>	6.5 yd <sup>3</sup>	6.4 m <sup>3</sup>	8.4 yd <sup>3</sup>	8.8 m <sup>3</sup>	11.5 yd <sup>3</sup>
Bucket Size Maximum	7.4 m <sup>3</sup>	9.7 yd <sup>3</sup>	7.4 m <sup>3</sup>	9.7 yd <sup>3</sup>	11.5 m <sup>3</sup>	15 yd <sup>3</sup>	11.5 m <sup>3</sup>	15 yd <sup>3</sup>
Tramming Capacity	12 500 kg	27,560 lb	14 000 kg	30,870 lb	17 200 kg	37,930 lb	20 000 kg	44,100 lb
Length	10 600 mm	34'9"	10 600 mm	34'9"	10 970 mm	36'0"	10 970 mm	36'0"
Width Bucket	2818 mm	9'3"	2818 mm	9'3"	3100 mm	10'2"	3400 mm	11'2"
Width over Tires	2650 mm	8'8"	2650 mm	8'8"	2900 mm	9'6"	2900 mm	9'6"
Height	2557 mm	8'5"	2557 mm	8'5"	2888 mm	9'6"	2888 mm	9'6"
Operating Weight	38 500 kg	84,880 lb	39 250 kg	86,530 lb	48 850 kg	107,710 lb	53 100 kg	117,090 lb
Engine Power	231 kW	310 hp	231 kW	310 hp	269 kW	361 hp	269 kW	361 hp
Engine Model	3176C EUI ATAAC		3176C EUI ATAAC		3406E EUI ATAAC		3406E EUI ATAAC	
Tire Size	26.5x25 32 Ply L5 STMS		26.5x25 36 Ply L5 STMS		29.5x29 34 Ply STMS		29.5R29 VSMS ★★	
Outer Turning Radius	6854 mm	22'6"	6854 mm	22'6"	7310 mm	24'0"	7440 mm	24'5"
Inner Turning Radius	3229 mm	10'7"	3229 mm	10'7"	3410 mm	11'2"	3410 mm	11'2"
Articulation Angle	44°		44°		42.5°		42.5°	
Oscillation Angle	±8°		±8°		±8°		±8°	
Bucket Raise Time	6.8 Sec.		6.8 Sec.		6.7 Sec.		7.6 Sec.	
Bucket Lower Time	2.4 Sec.		2.4 Sec.		2.4 Sec.		2.4 Sec.	
Bucket Tip Time	2.9 Sec.		2.9 Sec.		2.8 Sec.		2.8 Sec.	
Bucket Total Time	12.1 Sec.		12.1 Sec.		11.9 Sec.		12.8 Sec.	
Travel Speeds	km/h mph		km/h mph		km/h mph		km/h mph	
Forward 1	5.1	3.2	5.1	3.2	5.1	3.2	5.1	3.2
2	9.0	5.6	9.0	5.6	9.2	5.7	9.2	5.7
3	15.8	9.8	15.8	9.8	15.7	9.8	15.7	9.8
4	27.1	16.8	27.1	16.8	26.7	16.6	26.7	16.6
Reverse 1	5.9	3.6	5.9	3.6	6.4	4.0	6.4	4.0
2	10.3	6.4	10.3	6.4	11.2	7.0	11.2	7.0
3	17.9	11.1	17.9	11.1	19.3	12.0	19.3	12.0
4	30.7	19.1	30.7	19.1	32.5	20.2	32.5	20.2
Maximum Bucket Pin Height	4098 mm 13'5"		4098 mm 13'5"		4540 mm 14'11"		4540 mm 14'11"	
Maximum Bucket Dump Angle	46°		46°		46°		46°	
Break Out Force Tilt SAE	22 550 kg	49,720 lb	22 550 kg	49,720 lb	28 600 kg	63,060 lb	25 100 kg	55,340 lb
Static Tipping (Tramming)	37 335 kg	82,320 lb	37 335 kg	82,320 lb	39 690 kg	87,510 lb	31 880 kg	70,290 lb
Emergency Brake	Spring applied fluid released, wet discs all wheel ends		Spring applied fluid released, wet discs all wheel ends		Spring applied fluid released, wet discs all wheel ends		Spring applied fluid released, wet discs all wheel ends	
Service Brake	Fluid applied spring released, wet disc all wheels		Fluid applied spring released, wet disc all wheels		Fluid applied wet discs, spring released all wheel ends		Fluid applied wet discs, spring released all wheel ends	
Park Brake	S.A.F.R. Inboard spring applied fluid released, enclosed wet disc @ all wheels, front and rear circuits.		S.A.F.R. Inboard spring applied fluid released, enclosed wet disc @ all wheels, front and rear circuits.		Spring applied fluid released, wet discs all wheel ends		Spring applied fluid released, wet discs all wheel ends	
Fuel Capacity	570 L	151 U.S. gal	570 L	151 U.S. gal	900 L	238 U.S. gal	900 L	238 U.S. gal
Loading Clearance	—		—		2955 mm	8'10"	2955 mm	8'10"



Model	R1300		R1600		R1700G	
Rated payload	6500 kg	<b>14,330 lb</b>	10 200 kg	<b>22,490 lb</b>	12 500 kg	<b>27,560 lb</b>
Bucket capacity	3.4 m <sup>3</sup>	<b>4.4 yd<sup>3</sup></b>	5.9 m <sup>3</sup>	<b>7.7 yd<sup>3</sup></b>	7.4 m <sup>3</sup>	<b>9.7 yd<sup>3</sup></b>
Overall width	2050 mm	<b>6'9"</b>	2600 mm	<b>8'7"</b>	2818 mm	<b>9'3"</b>
Overall height	2000 mm	<b>6'7"</b>	2400 mm	<b>7'10"</b>	2557 mm	<b>8'5"</b>
Length (tramming)	8660 mm	<b>28'5"</b>	9710 mm	<b>31'10"</b>	10 595 mm	<b>34'9"</b>
Empty weight	20 150 kg	<b>44,430 lb</b>	29 800 kg	<b>65,710 lb</b>	38 500 kg	<b>84,890 lb</b>
Loaded weight	26 650 kg	<b>58,760 lb</b>	40 000 kg	<b>88,200 lb</b>	51 000 kg	<b>112,460 lb</b>
Ground clearance	320 mm	<b>12.6"</b>	342 mm	<b>13.5"</b>	400 mm	<b>15.7"</b>
Axle oscillation	<b>±10°</b>		<b>±10°</b>		<b>±8°</b>	

Model	R1700G SUPA 14		R2900		R2900 SUPA 20	
Rated payload	14 000 kg	<b>30,870 lb</b>	17 200 kg	<b>37,930 lb</b>	20 000 kg	<b>44,100 lb</b>
Bucket capacity	6.7 m <sup>3</sup>	<b>8.8 yd<sup>3</sup></b>	11.5 m <sup>3</sup>	<b>15 yd<sup>3</sup></b>	11.5 m <sup>3</sup>	<b>15 yd<sup>3</sup></b>
Overall width	2818 mm	<b>9'3"</b>	3100 mm	<b>10'2"</b>	3400 mm	<b>11'2"</b>
Overall height	2557 mm	<b>8'5"</b>	2890 mm	<b>8'6"</b>	2890 mm	<b>8'6"</b>
Length (tramming)	10 595 mm	<b>34'9"</b>	10 970 mm	<b>36'0"</b>	10 970 mm	<b>36'0"</b>
Empty weight	38 500 kg	<b>84,890 lb</b>	48 850 kg	<b>107,710 lb</b>	53 100 kg	<b>117,090 lb</b>
Loaded weight	52 500 kg	<b>115,760 lb</b>	66 050 kg	<b>145,640 lb</b>	73 100 kg	<b>161,190 lb</b>
Ground clearance	400 mm	<b>15.7"</b>	500 mm	<b>19.7"</b>	500 mm	<b>19.7"</b>
Axle oscillation	<b>±8°</b>		<b>±8°</b>		<b>±8°</b>	

Model	Bucket Type	SAE Capacity	
		m <sup>3</sup>	yd <sup>3</sup>
R1300	Standard	2.8	<b>3.7</b>
	Standard	3.4	<b>4.4</b>
	Ejector	2.5	<b>3.3</b>
R1600	Standard	4.2	<b>5.5</b>
	Standard	4.8	<b>6.3</b>
	Standard	5.9	<b>7.7</b>
	High penetration	4.2	<b>5.5</b>
	High penetration	4.8	<b>6.3</b>
	High penetration	5.9	<b>7.7</b>
	Ejector	4.5	<b>5.9</b>
R1700G and R1700G SUPA 14	Standard	5.0	<b>6.5</b>
	Standard	5.7	<b>7.5</b>
	Standard	6.7	<b>8.8</b>
	Standard	7.4	<b>9.7</b>
	High penetration	5.0	<b>6.5</b>
	High penetration	5.7	<b>7.5</b>
	High penetration	6.7	<b>8.8</b>
	High penetration	7.4	<b>9.7</b>
R2900 and R2900 SUPA 20	Standard	6.4	<b>8.4</b>
	Standard	7.3	<b>9.5</b>
	Standard	8.1	<b>10.6</b>
	Standard	8.8	<b>11.5</b>
	Standard	11.5	<b>15.0</b>
	High penetration	6.4	<b>8.4</b>
	High penetration	7.3	<b>9.5</b>
	High penetration	8.8	<b>11.5</b>
	High penetration	11.5	<b>15.0</b>

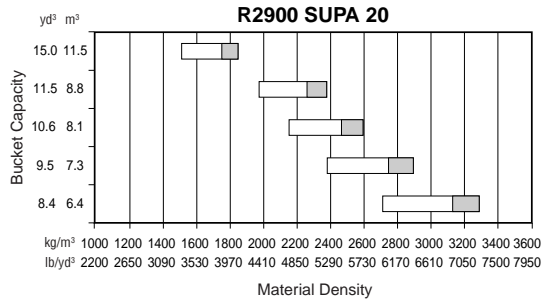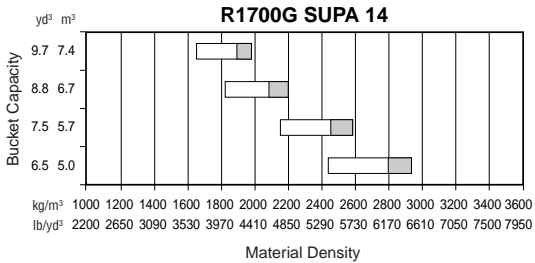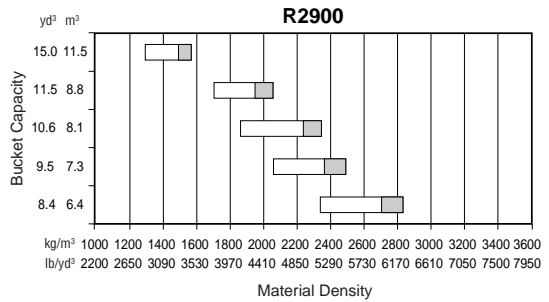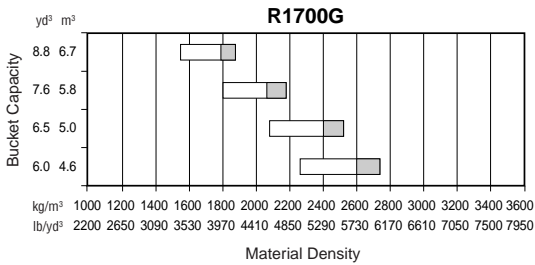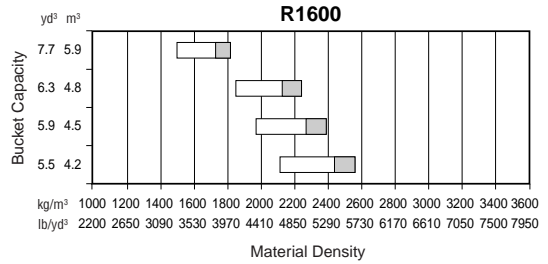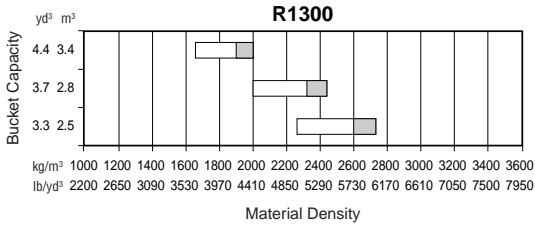

**Turning Dimensions**

Model	R1300	R1600	R1700G and R1700G SUPA 14	R2900	R2900 SUPA 20
Turn radius (outside)	5575 mm 18'4"	6587 mm 21'7"	6854 mm 22'6"	7310 mm 24'0"	7440 mm 24'5"
Turn radius (inside)	2972 mm 9'9"	3305 mm 10'10"	3229 mm 10'7"	3410 mm 11'2"	3410 mm 11'2"
Articulation angle	±42.5°	±42.5°	±44°	±42.5°	±42.5°



<b>MODEL</b>	<b>AE40 Series II</b>		<b>AD45</b>		<b>AD55*</b>	
Engine Power	365 kW	<b>490 hp</b>	380 kW	<b>510 hp</b>	485 kW	<b>650 hp</b>
Engine Model	<b>3408E HEUI</b>		<b>3408E HEUI</b>		<b>3456 EUI ATAAC</b>	
Tare Weight	41 800 kg	<b>92,170 lb</b>	40 500 kg	<b>89,300 lb</b>	43 500 kg	<b>95,920 lb</b>
Max. Capacity Tonnes	40 t	<b>44 T</b>	45 t	<b>50 T</b>	55 t	<b>61 T</b>
Capacity M3 (SAE) 2:1 Heaped	18.4 m <sup>3</sup>	<b>24 yd<sup>3</sup></b>	18.4 m <sup>3</sup>	<b>24 yd<sup>3</sup></b>	26.91 m <sup>3</sup>	<b>35 yd<sup>3</sup></b>
Distribution Loaded Front		<b>47%</b>		<b>45%</b>		<b>48%</b>
Distribution Loaded Rear		<b>53%</b>		<b>55%</b>		<b>52%</b>
Turning Radius	9589 mm	<b>31'6"</b>	9228 mm	<b>30'3"</b>	9636 mm	<b>31'7"</b>
Height	2890 mm	<b>9'6"</b>	2700 mm	<b>8'10"</b>	3100 mm	<b>10'2"</b>
Length	11 265 mm	<b>37'0"</b>	10 660 mm	<b>35'0"</b>	11 186 mm	<b>36'8"</b>
Loading Height	2700 mm	<b>8'10"</b>	2660 mm	<b>8'9"</b>	2660 mm	<b>8'9"</b>
Width	3200 mm	<b>10'5"</b>	3000 mm	<b>9'10"</b>	3250 mm	<b>10'8"</b>
Oscillation		<b>12°</b>		<b>12°</b>		<b>10°</b>
Articulation		<b>42.5°</b>		<b>42.5°</b>		<b>44°</b>
Tray Height Raised		<b>N/A</b>	5946 mm	<b>19'6"</b>	6932 mm	<b>22'9"</b>
Dump Time Sec		<b>15</b>		<b>10</b>		<b>11.5</b>
Travel Speeds	<b>km/h</b>	<b>mph</b>	<b>km/h</b>	<b>mph</b>	<b>km/h</b>	<b>mph</b>
Forward 1	7.7	<b>4.8</b>	7.5	<b>4.7</b>	7.8	<b>4.8</b>
2	10.6	<b>6.6</b>	10.6	<b>6.6</b>	10.8	<b>6.7</b>
3	14.5	<b>9</b>	14.3	<b>8.9</b>	14.6	<b>9.1</b>
4	19.3	<b>12</b>	19.2	<b>11.9</b>	19.6	<b>12.2</b>
5	26.2	<b>16.3</b>	25.9	<b>16.1</b>	26.5	<b>16.5</b>
6	35.4	<b>22</b>	34.9	<b>21.7</b>	35.5	<b>22.1</b>
7	48.1	<b>29.9</b>	47.1	<b>29.3</b>	47.9	<b>29.8</b>
8	—	—	—	—	—	—
Reverse 1	7.7	<b>4.8</b>	7.3	<b>4.5</b>	8	<b>5</b>
2	10.6	<b>6.6</b>	9.9	<b>6.2</b>	11	<b>6.8</b>
Tire Size	<b>29.5x29 2 ★★ Radials</b>		<b>29.5x29 2 ★★ Radials</b>		<b>35/65-R33</b>	
Emergency Brake	<b>Spring applied hyd. released all wheels</b>		<b>Spring applied hyd. released all wheels</b>		<b>Spring applied hyd. released all wheels</b>	
Service Brake	<b>Caterpillar oil cooled hyd. applied wet disc all wheels</b>		<b>Caterpillar oil cooled hyd. applied wet disc all wheels</b>		<b>Caterpillar oil cooled hyd. applied wet disc all wheels</b>	
Park Brake	<b>Spring applied hyd. released all wheels</b>		<b>Spring applied hyd. released all wheels</b>		<b>Spring applied hyd. released all wheels</b>	
Fuel Capacity	520 L	<b>137 U.S. gal</b>	520 L	<b>137 U.S. gal</b>	520 L	<b>137 U.S. gal</b>

\*Preliminary info.



MODEL	69D Dump		69D Ejector		73D	
Engine Power	380 kW	510 hp	380 kW	510 hp	509 kW	683 hp
Engine Model	3408E HEUI		3408E HEUI		3412E HEUI	
Tare Weight	30 100 kg	66,370 lb	34 700 kg	78,500 lb	40 300 kg	88,860 lb
Max. Capacity Tonnes	38 t	42 T	36.2 t	40 T	52.2 t	58 T
Capacity M3 (SAE) 2:1 Heaped	18.3 m <sup>3</sup>	24 yd <sup>3</sup>	18.2 m <sup>3</sup>	24 yd <sup>3</sup>	31.9 m <sup>3</sup>	42 yd <sup>3</sup>
Distribution Loaded Front		33%		31%		33%
Distribution Loaded Rear		67%		69%		67%
Turning Radius	9616 mm	31'7"	9616 mm	31'7"	10 820 mm	35'6"
Height	3442 mm	11'4"	3442 mm	11'4"	3770 mm	12'4"
Length	8127 mm	26'8"	7830 mm	25'8"	9230 mm	30'3"
Loading Height	3058 mm	10'0"	3160 mm	10'4"	3400 mm	11'2"
Width	3665 mm	12'0"	3665 mm	12'0"	4200 mm	13'9"
Oscillation		N/A		N/A		N/A
Articulation		N/A		N/A		N/A
Tray Height Raised	5735 mm	18'10"		N/A	6635 mm	21'9"
Dump Time Sec		9		16		11.4
Travel Speeds	km/h	mph	km/h	mph	km/h	mph
Forward 1	12.4	7.7	12.4	7.7	9.2	5.7
2	16.9	10.5	16.9	10.5	12.7	7.9
3	23	14.3	23	14.3	17.2	10.7
4	30.9	19.2	30.9	19.2	23.2	14.4
5	41.2	25.6	41.2	25.6	31.4	19.5
6	54.2	33.7	54.2	33.7	42.3	26.3
7	76.6	47.6	76.6	47.6	57.3	35.6
8	—	—	—	—	—	—
Reverse 1	13.5	8.4	13.5	8.4	11.3	7
2	—	—	—	—	—	—
Tire Size	18x33 2 ★★ Radials		18x33 2 ★★ Radials		21x35 2 ★★ Radials	
Emergency Brake	Caterpillar oil cooled hyd. applied wet discs on rear dry disc on front		Caterpillar oil cooled hyd. applied wet discs on rear dry disc on front		Caterpillar oil cooled hyd. applied wet discs on rear dry disc on front	
Service Brake	Caterpillar oil cooled hyd. applied wet disc on rear dry disc on front		Caterpillar oil cooled hyd. applied wet disc on rear dry disc on front		Caterpillar oil cooled hyd. applied wet disc on rear dry disc on front	
Park Brake	Spring applied hyd. released rear wheels		Spring applied hyd. released rear wheels		Spring applied hyd. released rear wheels	
Fuel Capacity	530 L	140 U.S. gal	530 L	140 U.S. gal	700 L	185 U.S. gal

**Articulated Trucks**

Model	AE40 Series II		AD45		AD55*	
Heaped capacity*	18.4 m <sup>3</sup>	<b>24.1 yd<sup>3</sup></b>	26.9 m <sup>3</sup>	<b>35.2 yd<sup>3</sup></b>	23.0 m <sup>3</sup>	<b>30.1 yd<sup>3</sup></b>
Overall width	3200 mm	<b>10'6"</b>	3000 mm	<b>9'10"</b>	3250 mm	<b>10'8"</b>
Overall height	2700 mm	<b>8'10"</b>	2700 mm	<b>8'10"</b>	3100 mm	<b>10'2"</b>
Overall length	11 265 mm	<b>36'11"</b>	10 660 mm	<b>35'0"</b>	11 186 mm	<b>36'8"</b>
Empty weight	41 800 kg	<b>92,170 lb</b>	40 500 kg	<b>89,300 lb</b>	43 500 kg	<b>95,920 lb</b>
Loaded weight	81 800 kg	<b>180,370 lb</b>	85 500 kg	<b>188,530 lb</b>	98 500 kg	<b>217,200 lb</b>
Ground clearance	452 mm	<b>17.8"</b>	452 mm	<b>17.8"</b>	490 mm	<b>19.3"</b>
Frame oscillation	<b>±12°</b>		<b>±10°</b>		<b>±12°</b>	

\*2:1 per SAE.

**Rigid Frame Trucks**

Model	69D Dump		69D Ejector		73D	
Max. capacity	38 t	<b>41.9 T</b>	36.2 t	<b>39.9 T</b>	52.2 t	<b>57.5 T</b>
Heaped capacity	18.3 m <sup>3</sup>	<b>23.9 yd<sup>3</sup></b>	18.2 m <sup>3</sup>	<b>23.8 yd<sup>3</sup></b>	31.9 m <sup>3</sup>	<b>41.7 yd<sup>3</sup></b>
Height (FOPS)	3442 mm	<b>11'4"</b>	3442 mm	<b>11'4"</b>	3770 mm	<b>12'4"</b>
Length	8127 mm	<b>26'8"</b>	7830 mm	<b>25'8"</b>	9230 mm	<b>30'3"</b>
Width	3665 mm	<b>12'0"</b>	3665 mm	<b>12'0"</b>	4200 mm	<b>13'9"</b>
Loading height (empty)	3058 mm	<b>10'0"</b>	3160 mm	<b>10'4"</b>	3400 mm	<b>11'2"</b>

\*Preliminary info.

**Body Selection**

Model	SAE Body Capacity	
AE40 Series II	18.4 m <sup>3</sup>	<b>24.1 yd<sup>3</sup></b>
	17.7 m <sup>3</sup>	<b>23.2 yd<sup>3</sup></b>
	20.8 m <sup>3</sup>	<b>27.2 yd<sup>3</sup></b>
AD45	18.4 m <sup>3</sup>	<b>24.1 yd<sup>3</sup></b>
	21.3 m <sup>3</sup>	<b>27.9 yd<sup>3</sup></b>
	25.5 m <sup>3</sup>	<b>33.4 yd<sup>3</sup></b>
AD55	23.0 m <sup>3</sup>	<b>30.1 yd<sup>3</sup></b>
	32.6 m <sup>3</sup>	<b>42.6 yd<sup>3</sup></b>
69D Dump	18.3 m <sup>3</sup>	<b>23.9 yd<sup>3</sup></b>
	22.7 m <sup>3</sup>	<b>29.7 yd<sup>3</sup></b>
	24.9 m <sup>3</sup>	<b>32.6 yd<sup>3</sup></b>
69D Ejector	18.2 m <sup>3</sup>	<b>23.8 yd<sup>3</sup></b>
73D	24.0 m <sup>3</sup>	<b>31.4 yd<sup>3</sup></b>
	30.6 m <sup>3</sup>	<b>40.0 yd<sup>3</sup></b>
	31.9 m <sup>3</sup>	<b>41.7 yd<sup>3</sup></b>

**Turning Dimensions**


**Articulated Trucks**

<b>Model</b>	<b>AE40 Series II</b>		<b>AD45</b>		<b>AD55*</b>	
Turn radius (outside)	9589 mm	<b>31'6"</b>	9228 mm	<b>30'3"</b>	9636 mm	<b>31'7"</b>
Turn radius (inside)	5448 mm	<b>19'11"</b>	5296 mm	<b>17'5"</b>	5260 mm	<b>17'3"</b>
Articulation angle	<b>±42.5°</b>		<b>±42.5°</b>		<b>±44°*</b>	

\*Preliminary info.

**Rigid Frame Trucks**

<b>Model</b>	<b>69D Dump</b>		<b>69D Ejector</b>		<b>73D</b>	
Turn circle (outside)	9616 mm	<b>31'7"</b>	9616 mm	<b>31'7"</b>	10 820 mm	<b>35'6"</b>
Turn circle (inside)	4372 mm	<b>14'4"</b>	4372 mm	<b>14'4"</b>	5090 mm	<b>16'8"</b>

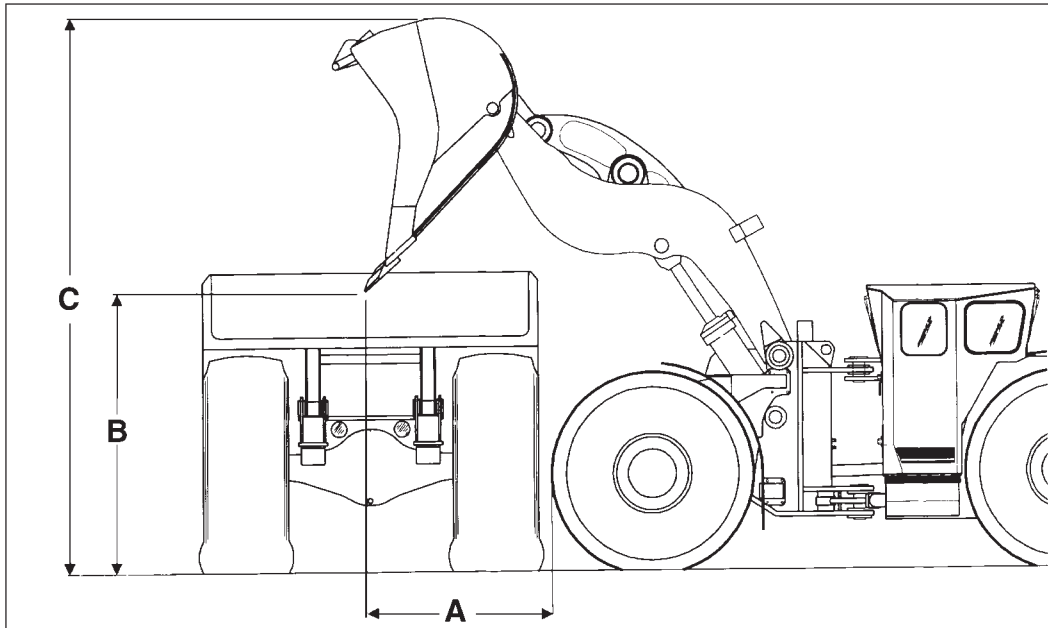

Loader	Target	A		B		C	
R1300		1637 mm	5'4"	1632 mm	5'4"	3525 mm	11'7"
R1600	<b>AD40 Series II</b>	1408 mm	4'7"	2213 mm	7'3"	4497 mm	14'9"
R1700G	<b>AD40 Series II</b>	1652 mm	5'5"	2490 mm	8'2"	4903 mm	16'1"
R1700G	<b>69D</b>	1652 mm	5'5"	2490 mm	8'2"	4903 mm	16'1"
R2900	<b>AD40 Series II</b>	1625 mm	5'4"	2855 mm	9'4"	5370 mm	17'7"
R2900	<b>69D</b>	1625 mm	5'4"	2855 mm	9'4"	5370 mm	17'7"
R2900	<b>73D</b>	1625 mm	5'4"	2855 mm	9'4"	5370 mm	17'7"

R1700G SUPA 14 and R2900 SUPA 20: For Load, Haul, Carry only @ rated load. Not truck loading @ rated load.

# HYDROMECHANICAL WORK TOOLS

## CONTENTS

### HYDRAULIC HAMMERS

Features:	
H45-H100	19-1
H115s-H180s	19-2
Applications	19-2
Tool selection	19-3
Specifications	19-5
Dimensions	19-7
Selection	19-8
Productivity	19-10

### MOBILE SHEARS

Features	19-13
Applications	19-13
Shearing capability table	19-13
Specifications	19-14
Matching guide	19-15

### CONCRETE PULVERIZERS

Features	19-16
Applications	19-16
Matching guide	19-16
Specifications	19-17

### CONCRETE CRUSHERS

Features	19-18
Applications	19-18
Matching guide	19-18
Specifications	19-19

### MULTI-PROCESSORS

Features	19-20
Applications	19-20
Matching guide	19-20
Jaw types	19-20
Specifications	19-21
Cutting capacity	19-24

## HYDRAULIC HAMMERS

### H45-H100 Hammer Features:

- **Low Pressure Accumulator** provides the energy for the piston power stroke.
- **Custom Side Plates** designed for Caterpillar carrier geometry. Protects power cell. Allows for complete folding of the boom on side-shift backhoes.
- **High Pressure Accumulator** dampens pressure peaks and pulsation, thus protecting carrier hydraulic system. Recovers rebound energy in hard material for greater impact power.
- **Distributor** has high oil volume for ultra high blow frequency.
- **Pressure Adjusting Valve** assures that all blows are delivered at a constant blow energy.
- **Long Heavy Piston** delivers maximum impact energy and minimizes recoil forces to carrier.
- **Long Front End** ensures proper piston — tool alignment.
- **Slip Fit Thrust Ring** dissipates harmful shock loads in abusive applications and is rotatable for additional life.
- **Slip Fit Upper Tool Bushing** is rotatable for additional life and provides positive tool alignment.
- **Slip Fit Lower Tool Bushing** provides positive tool alignment, is field replaceable and rotatable. Grease retention grooves provide extended lubrication and wear indication.
- **Sound suppressed** versions available for all models.



**H115s-H180s Hammer Features:**

- **Shock Mount** isolates forces to protect the carrier.
- **Integrally Mounted Accumulator** dampens pressure peaks inside the hammer to protect the carrier hydraulic system, and assist the piston in the power stroke.
- **Pressure Control Valve** allows hammer to strike with maximum fixed energy per blow.
- **Main Valve** directs the firing cycle and blocks the return port to protect the carrier hydraulics from pressure peaks.
- **Check Valve** maintains oil pressure in the accumulator when hammer is repositioned. This helps improve breaking efficiency (reduced waiting time).
- **Tie Rods** are heat torqued for easier tightening without torsion stresses.
- **Long Heavy Piston** minimizes recoil forces to protect hammer components and carrier structures.
- **Slip Fit Thrust Ring** dissipates shock loads in abusive applications and is rotatable for longer life.
- **Plastic Wear Plates** on all four sides guide the power cell within the housing.
- **Slip Fit Upper Tool Bushing** is rotatable for longer life and is replaceable. Guides the tool to optimize in-line piston/tool contact.
- **Slip Fit Sealed Lower Tool Bushing** provides positive tool alignment, is field replaceable and rotatable. It has grease retention grooves for extended lubrication and wear indication.
- **Sound Suppression** consists of housing noise dampening material, plugs and covers.
- **Autolube** available for all hammers.

**NOTE:** Internal components of hammers are machined to close tolerances and require clean oil with full lubricating properties. Hammers are sensitive to hot oil and need higher viscosity oil than the carrier. Hammers tend to shear multigrade mineral oil so that oil viscosity decreases. Contamination, water in oil, and decreased viscosity lead to earlier oil deterioration and the need for more frequent oil changes than normally recommended for the excavator. Extra care should be taken to avoid the entry of dust or dirt when installing or removing a hammer in the field.

**Hammer Applications**


- **Sewer and Water** — The hammer can be used on pockets of rock that slow down production. Also good for breaking up old concrete pipes, manholes, etc.
- **Road Construction** — An essential tool during improvements and upgrading. The hammer works well on removing existing curbs, traffic islands, ramps, or sections of concrete. With correct tool, it can cut asphalt.
- **Bridge Renewal** — Hammers are used to remove old bridge surfaces, railing supports, abutments, retaining walls, etc.
- **Demolition** — The hammer-equipped excavator is often a key helper in industrial demolition. It can break up fallen wall and floor sections as well as foundations, or other brick and concrete structures.
- **Mining and Aggregate** — Hammers can break oversized material to avoid secondary blasting, and size riprap. Hammers can be installed near crushers to prepare material for crushing.
- **Trenching/Primary Excavation** — In soft or layered materials, the hydraulic hammer with amoil or chisel point is an effective tool in excavation.
- **Direct Quarrying** — In many types of limestone, direct quarrying with hydraulic hammers can prove cost effective, especially where blasting is prohibited or restricted.

A hammer need not be full time attachment for these applications. It can be replaced by a bucket in a short time, allowing the machine to be used for digging, loading, lifting, or other tasks.

Consult your Caterpillar dealer for advice on correct sizing, installation and tool selection.

Standard Tools


Special Tools

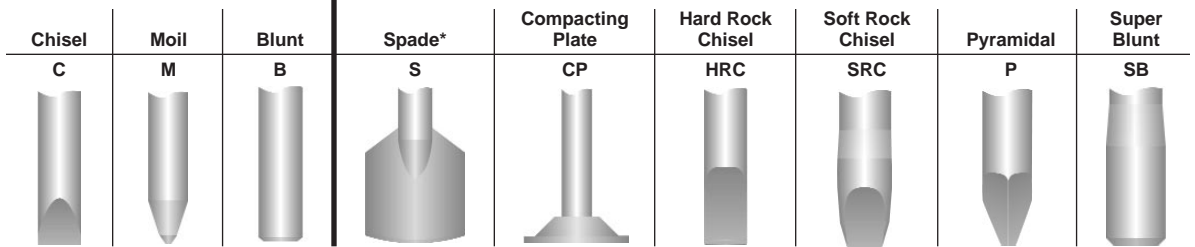

	H45 H45 s	H50 H50 s	H63 H63 s	H70 H70 s	H90C H90Cs	H100 H100 s	H115 s	H120Cs	H130 s	H140Cs	H160Cs	H180 s
<b>1. Roadbuilding/Construction</b>												
Breaking of road surface	S	S	S	S	C	C	C	C	SRC,C	SRC,C	SRC,C	SRC,C
Breaking uneven bedrock to lay a road						M,C	M,C	M,C	C,SRC, HRC	C,SRC, HRC	C,SRC, HRC	C,SRC, HRC
Primary Breaking to prepare road bed										C,SOC, HRC	C,SOC, HRC	C,SOC, HRC
Asphalt cutting to shape or area	S	S	S	S	S	S,C						
Trench excavation for drainage				C	C	M,C						
Demolition of bridges						M,C	M,C	M,C	C,SRC, HRC	C,M,B	C,M,B	C,M,B
Heavily reinforced bridge pillars										B,SB	B,SB	B,SB
Compacting soils	CP	CP	CP	CP								
Making holes (for traffic signs, lamp posts)					M	M						
Breaking of frozen ground		C,S	C,S	C,S	C,S	C,M	P,C	P,C	P,SRC, C	P,SRC, C	P,SRC, C	P,SRC, C
<b>2. Demolition/housing development</b>												
Demolition of concrete walls, roofs, floors	C,M	C,M	C,M	C,M	C,M	C,M	C,M,P	C,M,P	C,M,P SRC	C,M,P SRC	C,SRC, P	C,SRC, P
Demolition of light, reinforced concrete foundation (<0.5 m)	C,M	C,M	C,M	C,M	C,M	C,M	P	P	P,SRC			
Brick walls	C,M	C,M	C,M	C,M	C,M	C,M	C,M	C,M	C,SRC, HRC	C,SRC, HRC		
Rock trenches for mains/water supply/utilities					C,M	C,M	C,M	C,M	C,SRC, HRC			
Rock excavation for foundation						C,M	C,M	C,M	C,SRC, HRC	C,SRC, HRC	C,SRC, HRC	C,SRC, HRC
Mass excavation of rock for industrial building bases									C,SRC, HRC	C,SRC, HRC	C,SRC, HRC	C,SRC, HRC
Massive reinforced concrete foundations										P,SRC	P,SRC	P,SRC
Breaking of hard ground (not rock)					C,M	C,M	C,M	C,M	C,SRC	C,SRC		
Separating rebar from concrete (for recycling)				C,M	C,M	C,M	C,M	C,M	C,SRC	C,SRC	C,SRC	C,SRC

**Standard Tools**

**Special Tools**

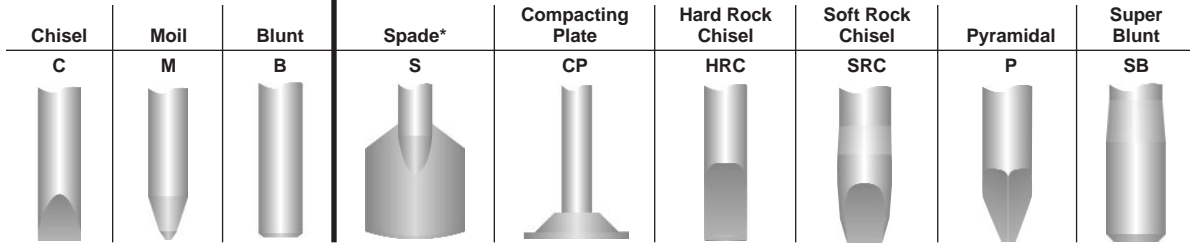

	H45 H45 s	H50 H50 s	H63 H63 s	H70 H70 s	H90C H90Cs	H100 H100 s	H115 s	H120Cs	H130 s	H140Cs	H160Cs	H180 s
<b>3. Quarrying/open cast mining</b>												
Secondary breaking of blasted rock							B	B	B,SB	B,SB	B,SB	B
Primary breaking of rock							C,M	C,M	C,SRC, HRC	C,SRC, HRC	C,SRC, HRC	C,SRC, HRC
Breaking oversizes on a crusher/feeder				M	M	B	B	B	B,SB	B,SB		
Breaking of oversizes on grizzly or feed chute					M	B	B	B	B,SB	B,SB		
Breaking of oversizes after blasting					M	B	B	B	B,SB	B,SB	B,SB	B,SB
<b>4. Underground applications</b>												
Trenching in tunnels								C,M	C,SRC, HRC	C,SRC, HRC	C,SRC, HRC	C,SRC, HRC
Scaling in tunnel roofs and walls				C	C	C						
<b>5. Metallurgical applications</b>												
Breaking of slag in casting ladles		C,M	C,M	C,M	C,M	C,M	M,C					
Breaking of slag in converter openings						C,M	M,C	M,C	M,C			
Cleaning of castings							M,C					
Breaking of massive steel slag											B,SB, HRC	B,SB, HRC
Breaking of aluminum electrolyze slag											B,HRC	B,HRC
Breaking of refractory linings in furnaces					C,M	C,M						
<b>6. Other applications</b>												
Rock breaking where blasting is restricted										C,SRC, HRC	C,SRC, HRC	C,SRC, HRC
Demolition under water							P	P	P			
Rock breaking under water										C,SRC, HRC	C,SRC, HRC	C,SRC, HRC

Model	H45/H45 s		H50/H50 s		H63/H63 s	
Working weight <sup>1</sup> :	130/140 kg	<b>286/308 lb</b>	200/220 kg	<b>440/484 lb</b>	300/315 kg	<b>660/693 lb</b>
Pin-on	—		—		275 kg	<b>605 lb</b>
Impact frequency <sup>2</sup>	<b>830-2500 bpm</b>		<b>450-1800 bpm</b>		<b>400-2000 bpm</b>	
Hammer operating pressure <sup>3</sup>	13 000 kPa	<b>1885 psi</b>	10 500 kPa	<b>1523 psi</b>	13 000 kPa	<b>1885 psi</b>
Carrier relief pressure <sup>4</sup>	21 000 kPa	<b>3045 psi</b>	21 000 kPa	<b>3045 psi</b>	21 000 kPa	<b>3045 psi</b>
Acceptable oil flow	20-50 L/min	<b>5-13 gpm</b>	20-70 L/min	<b>5-18 gpm</b>	20-100 L/min	<b>5-26 gpm</b>
Maximum back pressure	3000 kPa	<b>435 psi</b>	3000 kPa	<b>435 psi</b>	3000 kPa	<b>435 psi</b>
Low pressure	3100 kPa	<b>450 psi</b>	3500 kPa	<b>510 psi</b>	3100 kPa	<b>450 psi</b>
Oil temperature working range	-20°-+80°C	<b>-4°-+176°F</b>	-20°-+80°C	<b>-4°-+176°F</b>	-20°-+80°C	<b>-4°-+176°F</b>
Oil viscosity @ operating temperature	<b>20-1000 cSt</b>		<b>20-1000 cSt</b>		<b>20-1000 cSt</b>	
Line size (minimum)						
ID pressure	12 mm	<b>0.5"</b>	15 mm	<b>0.62"</b>	19 mm	<b>0.75"</b>
ID return	12 mm	<b>0.5"</b>	15 mm	<b>0.62"</b>	19 mm	<b>0.75"</b>
Certified CIMA tool energy*	137 J	<b>101 ft-lb</b>	198 J	<b>146 ft-lb</b>	372 J	<b>274 ft-lb</b>
Energy class	271 J	<b>200 ft-lb</b>	542 J	<b>400 ft-lb</b>	678 J	<b>500 ft-lb</b>

Model	H70/H70 s		H90C/H90Cs		H100/H100 s	
Working weight <sup>1</sup> :	425/430 kg	<b>935/946 lb</b>	590/600 kg	<b>1298/1320 lb</b>	820/830 kg	<b>1804/1826 lb</b>
Pin-on	370/400 kg	<b>815/880 lb</b>	480 kg	<b>1056 lb</b>	730 kg	<b>1605 lb</b>
Impact frequency <sup>2</sup>	<b>600-1800 bpm</b>		<b>500-1300 bpm</b>		<b>430-1100 bpm</b>	
Hammer operating pressure <sup>3</sup>	13 000 kPa	<b>1885 psi</b>	13 000 kPa	<b>1885 psi</b>	14 000 kPa	<b>2031 psi</b>
Carrier relief pressure <sup>4</sup>	21 000 kPa	<b>3045 psi</b>	21 000 kPa	<b>3045 psi</b>	21 000 kPa	<b>3045 psi</b>
Acceptable oil flow	50-150 L/min	<b>13-39 gpm</b>	60-150 L/min	<b>16-39 gpm</b>	60-120 L/min	<b>16-31 gpm</b>
Maximum back pressure	3000 kPa	<b>435 psi</b>	2000 kPa	<b>290 psi</b>	1000 kPa	<b>145 psi</b>
Low pressure	3900 kPa	<b>566 psi</b>	3300 kPa	<b>479 psi</b>	2700 kPa	<b>392 psi</b>
Oil temperature working range	-20°-+80°C	<b>-4°-+176°F</b>	-20°-+80°C	<b>-4°-+176°F</b>	-20°-+80°C	<b>-4°-+176°F</b>
Oil viscosity @ operating temperature	<b>20-1000 cSt</b>		<b>20-1000 cSt</b>		<b>20-1000 cSt</b>	
Line size (minimum)						
ID pressure	25 mm	<b>1"</b>	25 mm	<b>1"</b>	25 mm	<b>1"</b>
ID return	25 mm	<b>1"</b>	25 mm	<b>1"</b>	25 mm	<b>1"</b>
Certified CIMA tool energy*	622 J	<b>459 ft-lb</b>	735 J	<b>542 ft-lb</b>	1152 J	<b>850 ft-lb</b>
Energy class	1017 J	<b>750 ft-lb</b>	1356 J	<b>1000 ft-lb</b>	2034 J	<b>1500 ft-lb</b>

<sup>1</sup> Includes power cell, side plates/housing, average mounting bracket, where required, and standard tool.

<sup>2</sup> Approximate value, actual impact frequency depends on oil flow, oil viscosity, temperature, and material to be broken.

<sup>3</sup> Approximate value, operating pressure depends on oil flow, oil viscosity, temperature, material to be broken, and back pressure. Operating pressure is the result of correct low pressure adjustment.

<sup>4</sup> Approximate value, exact value depends on installation parameters.

\*Measured in accordance with the CIMA measuring guide for tool energy rating for hydraulic breakers developed by the Mounted Breaker Manufacturers Bureau of the Construction Industry Manufacturers Association (CIMA-MBMB).

Model	H115 s		H120Cs		H130 s	
Working weight <sup>1</sup>	1000 kg	<b>2200 lb</b>	1300 kg	<b>2870 lb</b>	1700 kg	<b>3740 lb</b>
Impact frequency <sup>2</sup>	<b>370-750 bpm</b>		<b>400-620 bpm</b>		<b>320-560 bpm</b>	
Hammer operating pressure <sup>3</sup>	14 000 kPa	<b>2031 psi</b>	14 000 kPa	<b>2031 psi</b>	14 000 kPa	<b>2031 psi</b>
Carrier relief pressure <sup>4</sup>	21 000 kPa	<b>3045 psi</b>	21 000 kPa	<b>3045 psi</b>	21 000 kPa	<b>3045 psi</b>
Acceptable oil flow	70-130 L/min	<b>18-34 gpm</b>	100-170 L/min	<b>26-45 gpm</b>	120-220 L/min	<b>31-53 gpm</b>
Maximum back pressure	1000 kPa	<b>145 psi</b>	1000 kPa	<b>145 psi</b>	1000 kPa	<b>145 psi</b>
Low pressure	—		—		—	
Oil temperature working range	-20°-+80°C	<b>-4°-+176°F</b>	-20°-+80°C	<b>-4°-+176°F</b>	-20°-+80°C	<b>-4°-+176°F</b>
Oil viscosity	<b>20-1000 cSt</b>		<b>20-1000 cSt</b>		<b>20-1000 cSt</b>	
Line size (minimum)						
ID pressure	25 mm	<b>1"</b>	25 mm	<b>1"</b>	32 mm	<b>1.25"</b>
ID return	25 mm	<b>1"</b>	25 mm	<b>1"</b>	32 mm	<b>1.25"</b>
Certified CIMA tool energy*	1481 J	<b>1092 ft-lb</b>	2884 J	<b>2127 ft-lb</b>	3739 J	<b>2758 ft-lb</b>
Energy class	3397 J	<b>2500 ft-lb</b>	4067 J	<b>3000 ft-lb</b>	4745 J	<b>3500 ft-lb</b>

Model	H140Cs		H160Cs		H180 s	
Working weight <sup>1</sup>	2530 kg	<b>5170 lb</b>	3150 kg	<b>6930 lb</b>	3800 kg	<b>8360 lb</b>
Impact frequency <sup>2</sup>	<b>270-480 bpm</b>		<b>300-480 bpm</b>		<b>370-520 bpm</b>	
Hammer operating pressure <sup>3</sup>	15 000 kPa	<b>2175 psi</b>	15 000 kPa	<b>2175 psi</b>	16 000 kPa	<b>2321 psi</b>
Carrier relief pressure <sup>4</sup>	22 000 kPa	<b>3190 psi</b>	22 000 kPa	<b>3190 psi</b>	21 000 kPa	<b>3045 psi</b>
Acceptable oil flow	160-230 L/min	<b>42-60 gpm</b>	210-310 L/min	<b>55-81 gpm</b>	220-300 L/min	<b>57-78 gpm</b>
Maximum back pressure	800 kPa	<b>116 psi</b>	800 kPa	<b>116 psi</b>	1000 kPa	<b>145 psi</b>
Low pressure	—		—		—	
Oil temperature working range	-20°-+80°C	<b>-4°-+176°F</b>	-20°-+80°C	<b>-4°-+176°F</b>	-20°-+80°C	<b>-4°-+176°F</b>
Oil viscosity	<b>20-1000 cSt</b>		<b>20-1000 cSt</b>		<b>20-1000 cSt</b>	
Line size (minimum)						
ID pressure	32 mm	<b>1.25"</b>	32 mm	<b>1.25"</b>	32 mm	<b>1.25"</b>
ID return	32 mm	<b>1.25"</b>	32 mm	<b>1.25"</b>	36 mm	<b>1.42"</b>
Certified CIMA tool energy*	4191 J	<b>3093 ft-lb</b>	5218 J	<b>3851 ft-lb</b>	5906 J	<b>4357 ft-lb</b>
Energy class	6779 J	<b>5000 ft-lb</b>	10 168 J	<b>7500 ft-lb</b>	14 913 J	<b>11,000 ft-lb</b>


<sup>1</sup> Includes power cell, side plates/housing, average mounting bracket, where required, and standard tool.

<sup>2</sup> Approximate value, actual impact frequency depends on oil flow, oil viscosity, temperature, and material to be broken.

<sup>3</sup> Approximate value, operating pressure depends on oil flow, oil viscosity, temperature, material to be broken, and back pressure. Operating pressure is the result of correct low pressure adjustment.

<sup>4</sup> Approximate value, exact value depends on installation parameters.

\*Measured in accordance with the CIMA measuring guide for tool energy rating for hydraulic breakers developed by the Mounted Breaker Manufacturers Bureau of the Construction Industry Manufacturers Association (CIMA-MBMB).

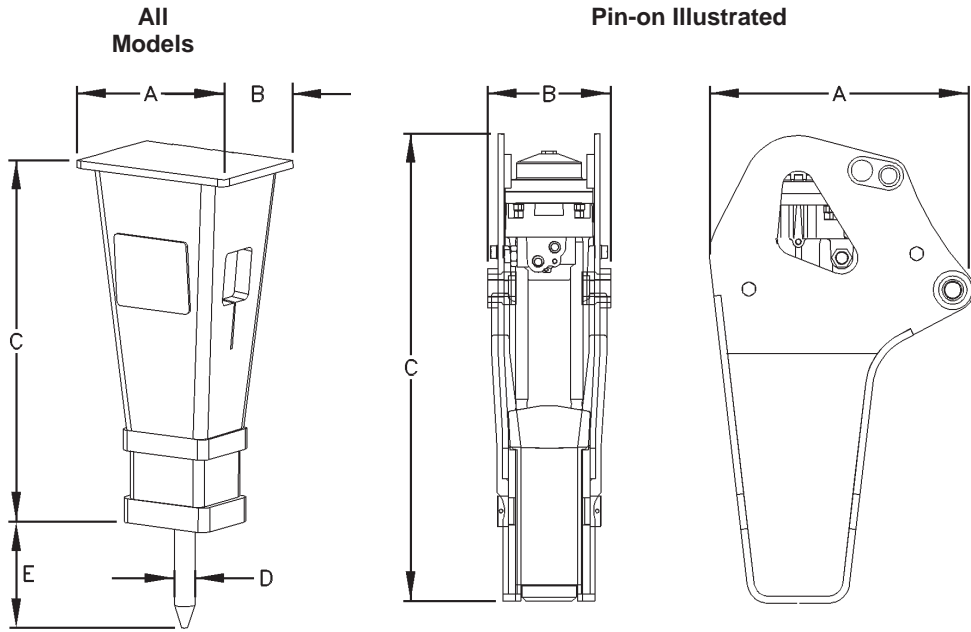

Model	A		B		C		D		E	
	mm	in	mm	in	mm	in	mm	in	mm	in
H180 s	730	28.7	730	28.7	2478	97.4	170	6.7	532	20.9
H160Cs	730	28.7	730	28.7	2326	91.4	160	6.3	632	24.8
H140Cs	585	23.0	540	21.3	2083	81.9	140	5.5	472	18.6
H130 s	585	23.0	540	21.3	1885	74.1	130	5.1	397	15.6
H120Cs	585	23.0	540	21.3	1783	70.1	115	4.5	357	14.1
H115 s	585	23.0	540	21.3	1625	63.9	106	4.2	390	15.4
H100	585	23.0	540	21.3	1397	54.9	95	3.7	459	18.1
H100 s	585	23.0	540	21.3	1394	54.8	95	3.7	459	18.1
H100 (pin-on)	633	24.9	426	16.7	1526	60.0	95	3.7	459	18.1
H90C	510	20.1	380	15.0	1286	50.6	84	3.3	417	16.4
H90Cs	520	20.5	400	15.7	1294	50.9	84	3.3	417	16.4
H90C (pin-on)	749	29.4	348	13.7	1325	52.1	84	3.3	417	16.4
H70	470	18.5	380	15.0	1134	44.6	70	2.8	402	15.8
H70 s	520	20.5	400	15.7	1150	45.3	70	2.8	390	15.3
H70 (pin-on)	690	27.1	348	13.7	1228	48.3	70	2.8	355	14.0
H70 s (pin-on)	797	31.3	348	13.7	1201	47.2	70	2.8	355	14.0
H63	470	18.5	380	15.0	1025	40.4	63	2.5	364	14.3
H63 s	440	17.3	380	15.0	1025	40.4	63	2.5	364	14.3
H50	340	13.4	280	11.0	925	36.4	50	2.0	261	10.3
H50 s	440	17.3	316	12.4	918	36.1	50	2.0	262	10.3
H45	340	13.4	280	11.0	775	30.5	45	1.8	262	10.3
H45 s	440	17.3	280	11.0	775	30.5	45	1.8	249	9.8

**Principles of Selection**

Key to the successful sale of a hammer is proper hammer selection.

**Background Information**

Collection of background information is the first step. The following information will assist in being sure the customer receives the correct hammer and that he has a positive hammer experience. The following issues should be examined.....

1. If any, what brand and model hammer was previously used and how did the hammer perform?
2. What % of time will the hammer be used on the machine?
3. Will the hammer be used in primary breaking or secondary breaking? (mainly an issue for large hammers)
4. What machine will the hammer be used on and what are the hydraulic flow and pressures of this machine?
5. What is the type of material to be broken and production required from the hammer? (best to obtain this from the end user but a table is available at the end of this section)

**Hammer Selection Process**

1. Using Cat carrier matching matrix on next page identify 2 or 3 possible hammers for your application (for competitive carriers use carrier weight class as reference).
2. Compare machine/carrier flow and pressures to those of the hammer candidates to validate compatibility. Eliminate hammers outside carrier specs.

3. Compare previous hammer energy rating and weight to candidate hammers..... if contractor had problems or marginal production with previous hammer consider a slightly larger hammer (note: only use CIMA energy rating and not a generic size class).
4. If hammer is to be used in primary breaking consider larger of hammer candidates.
5. Check productivity guidance tables at the back of this section. Identify hammer most compatible with requirements.
6. Determine if the application requires special hammer modifications, i.e. steel mill, underwater, tunneling, etc.

**Other Issues**

Once the hammer has been chosen, other elements need to be considered to have a successful hammer experience.

1. Select the correct hammer tool for the application (see tool application chart in this section).
2. Check to be sure the correct hammer bracket and hoses are specified. Be sure correct carrier oil is specified for hammer use (particularly important in high ambient areas).
3. Consider supplemental carrier cooling in areas of high ambient temperature.

Actual operating pressure and back pressure **MUST** be checked when the hammer is fitted to the carrier (just as important if the hammer goes on a competitive carrier or is installed by the contractor at his shop).

Model		H45/H45 s		H50/H50 s		H63/H63 s		H70/H70 s		H90C/H90Cs		H100/H100 s		H115 s		H120Cs		H130 s		H140Cs		H160Cs		H180 s	
		kg	lb	kg	lb	kg	lb	kg	lb	kg	lb	kg	lb	kg	lb	kg	lb	kg	lb	kg	lb	kg	lb	kg	lb
Min. Carrier		1300	2860	2500	5500	3000	6600	5000	11000	7000	15400	8000	17600	12000	26400	17000	37400	19000	41800	25000	55000	32000	70400	40000	88200
Max. Carrier		3200	7040	4500	9900	6500	14300	8000	17600	12000	26400	14000	30800	20000	44000	26000	57200	32000	70400	40000	88000	55000	121000	75000	166000
<b>Mini Excavator</b>																									
	301.5/301.6/301.8	●																							
	302.5	●		●																					
	303.5			●		●																			
	304.5					●																			
<b>Skid Steer</b>																									
	216			●		●																			
	226			●		●																			
	236					●																			
	246					●																			
<b>Backhoe Loader</b>																									
	416C					●		●		●															
	426C							●		●															
	428C							●		●															
	436C							●		●															
	438C							●		●															
	446B									●		●													
<b>300 HEX</b>																									
	307B							●		●															
	311B									●		●													
	312B									●		●		●											
	315B											●		●		●									
	317B											●		●											
	318B											●		●											
	M312											●		●											
	M315											●		●		●									
	M318													●		●									
	M320													●		●		●							
	320C													●		●		●							
	322B															●		●							
	325B															●		●		●					
	330B																●		●		●				
	345B																					●		●	
	350																						●		●
	365B																							●	
	375																							●	

These matches are for general reference purposes for Cat machines only. When special boom and quick coupler arrangements are in use, these matches may not apply. When matching hammers to competitive carriers, selection should be made by carrier weight. Refer to the carrier weight range at the top of the table in order to determine the correct match.









Hammer Models	Non-Reinforced Concrete		Reinforced Concrete		Sedimentary Rock		Volcanic Rock	
H45/H45 s	8-18 m <sup>3</sup>	<b>10-23 yd<sup>3</sup></b>	–		–		–	
H50/H50 s	12-20 m <sup>3</sup>	<b>16-26 yd<sup>3</sup></b>	–		–		–	
H63/H63 s	34-69 m <sup>3</sup>	<b>45-90 yd<sup>3</sup></b>	–		–		–	
H70/H70 s	65-107 m <sup>3</sup>	<b>85-140 yd<sup>3</sup></b>	19-46 m <sup>3</sup>	<b>25-60 yd<sup>3</sup></b>	–		–	
H90C/H90Cs	69-122 m <sup>3</sup>	<b>90-160 yd<sup>3</sup></b>	38-61 m <sup>3</sup>	<b>50-80 yd<sup>3</sup></b>	–		–	
H100/H100 s	96-214 m <sup>3</sup>	<b>125-280 yd<sup>3</sup></b>	99-134 m <sup>3</sup>	<b>130-175 yd<sup>3</sup></b>	84-191 m <sup>3</sup>	<b>110-250 yd<sup>3</sup></b>	42-99 m <sup>3</sup>	<b>55-130 yd<sup>3</sup></b>
H115 s	115-287 m <sup>3</sup>	<b>150-375 yd<sup>3</sup></b>	107-184 m <sup>3</sup>	<b>140-240 yd<sup>3</sup></b>	126-229 m <sup>3</sup>	<b>165-300 yd<sup>3</sup></b>	57-115 m <sup>3</sup>	<b>75-150 yd<sup>3</sup></b>
H120Cs	153-344 m <sup>3</sup>	<b>200-450 yd<sup>3</sup></b>	122-229 m <sup>3</sup>	<b>160-300 yd<sup>3</sup></b>	153-260 m <sup>3</sup>	<b>200-340 yd<sup>3</sup></b>	84-153 m <sup>3</sup>	<b>110-200 yd<sup>3</sup></b>
H130 s	210-375 m <sup>3</sup>	<b>275-490 yd<sup>3</sup></b>	153-268 m <sup>3</sup>	<b>200-350 yd<sup>3</sup></b>	191-306 m <sup>3</sup>	<b>250-400 yd<sup>3</sup></b>	103-210 m <sup>3</sup>	<b>135-275 yd<sup>3</sup></b>
H140Cs	–	–	–	–	229-535 m <sup>3</sup>	<b>300-700 yd<sup>3</sup></b>	115-268 m <sup>3</sup>	<b>150-350 yd<sup>3</sup></b>
H160Cs	–	–	–	–	268-688 m <sup>3</sup>	<b>350-900 yd<sup>3</sup></b>	153-459 m <sup>3</sup>	<b>200-600 yd<sup>3</sup></b>
H180 s	–	–	–	–	306-1223 m <sup>3</sup>	<b>400-1600 yd<sup>3</sup></b>	191-688 m <sup>3</sup>	<b>250-900 yd<sup>3</sup></b>

**Production rates listed are based on 8-hr shift**

The above figures are for general estimation purposes only and must not be used to guarantee any production figure to the customer. The actual working results may vary according to the quality and structure of the material to be broken, required degree of material size reduction, installation, condition of the carrier, conditions at the worksite, haulage of the broken material, skills of the operator etc.

The figures are for comparison and evaluation purposes only. Results will vary depending on operator, carrier and job conditions.

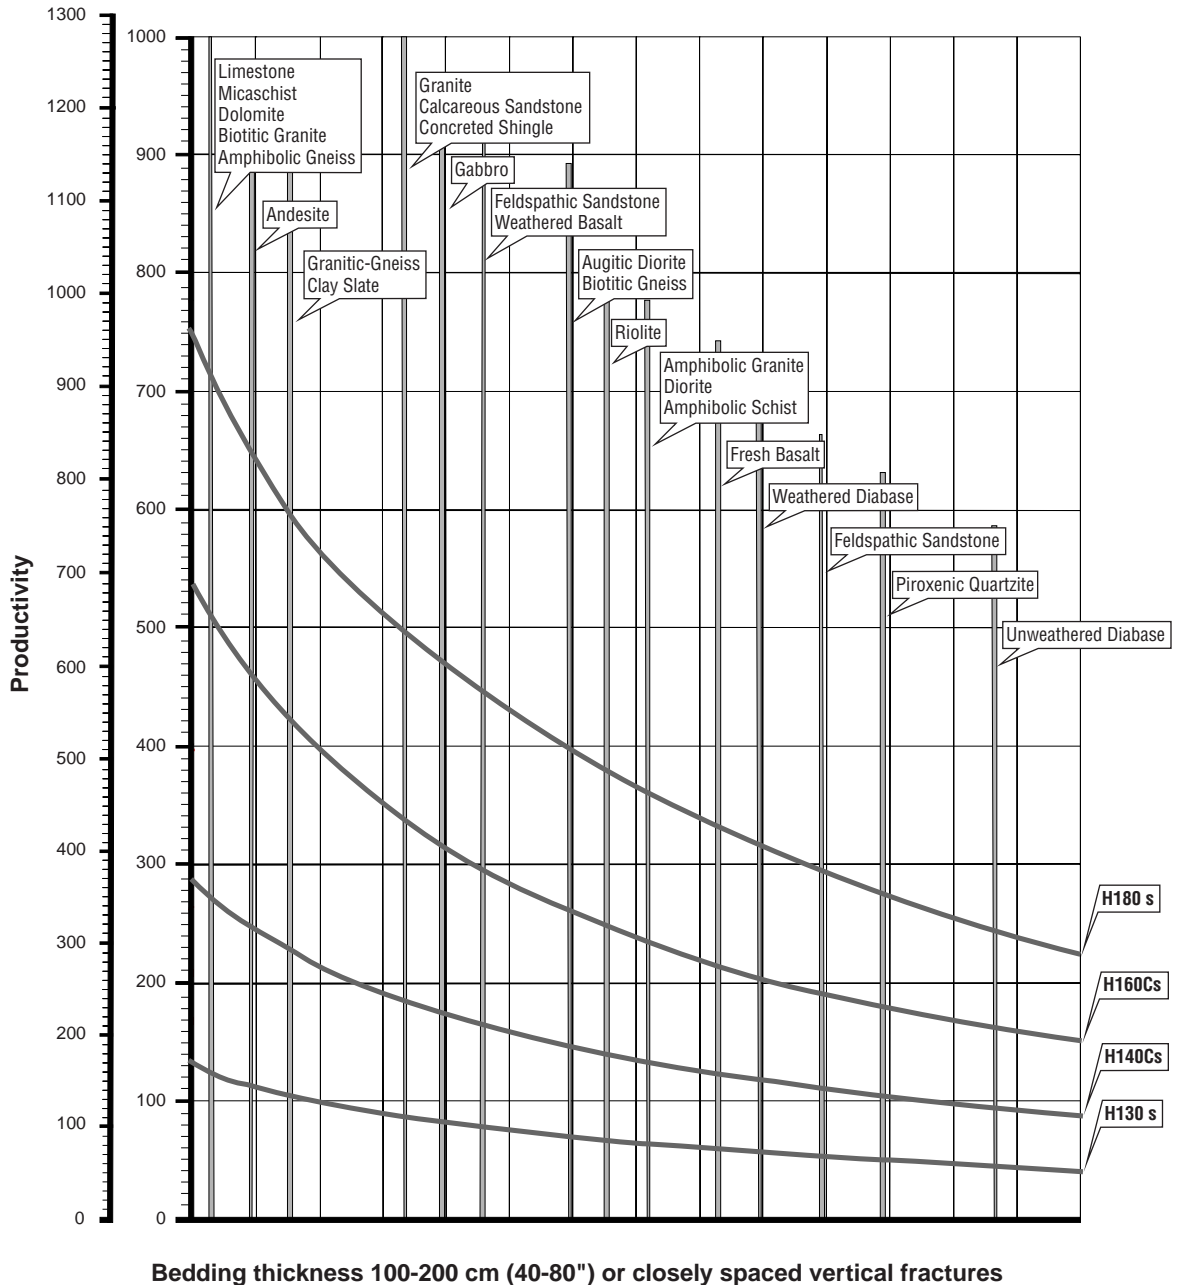

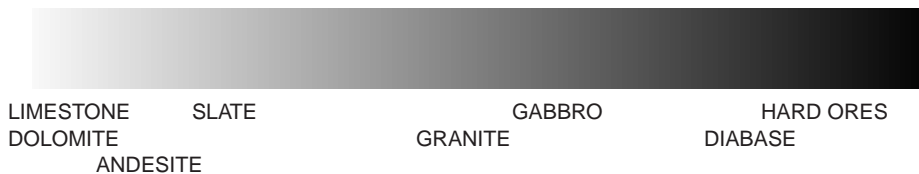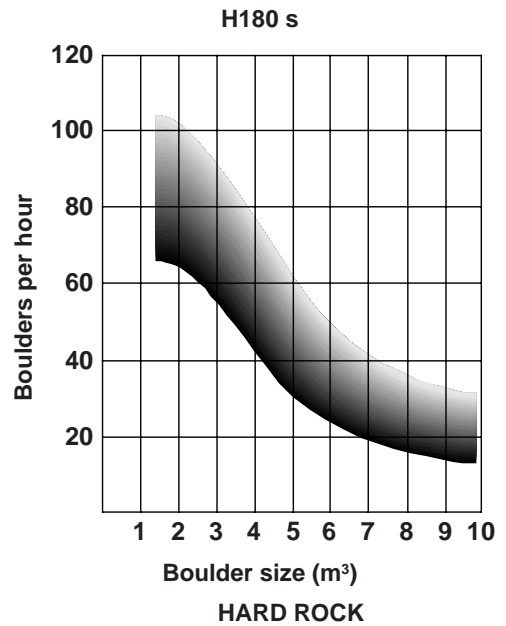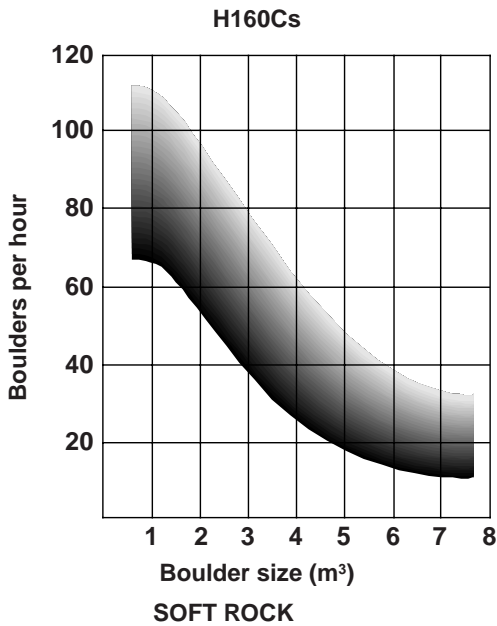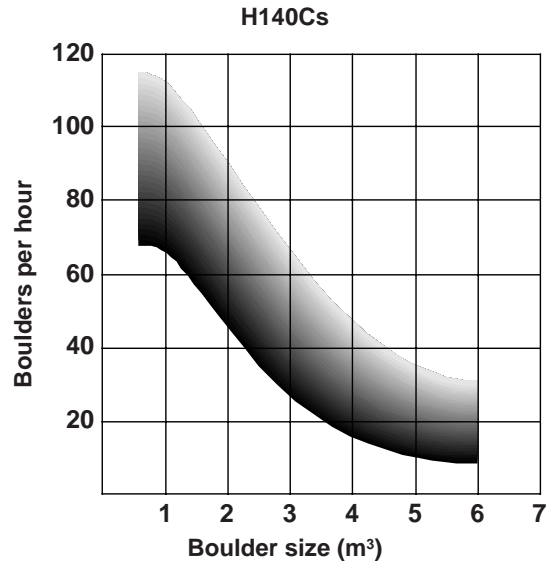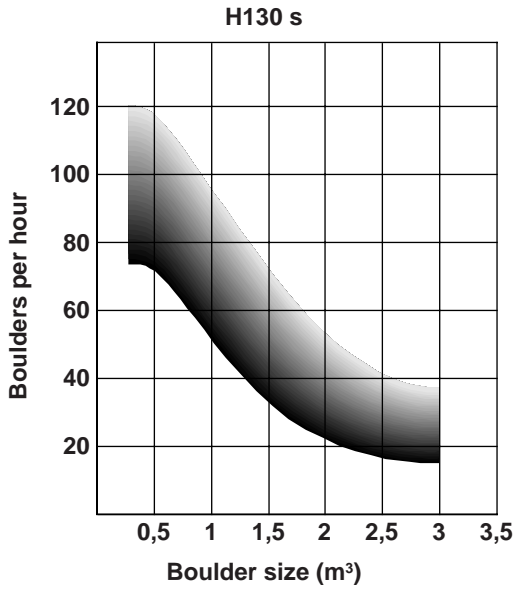

- Features
- Applications
- Shearing Capability Table


**MOBILE SCRAP AND DEMOLITION SHEARS**

**Features:**

- 180 degree side mounted rotation.
- Precision machined main bolt is field removable.
- 500 Brinell hardness wear plates throughout the upper and lower jaw.
- Hydraulic cylinder rod is protected. When activated the cylinder barrel is pushed out and the rod remains protected by the housing at all times.
- Transportation safety bars are designed to convert the shears to straight shears if the rotator is down for repair or overhaul.

**Applications:**

The Cat Mobile Scrap and Demolition Shears are widely used for demolishing steel structures, cutting up cars, trucks, farm machinery, railroad cars, large rubber tires, reinforced concrete structures, cables and scrap in general.



Model	S225		S230		S240		S250		S280		S2130	
	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
Narrow I-beams												
<b>A</b> Height	320	<b>12.6</b>	400	<b>15.7</b>	425	<b>16.7</b>	500	<b>19.7</b>	550	<b>21.7</b>	600	<b>23.6</b>
<b>B</b> Flange width	131	<b>5.2</b>	155	<b>6.1</b>	163	<b>6.4</b>	185	<b>7.3</b>	200	<b>7.9</b>	215	<b>8.5</b>
<b>C</b> Web thickness	11.5	<b>0.45</b>	14.4	<b>0.57</b>	15.3	<b>0.6</b>	18	<b>0.7</b>	19	<b>0.75</b>	21.6	<b>0.85</b>
<b>D</b> Flange thickness	17.3	<b>0.68</b>	21.6	<b>0.85</b>	23	<b>0.9</b>	27	<b>1.1</b>	30	<b>1.2</b>	32.4	<b>1.28</b>
Wide I-beams												
<b>A</b> Height	171	<b>6.7</b>	230	<b>9.1</b>	250	<b>9.8</b>	330	<b>13</b>	390	<b>15.4</b>	440	<b>17.3</b>
<b>B</b> Flange width	180	<b>7.1</b>	240	<b>9.4</b>	260	<b>10.2</b>	300	<b>11.8</b>	300	<b>11.8</b>	300	<b>11.8</b>
<b>C</b> Web thickness	6	<b>0.24</b>	7.5	<b>0.3</b>	7.5	<b>0.3</b>	9.5	<b>0.37</b>	11	<b>0.43</b>	11.5	<b>0.45</b>
<b>D</b> Flange thickness	9.5	<b>0.37</b>	12	<b>0.47</b>	12.5	<b>0.49</b>	16.5	<b>0.65</b>	19	<b>0.75</b>	21	<b>0.83</b>

The above profiles provide an indication of the shears relative cutting capability. The exact cutting dimensions depend on excavator operating pressure, the conditions of the shear knives and jaws and the steel's tensile strength.

**Technical Data** (All dimensions are approximate.)

<b>Model</b>	<b>S225</b>		<b>S230</b>		<b>S240</b>	
Approximate service weight excluding mounting bracket	2500 kg	<b>5520 lb</b>	3400 kg	<b>7500 lb</b>	5000 kg	<b>11,040 lb</b>
Length	3135 mm	<b>10'3"</b>	3590 mm	<b>11'9"</b>	4120 mm	<b>13'6"</b>
Jaw opening	533 mm	<b>21"</b>	530 mm	<b>21"</b>	710 mm	<b>28"</b>
Jaw depth	530 mm	<b>21"</b>	530 mm	<b>21"</b>	725 mm	<b>29"</b>
Primary cutter length	300 mm	<b>11.8"</b>	300 mm	<b>11.8"</b>	330 mm	<b>13"</b>
Maximum shear force throat/ primary blade center	3495/ 1800 kN	<b>393/202 st</b>	4620/ 2400 kN	<b>519/270 st</b>	6987/ 3538 kN	<b>785/398 st</b>
Maximum oil flow:						
Hydraulic cylinder	350 L/min	<b>92.6 gpm</b>	350 L/min	<b>92.6 gpm</b>	350 L/min	<b>92.6 gpm</b>
Maximum oil flow:						
Rotation	15 L/min	<b>4 gpm</b>	17 L/min	<b>4.5 gpm</b>	23 L/min	<b>6.1 gpm</b>
Maximum working pressure:						
Hydraulic cylinder	34 300 kPa	<b>4980 psi</b>	34 300 kPa	<b>4980 psi</b>	34 300 kPa	<b>4980 psi</b>
Rotation	20 200 kPa	<b>2900 psi</b>	20 200 kPa	<b>2900 psi</b>	20 200 kPa	<b>2900 psi</b>
Cycle time @ max. flow:						
Open		<b>1.2 sec</b>		<b>2.4 sec</b>		<b>5.0 sec</b>
Close		<b>3.5 sec</b>		<b>4.7 sec</b>		<b>8.3 sec</b>
Hydraulic rotation		<b>180°</b>		<b>180°</b>		<b>180°</b>
Approximate base machine operating weight:						
Boom	16 400 kg	<b>36,000 lb</b>	20 000 kg	<b>44,000 lb</b>	28 600 kg	<b>63,000 lb</b>
Stick	26 000 kg	<b>57,000 lb</b>	32 700 kg	<b>72,000 lb</b>	42 700 kg	<b>94,000 lb</b>

<b>Model</b>	<b>S250</b>		<b>S280</b>		<b>S2130</b>	
Approximate service weight excluding mounting bracket	5900 kg	<b>13,020 lb</b>	7500 kg	<b>16,560 lb</b>	12 300 kg	<b>27,200 lb</b>
Length	4430 mm	<b>14'6"</b>	5060 mm	<b>16'7"</b>	5835 mm	<b>19'2"</b>
Jaw opening	625 mm	<b>24.6"</b>	785 mm	<b>31"</b>	1060 mm	<b>41.8"</b>
Jaw depth	812 mm	<b>32"</b>	820 mm	<b>32.3"</b>	910 mm	<b>35.8"</b>
Primary cutter length	450 mm	<b>17.7"</b>	450 mm	<b>17.7"</b>	550 mm	<b>21.7"</b>
Maximum shear force throat/ primary blade center	8189/ 3580 kN	<b>920/402 st</b>	8809/ 4259 kN	<b>990/480 st</b>	11 931/ 5429 kN	<b>1340/610 st</b>
Maximum oil flow:						
Hydraulic cylinder	350 L/min	<b>92.6 gpm</b>	579 L/min	<b>153 gpm</b>	1000 L/min	<b>264 gpm</b>
Maximum oil flow:						
Rotation	31 L/min	<b>8.2 gpm</b>	53 L/min	<b>14 gpm</b>	47 L/min	<b>12.4 gpm</b>
Maximum working pressure:						
Hydraulic cylinder	34 300 kPa	<b>4980 psi</b>	34 300 kPa	<b>4980 psi</b>	34 300 kPa	<b>4980 psi</b>
Rotation	20 200 kPa	<b>2900 psi</b>	20 200 kPa	<b>2900 psi</b>	20 200 kPa	<b>2900 psi</b>
Cycle time @ max. flow:						
Open		<b>5.3 sec</b>		<b>3.3 sec</b>		<b>3.3 sec</b>
Close		<b>8.3 sec</b>		<b>6.9 sec</b>		<b>6.8 sec</b>
Hydraulic rotation		<b>180°</b>		<b>180°</b>		<b>180°</b>
Approximate base machine operating weight:						
Boom	33 700 kg	<b>74,000 lb</b>	41 800 kg	<b>92,000 lb</b>	75 000 kg	<b>165,000 lb</b>
Stick	54 500 kg	<b>120,000 lb</b>	80 000 kg	<b>176,000 lb</b>		<b>N/A</b>

## Matching Guide

### Stick Mounted/Reach Boom

Shear Model	Cat Excavator	Stick Range	
		m	ft
<b>S225</b>	320B	1.9	6'3"
	322B	2.5-3.6	8'2"-11'10"
	325B	2.0-4.2	6'7"-13'9"
	330B	2.15-4.8	7'1"-15'9"
<b>S230</b>	325B L	2.0-2.7	6'7"-8'10"
	330B L	2.15-3.9	7'1"-12'10"
	345B	2.9-4.8	9'6"-15'9"
	350 L	3.1-4.8	10'2"-15'9"
<b>S240</b>	345B	2.9-4.8	10'2"-12'2"
	350	3.1-3.7	9'6"-15'9"
<b>S250</b>	375	2.9-5.5	9'6"-18'1"
<b>S280</b>	375	2.9-3.4	9'6"-11'2"
	375*	2.9-4.4	9'6"-14'5"

\*GP Boom.

### Reach Boom Mounted

Shear Model	Cat Excavator
<b>S225</b>	315B
	318B
	320B
	322B
<b>S230</b>	320B
	322B
	325B
	330B
<b>S240</b>	325B
	330B
<b>S250</b>	330B
<b>S280</b>	345B
	350
<b>S2130</b>	375

**CONCRETE PULVERIZERS**

**Features:**

- Hydraulic cylinder rod is protected. When activated the cylinder barrel is pushed out and the rod remains protected by the housing at all times.
- Large diameter slewing ring powered by a hydraulic motor constitutes a rugged and fast 360 degree rotation system.
- P16 and P25 Pulverizers provide the optimum reach configuration. Fifteen replaceable teeth and two square shaped cutting knives.
- P20, P28, P40 and P60 provide the optimum productivity configuration. Twenty-one replaceable teeth with six replaceable square cutting knives.
- Patented staggered tooth design enhances crushing effectiveness of the jaws.
- Long powerful rebar cutters.

**Applications:**

Primary and secondary demolition in one operation. Ideal for reinforced concrete found in bridge decks, parking garages, support columns and abutments.

**Matching Guide**

**Stick Mounted/Reach Boom**

Pulverizer Model	Cat Excavator	Stick Range	
		m	ft
<b>P16</b>	320B	1.9-2.9	<b>6'3"-9'7"</b>
	322B	2.0-3.6	<b>6'7"-11'10"</b>
	325B	2.0-4.2	<b>6'7"-13'9"</b>
<b>P25</b>	325B	2.0-3.2	<b>6'7"-10'6"</b>
	330B	2.15-4.8	<b>7'1"-15'9"</b>
	345B	3.9-4.8	<b>12'10"-15'9"</b>
	350	4.05-4.8	<b>13'3"-15'9"</b>
<b>P28</b>	330B	2.15-3.3	<b>7'1"-10'10"</b>
	345B	3.9-4.8	<b>12'10"-15'9"</b>
	350	4.05-4.8	<b>13'3"-15'9"</b>
<b>P40</b>	345B	3.9-4.8	<b>12'10"-15'9"</b>
	350	3.1-3.7	<b>9'6"-12'2"</b>
	375	4.4-5.5	<b>14'5"-18'1"</b>
<b>P60</b>	375	2.9-4.4	<b>9'6"-14'5"</b>
	375*	2.9-4.4	<b>9'6"-14'5"</b>

\*GP Boom.

**Technical Data** (All dimensions are approximate.)

Model	P16		P25		P28	
Approximate service weight excluding mounting bracket	2030 kg	<b>4480 lb</b>	3000 kg	<b>6600 lb</b>	3500 kg	<b>7730 lb</b>
Length excluding mounting bracket	2280 mm	<b>89.8"</b>	2553 mm	<b>100.5"</b>	2625 mm	<b>103.4"</b>
Jaw width (fixed)	530 mm	<b>20.87"</b>	560 mm	<b>22.1"</b>	730 mm	<b>28.7"</b>
Jaw width (moving)	305 mm	<b>12"</b>	320 mm	<b>12.6"</b>	505 mm	<b>19.9"</b>
Jaw opening	750 mm	<b>29.5"</b>	900 mm	<b>35.4"</b>	850 mm	<b>33.5"</b>
Jaw depth	640 mm	<b>25.2"</b>	910 mm	<b>35.8"</b>	880 mm	<b>34.6"</b>
Maximum crushing force:						
Tooth — jaw's tip	735 kN	<b>83 st</b>	931 kN	<b>105 st</b>	880 kN	<b>99 st</b>
Tooth — throat	1235 kN	<b>139 st</b>	1509 kN	<b>170 st</b>	1973 kN	<b>222 st</b>
Maximum shearing force cutting blade middle (throat)	2110 kN	<b>237 st</b>	2990 kN	<b>336 st</b>	2853 kN	<b>320 st</b>
Maximum oil flow:						
Hydraulic cylinder	180 L/min	<b>48 gpm</b>	350 L/min	<b>93 gpm</b>	350 L/min	<b>93 gpm</b>
Cycle time*		<b>8.3 sec</b>		<b>5.7 sec</b>		<b>5.7 sec</b>
Rotation	20 L/min	<b>5 gpm</b>	20 L/min	<b>5 gpm</b>	20 L/min	<b>5 gpm</b>
Maximum working pressure:						
Hydraulic cylinder	34 300 kPa	<b>4980 psi</b>	34 300 kPa	<b>4980 psi</b>	34 300 kPa	<b>4980 psi</b>
Rotation	17 200 kPa	<b>2465 psi</b>	17 200 kPa	<b>2465 psi</b>	17 200 kPa	<b>2465 psi</b>
Hydraulic rotation continuous		<b>360°</b>		<b>360°</b>		<b>360°</b>
Approximate base machine operating weight	16 000 kg	<b>35,000 lb</b>	25 000 kg	<b>55,000 lb</b>	28 000 kg	<b>62,000 lb</b>

Model	P40		P60	
Approximate service weight excluding mounting bracket	5300 kg	<b>11,700 lb</b>	8300 kg	<b>18,320 lb</b>
Length excluding mounting bracket	2830 mm	<b>111.4"</b>	3250 mm	<b>128"</b>
Jaw width (fixed)	820 mm	<b>32.3"</b>	950 mm	<b>37.4"</b>
Jaw width (moving)	580 mm	<b>22.8"</b>	655 mm	<b>25.8"</b>
Jaw opening	1050 mm	<b>41.3"</b>	1150 mm	<b>45.3"</b>
Jaw depth	1080 mm	<b>42.5"</b>	1130 mm	<b>44.5"</b>
Maximum crushing force:				
Tooth — jaw's tip	1533 kN	<b>173 st</b>	1920 kN	<b>216 st</b>
Tooth — throat	3776 kN	<b>464 st</b>	4130 kN	<b>464 st</b>
Maximum shearing force cutting blade middle (throat)	5931 kN	<b>667 st</b>	5770 kN	<b>649 st</b>
Maximum oil flow:				
Hydraulic cylinder	579 L/min	<b>153 gpm</b>	579 L/min	<b>153 gpm</b>
Cycle time*		<b>6.9 sec</b>		<b>10.4 sec</b>
Rotation	20 L/min	<b>5 gpm</b>	20 L/min	<b>5 gpm</b>
Maximum working pressure:				
Hydraulic cylinder	34 300 kPa	<b>4980 psi</b>	34 300 kPa	<b>4980 psi</b>
Rotation	17 200 kPa	<b>2465 psi</b>	17 200 kPa	<b>2465 psi</b>
Hydraulic rotation continuous		<b>360°</b>		<b>360°</b>
Approximate base machine operating weight	40 000 kg	<b>88,000 lb</b>	70 000 kg	<b>154,000 lb</b>

\*Cycle time may vary due to machine configuration and operating conditions.



## CONCRETE CRUSHERS

### Features:

- Two powerful hydraulic cylinders protected from damage by the unique static rod design.
- Each crushing arm has two cutters and two crushing teeth.
- Replaceable cutters and teeth are bolted and tack welded to the jaw.
- Rebar cutters have four cutting edges.
- Large diameter slewing ring powered by a hydraulic motor constitutes a rugged and fast 360 degree rotation system.

### Applications:

Primary demolition where productivity is crucial, reinforced concrete structures with thick walls and large diameter columns. Also used on bridge decks, parking garages, support columns and abutments with a thickness of up to five feet.

## Matching Guide

### Stick Mounted/Reach Boom

Crusher Model	Cat Excavator	Stick Range	
		m	ft
<b>CR20</b>	320B	1.9-3.9	<b>6'3"-12'10"</b>
	322B	2.0-3.6	<b>6'7"-11'10"</b>
<b>CR28</b>	325B	2.0-3.2	<b>6'7"-10'6"</b>
	330B	2.15-3.9	<b>7'1"-12'10"</b>
	345B	4.8	<b>15'9"</b>
	350	4.8	<b>15'9"</b>
<b>CR35</b>	345B	2.9-3.9	<b>9'6"-12'10"</b>
	350	3.1-4.05	<b>10'2"-13'3"</b>
<b>CR50</b>	375	2.9-5.5	<b>9'6"-18'1"</b>
	375*	2.9-5.5	<b>9'6"-18'1"</b>

\*GP Boom.

**Technical Data** (All dimensions are approximate.)

<b>Model</b>	<b>CR20</b>		<b>CR28</b>		<b>CR35</b>		<b>CR50</b>	
Approximate service weight excluding mounting bracket	2300 kg	<b>5080 lb</b>	3100 kg	<b>6850 lb</b>	4200 kg	<b>9300 lb</b>	7000 kg	<b>15,450 lb</b>
Length excluding mounting bracket	2110 mm	<b>83"</b>	2320 mm	<b>91.3"</b>	2510 mm	<b>98.8"</b>	3440 mm	<b>135.4"</b>
Jaw opening (maximum)	720 mm	<b>28.3"</b>	915 mm	<b>36"</b>	1190 mm	<b>46.8"</b>	1600 mm	<b>63"</b>
Jaw depth	630 mm	<b>24.8"</b>	750 mm	<b>29.5"</b>	830 mm	<b>32.6"</b>	880 mm	<b>34.6"</b>
Maximum crushing force:								
Tip	719 kN	<b>81 st</b>	784 kN	<b>88 st</b>	833 kN	<b>93.6 st</b>	1628 kN	<b>183 st</b>
Middle tooth	882 kN	<b>99 st</b>	1088 kN	<b>122 st</b>	1128 kN	<b>127 st</b>	2100 kN	<b>236 st</b>
Maximum shearing force cutting center	2795 kN	<b>314 st</b>	3080 kN	<b>346 st</b>	4787 kN	<b>538 st</b>	6857 kN	<b>770 st</b>
Maximum oil flow:								
Hydraulic cylinder	180 L/min	<b>48 gpm</b>	350 L/min	<b>93 gpm</b>	350 L/min	<b>93 gpm</b>	579 L/min	<b>153 gpm</b>
Cycle time*	<b>7.3 sec</b>		<b>4.8 sec</b>		<b>6.2 sec</b>		<b>10.8 sec</b>	
Rotation	20 L/min	<b>5 gpm</b>	20 L/min	<b>5 gpm</b>	20 L/min	<b>5 gpm</b>	20 L/min	<b>5 gpm</b>
Maximum working pressure:								
Hydraulic cylinder	34 300 kPa	<b>4980 psi</b>	34 300 kPa	<b>4980 psi</b>	34 300 kPa	<b>4980 psi</b>	34 300 kPa	<b>4980 psi</b>
Rotation	17 200 kPa	<b>2465 psi</b>	17 200 kPa	<b>2465 psi</b>	17 200 kPa	<b>2465 psi</b>	17 200 kPa	<b>2465 psi</b>
Hydraulic rotation continuous	<b>360°</b>		<b>360°</b>		<b>360°</b>		<b>360°</b>	
Approximate base machine operating weight	20 000 kg	<b>44,000 lb</b>	28 000 kg	<b>62,000 lb</b>	35 000 kg	<b>77,000 lb</b>	50 000 kg	<b>110,000 lb</b>

\*Cycle time may vary due to machine configuration and operating conditions.

## Multi-Processors

- Features
- Applications
- Matching Guide
- Jaw Types

### MULTI-PROCESSORS

#### Features:

- **Wide selection** of interchangeable jaws.
- **Lifting eye placement** and adjustable stop bolts allow quick jaw changes.
- **Single, large diameter** cross mounted cylinder provides exceptional cutting and crushing force.
- **Jaws are manufactured** of high quality tool steel with outstanding tensile strength.
- **Non impact** tools that work at a relatively low noise level.

#### Applications:

The Cat Multi-Processors can be used to accomplish most tasks on a demolition job. One common housing with a wide selection of interchangeable jaws allows the tool to cut, crush or pulverize the toughest of materials. Highly reinforced concrete, structural steel beams, pipes, cable, steel plate and storage tanks.

### Matching Guide

#### Stick Mounted/Reach Boom

Multi-Processors Model	Cat Excavator	Stick Range	
		m	ft
<b>MP15</b>	320B	1.9-3.9	6'3"-12'10"
	322B	3.6	11'10"
<b>MP20</b>	322B	2.5-2.95	8'2"-9'8"
	325B	2.7-3.2	8'10"-10'6"
	330B	3.3-3.9	10'10"-12'10"

**Note:** Matching guide for all Multi-Processor and Jaw configurations. Tank Shear Jaws are not available for MP15.

### CATERPILLAR MULTI-PROCESSOR INTERCHANGEABLE JAWS

#### Concrete Cutter Jaws (CC)

- For precise demolition/cutting of heavily reinforced concrete structures.
- Cuts structural steel and pipe.
- Equipped with replaceable concrete crusher teeth and reversible steel cutting knives.

#### Shear Jaws (S)

- For demolition of steel structures.
- Cuts angle and channel iron, beams, pipe, rebar, cable and tires.
- Knives are reversible.

#### Tank Shear Jaws (TS)

- Quickly cuts steel plate on barges, railway cars, grain, water, oil, and fuel tanks. Dual knives on the moving and static jaws produce smooth, straight edges.
- All knives are reversible.
- Available for MP20 only.

#### Crusher Jaws (CR)

- For demolition of moderately reinforced concrete structures. Capable of crushing concrete and cutting rebar.
- Replaceable crusher teeth and reversible knives.

#### Primary Pulverizer Jaws (PP)

- Combines capability to demolish and recycle moderately reinforced concrete structures. Pulverizes concrete, cuts rebar and separates rebar from concrete.
- Replaceable crusher teeth and reversible knives.

#### Secondary Pulverizer Jaws (PS)

- Recycles demolished concrete by pulverizing concrete, separating concrete and rebar, and cutting rebar as needed.

**All jaw sets can be interchanged quickly with the lifting eyes and the adjustable stop-bolts on jaws and body.**

**Technical Data** (All dimensions are approximate.)

Model	MP15		MP20		MP15		MP20	
Jaw Type	PS		PS		PP		PP	
Weight total — housing, jaw & bracket	1850 kg	<b>4080 lb</b>	2650 kg	<b>5840 lb</b>	1900 kg	<b>4190 lb</b>	2750 kg	<b>6065 lb</b>
Weight of the jaw	700 kg	<b>1545 lb</b>	1050 kg	<b>2315 lb</b>	750 kg	<b>1655 lb</b>	1150 kg	<b>2535 lb</b>
Dimensions:								
Length	2250 mm	<b>88.6"</b>	2450 mm	<b>96.5"</b>	2220 mm	<b>87.4"</b>	2325 mm	<b>91.5"</b>
Height	1650 mm	<b>65"</b>	1900 mm	<b>74.8"</b>	1590 mm	<b>62.6"</b>	1775 mm	<b>69.9"</b>
Width	800 mm	<b>31.5"</b>	800 mm	<b>31.5"</b>	800 mm	<b>31.5"</b>	800 mm	<b>31.5"</b>
Jaw width (fixed)	440 mm	<b>17.3"</b>	500 mm	<b>19.7"</b>	480 mm	<b>18.9"</b>	540 mm	<b>21.3"</b>
Jaw width (moving)	310 mm	<b>12.2"</b>	360 mm	<b>14.2"</b>	280 mm	<b>11"</b>	340 mm	<b>13.4"</b>
Jaw opening	730 mm	<b>28.7"</b>	890 mm	<b>35"</b>	700 mm	<b>27.6"</b>	800 mm	<b>31.5"</b>
Jaw depth	670 mm	<b>26.4"</b>	800 mm	<b>31.5"</b>	700 mm	<b>27.6"</b>	800 mm	<b>31.5"</b>
Cutter length	200 mm	<b>7.9"</b>	200 mm	<b>7.9"</b>	200 mm	<b>7.9"</b>	200 mm	<b>7.9"</b>
Maximum crushing/shear force:								
Tooth — jaw tip	750 kN	<b>84 st</b>	1000 kN	<b>112 st</b>	650 kN	<b>73 st</b>	950 kN	<b>107 st</b>
At 2 <sup>nd</sup> tooth	1000 kN	<b>112 st</b>	1300 kN	<b>146 st</b>	900 kN	<b>101 st</b>	1300 kN	<b>146 st</b>
Primary blade center	2200 kN	<b>247 st</b>	3000 kN	<b>337 st</b>	2100 kN	<b>236 st</b>	2750 kN	<b>309 st</b>
Maximum oil flow:								
Hydraulic cylinder	150 L/min	<b>40 gpm</b>	200 L/min	<b>53 gpm</b>	150 L/min	<b>40 gpm</b>	200 L/min	<b>53 gpm</b>
Cycle time		<b>5 sec</b>		<b>6 sec</b>		<b>5 sec</b>		<b>6 sec</b>
Rotation	40 L/min	<b>11 gpm</b>	40 L/min	<b>11 gpm</b>	40 L/min	<b>11 gpm</b>	40 L/min	<b>11 gpm</b>
Maximum working pressure:								
Hydraulic cylinder	35 000 kPa	<b>5075 psi</b>	35 000 kPa	<b>5075 psi</b>	35 000 kPa	<b>5075 psi</b>	35 000 kPa	<b>5075 psi</b>
Rotation	14 000 kPa	<b>2030 psi</b>	14 000 kPa	<b>2030 psi</b>	14 000 kPa	<b>2030 psi</b>	14 000 kPa	<b>2030 psi</b>
Excavator size:								
Minimum	15 000 kg	<b>33,000 lb</b>	20 000 kg	<b>44,000 lb</b>	15 000 kg	<b>33,000 lb</b>	20 000 kg	<b>44,000 lb</b>
Maximum	25 000 kg	<b>55,000 lb</b>	35 000 kg	<b>77,000 lb</b>	25 000 kg	<b>55,000 lb</b>	35 000 kg	<b>77,000 lb</b>

**Technical Data** (All dimensions are approximate.)

<b>Model</b>	<b>MP15</b>		<b>MP20</b>		<b>MP15</b>		<b>MP20</b>	
<b>Jaw Type</b>	<b>CR</b>		<b>CR</b>		<b>S</b>		<b>S</b>	
Weight total — housing, jaw & bracket	1800 kg	<b>3970 lb</b>	2600 kg	<b>5730 lb</b>	1800 kg	<b>3970 lb</b>	2600 kg	<b>5730 lb</b>
Weight of the jaw	650 kg	<b>1430 lb</b>	1000 kg	<b>2205 lb</b>	650 kg	<b>1430 lb</b>	1000 kg	<b>2205 lb</b>
Dimensions:								
Length	2200 mm	<b>86.6"</b>	2350 mm	<b>92.5"</b>	2100 mm	<b>82.7"</b>	2250 mm	<b>88.6"</b>
Height	1510 mm	<b>59.4"</b>	1750 mm	<b>68.9"</b>	1310 mm	<b>51.6"</b>	1510 mm	<b>59.4"</b>
Width	800 mm	<b>31.5"</b>	800 mm	<b>31.5"</b>	800 mm	<b>31.5"</b>	800 mm	<b>31.5"</b>
Jaw width (fixed)	300 mm	<b>11.8"</b>	360 mm	<b>14.2"</b>	300 mm	<b>11.8"</b>	320 mm	<b>12.6"</b>
Jaw width (moving)	100 mm	<b>3.9"</b>	130 mm	<b>5.1"</b>	80 mm	<b>3.1"</b>	100 mm	<b>3.9"</b>
Jaw opening	710 mm	<b>28"</b>	850 mm	<b>33.5"</b>	350 mm	<b>13.8"</b>	420 mm	<b>16.5"</b>
Jaw depth	700 mm	<b>27.6"</b>	770 mm	<b>30.3"</b>	480 mm	<b>18.9"</b>	580 mm	<b>22.8"</b>
Cutter length	200 mm	<b>7.9"</b>	260 mm	<b>10.2"</b>	400 mm	<b>15.7"</b>	520 mm	<b>20.5"</b>
Maximum crushing/ shear force:								
Tooth — jaw tip	700 kN	<b>79 st</b>	950 kN	<b>107 st</b>	900 kN	<b>101 st</b>	1200 kN	<b>135 st</b>
At 2 <sup>nd</sup> tooth	950 kN	<b>107 st</b>	1350 kN	<b>152 st</b>	—	—	—	—
Primary blade center	2100 kN	<b>236 st</b>	2900 kN	<b>326 st</b>	2100 kN	<b>236 st</b>	2900 kN	<b>326 st</b>
At throat	—	—	—	—	4200 kN	<b>472 st</b>	5800 kN	<b>652 st</b>
Maximum oil flow:								
Hydraulic cylinder	150 L/min	<b>40 gpm</b>	200 L/min	<b>53 gpm</b>	150 L/min	<b>40 gpm</b>	200 L/min	<b>53 gpm</b>
Cycle time	<b>5 sec</b>		<b>6 sec</b>		<b>5 sec</b>		<b>6 sec</b>	
Rotation	40 L/min	<b>11 gpm</b>	40 L/min	<b>11 gpm</b>	40 L/min	<b>11 gpm</b>	40 L/min	<b>11 gpm</b>
Maximum working pressure:								
Hydraulic cylinder	35 000 kPa	<b>5075 psi</b>	35 000 kPa	<b>5075 psi</b>	35 000 kPa	<b>5075 psi</b>	35 000 kPa	<b>5075 psi</b>
Rotation	14 000 kPa	<b>2030 psi</b>	14 000 kPa	<b>2030 psi</b>	14 000 kPa	<b>2030 psi</b>	14 000 kPa	<b>2030 psi</b>
Excavator size:								
Minimum	15 000 kg	<b>33,000 lb</b>	20 000 kg	<b>44,000 lb</b>	15 000 kg	<b>33,000 lb</b>	20 000 kg	<b>44,000 lb</b>
Maximum	25 000 kg	<b>55,000 lb</b>	35 000 kg	<b>77,000 lb</b>	25 000 kg	<b>55,000 lb</b>	35 000 kg	<b>77,000 lb</b>

**Technical Data** (All dimensions are approximate.)

<b>Model</b>	<b>MP15</b>		<b>MP20</b>		<b>MP20</b>	
<b>Jaw Type</b>	<b>CC</b>		<b>CC</b>		<b>TS</b>	
Weight total — housing, jaw & bracket	1800 kg	<b>3970 lb</b>	2600 kg	<b>5730 lb</b>	2600 kg	<b>5730 lb</b>
Weight of the jaw	650 kg	<b>1430 lb</b>	1000 kg	<b>2205 lb</b>	1000 kg	<b>2205 lb</b>
Dimensions:						
Length	2200 mm	<b>86.6"</b>	2400 mm	<b>94.5"</b>	2400 mm	<b>94.5"</b>
Height	1510 mm	<b>59.4"</b>	1750 mm	<b>68.9"</b>	1750 mm	<b>68.9"</b>
Width	800 mm	<b>31.5"</b>	800 mm	<b>31.5"</b>	800 mm	<b>31.5"</b>
Jaw width (fixed)	300 mm	<b>11.8"</b>	360 mm	<b>14.2"</b>	290 mm	<b>11.4"</b>
Jaw width (moving)	100 mm	<b>3.9"</b>	130 mm	<b>5.1"</b>	120 mm	<b>4.7"</b>
Jaw opening	670 mm	<b>26.4"</b>	820 mm	<b>32.2"</b>	440 mm	<b>17.3"</b>
Jaw depth	670 mm	<b>26.4"</b>	790 mm	<b>31.1"</b>	460 mm	<b>18.1"</b>
Cutter length	400 mm	<b>15.8"</b>	460 mm	<b>18.1"</b>	460 mm	<b>18.1"</b>
Maximum crushing/ shear force:						
Tooth — jaw tip	700 kN	<b>79 st</b>	950 kN	<b>107 st</b>	—	—
Front cutter tip	1000 kN	<b>112 st</b>	1400 kN	<b>157 st</b>	—	—
Primary blade center	2200 kN	<b>247 st</b>	3000 kN	<b>337 st</b>	—	—
At tip	—	—	—	—	1400 kN	<b>157 st</b>
At jaw center	—	—	—	—	2200 kN	<b>247 st</b>
At throat	—	—	—	—	4400 kN	<b>494 st</b>
Cutting capacity plate steel	—	—	—	—	25 mm	<b>1"</b>
Maximum oil flow:						
Hydraulic cylinder	150 L/min	<b>40 gpm</b>	200 L/min	<b>53 gpm</b>	200 L/min	<b>53 gpm</b>
Cycle time		<b>5 sec</b>		<b>6 sec</b>		<b>6 sec</b>
Rotation	40 L/min	<b>11 gpm</b>	40 L/min	<b>11 gpm</b>	40 L/min	<b>11 gpm</b>
Maximum working pressure:						
Hydraulic cylinder	35 000 kPa	<b>5075 psi</b>	35 000 kPa	<b>5075 psi</b>	35 000 kPa	<b>5075 psi</b>
Rotation	14 000 kPa	<b>2030 psi</b>	14 000 kPa	<b>2030 psi</b>	14 000 kPa	<b>2030 psi</b>
Excavator size:						
Minimum	15 000 kg	<b>33,000 lb</b>	20 000 kg	<b>44,000 lb</b>	20 000 kg	<b>44,000 lb</b>
Maximum	25 000 kg	<b>55,000 lb</b>	35 000 kg	<b>77,000 lb</b>	35 000 kg	<b>77,000 lb</b>

**Cutting Capacity**





<b>Model</b>	<b>MP15</b>		<b>MP20</b>	
Narrow I-beams:				
Height	300 mm	<b>11.8"</b>	400 mm	<b>15.7"</b>
Flange width	150 mm	<b>5.9"</b>	180 mm	<b>7.1"</b>
Flange thickness	10.7 mm	<b>0.42"</b>	13.5 mm	<b>0.53"</b>
Web thickness	7.1 mm	<b>0.28"</b>	8.6 mm	<b>0.34"</b>
Wide I-beams:				
Height	190 mm	<b>7.5"</b>	250 mm	<b>9.8"</b>
Flange width	200 mm	<b>7.9"</b>	260 mm	<b>10.2"</b>
Flange thickness	10 mm	<b>0.39"</b>	12.5 mm	<b>0.49"</b>
Web thickness	6.5 mm	<b>0.26"</b>	7.5 mm	<b>0.3"</b>
Solid-round	65 mm	<b>2.6"</b>	80 mm	<b>3.3"</b>
Solid-square	60 mm	<b>2.4"</b>	70 mm	<b>2.8"</b>

The above profiles provide an indication of the shear's cutting capability. The exact cutting dimensions depend on excavator size, the conditions of the cutters and jaws and the tensile strength of the steel.

# ENGINES

## CONTENTS

Design data .....	20-2
Rating explanations .....	20-2
Industrial Diesel Engines .....	20-3
Underground Mining Diesel Engines .....	20-7
Fire Pump Engines .....	20-9
Industrial Gaseous Fueled Engines .....	20-10
Generator Sets — Diesel — 50 Hz .....	20-12
Generator Sets — Diesel — 60 Hz .....	20-13
Olympian Generator Sets .....	20-14
Generator Sets — Gaseous Fueled .....	20-15
Marine Propulsion — Rating Levels .....	20-17
Marine Generator Sets .....	20-20
Truck Diesel Engines .....	20-22

	TYPE	NO. OF MODELS	RANGE
	<b>Diesel</b>	20	46 to 4920 kW 62 to 6600 hp EPA Certified
	<b>Gaseous Fueled</b>	13	41 to 3509 kW 55 to 4705 hp EPA Certified
<b>GENERATOR SETS</b>			50 HZ-kV•A w/fan Prime-112 to 2250 Standby-125 to 2500
	<b>Diesel High Speed</b>	15	60 HZ-kW w/fan Prime-113 to 1825 Standby-125 to 2000
	<b>Diesel Medium Speed</b>		50 HZ-kV•A w/o fan 2200 to 9310 60 HZ-kW w/o fan 1650 to 7160
	<b>Gaseous Fueled</b>	12	50 HZ-kV•A w/o fan Continuous-105 to 4020 60 HZ-kW w/o fan Continuous-85 to 3285
<b>OLYMPIAN GENERATOR SETS*</b>			50 HZ-kV•A Prime-6 to 200 Standby-8 to 220
	<b>Diesel</b>		60 HZ-kW Prime-6 to 180 Standby-8 to 200
	<b>Gaseous Fueled</b>		50 HZ-kV•A Prime-6 to 90 Standby-12 to 100 60 HZ-kW Prime-6 to 90 Standby-12 to 100
<b>MARINE</b>			
	<b>Propulsion</b>	17	63 to 7200 kW 85 to 9655 hp
	<b>Generator Sets</b>	12	50 HZ kV•A 63 to 6500 Prime 60 HZ-kW 65 to 4840 Prime
<b>TRUCK</b>			
	<b>Diesel</b>	9	131 to 448 kW 175 to 600 hp EPA, CARB and Canadian certified

\*Olympian Generator Sets are manufactured exclusively for Caterpillar dealers.



**DESIGN DATA****Diesel Engines**

*Bearings* — Precision-type steel-backed aluminum alloy with lead-tin overlay copper bonded to bearing surface. High load carrying ability and exceptional fatigue strength.

*Block* — Cast from high tensile strength grey iron. Internal ribbing provides added strength.

*Cooling* — Built-in, gear driven centrifugal pump (belt driven for 3116 and 3208) circulates jacket water through engine at all times. Water temperature is thermostatically controlled. Heat exchangers and radiators are available.

*Crankshaft* — Forged steel, dynamically balanced, heat treated and superfinished.

*Cylinder Liners* — Internal surface induction hardened (1.7 L, 3300, 3400, 3500 and 3600 Families) for excellent wear life. Full-length watercooled for efficient heat transfer.

*Fuel System* — Adjustment free for reduced engine maintenance, individual fuel injection pumps have built-in calibration — no adjustment required after fuel nozzle replacement (1.7 L, 1.9 L, 3406E, 3456, 3500 and 3600 families have unit injectors). 3126, 3408E and 3412E use the Caterpillar Hydraulic Electronic Fuel Injection (HEUI) system.

*Governor* — Hydra-mechanical (Woodward 3161 on 3500 and 3600 Families) for reliability, good response and smooth, stable load changes. Electronically controlled engines use Caterpillar proprietary software and hardware.

*Lubrication* — Positive displacement gear pump maintains continuous flow of lubricant under pressure to all moving parts. Full-flow filtration is provided by replaceable cellulose filters. Watercooled oil cooler maintains proper oil temperature.

*Pistons* — Three-ring design (two-ring on 3208) reduces friction, provides excellent oil control, and increases engine efficiency.

*Starting* — Electric and air starting systems are offered for most models.

*Valves* — Hardened steel alloy. Valves rotate 3° each time they lift to seat in a new position and allow even heat distribution (except for 3116).

**Gaseous Fueled Engines**

*Combustion System* — The piston design and compression ratios available provide the ability to utilize a wide variety of gaseous fuels as well as provide low emission output (below 2.0 grams/bhp-hr  $\text{NO}_x$ ).

*Fuel System* — Heavy-duty, industrial-type carburetors designed to maintain optimum air-fuel ratio at all loads and speeds.

*Ignition System* — Caterpillar Gaseous Fueled Engines employ a low tension magneto, together with an ignition transformer (one at each cylinder), to provide up to 34 kV to spark plugs. The Cat Electronic Ignition system is also available on certain engines.

**RATING EXPLANATIONS**

All engine ratings listed include such standard accessories as air cleaner and fuel, lube, and jacket water pumps. Power required for auxiliaries such as cooling fans, air compressors, charging alternators, special pumps, etc., must be deducted to arrive at the net power available to drive the load (except as noted). Other ratings are available for specific application and customer requirements, i.e., locomotive, oil field, fire pump, irrigation, etc. Consult your Caterpillar Dealer.

**Rating Conditions**

Performance is based on SAE J1995 standard conditions of 100 kPa (29.61 in Hg) and 25°C (77°F). Performance also applies at ISO 3046/1 (except for Spark Ignited Engines), DIN 6271 and BS 5514 standard conditions of 100 kPa (29.61 in Hg), 27°C (81°F) and 60% relative humidity.

Fuel consumption is based on fuel oil having an LHV of 42 780 kJ/kg (18,390 Btu/lb) and weighing 838.9 g/liter (7.001 lb/U.S. gal). All ratings are based on distillate fuel.

**Altitude and Temperature Capabilities**

*Industrial Diesel Engines* — Most intermittent and continuous ratings are applicable to at least 1320 m (5000 ft) elevation without derating. Consult factory for specific applications.

*Gaseous Fueled Engines* — Ratings for turbocharged and aftercooled engines are generally applicable to 1500 m (5000 ft). Naturally aspirated engines are applicable to 150 m (500 ft).

*Diesel Truck Engines* — Refer to specification sheets for altitude capability of individual truck engine ratings.

Cat Diesel Engines for Industrial Applications

Model Type	"Ind A" Continuous			"Ind B"			"Ind C" Intermittent			"Ind D"			"Ind E"			EPA Certified
	kW	hp	rpm	kW	hp	rpm	kW	hp	rpm	kW	hp	rpm	kW	hp	rpm	
3003 DINA	—	—	—	—	—	—	15	20	2800	—	—	—	—	—	—	X
3003 DINA	—	—	—	—	—	—	18	24	3600	—	—	—	—	—	—	X
3003 DINA	—	—	—	—	—	—	18	24	3600	—	—	—	—	—	—	X
3013 DINA	—	—	—	—	—	—	24	32	2800	—	—	—	—	—	—	X
3024 DINA	—	—	—	—	—	—	37	50	2800	—	—	—	—	—	—	X
3034 DINA	—	—	—	—	—	—	47	63	2600	—	—	—	—	—	—	X
3054 DINA	47	63	2200	—	—	—	52	70	2200	—	—	—	—	—	—	X
3054 DINA	56	76	2400	—	—	—	65	87	2600	—	—	—	—	—	—	
3054B DITA	58	77	2200	—	—	—	64	86	2400	—	—	—	—	—	—	
3054 DIT	72	96	2400	—	—	—	83	111	2600	—	—	—	—	—	—	
3054 DIT	73	97	2400	—	—	—	81	108	2400	—	—	—	—	—	—	X
3054 DITA	86	110	2300	—	—	—	91	122	2300	—	—	—	—	—	—	X
3056 DINA	77	103	2500	—	—	—	86	115	2500	—	—	—	—	—	—	X
3056 DINA	84	114	2400	—	—	—	96	129	2600	—	—	—	—	—	—	
3056 DIT	101	135	2500	—	—	—	112	150	2500	—	—	—	—	—	—	X
3056 DIT	105	140	2400	—	—	—	119	159	2600	—	—	—	—	—	—	
3056 DITA	119	160	2400	—	—	—	135	181	2600	—	—	—	—	—	—	
3056 DITA	121	162	2500	—	—	—	134	180	2500	—	—	—	—	—	—	X
3116 DIT	—	—	—	86	115	1800	—	—	—	—	—	—	—	—	—	X
3116 DIT	—	—	—	86	115	1800	—	—	—	—	—	—	—	—	—	
3116 DITA	—	—	—	97	130	1800	—	—	—	—	—	—	—	—	—	X
3116 DITA	—	—	—	97	130	1800	—	—	—	—	—	—	—	—	—	
3116 DIT	97	130	2200	105	140	2200	108	145	2200	119	160	2200	119	160	2200	X
3116 DIT	97	130	2200	105	140	2200	108	145	2200	119	160	2200	119	160	2200	
3116 DIT	104	140	2400	112	150	2400	116	155	2400	123	165	2400	123	165	2400	X
3116 DIT	104	140	2400	112	150	2400	116	155	2400	123	165	2400	123	165	2400	
3116 DITA	104	140	2200	112	150	2200	119	160	2200	142	190	2200	142	190	2200	X
3116 DITA	104	140	2200	112	150	2200	119	160	2200	146	195	2200	—	—	—	
3116 DITA	—	—	—	119	160	1800	—	—	—	—	—	—	—	—	—	
3116 DIT	—	—	—	—	—	—	127	170	2600	127	170	2600	127	170	2600	X
3116 DIT	—	—	—	—	—	—	127	170	2600	134	180	2600	134	180	2600	
3116 DITA	—	—	—	119	160	1800	134	180	1800	—	—	—	—	—	—	X
3116 DITA	112	150	2400	123	165	2400	131	175	2400	149	200	2400	140	200	2400	X
3116 DITA	112	150	2400	123	165	2400	131	175	2400	157	210	2400	—	—	—	
3116 DITA	—	—	—	—	—	—	142	190	2600	142	190	2600	142	190	2600	X
3116 DITA	—	—	—	—	—	—	142	190	2600	142	190	2600	142	190	2600	
3116 DITA	131	175	2200	138	185	2200	145	195	2200	153	205	2200	153	205	2200	X
3116 DITA	131	175	2200	138	185	2200	145	195	2200	164	220	2200	164	220	2200	
3116 DITA	142	190	2400	149	200	2400	157	210	2400	157	210	2400	157	210	2400	X
3116 DITA	142	190	2400	149	200	2400	157	210	2400	172	230	2400	172	230	2400	
3116 DITA	—	—	—	—	—	—	164	220	2600	164	220	2600	164	220	2600	X
3116 DITA	—	—	—	—	—	—	172	230	2600	—	—	—	—	—	—	
3116 DITA	—	—	—	—	—	—	194	260	2600	201	270	2600	201	270	2600	
3116 ATAAC	—	—	—	—	—	—	205	275	2450	—	—	—	—	—	—	X
3126 DITA	—	—	—	—	—	—	186	250	2500	186	250	2500	186	250	2500	X
3126 DITA	—	—	—	—	—	—	194	260	2600	194	260	2600	194	260	2600	X
3126 DITA	160	215	2200	172	230	2200	179	240	2200	186	250	2200	190	255	2200	X
3126 DITA	164	220	2400	172	230	2400	179	240	2400	190	255	2400	194	260	2400	X
3176C ATAAC	231	310	2100	250	335	2100	272	365	2100	291	390	2100	317	425	2100	X
3196 ATAAC	276	370	2100	298	400	2100	317	425	2100	339	455	2100	373	500	2100	X
3208 DINA	93	125	2400	112	150	2400	131	175	2800	*	*	*	*	*	*	
3208 DIT	112	150	1800	—	—	—	157	210	2800	—	—	—	—	—	—	X
3208 DINA	112	150	2400	131	175	2400	157	210	2800	*	*	*	*	*	*	

DINA — Direct Injection Naturally Aspirated  
DIT — Direct Injection Turbocharged  
DITA — Direct Injection Turbocharged-Aftercooled  
ATAAC — Air-to-air Aftercooled

(Continued on next page)

## Cat Diesel Engines for Industrial Applications (cont'd)

Model Type	"Ind A" Continuous			"Ind B"			"Ind C" Intermittent			"Ind D"			"Ind E"			EPA Certified
	kW	hp	rpm	kW	hp	rpm	kW	hp	rpm	kW	hp	rpm	kW	hp	rpm	
3208 DIT	119	160	2200	119	160	2200	123	165	2200	131	175	2200	138	185	2200	X
3208 DIT	142	190	2400	142	190	2400	149	200	2400	157	210	2400	164	220	2400	X
3208 DIT	149	200	2400	168	225	2400	187	250	2600	*	*	*	*	*	*	
3208 DIT	149	200	2400	—	—	—	168	225	2600	*	*	*	*	*	*	
3208 DIT	—	—	—	—	—	—	187	250	2600	194	260	2600	194	260	2600	X
3208 DIT	172	230	2400	183	245	2400	205	275	2600	213	285	2600	220	295	2600	
3208 DITA	183	245	2400	183	245	2400	224	300	2600	224	300	2400	224	300	2400	X
3208 ATAAC	187	250	2200	187	250	2200	187	250	2200	209	280	2200	209	280	2200	X
3208 ATAAC	205	275	2400	209	280	2400	224	300	2600	235	315	2600	246	330	2600	
3208 ATAAC	224	300	2400	224	300	2400	224	300	2400	235	315	2400	235	315	2400	X
3208 ATAAC	—	—	—	—	—	—	231	310	2600	246	330	2600	246	330	2600	X
3304 DINA	63	85	2000	67	90	2000	75	100	2200	—	—	—	82	110	2200	
3304 PCNA	63	85	2000	—	—	—	75	100	2200	—	—	—	—	—	—	
3304 DIT	93	125	2000	112	150	2000	123	165	2200	131	175	2200	138	185	2200	
3304 PCT	93	125	2000	—	—	—	123	165	2200	—	—	—	—	—	—	
3306 DINA	93	125	2000	101	135	2000	112	150	2200	119	160	2200	127	170	2200	
3306 PCNA	93	125	2000	—	—	—	112	150	2200	—	—	—	—	—	—	
3306 DIT	116	155	2000	131	175	2000	149	200	2200	*	*	*	*	*	*	
3306 DIT	127	170	2000	149	200	2000	168	225	2200	*	*	*	*	*	*	
3306 DIT	142	190	2000	157	210	2000	168	225	2200	160	215	2200	160	215	2200	X
3306 DIT	142	190	2000	168	225	2000	187	250	2200	—	—	—	—	—	—	
3306 PCT	142	190	2000	—	—	—	187	250	2200	—	—	—	—	—	—	
3306 DITA	157	210	2000	172	230	2000	186	250	2200	198	265	2200	205	275	2200	X
3306 PCTA	160	215	2000	—	—	—	201	270	2200	—	—	—	—	—	—	
3306 DITA	194	260	2000	205	275	2000	224	300	2200	231	310	2200	243	325	2200	
3306 DITA	205	275	2000	220	295	2000	242	325	2200	246	330	2200	250	335	2200	X
3306 DITA	205	275	2000	216	290	2000	224	300	2200	239	320	2200	250	335	2200	X
3306 DITA	205	275	2000	220	295	2000	242	325	2200	246	330	2200	250	335	2200	
3406C DITA	199	267	1300	—	—	—	199	267	1300	—	—	—	—	—	—	
3406C DIT	201	270	1800	224	300	2000	242	325	2100	283	380	2100	291	390	2100	
3406C DITA	205	275	1800	242	325	2000	269	360	2100	313	420	2100	336	450	2100	
3406C DITA	242	325	1800	276	370	2000	298	400	2100	358	480	2100	373	500	2100	
3406C DITA	257	345	1800	254	340	2000	250	335	2100	—	—	—	—	—	—	X
3406C DITA	268	360	1800	268	360	2000	269	360	2100	298	400	2100	324	435	2100	X
3406C PCTA	—	—	—	—	—	—	280	375	2100	—	—	—	—	—	—	
3406C DITA	280	375	1800	291	390	2000	298	400	2100	324	435	2100	362	485	2100	X
3406C DITA	287	385	1800	328	440	2000	343	460	2100	373	500	2100	384	515	2100	X
3406C DITA	313	420	1800	328	440	2000	343	460	2100	384	515	2100	392	525	2100	
3406E ATAAC	317	425	1800	317	425	2000	336	450	2100	—	—	—	—	—	—	X
3406E ATAAC	—	—	—	—	—	—	392	525	2100	421	565	2100	429	575	2100	X
3408 DITA	238	319	1200	—	—	—	261	350	1200	—	—	—	—	—	—	
3408 DIT	242	325	1800	272	365	2000	317	425	2100	339	455	2100	358	480	2100	
3408 PCTA	—	—	—	—	—	—	354	475	2100	—	—	—	—	—	—	
3408 DITA	347	465	1800	365	490	2000	377	505	2100	392	525	2100	399	535	2100	X
3408 DITA	347	465	1800	366	490	2000	377	505	2100	392	525	2100	399	535	2100	
3408E DITA	354	475	1800	392	525	2000	373	500	1800	—	—	—	—	—	—	X
3408E DITA	—	—	—	—	—	—	429	575	2100	466	625	2100	504	675	2100	X
3408E ATAAC	—	—	—	—	—	—	466	625	2100	522	700	2100	560	750	2100	X
3412E DITA	—	—	—	317	425	1200	—	—	—	*	*	*	*	*	*	
3412E DITA	—	—	—	373	500	1200	429	575	1300	*	*	*	*	*	*	
3412 DITA	317	425	1200	—	—	—	399	535	1300	—	—	—	—	—	—	
3412 DIT	354	475	1800	384	515	2000	429	575	2100	522	700	2100	552	740	2100	
3412E DITA	373	500	1800	448	600	2000	485	650	2100	—	—	—	—	—	—	X

DIT — Direct Injection Turbocharged

DITA — Direct Injection Turbocharged-Aftercooled

ATAAC — Air-to-air Aftercooled

DINA — Direct Injection Naturally Aspirated

PC — Pre-combustion Chamber

NA — Naturally Aspirated

T — Turbocharged

TA — Turbocharged Aftercooled

(Continued on next page)

Cat Diesel Engines for Industrial Applications (cont'd)

Model Type	"Ind A" Continuous			"Ind B"			"Ind C" Intermittent			"Ind D"			"Ind E"			EPA Certified
	kW	hp	rpm	kW	hp	rpm	kW	hp	rpm	kW	hp	rpm	kW	hp	rpm	
3412 DIT	373	500	1800	410	550	2000	485	650	2100	503	675	2100	522	700	2100	
3412C DITA	418	560	1800	447	600	2000	485	650	2100	522	700	2100	552	740	2100	X
3412E DITA	—	—	—	466	625	1400	—	—	—	*	*	*	*	*	*	
3412E DITTA	433	580	1800	507	680	2000	560	750	2100	—	—	—	—	—	—	X
3412E DITTA	—	—	—	—	—	—	—	—	—	634	850	2100	634	850	2100	
3412C DITTA	533	715	1800	541	725	2000	559	750	2100	—	—	—	—	—	—	X
3412 DITA	533	715	1800	552	740	2000	559	750	2100	656	880	2100	716	960	2100	
3412E DITTA	548	735	1800	560	750	2000	560	750	2100	—	—	—	—	—	—	X
3412E DITTA	—	—	—	—	—	—	627	840	1800	739	990	2100	783	1050	2100	
3412E DITTA	—	—	—	—	—	—	642	860	2100	—	—	—	—	—	—	
3508 DITA	507	680	1200	—	—	—	612	820	1300	*	*	*	*	*	*	
3508 DITA	578	775	1800	—	—	—	634	850	1800	*	*	*	*	*	*	
3508 DITA	638	855	1800	697	935	1800	746	1000	1800	*	*	*	*	*	*	
3512 DITA	761	1020	1200	—	—	—	858	1150	1300	*	*	*	*	*	*	
3512 DITA	877	1175	1800	—	—	—	1007	1350	1800	*	*	*	*	*	*	
3512 DITA	955	1280	1800	1048	1405	1800	1119	1500	1800	*	*	*	*	*	*	
3516 DITA	1011	1355	1200	—	—	—	1242	1665	1300	*	*	*	*	*	*	
3516 DITA	1156	1550	1800	—	—	—	1268	1700	1800	*	*	*	*	*	*	
3516 DITA	1275	1710	1800	1391	1865	1800	1492	2000	1800	*	*	*	*	*	*	

DITA — Direct Injection Turbocharged-Aftercooled  
DITTA — Direct Injection Twin Turbocharged-Aftercooled

Rating Definitions:

**NOTE:** Application examples are for reference only. For an exact determination of the appropriate rating, contact the factory or your local Caterpillar Dealer.

Rating conditions:

All ratings are based on SAE J1349 standard ambient conditions of 100 kPa (29.6 in Hg), 30% relative humidity and 25°C (77°F). Ratings also apply at AS1501, BS5514, DIN6271 and ISO3046/1 standard conditions.

Power is based on API gravity of 35 at 15°C (60°F), fuel having a LHV of 42 780 kJ/kg (18,390 Btu/lb) used at 29°C (84°F) with a density of 838.9 g/L (7.001 lb/U.S. gal).

Ratings are the total output capability of the engine equipped with standard accessories: lube oil, fuel oil and jacket water pumps.

**A Rating (Continuous):**

- For heavy-duty services when engine is operated at rated load and speed up to 100% of the time without interruption or load cycling.
- Time at full load up to 100% of the duty cycle.
- Typical application examples include pipeline pumping, ventilation.

**B Rating:**

- For service where power and/or speed are cyclic.
- Time at full load not to exceed 80% of the duty cycle.
- Typical application examples include irrigation where normal pump demand is 85% of engine rating, oil field mechanical pumping/drilling, stationary/plant air compressors.

**C Rating (Intermittent):**

- For service where power and/or speed are cyclic. Horsepower and speed capability of the engine can be utilized for one uninterrupted hour followed by one hour of operation at or below the A rating.
- Time at full load not to exceed 50% of the duty cycle.
- Typical application examples include agricultural tractors, harvesters and combines, truck off-highway, fire pumps, blast hole drills, rock crushers, wood chippers with high torque rise, oil field hoisting, and portable air compressors.

**D Rating:**

- For service where rated power is required for periodic overloads. The maximum horsepower and speed capability of the engine can be utilized for a maximum of 30 uninterrupted minutes followed by one hour at the C rating.
- Time at full load not to exceed 10% of the duty cycle.
- Typical application examples include offshore cranes, runway snow blowers, water well drills, and fire pump certification power.

**E Rating:**

- For service where rated power is required for a short time for initial starting or sudden overload. For emergency service where standard power is unavailable. Horsepower and speed capability of the engine can be utilized for a maximum of 15 uninterrupted minutes followed by one hour at the C rating or duration of emergency.
- Time at full load not to exceed 5% of the duty cycle.
- Typical application examples include standby centrifugal water pumps, oil field well servicing, crash trucks and gas turbine starters.

## Cat Diesel Engines for Industrial Applications (cont'd)

Engine Model	Distillate A Rating (Continuous)			Heavy Fuel A Rating (Continuous)		
	kW	bhp	rpm	kW	bhp	rpm
3606	1490	1998	750	1350	1810	750
3606	1560	2092	800	1355	1817	800
3606	1730	2320	900	1570	2105	900
3606	1850	2481	1000	1680	2253	1000
3608	1980	2655	750	1800	2414	750
3608	2080	2789	800	1800	2414	800
3608	2300	3084	900	2090	2803	900
3608	2460	3299	1000	2240	3004	1000
3612	2980	3996	750	2700	3621	750
3612	3120	4184	800	2710	3634	800
3612	3460	4640	900	3140	4211	900
3612	3700	4962	1000	3360	4506	1000
3616	3960	5310	750	3600	4828	750
3616	4160	5579	800	3600	4828	800
3616	4600	6169	900	4180	5605	900
3616	4920	6598	1000	4480	6008	1000
12CM32	5760	7724	750	5760	7724	750
16CM32	7680	10,300	750	7680	10,300	750

**Underground Mining Diesel Engines**

ENGINES INTENDED FOR USE IN AREAS OF UNDERGROUND COAL MINES WHERE "NON-PERMISSIBLE" EQUIPMENT IS ALLOWED (MSHA, PART 7, CATEGORY B):

Model & Type	kW	hp	rpm	Vent Rate		Particulate Index		MSHA Certif. No.
				cfm	cfm/hp	cfm	cfm/hp	
3054 DIT	81	108	2400	9000	83	9000	83	7E-B064-0
3054 DITA	91	122	2300	10000	82	7500	61	7E-B065-0
3056 DIT	113	152	2200	13000	86	12000	79	7E-B066-0
3176C ATAAC <sup>1,3</sup>	201	270	2100	11500	42.6	7500	27.8	7E-B012-0
3176C ATAAC <sup>1,3</sup>	231	310	2100	13500	43.5	7500	24.2	7E-B012-0
3176C ATAAC <sup>1,3</sup>	250	335	2100	15000	44.8	8000	23.9	7E-B012-0
3304 PCNA <sup>2</sup>	75	100	2200	5000	50.0	15000	150.0	7E-B004-0
3306 PCNA <sup>2</sup>	112	150	2200	7500	50.0	23000	153.3	7E-B003-0
3306 DITA <sup>2</sup>	123	165	2200	10500	63.6	5500	33.3	7E-B010-1
3306 DITA <sup>2</sup>	149	200	2200	15000	75.0	6000	30.0	7E-B010-1
3306 DITA <sup>2</sup>	164	220	2200	15000	68.2	6000	27.3	7E-B010-1
3306 DITA <sup>2</sup>	175	235	2200	15000	63.8	6000	25.5	7E-B010-1
3306 ATAAC <sup>2</sup>	175	235	2200	11500	48.9	12000	51.1	7E-B017-0
3306 DITA <sup>2</sup>	187	250	2200	15000	60.0	6000	24.0	7E-B010-1
3306 ATAAC <sup>2</sup>	190	255	2200	11500	45.1	12000	47.1	7E-B017-0
3306 DITA <sup>2</sup>	201	270	2200	15000	55.6	6000	22.2	7E-B010-1
3306 ATAAC <sup>2</sup>	201	270	2200	11500	42.6	12000	44.4	7E-B017-0
3306 ATAAC <sup>2</sup>	213	285	2200	11500	40.4	12000	42.1	7E-B017-0
3306 ATAAC <sup>2</sup>	224	300	2200	11500	38.3	12000	40.0	7E-B017-0
3406E ATAAC <sup>1</sup>	269	360	2100	17000	47.2	14000	38.9	7E-B018-0
3406E ATAAC <sup>1</sup>	298	400	2100	18500	46.3	13000	32.5	7E-B018-0
3406E ATAAC <sup>1</sup>	317	425	2100	20000	47.1	12000	28.2	7E-B018-0
3406E ATAAC <sup>1</sup>	336	450	2100	21000	46.7	12000	26.7	7E-B018-0
3406E ATAAC <sup>1</sup>	354	475	2100	22000	46.3	13000	27.4	7E-B018-0
3406E ATAAC <sup>1</sup>	366	490	2100	22000	44.9	10500	21.4	7E-B012-0
3406E ATAAC <sup>1</sup>	373	500	2100	24000	48.0	12500	25.0	7E-B012-0

<sup>1</sup>Electronically controlled/governed.

<sup>2</sup>Mechanically governed.

<sup>3</sup>Also approved to CANMET/CSA (Cert. No. 1099).

(Continued on next page)

PC — Precombustion Chamber (Indirect Injection)

DI — Direct Injection

NA — Naturally Aspirated

ATAAC — Turbocharged and Air-to-Air Aftercooled

T — Turbocharged

TA — Turbocharged-Aftercooled

## Underground Mining Diesel Engines (cont'd)

## ENGINES INTENDED FOR USE IN NON-GASSY MINES AND TUNNELS, CERTIFIED UNDER MSHA, PART 32 (SCHEDULE 24):

Model & Type	kW	hp	rpm	Vent Rate		Particulate Index		MSHA Certif. No.
				cfm	cfm/hp	cfm	cfm/hp	
3304 PCT	105	141	1800	23000	163.1	—	—	24/D54-7
3304 PCT	116	155	2000	30000	193.5	—	—	24/D54-7
3304 PCT	123	165	2200	33000	200.0	—	—	24/D54-7
3306 PCT	160	215	1800	30000	139.5	—	—	24/D90-0
3306 PCTA	160	215	1800	22600	105.1	—	—	24/D91-1
3306 PCTA	168	225	1900	25000	111.1	—	—	24/D91-1
3306 PCTA	175	235	2000	27000	114.9	—	—	24/D91-1
3306 PCT	175	235	2000	37000	157.4	—	—	24/D90-0
3306 PCT	179	240	2200	41000	170.8	—	—	24/D90-0
3306 PCT	187	250	2200	44080	146.3	—	—	24/D90-0
3306 PCTA	187	250	2200	30800	123.2	—	—	24/D91-1
3306 PCTA	201	270	2200	32700	121.1	—	—	24/D91-1
3406 PCTA	213	285	1800	39000	136.8	—	—	24/D119-0
3406 PCTA	224	300	1800	40000	133.3	—	—	24/D119-0
3406 PCTA	242	325	2000	46000	141.5	—	—	24/D119-0
3406 PCTA	261	350	2000	49000	140.0	—	—	24/D119-0
3406 PCTA	280	375	2100	54000	144.0	—	—	24/D119-0
3408 PCTA	280	375	1600	38000	101.3	—	—	24/D121-0
3408 PCTA	298	400	1900	47000	117.5	—	—	24/D121-0
3408 PCTA	317	425	2100	53000	124.7	—	—	24/D121-0
3408 PCTA	343	460	2000	54000	117.4	—	—	24/D121-0
3408 PCTA	354	475	2100	58000	122.1	—	—	24/D121-0

## ENGINES INTENDED FOR USE IN AREAS OF UNDERGROUND COAL MINES WHERE "PERMISSIBLE" EQUIPMENT IS REQUIRED (MSHA, PART 7, CATEGORY A):

3304 PCNA <sup>2</sup>	75	100	2200	6500	65.0	17500	175.0	7E-A003-0
3306 PCNA <sup>2</sup>	112	150	2200	9500	63.3	27000	180.0	7E-A002-0

<sup>2</sup>Mechanically governed.

PC — Precombustion Chamber (Indirect Injection)  
 DI — Direct Injection  
 NA — Naturally Aspirated

ATAAC — Turbocharged and Air-to-Air Aftercooled  
 T — Turbocharged  
 TA — Turbocharged-Aftercooled

**Cat Engines for Fire Pump Packages**

Engine Model	Cycl.	1460 rpm		1750 rpm		1900 rpm		2100 rpm		2200 rpm	
		kW	hp	kW	hp	kW	hp	kW	hp	kW	hp
3208 DINA	V8	75	101	90	121	97	130	105	141	108	145
3208 DINA	V8	91	122	105	141	112	150	123	165	127	170
3208 DIT	V8	108	145	146	196	157	211	175	235	183	245
3306 DIT	I6	145	195	172	231	184	247	199	267	—	—
3406 DITA	I6	183	245	198	266	207	278	214	287	—	—
3406 DIT	I6	184	247	218	292	233	312	246	330	—	—
3406 DITA	I6	224	300	313	420	317	425	321	430	—	—
3406 DIT	I6	242	325	276	370	280	375	280	375	—	—
3406 DITA	I6	—	—	343	460	343	460	360	483	—	—
3408 DITA	V8	—	—	359	481	369	495	378	507	—	—
3408 DITA	V8	—	—	380	510	392	525	392	525	—	—
3412 DIT	V12	—	—	401	538	—	—	427	572	—	—
3412 DITA	V12	—	—	476	638	551	739	551	739	—	—
3412 DIT	V12	466	625	492	660	507	680	522	700	—	—
3412 DITA	V12	—	—	597	900	642	860	649	870	—	—
3508 DITA	V8	709	950	794	1065	—	—	—	—	—	—
3512 DITA	V12	1067	1430	1193	1600	—	—	—	—	—	—
3516 DITA	V16	1417	1900	1480	1985	—	—	—	—	—	—

Engine Model	Cycl.	2300 rpm		2400 rpm		2600 rpm		2800 rpm		3000 rpm	
		kW	hp	kW	hp	kW	hp	kW	hp	kW	hp
3208 DINA	V8	112	150	116	156	119	160	123	165	119	160
3208 DINA	V8	131	176	134	180	136	182	139	187	139	185
3208 DIT	V8	187	251	190	255	194	260	201	270	—	—
3306 DIT	I6	203	272	—	—	—	—	—	—	—	—
3306 DITA	I6	212	284	—	—	—	—	—	—	—	—
3406 DIT	I6	261	350	—	—	—	—	—	—	—	—
3406 DITA	I6	339	455	—	—	—	—	—	—	—	—
3408 DITA	V8	380	510	—	—	—	—	—	—	—	—
3412 DIT	V12	466	625	—	—	—	—	—	—	—	—
3412 DITA	V12	649	870	—	—	—	—	—	—	—	—

T — Turbocharged  
 NA — Naturally Aspirated  
 TA — Turbocharged-Aftercooled

**Rating Definition:**

**Standby:** Fire pump engine ratings represent the output which may be utilized to drive stationary fire pumps where the pumping equipment has been sized according to ULI and FM procedures.



## Cat Gas Engines for Industrial Applications

Engine	750 rpm		800 rpm		900 rpm		1000 rpm		1100 rpm		1200 rpm		1400 rpm		1500 rpm		1600 rpm		1800 rpm		Com- pression Ratio
	kW	hp	kW	hp	kW	hp	kW	hp	kW	hp	kW	hp	kW	hp	kW	hp	kW	hp	kW	hp	
G3304 NA	—	—	—	—	—	—	41	55	45	60	48	65	56	75	60	80	63	85	71	95	H
G3306 NA	—	—	—	—	—	—	60	80	67	90	75	100	86	115	94	126	97	130	108	145	H
G3306 TA <sup>2</sup>	—	—	—	—	—	—	82	110	90	120	97	130	118	158	123	165	134	180	151	203	L/H
G3306 TA <sup>1</sup>	—	—	—	—	—	—	90	120	100	134	108	145	127	170	136	183	140	188	157	211	L
G3306 TA <sup>1</sup>	—	—	—	—	—	—	90	120	100	134	108	145	127	170	136	183	145	195	164	220	H
G3406 NA	—	—	—	—	—	—	—	—	—	—	—	—	124	167	133	179	142	191	160	215	H
G3406 NA	—	—	—	—	—	—	93	125	101	135	112	150	131	175	—	—	—	—	—	—	H
G3406 TA <sup>2</sup>	—	—	—	—	—	—	—	—	—	—	—	—	187	250	201	270	215	289	242	325	L/H
G3406 TA <sup>2</sup>	—	—	—	—	—	—	134	180	145	195	160	215	187	250	—	—	—	—	—	—	L/H
G3406 TA <sup>1</sup>	—	—	—	—	—	—	—	—	—	—	—	—	209	280	227	304	242	324	257	345	H
G3406 TA <sup>1</sup>	—	—	—	—	—	—	—	—	—	—	—	—	209	280	227	304	242	324	272	365	L
G3406 TA <sup>1</sup>	—	—	—	—	—	—	151	203	164	220	181	243	209	280	—	—	—	—	—	—	L/H
G3408 NA	—	—	—	—	—	—	—	—	—	—	—	—	148	198	158	212	169	226	190	225	H
G3408 NA	—	—	—	—	—	—	112	150	123	165	134	180	157	210	—	—	—	—	—	—	H
G3408 TA <sup>2</sup>	—	—	—	—	—	—	160	214	175	235	192	257	224	300	—	—	—	—	—	—	L
G3408 TA <sup>2</sup>	—	—	—	—	—	—	—	—	—	—	—	—	224	310	248	333	265	355	298	400	L/H
G3408 TA <sup>2</sup>	—	—	—	—	—	—	165	221	181	243	198	265	231	310	—	—	—	—	—	—	H
G3408 TA <sup>1</sup>	—	—	—	—	—	—	175	235	193	259	210	282	246	330	—	—	—	—	—	—	L
G3408 TA <sup>1</sup>	—	—	—	—	—	—	—	—	—	—	—	—	261	350	280	375	298	400	336	450	L/H
G3408 TA <sup>1</sup>	—	—	—	—	—	—	187	250	205	275	224	300	261	350	—	—	—	—	—	—	H
G3412 NA	—	—	—	—	—	—	—	—	—	—	—	—	212	284	227	304	242	324	272	365	H
G3412 NA	—	—	—	—	—	—	168	225	184	247	194	270	235	315	—	—	—	—	—	—	H
G3412 TA <sup>2</sup>	—	—	—	—	—	—	239	321	263	353	287	385	336	450	—	—	—	—	—	—	L
G3412 TA <sup>2</sup>	—	—	—	—	—	—	248	332	272	365	297	398	347	465	—	—	—	—	—	—	H
G3412 TA <sup>2</sup>	—	—	—	—	—	—	—	—	—	—	—	—	348	466	373	500	397	533	448	600	L/H
G3412 LE <sup>2</sup>	—	—	—	—	—	—	—	—	—	—	—	—	—	—	395	530	422	566	475	637	L/H
G3412 TA <sup>1</sup>	—	—	—	—	—	—	263	353	290	389	316	424	369	495	—	—	—	—	—	—	L
G3412 TA <sup>1</sup>	—	—	—	—	—	—	280	375	306	410	336	450	392	525	—	—	—	—	—	—	H
G3412 LE <sup>1</sup>	—	—	—	—	—	—	—	—	—	—	—	—	—	—	419	562	448	600	504	675	L/H
G3412 TA <sup>1</sup>	—	—	—	—	—	—	—	—	—	—	—	—	392	525	419	562	448	600	504	675	L/H
G3508 NA	—	—	—	—	—	—	192	258	213	285	231	310	—	—	—	—	—	—	—	—	L
G3508 LE <sup>2</sup>	—	—	—	—	—	—	—	—	350	470	384	515	470	630	—	—	—	—	—	—	L
G3508 TA <sup>2</sup>	—	—	—	—	—	—	327	438	359	482	392	525	—	—	—	—	—	—	—	—	L
G3508 TA <sup>1</sup>	—	—	—	—	—	—	336	450	371	497	407	545	—	—	—	—	—	—	—	—	L
G3508 LE <sup>1</sup>	—	—	—	—	—	—	—	—	373	500	407	545	500	670	—	—	—	—	—	—	L
G3512 NA	—	—	—	—	—	—	327	438	359	482	391	525	—	—	—	—	—	—	—	—	L
G3512 TA <sup>2</sup>	—	—	—	—	—	—	490	658	541	723	589	790	—	—	—	—	—	—	—	—	L
G3512 LE <sup>2</sup>	—	—	—	—	—	—	504	675	556	745	604	810	705	945	—	—	—	—	—	—	L
G3512 TA <sup>1</sup>	—	—	—	—	—	—	504	675	556	745	604	810	—	—	—	—	—	—	—	—	L
G3512 LE <sup>1,3</sup>	—	—	—	—	—	—	535	718	589	790	641	860	745	1005	—	—	—	—	—	—	L

NA — Naturally Aspirated  
TA — Turbocharged-Aftercooled  
LE — Low Emission  
H — High compression ratio  
L — Low compression ratio

<sup>1</sup>32°C (90°F) water to the aftercooler.

<sup>2</sup>54°C (130°F) water to the aftercooler.

<sup>3</sup>54°C (130°F) water to the aftercooler with air fuel ratio control.

(Continued on next page)

## Rating Definition:

**Continuous:** Output available without varying load for an unlimited time. Continuous power in accordance with ISO8528, ISO3046/1, AS2789, DIN6271, and BS5514.

**Cat Gas Engines for Industrial Applications (cont'd)**

Engine	750 rpm		800 rpm		900 rpm		1000 rpm		1100 rpm		1200 rpm		1400 rpm		1500 rpm		1600 rpm		1800 rpm		Com- pression Ratio
	kW	hp	kW	hp	kW	hp	kW	hp	kW	hp	kW	hp	kW	hp	kW	hp	kW	hp	kW	hp	
G3516 NA	—	—	—	—	—	—	416	558	459	615	492	660	—	—	—	—	—	—	—	—	L
G3516 TA <sup>2</sup>	—	—	—	—	—	—	653	875	720	965	783	1050	—	—	—	—	—	—	—	—	L
G3516 TA <sup>1</sup>	—	—	—	—	—	—	651	900	741	994	809	1085	—	—	—	—	—	—	—	—	L
G3516 LE <sup>2</sup>	—	—	—	—	—	—	671	900	741	994	809	1085	944	1265	—	—	—	—	—	—	L
G3516 LE <sup>1,3</sup>	—	—	—	—	—	—	712	955	783	1050	858	1150	999	1340	—	—	—	—	—	—	L
G3606 LE <sup>2</sup>	928	1245	992	1330	1119	1500	1242	1665	—	—	—	—	—	—	—	—	—	—	—	—	L
G3606 LE <sup>1</sup>	984	1320	1052	1410	1184	1588	1316	1765	—	—	—	—	—	—	—	—	—	—	—	—	L
G3608 LE <sup>2</sup>	1242	1665	1324	1775	1491	2000	1659	2225	—	—	—	—	—	—	—	—	—	—	—	—	L
G3608 LE <sup>1</sup>	1312	1760	1402	1880	1579	2117	1754	2352	—	—	—	—	—	—	—	—	—	—	—	—	L
G3612 LE <sup>2</sup>	1864	2500	1987	2665	2237	3000	2487	3335	—	—	—	—	—	—	—	—	—	—	—	—	L
G3612 LE <sup>1</sup>	1976	2650	2107	2825	2368	3175	2632	3530	—	—	—	—	—	—	—	—	—	—	—	—	L
G3616 LE <sup>2</sup>	2487	3335	2651	3555	2983	4000	3315	4445	—	—	—	—	—	—	—	—	—	—	—	—	L
G3616 LE <sup>1</sup>	2632	3530	2808	3765	3158	4235	3509	4705	—	—	—	—	—	—	—	—	—	—	—	—	L

NA — Naturally Aspirated

TA — Turbocharged-Aftercooled

LE — Low Emission

L — Low compression ratio

<sup>1</sup>32°C (90°F) water to the aftercooler.

<sup>2</sup>54°C (130°F) water to the aftercooler.

<sup>3</sup>54°C (130°F) water to the aftercooler with air fuel ratio control.

**Rating Definition:**

**Continuous:** Output available without varying load for an unlimited time. Continuous power in accordance with ISO8528, ISO3046/1, AS2789, DIN6271, and BS5514.

## 50 Hz Diesel Gen Set Ratings

Gen Set Model	1500 rpm — With Fan		
	Standby kV•A	Prime kV•A	Continuous kV•A
3304 T	125	112	105
3208 T	175	150	145
3208 ATAAC	200	—	—
3306 TA	250	225	188
3306 ATAAC	275	250	206
3406 T	300	275	238
3406 TA	350	320	258
3406 TA	400	365	319
3408 TA	400	365	319
3412 T	500	455	369
3412 TT	550	500	400
3412 TA	600	545	432
3412 TA	650	600	444
3412 TA	700	635	500
3412 TA	750	680	549
3412 TA	800	725	575
3412 TA	900	810	—
3508 TA	1000	910	812
3508B	1100	1000	906
3512 TA	1250	1150	1000
3512 TA	1400	1275	1206
3512B	1500	1360	1320
3512B	1600	1500	—
3516 TA	1750	1600	1600
3516 TA	2000	1825	1600
3516B	2250	2000	1750
	1000 rpm		
3406 TA	—	188	—
3408 TA	—	256	—
3412 TA	—	350	—
3508 TA	525	500	488
3512 TA	812	750	700
3512 TA	950	856	838
3516 TA	950	875	689
3516 TA	1300	1169	1175

Gen Set Model	1000 rpm — Without Fan		
	Standby	Prime	Continuous
3606 TA	2690	2425	2200
3608 TA	3575	3250	2940
3612 TA	5375	4850	4400
3616 TA	7150	6500	5875
	750 rpm		
3606 TA	2160	1960	1775
3608 TA	2860	2600	2365
3612 TA	4325	3925	3550
3616 TA	5725	5200	4725

T — Turbocharged  
TA — Turbocharged-Aftercooled  
TT — Twin Turbochargers

ATAAC — Air-to-air Aftercooled  
kV•A — Generator output

## Rating Definitions:

**Standby:** Output available with varying load for the duration of the interruption of the normal source power.\*

**Prime:** Output available with varying load for an unlimited time.\*\*

**Continuous:** Output available without varying load for an unlimited time.\*\*\*

\*Fuel stop power in accordance with ISO3046/1, AS2789, DIN6271, and BS5514.

\*\*Prime power in accordance with ISO8528, overload power in accordance with ISO3046/1, AS2789, DIN6271, and BS5514.

\*\*\*Continuous power in accordance with ISO8528, ISO3046/1, AS2789, DIN6271, and BS5514.

60 Hz Diesel Gen Set Ratings

Gen Set Model	1800 rpm — With Fan		
	Standby kW	Prime kW	Continuous kW
3304 T	125	113	100
3208 T	175	160	139
3208 ATAAC	200	—	—
3306 TA	230	210	—
3306 ATAAC	250	225	210
3406 TA	300	275	265
3406 TA	350	320	265
3406 TA	400	365	290
3408 TA	400	365	300
3412 T	500	455	360
3412 TA	550	500	400
3412 TA	600	545	435
3412 TA	650	591	473
3412 TA	700	635	500
3412 TA	750	680	540
3412 TA	800	725	575
3508 TA	900	820	660
3508B	1000	910	832
3512 TA	1100	1000	890
3512 TA	1250	1135	1010
3512B TA	1400	1275	1230
3512B TA	1500	1360	—
3516 TA	1750	1600	1450
3516B TA	2000	1825	1640
	1200 rpm		
3406 TA	—	170	—
3408 TA	—	225	—
3412 TA	—	325	—
3508 TA	450	425	400
3512 TA	700	650	650
3512 TA	925	830	830
3516 TA	975	900	820
3516 TA	1250	1100	1020

Gen Set Model	900 rpm — Without Fan		
	Standby	Prime	Continuous
3606 TA	2000	1820	1650
3608 TA	2660	2420	2200
3612 TA	4000	3640	3300
3616 TA	5320	4840	4400
	720 rpm		
3606 TA	1680	1525	1375
3608 TA	2220	2020	1830
3612 TA	3360	3050	2750
3616 TA	4440	4040	3660

T — Turbocharged  
TA — Turbocharged-Aftercooled  
ATAAC — Air-to-air Aftercooled  
ekW — Generator output at 0.8 p.f.

Rating Definitions:

**Standby:** Output available with varying load for the duration of the interruption of the normal source power.\*

**Prime:** Output available with varying load for an unlimited time.\*\*

**Continuous:** Output available without varying load for an unlimited time.\*\*\*

\*Fuel stop power in accordance with ISO3046/1, AS2789, DIN6271, and BS5514.

\*\*Prime power in accordance with ISO8528, overload power in accordance with ISO3046/1, AS2789, DIN6271, and BS5514.

\*\*\*Continuous power in accordance with ISO8528, ISO3046/1, AS2789, DIN6271, and BS5514.

## Olympian Generator Sets\*

Gen Set Model	Prime		Standby	
	50 Hz (kV•A)	60 Hz (ekW)	50 Hz (kV•A)	60 Hz (ekW)
<b>Gas</b>				
CG012	6	6	12	12
CG015	10	10	15	15
CG020	15	15	20	20
CG025	20	20	25	25
CG030	20	20	30	30
CG035	25	25	35	35
CG040	30	30	40	40
CG050	40	40	50	50
CG070	50	50	70	70
CG085	70	70	80	80
CG100	90	90	100	100
<b>Diesel</b>				
CD008	6	6	8	8
CD010	8	8	10	10
CD012	10	10	12.5	12.5
CD015	12.5	12.5	15	15
CD017	15	15	17.5	17.5
CD020	15	15	20	20
CD025	20	20	25	25
CD030	25	25	30	30
CD035	30	30	35	35
CD040	45	36	50	40
CD050	50	45	55	50
CD060	59	54	65	60
CD075	67	68	75	75
CD080	79	72	88	80
CD100	100	90	110	100
CD125	100	100	125	125
CD150	135	135	150	150
CD175	160	160	175	175
CD200	180	180	200	200
CD220	200	200	220	230

\*Olympian Generator Sets are manufactured exclusively for Caterpillar dealers by Generac Corporation.

kV•A — Generator output

ekW — Generator output at 0.8 p.f.

**Gaseous Fueled Generator Set Ratings**

Gen Set Model	Continuous		Standby	Compression Ratio
	1500 rpm	1800 rpm	1800 rpm	
	Without Fan		Without Fan	
	50 Hz kV•A	60 Hz ekW	60 Hz ekW	
G3306 NA	87	85	—	L
G3306 NA	106	100	—	H
G3306 TA <sup>2</sup>	137	135	—	L
G3306 TA <sup>1</sup>	156	140	—	L
G3306 TA <sup>1</sup>	156	150	—	H
G3406 NA	156	145	—	H
G3406 NA	—	156	150	H
G3408 NA	187	175	—	H
G3406 TA <sup>2</sup>	219	210	255	H
G3406 TA <sup>2</sup>	219	210	245	L
G3406 TA <sup>1</sup>	231	225	265	L
G3406 TA <sup>1</sup>	231	225	275	H
G3408 TA <sup>2</sup>	262	255	300	L
G3408 TA <sup>2</sup>	262	255	310	H
G3412 NA	281	250	—	H
G3408 TA <sup>1</sup>	288	280	325	L
G3408 TA <sup>1</sup>	287	280	340	H
G3412 TA <sup>2</sup>	406	395	—	L
G3412 TA <sup>2</sup>	406	395	480	H
G3412 TA <sup>1</sup>	437	—	—	L
G3412 TA <sup>1</sup>	444	425	495	H
G3412 LE <sup>2</sup>	469	395	500	H
G3412 LE <sup>1</sup>	495	425	515	H
G3508 NA <sup>1</sup>	300	—	—	L
G3508 TA <sup>1,3</sup>	505	—	—	L/H
G3512 LE <sup>2</sup>	906	—	—	L
G3512 LE <sup>1</sup>	956	—	—	L/H
G3516 LE <sup>2</sup>	1219	—	—	L/H
G3516 LE <sup>1</sup>	1281	—	—	L/H
G3516 LE <sup>2</sup>	—	—	1040	H
	<b>1000 rpm</b>	<b>1200 rpm</b>	<b>1800 rpm</b>	
G3508 NA	—	210	—	L
G3508 TA <sup>2</sup>	—	370	—	L
G3508 TA <sup>1</sup>	—	380	—	L
G3508 LE <sup>2</sup>	—	375	—	L/H
G3508 LE <sup>1</sup>	—	400	—	H
G3512 NA	—	365	—	L
G3516 NA	—	460	—	L
G3512 TA <sup>2</sup>	—	555	—	L
G3512 TA <sup>1</sup>	—	570	—	L
G3512 LE <sup>2</sup>	—	570	—	H
G3512 LE <sup>1</sup>	—	600	—	H
G3516 TA <sup>2</sup>	—	750	—	L
G3516 TA <sup>1</sup>	—	770	—	L
G3516 LE <sup>2</sup>	—	770	—	L/H
G3516 LE <sup>1</sup>	—	820	—	L/H

TA — Turbocharged-Aftercooled

NA — Naturally Aspirated

LE — Low Emission

kV•A — Generator output

ekW — Generator output at 0.8 p.f.

H — High compression ratio

L — Low compression ratio

<sup>1</sup>32°C (90°F) or lower water temperature to the aftercooler.

<sup>2</sup>54°C (130°F) or lower water temperature to the aftercooler.

<sup>3</sup>45°C (113°F).

## Gaseous Fueled Generator Set Ratings (cont'd)

Gen Set Model	Continuous		Standby	Compression Ratio
	1000 rpm	900 rpm	1800 rpm	
	Without Fan		Without Fan	
	50 Hz kV•A	60 Hz ekW	60 Hz ekW	
G3606 LE <sup>2</sup>	1475	1050	—	L
G3606 LE <sup>1</sup>	1563	1115	—	L
G3608 LE <sup>2</sup>	1969	1420	—	L
G3608 LE <sup>1</sup>	2088	1505	—	L
G3612 LE <sup>2</sup>	2981	2130	—	L
*G3612 LE <sup>2</sup>	3013	2150	—	H
G3612 LE <sup>1</sup>	3175	2250	—	L
*G3612 LE <sup>3</sup>	3189	—	—	H
*G3612 LE <sup>1</sup>	3419	2455	—	H
G3616 LE <sup>2</sup>	4000	2850	—	L
*G3616 LE <sup>2</sup>	4019	2885	—	H
G3616 LE <sup>1</sup>	4238	3030	—	L
*G3616 LE <sup>3</sup>	4250	—	—	H
*G3616 LE <sup>1</sup>	4569	3265	—	H

LE — Low Emission

kV•A — Generator output

ekW — Generator output at 0.8 p.f.

H — High compression ratio

L — Low compression ratio

<sup>1</sup>32°C (90°F) or lower water temperature to the aftercooler.<sup>2</sup>54°C (130°F) or lower water temperature to the aftercooler.<sup>3</sup>45°C (113°F).

\*Ratings with engine-driven auxiliary water pump excluded.

## Cat Medium Speed Generator Sets

Model	60 Hz					50 Hz				
	400 rpm	514 rpm	600 rpm	720 rpm	900 rpm	428 rpm	500 rpm	600 rpm	750 rpm	1000 rpm
	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW
6CM20					1083					1083
6CM20					1020					1140
8CM20					1445					1445
9CM20					1620					1620
6CM25				1650					1710	
8CM25				2200					2280	
9CM25				2480					2570	
6CM32			2765					2765		
8CM32			3690					3690		
9CM32			4150					4150		
12CM32				5365					5590	
16CM32				7160					7490	
6CM601C	6790					7275				
8CM601C	9060					9700				
6CM43		5240					5240			
7CM43		6110					6110			
8CM43		6980					6980			
9CM43		7860					7860			
12CM43		10 480					10 480			
14CM43		12 220					12 220			
16CM43		13 970					13 970			
18CM43		15 710					15 710			

Cat Engines for Marine Propulsion Applications

Engine Model	A			B			C			D			E		
	kW	hp	rpm	kW	hp	rpm	kW	hp	rpm	kW	hp	rpm	kW	hp	rpm
3304B NA	63	85	2000	—	—	—	75	100	2200	—	—	—	—	—	—
3304B T	93	125	2000	104	140	2000	123	165	2200	134	180	2200	142	190	2200
3208 NA	112	150	2400	134	180	2400	157	210	2800	157	210	2800	157	210	2800
3306B T	142	190	2000	164	220	2000	186	250	2200	—	—	—	209	280	2200
3116 TA	153	205	2400	153	205	2400	190	255	2600	205	275	2600	224	300	2800
3116 TA	172	230	2400	172	230	2400	209	280	2600	231	310	2600	261	350	2800
3126B	—	—	—	—	—	—	—	—	—	—	—	—	287	385	2800
3126 TA	—	—	—	—	—	—	—	—	—	—	—	—	313	420	2800
3208 T	160	215	2400	190	255	2400	216	290	2800	224	300	2800	239	320	2800
3208 TA	—	—	—	—	—	—	—	—	—	—	—	—	325	435	2800
3306B TA	160	215	2000	175	235	2000	201	270	2200	235	315	2200	261	350	2200
3306B TA	175	235	2000	186	250	2000	216	290	2200	250	335	2200	265	355	2200
3208 TA	175	235	2400	205	275	2400	235	315	2600	254	340	2800	280	375	2800
3406C T	186	250	1800	224	300	1800	260	348	2100	—	—	—	300	402	2100
3406C TA	205	275	1200	231	310	1350	—	—	—	—	—	—	—	—	—
3406C TA	240	322	1800	283	380	1800	—	—	—	—	—	—	—	—	—
3408C TA	261	350	1250	294	394	1350	—	—	—	—	—	—	—	—	—
3406C TA	—	—	—	298	400	1800	—	—	—	—	—	—	—	—	—
3176C	—	—	—	—	—	—	—	—	—	—	—	—	425	570	2300
3176C TA	—	—	—	—	—	—	—	—	—	—	—	—	448	600	2300
3406 TA	272	365	1800	328	440	2100	358	480	2100	399	535	2100	433	580	2100
3196 DI-TA-SC	—	—	—	—	—	—	—	—	—	—	—	—	448	600	2300
3196 DI-TA-SC	—	—	—	—	—	—	366	490	2300	425	570	2300	492	660	2300
3408C TA	280	375	1300	350	470	1800	380	510	2100	—	—	—	—	—	—
3408C TA	300	402	1800	384	515	2100	403	540	2100	425	570	2100	436	585	2100
3412C TA	317	425	1200	354	475	1200	570	764	2100	—	—	—	—	—	—
3406E TA-SC	—	—	—	354	475	1800	—	—	—	—	—	—	—	—	—
3406E TA-SC	336	450	1800	410	550	2100	448	600	2100	522	700	2200	597	800	2300
3408C TA	339	455	1800	358	480	1800	—	—	—	—	—	—	—	—	—
3412C T	375	503	1800	403	540	1800	403	540	1800	—	—	—	—	—	—
3508 TA	448	600	1200	—	—	—	—	—	—	—	—	—	—	—	—
3412C TA	448	600	1800	459	615	1800	474	635	1800	—	—	—	—	—	—
3412 TA	465	624	1800	500	671	1800	615	825	2100	671	900	2100	746	1000	2100
3412C TA	485	650	1800	537	720	1800	—	—	—	—	—	—	—	—	—
3508 TA	526	705	1200	600	805	1300	612	820	1300	—	—	—	—	—	—
3508 TA	578	775	1600/ 1800	—	—	—	634	850	1800	—	—	—	—	—	—
3412 TA	—	—	—	—	—	—	634	850	2300	783	1050	2300	970	1300	2300
3508B TA	578	775	1200	634	850	1200	671	900	1200	—	—	—	—	—	—

NA — Naturally Aspirated  
T — Turbocharged  
DI — Direct Injection

SC — Separate Circuit  
TA — Turbocharged-Aftercooled

(Continued on next page)

Rating Definitions: (except 3600s)

- A: For use with little load cycling in oceangoing displacement hulls such as freighters, tugboats and bottomdrag trawlers, and deep river towboats.
- B: For use in midwater trawlers, purse seiners, crew and supply boats, ferry boats with trips longer than one hour, and towboats in rivers where locks, sandbars, curves or traffic dictate frequent slowing.

- C: For use in yachts with displacement hulls, as well as ferries with trips less than one hour, fish boats with higher speed journey out and back (e.g., some lobster, crayfish and tuna), and short trip coastal freighters.
- D: For use in patrol, customs, police boats, and some fire boats. Also for bow/stern thrusters.
- E: For use in pleasure craft with planing hulls, as well as for patrol, pilot and harbor master boats.



## Cat Engines for Marine Propulsion Applications (cont'd)

Engine Model	A			B			C			D			E		
	kW	hp	rpm	kW	hp	rpm	kW	hp	rpm	kW	hp	rpm	kW	hp	rpm
3412C TA*	—	—	—	559	<b>750</b>	2100	746	<b>1000</b>	2300	858	<b>1150</b>	2300	—	—	—
3412C TA*	—	—	—	690	<b>925</b>	2100	783	<b>1050</b>	2300	—	—	—	—	—	—
3412C TTA**	—	—	—	—	—	—	—	—	—	—	—	—	1007	<b>1350</b>	2300
3508 TA	638	<b>855</b>	1600/ 1800	716	<b>960</b>	1800	746	<b>1000</b>	1800	858	<b>1150</b>	1800	—	—	—
3508 EUI	638	<b>855</b>	1600	675	<b>905</b>	1600	701	<b>940</b>	1600	—	—	—	—	—	—
3508 EUI	638	<b>855</b>	1800	716	<b>960</b>	1800	746	<b>1000</b>	1800	858	<b>1150</b>	1800	—	—	—
3512 TA	671	<b>900</b>	900	—	—	—	—	—	—	—	—	—	—	—	—
3512B TA	738	<b>990</b>	900	—	—	—	—	—	—	—	—	—	—	—	—
3508B	746	<b>1000</b>	1600	783	<b>1050</b>	1600	820	<b>1100</b>	1600	—	—	—	—	—	—
3508B	746	<b>1000</b>	1800	783	<b>1050</b>	1800	820	<b>1100</b>	1800	—	—	—	—	—	—
3512 TA	790	<b>1060</b>	1200	902	<b>1210</b>	1200	932	<b>1250</b>	1200	—	—	—	—	—	—
3508B-hp	—	—	—	895	<b>1200</b>	1785	969	<b>1300</b>	1835	1044	<b>1400</b>	1880	1119	<b>1500</b>	1925
3512 TA	876	<b>1175</b>	1600	—	—	—	—	—	—	—	—	—	—	—	—
3512 TA	876	<b>1175</b>	1800	—	—	—	969	<b>1300</b>	1800	—	—	—	—	—	—
3512 TA	900	<b>1200</b>	1200	970	<b>1300</b>	1200	1060	<b>1410</b>	1200	—	—	—	—	—	—
3516 TA	895	<b>1200</b>	900	—	—	—	—	—	—	—	—	—	—	—	—
3512 TA	955	<b>1280</b>	1600	1014	<b>1360</b>	1600	1052	<b>1410</b>	1600	—	—	—	—	—	—
3512 TA	955	<b>1280</b>	1800	1078	<b>1445</b>	1800	1119	<b>1500</b>	1800	1305	<b>1750</b>	1800	—	—	—
3512 EUI	954	<b>1280</b>	1600	1014	<b>1360</b>	1600	1051	<b>1410</b>	1600	—	—	—	—	—	—
3512 EUI	954	<b>1280</b>	1800	1078	<b>1445</b>	1800	1119	<b>1500</b>	1800	1305	<b>1750</b>	1800	—	—	—
3512B TA	970	<b>1300</b>	1200	1007	<b>1350</b>	1200	1100	<b>1475</b>	1200	—	—	—	—	—	—
3516B	984	<b>1320</b>	900	—	—	—	—	—	—	—	—	—	—	—	—
3516 TA	1052	<b>1410</b>	1200	1200	<b>1610</b>	1200	1242	<b>1665</b>	1200	—	—	—	—	—	—
3512B	1119	<b>1500</b>	1600	1174	<b>1575</b>	1600	1230	<b>1650</b>	1600	—	—	—	—	—	—
3512B	1119	<b>1500</b>	1800	1174	<b>1575</b>	1800	1230	<b>1650</b>	1800	—	—	—	—	—	—
3516 TA	1156	<b>1550</b>	1600	—	—	—	—	—	—	—	—	—	—	—	—
3516 TA	1156	<b>1550</b>	1800	—	—	—	1268	<b>1700</b>	1800	—	—	—	—	—	—
3516 TA	1195	<b>1600</b>	1200	1250	<b>1675</b>	1200	1305	<b>1750</b>	1200	—	—	—	—	—	—
3512B-hp	—	—	—	1343	<b>1800</b>	1785	1454	<b>1950</b>	1835	1567	<b>2100</b>	1880	1679	<b>2250</b>	1925
3516B	1231	<b>1650</b>	1200	1305	<b>1750</b>	1200	1380	<b>1850</b>	1200	—	—	—	—	—	—
3512B*	1250	<b>1676</b>	1600	1306	<b>1750</b>	1600	1380	<b>1850</b>	1600	—	—	—	—	—	—
3516 TA	1275	<b>1710</b>	1600	—	—	—	—	—	—	—	—	—	—	—	—
3516 TA	1275	<b>1710</b>	1600/ 1800	—	—	—	—	—	—	—	—	—	—	—	—
3516 TA	1275	<b>1710</b>	1800	1432	<b>1920</b>	1800	1491	<b>2000</b>	1800	1641	<b>2200</b>	1800	—	—	—
3516 EUI	1275	<b>1710</b>	1600	1350	<b>1810</b>	1600	1398	<b>1875</b>	1600	—	—	—	—	—	—
3516 EUI	1275	<b>1710</b>	1800	1432	<b>1920</b>	1800	1491	<b>2000</b>	1800	1641	<b>2200</b>	1800	—	—	—
3516B	1492	<b>2000</b>	1600	1566	<b>2100</b>	1600	1641	<b>2200</b>	1600	—	—	—	—	—	—
3516B	1492	<b>2000</b>	1800	1566	<b>2100</b>	1800	1641	<b>2200</b>	1800	—	—	—	—	—	—
3516B-hp	—	—	—	1790	<b>2400</b>	1785	1939	<b>2600</b>	1835	2088	<b>2800</b>	1880	2237	<b>3000</b>	1925
3516B*	1686	<b>2260</b>	1600	1772	<b>2375</b>	1600	1865	<b>2500</b>	1600	—	—	—	—	—	—

TA — Turbocharged-Aftercooled  
TTA — Twin Turbocharged-Aftercooled

EUI — Electronic Unit Injection

\*High displacement.

\*\*Non-revenue producing boats.

## Rating Definitions: (except 3600s)

- A:** For use with little load cycling in oceangoing displacement hulls such as freighters, tugboats and bottomdrag trawlers, and deep river towboats.
- B:** For use in midwater trawlers, purse seiners, crew and supply boats, ferry boats with trips longer than one hour, and towboats in rivers where locks, sandbars, curves or traffic dictate frequent slowing.

- C:** For use in yachts with displacement hulls, as well as ferries with trips less than one hour, fish boats with higher speed journey out and back (e.g., some lobster, crayfish and tuna), and short trip coastal freighters.
- D:** For use in patrol, customs, police boats, and some fire boats. Also for bow/stern thrusters.
- E:** For use in pleasure craft with planing hulls, as well as for patrol, pilot and harbor master boats.

**Cat Engines for Marine Propulsion Applications**

Engine Model	CS			MC		
	kW	hp	rpm	kW	hp	rpm
3606 TA	1490	2000	750	1640	2200	750
3606 TA	1560	2090	800	1720	2310	800
3606 TA	1730	2320	900	1900	2550	900
3606 TA	1850	2480	1000	2030	2720	1000
3608 TA	1980	2660	750	2180	2920	750
3608 TA	2080	2790	800	2290	3070	800
3608 TA	2300	3080	900	2530	3390	900
3608 TA	2460	3300	1000	2710	3630	1000
3612 TA	2980	4000	750	3280	4400	750
3612 TA	3120	4180	800	3440	4610	800
3612 TA	3460	4640	900	3800	5100	900
3612 TA	3700	4960	1000	4060	5440	1000
3616 TA	3960	5310	750	4360	5850	750
3616 TA	4160	5580	800	4580	6140	800
3616 TA	4600	6170	900	5060	6790	900
3616 TA	4920	6600	1000	5420	7270	1000

Engine Model	Fast commercial vessel rating			Military fast vessel rating		
	kW	hp	rpm	kW	hp	rpm
3612	4250	5700	1000	4500	6035	1000
3616	5650	7575	1000	6000	8050	1000
3618	7200	9655	1050	—	—	—

TA — Turbocharged-Aftercooled

**RATING DEFINITIONS: (3600s)**

**CS:** Continuous Service is suitable for continuous duty applications, including dredges, for operation without interruption or load cycling.

**MC:** Maximum Continuous is generally used for vessel applications involving varying loads. The engine power actually produced is limited by application guidelines, leaving a power reserve for unusual operating conditions.

50 Hz			
Model	rpm	ekW	kV•A
3304B NA*	1500	50	63
3304B T*	1500	85	106
3306B T**	1500	120	150
3306B T	1500	145	180
3306B T**	1500	155	194
3306B T	1500	160	200
3406C T**	1500	200	250
3406C T	1500	215	269
3406C TA**	1500	240	300
3406C TA	1500	245	306
3408C TA	1500	280	350
3408C TA**	1500	310	388
3412C T	1500	350	438
3412C T**	1500	385	481
3508 TA	1000	400	500
3412C T	1500	405	506
3412C TA	1500	460	575
3412C TA**	1500	480	600
3412C TA	1500	500	625
3508 TA	1500	505	631
3508 TA	1500	630	788
3508 EUI TA	1500	630	788
3508B TA	1500	725	906
3512 TA	1000	730	913
3512 TA	1500	760	950
3508B TA	1500	800	1000
3512 TA	1000	815	1019
3516 TA	1000	950	1188

50 Hz			
Model	rpm	ekW	kV•A
3512 TA	1500	965	1206
3512 EUI TA	1500	965	1206
3516 TA	1500	1025	1281
3516 TA	1000	1040	1300
3512B TA	1500	1090	1363
3512B TA	1500	1200	1500
3516 TA	1500	1285	1606
3516 EUI TA	1500	1285	1606
3516B TA	1500	1460	1825
3606 TA	750	1570	1963
3516B TA	1500	1600	2000
3606 TA	1000	1940	2425
3608 TA	750	2080	2600
3608 TA	1000	2600	3250
3612 TA	750	3140	3925
3612 TA	1000	3880	4850
3616 TA	750	4160	5200
3616 TA	1000	5200	6500

\*Radiator cooled option.

\*\*Radiator cooled only.

NA — Naturally Aspirated

T — Turbocharged

TA — Turbocharged-Aftercooled

EUI — Electronic Unit Injection

ekW — Generator output at 0.8 p.f.

kV•A — Generator output

**Rating Definition:**

Prime power for continuous electrical service — capable of 10% overload. Marine generator ratings are based on 90°C (194°F) temperature rise for the generator.

**Rating conditions:**

Ratings are based on SAE J3046 and J1349 standard conditions of 100 kPa (29.61 in Hg) and 25°C (77°F). These ratings also apply to ISO8665, ISO30461/1, DIN6271, and BS5514 standard conditions of 100 kPa (29.61 in Hg), 27°C (81°F) and 60% relative humidity.

Fuel rates are based on fuel oil of 35°API [16°C (60°F)] gravity having an LHV of 42 780 kJ/kg (18,390 Btu/lb) when used at 29°C (85°F) and weighing 838.9 g/liter (7.001 lbs/U.S. gal).

60 Hz			
Model	rpm	ekW	kV•A
3304B NA*	1800	65	81
3304B T*	1800	105	131
3306B T*	1800	170	213
3306B TA**	1800	190	238
3306B TA	1800	195	244
3406C T**	1800	250	313
3406C T	1800	260	325
3406C TA**	1800	315	394
3406C TA	1800	320	400
3408C TA	1800	350	438
3408C TA*	1800	370	462
3412C T**	1800	400	500
3412C T	1800	425	531
3508 TA	1200	450	563
3412C TA	1800	500	625
3412C TA**	1800	550	688
3508 TA	1800	560	700
3412C TA	1800	590	738
3508 TA	1800	715	894
3508 EUI TA	1800	715	894
3512 TA	1200	750	938
3512 TA	1800	850	1063
3508B TA	1800	910	1138
3512 TA	1200	910	1138
3512B TA	1800	965	1206
3516 TA	1200	1000	1250

60 Hz			
Model	rpm	ekW	kV•A
3512 TA	1800	1070	1338
3512 EUI TA	1800	1070	1338
3512B TA	1800	1090	1363
3516 TA	1800	1135	1418
3516 TA	1200	1170	1463
3512B TA	1800	1360	1700
3516 TA	1800	1440	1800
3516 EUI TA	1800	1440	1800
3606 TA	720	1525	1906
3606 TA	900	1820	2275
3516B TA	1800	1825	2281
3608 TA	720	2020	2525
3608 TA	900	2420	3025
3612 TA	720	3050	3813
3612 TA	900	3640	4550
3616 TA	720	4040	5050
3616 TA	900	4840	6050

\*Radiator cooled option.

\*\*Radiator cooled only.

NA — Naturally Aspirated

T — Turbocharged

TA — Turbocharged-Aftercooled

EUI — Electronic Unit Injection

ekW — Generator output at 0.8 p.f.

kV•A — Generator output

#### Rating Definition:

Prime power for continuous electrical service — capable of 10% overload. Marine generator ratings are based on 90°C (194°F) temperature rise for the generator.

#### Rating conditions:

Ratings are based on SAE J3046 and J1349 standard conditions of 100 kPa (29.61 in Hg) and 25°C (77°F). These ratings also apply at ISO8665, ISO30461/1, DIN6271, and BS5514 standard conditions of 100 kPa (29.61 in Hg), 27°C (81°F) and 60% relative humidity.

Fuel rates are based on fuel oil of 35°API [16°C (60°F)] gravity having an LHV of 42 780 kJ/kg (18,390 Btu/lb) when used at 29°C (85°F) and weighing 838.9 g/liter (7.001 lbs/U.S. gal).

# Engines

## Truck Diesel

- 3126B    ● C-10
- 3306C    ● G3306

### Medium Duty Engines

Diesel Engine Model	Ratings			Peak Torque			Torque Rise	Weight		Mechanical	Electronic
	kW	hp	rpm	N•m	lb-ft	rpm		kg	lb		
<b>3126B</b>	131	<b>175</b>	2500	569	<b>420</b>	1440	25%	568	<b>1250</b>		X
	142	<b>190</b>	2500	705	<b>520</b>	1440	40%	568	<b>1250</b>		X
	157	<b>210</b>	2500	705	<b>520</b>	1440	21%	568	<b>1250</b>		X
	157	<b>210</b>	2500	820	<b>605</b>	1440	45%	568	<b>1250</b>		X
	157	<b>210</b>	2500*	705	<b>520</b>	1440	23%	568	<b>1250</b>		X
	172	<b>230</b>	2500	898	<b>660</b>	1440	37%	568	<b>1250</b>		X
	187	<b>250</b>	2400	898	<b>660</b>	1440	26%	568	<b>1250</b>		X
	187	<b>250</b>	2400	1088	<b>800</b>	1440	52%	568	<b>1250</b>		X
	205	<b>275</b>	2400	1088	<b>800</b>	1440	38%	568	<b>1250</b>		X
	205	<b>275</b>	2400	1170	<b>860</b>	1440	49%	568	<b>1250</b>		X
	224	<b>300</b>	2400	1088	<b>800</b>	1440	27%	568	<b>1250</b>		X
	224	<b>300</b>	2400**	1178	<b>860</b>	1440	36%	568	<b>1250</b>		X
	246	<b>330</b>	2400**	1170	<b>860</b>	1440	19%	568	<b>1250</b>		X

\*For use with AT545 transmission only.

\*\*Fire truck/RV rating only.

### Heavy Duty Engines

Diesel Engine Model	Ratings		Peak Torque			Governed Speed rpm	Torque Rise	Weight		Mechanical	Electronic
	kW	hp	N•m	lb-ft	rpm			kg	lb		
<b>C-10</b>	227	<b>305</b>	1559	<b>1150</b>	1200	1800	29%	932	<b>2050</b>		X
	227	<b>305</b>	1424	<b>1050</b>	1200	2100	38%	932	<b>2050</b>		X
	250	<b>335</b>	1695	<b>1250</b>	1200	1800	28%	932	<b>2050</b>		X
	261	<b>350</b>	1830	<b>1350</b>	1200	1800	32%	932	<b>2050</b>		X
	276	<b>370</b>	1830	<b>1350</b>	1200	1800	25%	932	<b>2050</b>		X
	250/ 276	<b>335/ 370 MT</b>	1695/ 1830	<b>1250/ 1350</b>	1200	1800	28%/ 25%	932	<b>2050</b>		X
	227	<b>305</b>	1559	<b>1150</b>	1200	2100	51%	932	<b>2050</b>		X
	250	<b>335</b>	1695	<b>1250</b>	1200	2100	49%	932	<b>2050</b>		X
	261	<b>350</b>	1830	<b>1350</b>	1200	2100	54%	932	<b>2050</b>		X
	<b>3306C</b>	224	<b>300</b>	1559	<b>1150</b>	1200	2000	46%	896	<b>1975</b>	X
<b>G3306</b>	250	<b>235</b>	1088	<b>800</b>	1440	2100	31%	896	<b>1975</b>		X
	261	<b>250</b>	1111	<b>820</b>	1440	2100	36%	896	<b>1975</b>		X

MT — Multi-Torque Rating

(Continued on next page)

Heavy Duty Engines (cont'd)

Diesel Engine Model	Ratings		Peak Torque			Governed Speed rpm	Torque Rise	Weight		Mechanical	Electronic
	kW	hp	N•m	lb-ft	rpm			kg	lb		
C-12	250	<b>335</b>	2108	<b>1550</b>	1440	2100	85%	940	<b>2070</b>		X
	265	<b>355</b>	1695	<b>1350</b>	1440	2100	52%	940	<b>2070</b>		X
	265	<b>355</b>	1830	<b>1350</b>	1200	1800	30%	940	<b>2070</b>		X
	276**	<b>370**</b>	1695	<b>1250</b>	1200	1800	16%	940	<b>2070</b>		
	283	<b>380</b>	1972	<b>1450</b>	1200	1800	31%	940	<b>2070</b>		X
	291	<b>380</b>	1972	<b>1450</b>	1200	2100	53%	940	<b>2070</b>		X
	294	<b>395</b>	1972	<b>1450</b>	1200	1800	26%	940	<b>2070</b>		X
	294	<b>395</b>	1972	<b>1450</b>	1200	2100	47%	940	<b>2070</b>		X
	306	<b>410</b>	1972	<b>1450</b>	1200	1800	21%	940	<b>2070</b>		X
	306	<b>410</b>	2108	<b>1550</b>	1200	1800	30%	940	<b>2070</b>		X
	306	<b>410</b>	1972	<b>1450</b>	1200	2100	51%	940	<b>2070</b>		X
	306	<b>410</b>		<b>1550</b>	1200	2100	51%	940	<b>2070</b>		
	306**	<b>410**</b>	1695	<b>1250</b>	1200	2100	22%	940	<b>2070</b>		
	317*	<b>425*</b>	1972	<b>1450</b>	1200	2100	41%	940	<b>2070</b>		X
	317*	<b>425*</b>	2108	<b>1550</b>	1200	2100	51%	940	<b>2070</b>		X
	321	<b>430</b>	2244	<b>1650</b>	1200	2100	53%	940	<b>2070</b>		X
	321	<b>430</b>	2244	<b>1650</b>	1200	1800	32%	940	<b>2070</b>		X
	265/ 306	<b>355/ 410 MT</b>	1695/ 1972	<b>1350/ 1450</b>	1200	1800	30%/ 21%	940	<b>2070</b>		X
	265/ 306	<b>355/ 410 MT</b>	1695/ 2108	<b>1350/ 1550</b>	1200	1800	30%/ 30%	940	<b>2070</b>		X
	283/ 306	<b>380/ 410 MT</b>	1972/ 2224	<b>1450/ 1550</b>	1200	1800	31%/ 30%	940	<b>2070</b>		X
	283/ 321	<b>380/ 430 MT</b>	1972/ 2244	<b>1450/ 1650</b>	1200	1800	31%/ 53%	940	<b>2070</b>		
	339*	<b>455</b>	2108	<b>1550</b>	1200	2100	36%	940	<b>2070</b>		X
	3406C	261	<b>350</b>	1972	<b>1450</b>	1200	1800	42%	1328	<b>2926</b>	X
317		<b>425</b>	2244	<b>1650</b>	1200	1900	40%	1328	<b>2926</b>	X	
3406E	265	<b>355</b>	1836	<b>1350</b>	1200	1800	30%	1301	<b>2867</b>		X
	265	<b>355</b>	1836	<b>1350</b>	1200	2100	52%	1301	<b>2867</b>		X
	265	<b>355 MT</b>	1836/ 1972	<b>1350/ 1450</b>	1200	1800	30%/ 40%	1301	<b>2867</b>		X
	280	<b>375</b>	1972	<b>1450</b>	1200	1800	33%	1301	<b>2867</b>		X
	280	<b>375</b>	1972	<b>1450</b>	1200	2100	55%	1301	<b>2867</b>		X
	280	<b>375 MT</b>	1972/ 2108	<b>1450/ 1550</b>	1200	1800	33%/ 42%	1301	<b>2867</b>		X
	280/ 324	<b>375/ 435 MT</b>	1972/ 2244	<b>1450/ 1650</b>	1200	1800	33%/ 22%	1301	<b>2867</b>		X
	280/ 324	<b>375/ 435 MT</b>	1972/ 2244	<b>1450/ 1550</b>	1200	1800	33%/ 30%	1301	<b>2867</b>		X

\*RV, Bus and Fire truck applications only.

\*\*Dual fueled version.

(Continued on next page)

MT — Multi-Torque Rating

# Engines

- Truck Diesel
- 3406E
- Euro 2 Ratings

## Heavy Duty Engines (cont'd)

Diesel Engine Model	Ratings		Peak Torque			Governed Speed rpm	Torque Rise	Weight		Mechanical	Electronic
	kW	hp	N•m	lb-ft	rpm			kg	lb		
<b>3406E (cont'd)</b>	324	<b>435</b>	2108	<b>1550</b>	1200	1800	22%	1301	<b>2867</b>		X
	324	<b>435</b>	2108	<b>1550</b>	1200	2100	42%	1301	<b>2867</b>		X
	324	<b>435</b>	2244	<b>1650</b>	1200	1800	30%	1301	<b>2867</b>		X
	324	<b>435</b>	2244	<b>1650</b>	1200	2100	52%	1301	<b>2867</b>		X
	334	<b>455</b>	2244	<b>1650</b>	1200	1800	24%	1301	<b>2867</b>		X
	324	<b>455</b>	2244	<b>1650</b>	1200	2100	45%	1301	<b>2867</b>		X
	324	<b>455 MT</b>	2108/ 2380	<b>1550/ 1750</b>	1200	1800	36%/ 54%	1301	<b>2867</b>		X
	354	<b>475</b>	2244	<b>1650</b>	1200	2100	39%	1301	<b>2867</b>		X
	354	<b>475</b>	2244	<b>1650</b>	1200	1800	19%	1301	<b>2867</b>		X
	354	<b>475</b>	2380	<b>1750</b>	1200	2100	47%	1301	<b>2867</b>		X
	354	<b>475</b>	2380	<b>1750</b>	1200	1800	26%	1301	<b>2867</b>		X
	354/ 373	<b>475/ 500</b>	2380/ 2516	<b>1650/ 1850</b>	1200	2100	39%/ 48%	1301	<b>2867</b>		X
	373	<b>500</b>	2244	<b>1650</b>	1200	2100	32%	1301	<b>2867</b>		
	373	<b>500</b>	2516	<b>1850</b>	1200	1800	27%	1301	<b>2867</b>		X
	373	<b>500</b>	2380	<b>1750</b>	1200	2100	40%	1301	<b>2867</b>		X
	373	<b>500</b>	2516	<b>1850</b>	1200	2100	48%	1301	<b>2867</b>		X
	410	<b>550</b>	2516	<b>1850</b>	1200	2100	40%	1301	<b>2867</b>		X
	373	<b>500 MT</b>	2380/ 2516	<b>1750/ 1850</b>	1200	2100	40%/48%	1301	<b>2867</b>		
	429	<b>575</b>	2516	<b>1850</b>	1200	2100	32%	1301	<b>2867</b>		
	448*	<b>600</b>	2788	<b>2050</b>	1200	2100	37%	1301	<b>2867</b>		X
<b>EURO 2 RATINGS</b>											
<b>3126B</b>	142	<b>190</b>	705	<b>520</b>	1440	2500	27%	568	<b>1250</b>		X
	157	<b>210</b>	820	<b>605</b>	1440	2500	45%	568	<b>1250</b>		X
	187	<b>250</b>	1088	<b>800</b>	1440	2400	52%	568	<b>1250</b>		X
	205	<b>275</b>	1125	<b>830</b>	1440	2400	45%	568	<b>1250</b>		X
	224	<b>300</b>	1178	<b>860</b>	1440	2400	37%	568	<b>1250</b>		X
<b>C10</b>	242	<b>325</b>	1695	<b>1250</b>	1200	1900	39%	932	<b>2050</b>		X
	261	<b>350</b>	1695	<b>1250</b>	1200	1900	29%	932	<b>2050</b>		X
	272	<b>365</b>	1830	<b>1350</b>	1200	1900	34%	932	<b>2050</b>		X
<b>C12</b>	250	<b>335</b>	1830	<b>1350</b>	1200	1900	44%	940	<b>2070</b>		X
	283	<b>380</b>	1898	<b>1400</b>	1200	1900	33%	940	<b>2070</b>		X
	306	<b>410</b>	2108	<b>1550</b>	1200	1900	37%	940	<b>2070</b>		X
<b>3406E</b>	334	<b>455</b>	2244	<b>1650</b>	1200	1900	31%	1301	<b>2867</b>		X

\*15.8 L 3406E 600.

MT — Multi-Torque Rating

# FORMER MODELS



## TRACK-TYPE TRACTORS

Model	Product Ident. No. Prefix	Years Built	Horse-power FW/ Drawbar	Approx. Machine Weight kg (lb)	Gauge m (ft) and Width m (ft)	Length m (ft) and Height m (ft)	Transmission	Rated Drawbar Pull — kg (lb) and Forward Speed — km/h (mph)					
								1st	2nd	3rd	4th	5th	6th
D2	4U	47-58	43/38	3258 (7175)	1.02 (3'4") 1.42 (4'8")	2.74 (9'0") 1.57 (5'2")	DD	3609 (7950)	2588 (5700)	2061 (4540)	1634 (3600)	1067 (2350)	
D2	4U	47-58	42/35	3258 (7175)	1.02 (3'4") 1.57 (5'2")	2.74 (9'0") 1.57 (5'2")	DD	3609 (7950)	2588 (5700)	2061 (4540)	1634 (3600)	1067 (2350)	
D2	5U	57-58	38/32	3119 (5870)	1.27 (4'2") 1.42 (4'8")	2.74 (9'0") 1.57 (5'2")	DD	3033 (6680)	2483 (5420)	2007 (4420)	1703 (3570)	1035 (2280)	
D2	5U	57-58	43/38	3373 (7430)	1.27 (4'2") 1.67 (5'6")	2.74 (9'0") 1.57 (5'2")	DD	3609 (7950)	2588 (5700)	2061 (4540)	1634 (3600)	1067 (2250)	
D3	79U	72-79	62/—	4812 (10,610)	1.42 (4'8") 1.78 (5'10")	2.77 (9'1") 1.70 (5'7")	PS						
D3 LGP	6N	72-79	62/—	5410 (11,925)	1.65 (5'5") 2.29 (7'6")	2.97 (9'10") 1.70 (5'7")	PS						
D3B	23Y	79-87	65	6719 (14,812)	1.42 (4'8") 1.78 (5'10")	2.77 (9'1") 2.67 (8'9")	PS						
D3B	27Y	79-87	65	6877 (15,160)	1.42 (4'8") 1.78 (5'10")	2.77 (9'1") 2.67 (8'9")	PS						
D3B LGP	24Y	79-87	65	7479 (16,488)	1.65 (5'5") 2.29 (7'6")	2.99 (9'10") 2.67 (8'9")	PS						
D3B LGP	28Y	79-87	65	7637 (16,836)	1.65 (5'5") 2.29 (7'6")	2.99 (9'10") 2.67 (8'9")	PS						
D3B	3YC	85-87	65	6719 (14,812)	1.42 (4'8") 1.78 (5'10")	2.77 (9'1") 2.67 (8'9")	DD						
D3B LGP	5MC	85-87	65	7479 (16,488)	1.65 (5'5") 2.29 (7'6")	2.99 (9'10") 2.67 (8'9")	DD						

**NOTE:** Power Shift models show speeds only, not drawbar pull.  
**NOTE:** Track-Type Tractor weights do not include blades until 1967.



Track-Type Tractors (cont'd)

Model	Product Ident. No. Prefix	Years Built	Horse-power FW/ Drawbar	Approx. Machine Weight kg (lb)	Gauge m (ft) and Width m (ft)	Length m (ft) and Height m (ft)	Transmission	Rated Drawbar Pull — kg (lb) and Forward Speed — km/h (mph)					
								1st	2nd	3rd	4th	5th	6th
D3C	5KG	87-90	67	7084 <b>(15,618)</b>	1.42 <b>(4'8")</b> 1.79 <b>(5'10.6")</b>	2.8 <b>(9'4")</b> 2.66 <b>(8'8.9")</b>	PS	3.1 <b>(1.9)</b>	5.9 <b>(3.7)</b>	10.8 <b>(6.7)</b>			
D3C Series II		90-93	70	7001 <b>(15,435)</b>	1.42 <b>(4'8")</b> 1.79 <b>(5'11")</b>		PS	3.1 <b>(1.9)</b>	5.9 <b>(3.7)</b>	10.8 <b>(6.7)</b>			
D3C XL Series II		91-93	70	7242 <b>(15,965)</b>	1.42 <b>(4'8")</b> 1.83 <b>(6'0")</b>		PS	3.1 <b>(1.9)</b>	5.9 <b>(3.7)</b>	10.8 <b>(6.7)</b>			
D3C LGP	1PJ	87-90	67	7788 <b>(17,170)</b>	1.65 <b>(5'4")</b> 2.29 <b>(7'6")</b>	3.0 <b>(9'10.1")</b> 2.66 <b>(8'8.9")</b>	PS	3.1 <b>(1.9)</b>	5.9 <b>(3.7)</b>	10.8 <b>(6.7)</b>			
D3C LGP Series II		90-93	70	7788 <b>(17,170)</b>	1.65 <b>(5'5")</b> 2.29 <b>(7'6")</b>		PS	3.1 <b>(1.9)</b>	5.9 <b>(3.7)</b>	10.8 <b>(6.7)</b>			
D4	6U	47-59	48/43	4629 <b>(10,195)</b>	1.12 <b>(3'8")</b> 1.58 <b>(5'2")</b>	3.07 <b>(11'0")</b> 1.54 <b>(5'1")</b>	DD	4531 <b>(9980)</b> 2.7 <b>(1.7)</b>	3496 <b>(7700)</b> 4.2 <b>(2.4)</b>	2656 <b>(5850)</b> 4.8 <b>(3.0)</b>	2089 <b>(4600)</b> 6.0 <b>(3.7)</b>	1339 <b>(2950)</b> 8.7 <b>(5.4)</b>	
D4	6U	47-59	60/48	4847 <b>(10,675)</b>	1.12 <b>(3'8")</b> 1.58 <b>(5'2")</b>	3.16 <b>(10'5")</b> 1.54 <b>(5'1")</b>	DD	4858 <b>(10,700)</b> 3.1 <b>(1.9)</b>	3496 <b>(7700)</b> 4.3 <b>(2.7)</b>	2724 <b>(6000)</b> 5.5 <b>(3.4)</b>	2093 <b>(4610)</b> 6.8 <b>(4.2)</b>	1326 <b>(2920)</b> 9.8 <b>(6.1)</b>	
D4	6U	47-59	63/50	4844 <b>(10,675)</b>	1.12 <b>(3'8")</b> 1.58 <b>(5'2")</b>	3.18 <b>(10'5")</b> 1.76 <b>(5'10")</b>	DD	4858 <b>(10,700)</b> 3.1 <b>(1.9)</b>	3528 <b>(7770)</b> 4.3 <b>(2.7)</b>	2724 <b>(6000)</b> 5.5 <b>(3.4)</b>	2093 <b>(4610)</b> 6.8 <b>(4.2)</b>	1326 <b>(2920)</b> 9.8 <b>(6.1)</b>	
D4	7U	47-59	63/50	5067 <b>(10,970)</b>	1.52 <b>(5'0")</b> 1.98 <b>(6'6")</b>	3.16 <b>(10'5")</b> 1.76 <b>(5'10")</b>	DD	4858 <b>(10,700)</b> 3.1 <b>(1.9)</b>	3528 <b>(7770)</b> 4.3 <b>(2.7)</b>	2724 <b>(6000)</b> 5.5 <b>(3.4)</b>	2093 <b>(4610)</b> 6.8 <b>(4.2)</b>	1326 <b>(2920)</b> 9.8 <b>(6.1)</b>	
D4B	2XF	87	75	7450 <b>(16,420)</b>	1.42 <b>(4'8")</b> 1.78 <b>(5'10")</b>	2.78 <b>(9'1")</b> 2.67 <b>(8'9")</b>	PS	3.2 <b>(2.0)</b>	6.0 <b>(3.7)</b>	11.1 <b>(6.9)</b>			
D4B LGP	1SG	87	75	7800 <b>(17,200)</b>	1.65 <b>(5'5")</b> 2.29 <b>(7'6")</b>	2.99 <b>(9'10")</b> 2.67 <b>(8'9")</b>	PS	3.2 <b>(2.0)</b>	6.0 <b>(3.7)</b>	11.1 <b>(6.9)</b>			
D4C	39A	59-63	65/52	5064 <b>(11,155)</b>	1.12 <b>(3'8")</b> 1.58 <b>(5'2")</b>	3.05 <b>(10'1")</b> 1.76 <b>(5'10")</b>	DD	4858 <b>(10,700)</b> 3.1 <b>(1.9)</b>	3528 <b>(7770)</b> 4.3 <b>(2.7)</b>	2724 <b>(6000)</b> 5.5 <b>(3.4)</b>	2093 <b>(4610)</b> 6.8 <b>(4.2)</b>	1321 <b>(2910)</b> 9.8 <b>(6.1)</b>	

NOTE: Power Shift models show speeds only, not drawbar pull.  
NOTE: Track-Type Tractor weights do not include blades until 1967.

## Track-Type Tractors (cont'd)

Model	Product Ident. No. Prefix	Years Built	Horse-power FW/ Drawbar	Approx. Machine Weight kg (lb)	Gauge m (ft) and Width m (ft)	Length m (ft) and Height m (ft)	Transmission	Rated Drawbar Pull — kg (lb) and Forward Speed — km/h (mph)						
								1st	2nd	3rd	4th	5th	6th	
D4C	40A	59-63	65/52	4881 (10,750)	1.52 (5'0") 1.98 (6'6")	3.05 (10'1") 1.76 (5'10")	DD	4858 (10,700)	3528 (7770)	2724 (6000)	2093 (4610)	1321 (2910)		
D4C	1RJ	87-90	78	7581 (16,714)	1.42 (4'7") 1.83 (6'0")	3.00 (9'10.1") 2.66 (8'8.9")	PS		3.1 (1.9)	4.3 (2.7)	5.5 (3.4)	6.8 (4.2)	9.8 (6.1)	
D4C Series II		90-93	80	7557 (16,660)	1.42 (4'8") 1.83 (6'5")		PS		3.1 (1.9)	5.9 (3.7)	11.1 (6.9)			
D4C LGP	2CJ	87-90	78	7905 (17,427)	1.65 (5'4") 2.29 (7'6")	3.00 (9'10.1") 2.66 (8'8.9")	PS							
D4C LGP Series II		90-93	80	7905 (17,427)	1.65 (5'5") 2.29 (7'6")		PS		3.2 (2.0)	5.9 (3.7)	11.1 (6.9)			
D4D	78A	63-68	65/52	5900 (13,000)	1.52 (5'0") 1.98 (6'6")	3.35 (11'0") 2.41 (7'11")	DD	5300 (11,690)	3700 (8160)	2560 (5640)	1880 (4150)	1350 (2980)		
D4D	22C	67-68	65/—	5900 (13,100)	1.52 (5'0") 1.98 (6'6")	3.38 (11'1") 2.41 (7'11")	PS		3.2 (2.0)	5.8 (3.6)	9.3 (5.8)			
D4D	82J	63	—/65	7910 (17,440)	1.52 (5'0") 1.98 (6'6")	3.38 (11'1") 2.67 (8'9")	DD	6150 (13,550)	4150 (9140)	2820 (6210)	2030 (4480)	1420 (3120)		
D4D	83J	67-71	—/65	8270 (18,240)	1.52 (5'0") 1.98 (6'6")	3.38 (11'1") 2.67 (8'9")	PS		3.2 (2.0)	5.7 (3.6)	9.3 (5.8)			
D4D	83J	72-77	—/75	5900 (13,100)	1.52 (5'0") 1.98 (6'6")	3.38 (11'1") 2.67 (8'9")	DD	6150 (13,550)	4150 (9140)	2820 (6210)	2030 (4480)	1420 (3120)		
D4E	27X	77-84	80/—	9013 (19,820)	1.52 (5'0") 2.44 (8'0")	3.86 (12'8") 2.72 (8'11")	DD	6495 (14,320)	4425 (9756)	3018 (6654)	2172 (4788)	1509 (3327)		
D4E	28X	77-84	80/—	9090 (20,040)	1.52 (5'0") 2.44 (8'0")	3.86 (12'8") 2.72 (8'11")	PS		3.3 (2.1)	5.9 (3.7)	9.5 (5.9)			

NOTE: Power Shift models show speeds only, not drawbar pull.

NOTE: Track-Type Tractor weights do not include blades until 1967.

Track-Type Tractors (cont'd)

Model	Product Ident. No. Prefix	Years Built	Horse-power FW/ Drawbar	Approx. Machine Weight kg (lb)	Gauge m (ft) and Width m (ft)	Length m (ft) and Height m (ft)	Transmission	Rated Drawbar Pull — kg (lb) and Forward Speed — km/h (mph)						
								1st	2nd	3rd	4th	5th	6th	
D4H (JPN)	8PB*	85-89	90/—	9975 <b>(21,991)</b>	1.67 <b>(5'6")</b> 2.13 <b>(7'0")</b>	3.422 <b>(11'3")</b> 2.933 <b>(9'8")</b>	PS	3.5 <b>(2.2)</b>	6.2 <b>(3.9)</b>	10.2 <b>(6.3)</b>				
D4H (JPN)	2AC*	85-89	90/—	10 111 <b>(22,291)</b>	1.67 <b>(5'6")</b> 2.13 <b>(7'0")</b>	3.422 <b>(11'3")</b> 2.933 <b>(9'8")</b>	DD	7618 <b>(16,798)</b>	5843 <b>(12,884)</b>	4333 <b>(9554)</b>	3207 <b>(7071)</b>	2335 <b>(5149)</b>	1640 <b>(3617)</b>	
D4H (JPN)	8PB*	89-90	95/—	10 105 <b>(22,277)</b>	1.67 <b>(5'6")</b> 2.13 <b>(7'0")</b>	3.422 <b>(11'3")</b> 2.933 <b>(9'8")</b>	PS	3.5 <b>(2.2)</b>	6.2 <b>(3.9)</b>	10.2 <b>(6.3)</b>				
D4H (JPN)	8PB	91-96	95/—	11 019 <b>(24,242)</b>	1.67 <b>(5'6")</b> 2.13 <b>(7'0")</b>	3.44 <b>(11'3")</b> 2.939 <b>(9'8")</b>	PS	3.5 <b>(2.2)</b>	6.2 <b>(3.9)</b>	10.2 <b>(6.3)</b>				
D4H (JPN)	2AC*	89-90	95/—	10 231 <b>(22,555)</b>	1.67 <b>(5'6")</b> 2.13 <b>(7'0")</b>	3.422 <b>(11'3")</b> 2.933 <b>(9'8")</b>	DD	7454 <b>(16,434)</b>	5715 <b>(12,599)</b>	4235 <b>(9336)</b>	3132 <b>(6904)</b>	2277 <b>(5020)</b>	1597 <b>(3520)</b>	
D4H (JPN)	2AC	91-96	95/—	11 019 <b>(24,242)</b>	1.67 <b>(5'6")</b> 2.13 <b>(7'0")</b>	3.44 <b>(11'3")</b> 2.939 <b>(9'8")</b>	DD	7454 <b>(16,434)</b>	5715 <b>(12,599)</b>	4235 <b>(9336)</b>	3132 <b>(6904)</b>	2227 <b>(5020)</b>	1597 <b>(3520)</b>	
D4H LGP (JPN)	9DB*	85-89	90/—	11 245 <b>(24,790)</b>	2.00 <b>(6'7")</b> 2.76 <b>(9'1")</b>	3.693 <b>(10'4")</b> 2.986 <b>(9'10")</b>	PS	3.5 <b>(2.2)</b>	6.2 <b>(3.9)</b>	10.2 <b>(6.3)</b>				
D4H LGP (JPN)	3AC*	85-89	90/—	11 381 <b>(25,090)</b>	2.00 <b>(6'7")</b> 2.76 <b>(9'1")</b>	3.693 <b>(10'4")</b> 2.986 <b>(9'10")</b>	DD	7618 <b>(16,798)</b>	5843 <b>(12,884)</b>	4333 <b>(9554)</b>	3207 <b>(7071)</b>	2335 <b>(5149)</b>	1640 <b>(3617)</b>	
D4H LGP (JPN)	9DB*	89-90	95/—	11 350 <b>(25,022)</b>	2.00 <b>(6'7")</b> 2.76 <b>(9'1")</b>	3.693 <b>(10'4")</b> 2.986 <b>(9'10")</b>	PS	3.5 <b>(2.2)</b>	6.2 <b>(3.9)</b>	10.2 <b>(6.3)</b>				
D4H LGP (JPN)	9DB	91-96	105/—	12 440 <b>(27,368)</b>	2.00 <b>(6'7")</b> 2.76 <b>(9'1")</b>	3.718 <b>(12'2")</b> 3.04 <b>(10'0")</b>	PS	3.4 <b>(2.1)</b>	6.0 <b>(3.7)</b>	10.2 <b>(6.4)</b>				
D4H LGP (JPN)	3AC*	89-90	95/—	11 476 <b>(25,300)</b>	2.00 <b>(6'7")</b> 2.76 <b>(9'1")</b>	3.693 <b>(10'4")</b> 2.986 <b>(9'10")</b>	DD	7454 <b>(16,434)</b>	5715 <b>(12,599)</b>	4235 <b>(9336)</b>	3132 <b>(6904)</b>	2277 <b>(5020)</b>	1597 <b>(3520)</b>	
D4H LGP (JPN)	9GJ	92-96	105/—	12 440 <b>(27,368)</b>	2.00 <b>(6'7")</b> 2.76 <b>(9'1")</b>	3.718 <b>(12'2")</b> 3.04 <b>(10'0")</b>	PS	3.4 <b>(2.1)</b>	6.0 <b>(3.7)</b>	10.2 <b>(6.4)</b>				
D4H XL (JPN)	8PS	92-96	105/—	11 786 <b>(25,929)</b>	1.77 <b>(5'10")</b> 2.28 <b>(7'6")</b>	3.446 <b>(11'4")</b> 2.99 <b>(9'10")</b>	PS	3.4 <b>(2.1)</b>	6.0 <b>(3.7)</b>	10.2 <b>(6.4)</b>				

\*D4H models prior to Series II. Product identification number prefix still in use for current product.

**NOTE:** Power Shift models show speeds only, not drawbar pull.

**NOTE:** Track-Type Tractor weights do not include blades until 1967.

## Track-Type Tractors (cont'd)

Model	Product Ident. No. Prefix	Years Built	Horse-power FW/ Drawbar	Approx. Machine Weight kg (lb)	Gauge m (ft) and Width m (ft)	Length m (ft) and Height m (ft)	Transmission	Rated Drawbar Pull — kg (lb) and Forward Speed — km/h (mph)							
								1st	2nd	3rd	4th	5th	6th		
D5	81H	67-67	93/75	8300 (18,200)	1.52 (5'0") 2.02 (6'8")	3.89 (12'9") 2.00 (8'7")	DD	7870 (17,330)	4910 (10,820)	3330 (7320)	2230 (4920)	1440 (3170)			
D5	82H	67-67	93/75	8400 (18,600)	1.88 (6'2") 2.38 (7'10")	3.89 (12'9") 2.00 (8'7")	DD	7870 (17,330)	4910 (10,820)	3330 (7320)	2230 (4920)	1440 (3170)			
D5	83H	67-67	93/—	8500 (18,800)	1.52 (5'0") 2.02 (6'8")	3.89 (12'9") 2.64 (8'8")	PS				2.7 (1.7)	4.2 (2.6)	5.8 (3.6)	8.0 (5.0)	11.1 (6.9)
D5	84H	67-67	93/—	8700 (19,200)	1.88 (6'2") 2.38 (7'10")	3.89 (12'9") 2.64 (8'8")	PS				3.6 (2.2)	6.1 (3.8)	10.1 (6.3)		
D5	98J	67-77	105	11 290 (24,400)	1.52 (5'0") 2.02 (6'8")	3.89 (12'9") 2.74 (9'0")	DD	8770 (19,340)	5500 (12,130)	3750 (8270)	2540 (5610)	1660 (3660)			
D5	93J	67-77	105	11 290 (24,400)	1.52 (5'0") 2.02 (6'8")	3.89 (12'9") 2.74 (9'0")	DD	8770 (19,340)	5500 (12,130)	3750 (8270)	2540 (5610)	1660 (3660)	9.0 (5.6)		
D5	94J	66-77	105	11 390 (25,100)	1.88 (6'2") 2.38 (7'10")	3.89 (12'9") 2.74 (9'0")	DD	8770 (19,340)	5500 (12,130)	3750 (8270)	2540 (5610)	1660 (3660)			
D5	95J	66-77	105	11 290 (24,900)	1.52 (5'0") 2.02 (6'8")	3.89 (12'9") 2.74 (9'0")	PS				2.7 (1.7)	4.2 (2.6)	5.8 (3.6)	8.0 (5.0)	11.1 (6.9)
D5	96J	66-77	105	11 600 (25,600)	1.88 (6'2") 2.38 (7'10")	3.89 (12'9") 2.74 (9'0")	PS				2.7 (1.7)	4.2 (2.6)	5.8 (3.6)	8.0 (5.0)	11.1 (6.9)
D5B	25X	77-84	105/—	11 619 (25,615)	1.88 (6'2") 3.15 (10'4")	4.60 (15'1") 2.77 (9'1")	PS				3.5 (2.2)	6.1 (3.8)	10.1 (6.3)		
D5B	23X	77-82	105/—	11 283 (24,875)	1.88 (6'2") 3.15 (10'4")	4.60 (15'1") 2.77 (9'1")	DD	8060 (17,770)	5030 (11,100)	3410 (7520)	2290 (5060)	1480 (3260)			
D5C		91-93	90	8460 (18,650)	1.54 (5'1") 2.01 (6'7")		PS				3.5 (2.2)	6.3 (3.9)	10.0 (6.2)		
D5C LGP		91-93	90	8987 (19,800)	1.72 (5'8") 2.38 (7'10")		PS				3.5 (2.2)	6.3 (3.9)	10.0 (6.2)		

NOTE: Power Shift models show speeds only, not drawbar pull.

NOTE: Track-Type Tractor weights do not include blades until 1967.

Track-Type Tractors (cont'd)

Model	Product Ident. No. Prefix	Years Built	Horse-power FW/ Drawbar	Approx. Machine Weight kg (lb)	Gauge m (ft) and Width m (ft)	Length m (ft) and Height m (ft)	Transmission	Rated Drawbar Pull — kg (lb) and Forward Speed — km/h (mph)						
								1st	2nd	3rd	4th	5th	6th	
D5H (FR)	8RC*	85-90	120/—	12 144 (26,772)	1.8 (5'11") 2.21 (7'3")	3.6 (11'10") 2.93 (9'7")	PS	— 3.3 (2.1)	— 5.9 (3.7)	— 10.0 (6.2)				
D5H (FR)	8RC	91-96	120/—	13 250 (29,200)	1.8 (5'11") 2.31 (7'7")	3.6 (11'10") 3.0 (9'10")	DD		3.3 (2.1)	5.9 (3.7)	10.0 (6.2)			
D5H (FR)	7NC*	85-90	120/—	12 212 (26,922)	1.8 (5'11") 2.21 (7'3")	3.6 (11'10") 2.93 (9'7")	DD	9140 (20,150)	7005 (15,440)	5190 (11,440)	3835 (8450)	2785 (6140)	1950 (4300)	
D5H (FR)	7NC	91-96	120/—	13 250 (29,200)	1.8 (5'11") 2.31 (7'7")	3.6 (11'10") 3.0 (9'10")	DD	9140 (20,150)	7005 (15,440)	5190 (11,440)	3835 (8450)	2785 (6140)	1950 (4300)	
D5H LGP (FR)	1DD*	86-90	120/—	14 685 (32,380)	2.16 (7'1") 3.02 (9'11")	4.129 (13'7") 3.069 (10'1")	PS		3.3 (2.1)	5.9 (3.7)	10.0 (6.2)			
D5H LGP (FR)	1DD	91-96	130/—	16 200 (35,700)	2.16 (7'1") 3.02 (9'11")	4.133 (13'7") 3.135 (10'3")	PS		3.3 (2.1)	5.9 (3.7)	10.0 (6.2)			
D5H LGP (FR)	9HC*	85-90	120/—	14 878 (32,800)	2.16 (7'1") 3.02 (9'11")	4.129 (13'7") 3.069 (10'1")	DD	9140 (20,150)	7005 (15,440)	5190 (11,440)	3835 (8450)	2785 (6140)	1950 (4300)	
D5H LGP (FR)	9HC	91-96	130/—	16 200 (35,700)	2.16 (7'1") 3.02 (9'11")	4.133 (13'7") 3.135 (10'3")	DD	10 061 (22,181)	7725 (17,031)	5738 (12,650)	4256 (9384)	3109 (6855)	2195 (4840)	
D5H (JPN)	3MD*	86-90	120/—	12 144 (26,772)	1.8 (5'11") 2.21 (7'3")	3.6 (11'10") 2.93 (9'7")	PS		3.3 (2.1)	5.9 (3.7)	10.0 (6.2)			
D5H (JPN)	3MD	91-96	120/—	13 250 (29,200)	1.8 (5'11") 2.31 (7'7")	3.6 (11'10") 3.0 (9'10")	PS		3.3 (2.1)	5.9 (3.7)	10.0 (6.2)			
D5H (JPN)	1YD*	86-90	120/—	12 212 (26,922)	1.8 (5'11") 2.21 (7'3")	3.6 (11'10") 2.93 (9'7")	DD	9140 (20,150)	7005 (15,440)	5190 (11,440)	3835 (8450)	2785 (6140)	1950 (4300)	
D5H (JPN)	1YD*	91-96	120/—	13 250 (29,200)	1.8 (5'11") 2.31 (7'7")	3.6 (11'10") 3.0 (9'10")	DD	9140 (20,150)	7005 (15,440)	5190 (11,440)	3835 (8450)	2785 (6140)	1950 (4300)	

\*D5H models prior to Series II. Product identification number prefix still in use for current product.

NOTE: Power Shift models show speeds only, not drawbar pull.

NOTE: Track-Type Tractor weights do not include blades until 1967.

## Track-Type Tractors (cont'd)

Model	Product Ident. No. Prefix	Years Built	Horse-power FW/ Drawbar	Approx. Machine Weight kg (lb)	Gauge m (ft) and Width m (ft)	Length m (ft) and Height m (ft)	Transmission	Rated Drawbar Pull — kg (lb) and Forward Speed — km/h (mph)						
								1st	2nd	3rd	4th	5th	6th	
D5H LGP (JPN)	4KD*	86-90	120/—	14 685 (32,380)	2.16 (7'1") 3.02 (9'11")	4.129 (13'7") 3.069 (10'1")	PS	3.3 (2.1)	5.9 (3.6)	10.0 (6.2)				
D5H LGP (JPN)	4KD	91-96	130/—	16 200 (35,700)	2.16 (7'1") 3.02 (9'11")	4.133 (13'7") 3.135 (10'3")	PS	3.3 (2.1)	5.9 (3.7)	10.0 (6.2)				
D5H LGP (JPN)	2SD*	86-90	120/—	14 878 (32,800)	2.16 (7'1") 3.02 (9'11")	4.129 (13'7") 3.069 (10'1")	DD	9140 (20,150) 2.7 (1.7)	7005 (15,440) 3.4 (2.1)	5190 (11,440) 4.5 (2.8)	3835 (8450) 5.8 (3.6)	2785 (6140) 7.6 (4.7)	1950 (4300) 10.0 (6.2)	
D5H LGP (JPN)	2SD	91-96	130/—	16 200 (35,700)	2.16 (7'1") 3.02 (9'11")	4.133 (13'7") 3.135 (10'3")	DD	10 061 (22,181) 2.6 (1.6)	7725 (17,031) 3.4 (2.1)	5738 (12,650) 4.5 (2.7)	4256 (9384) 5.8 (3.6)	3109 (6855) 7.5 (4.7)	2195 (4840) 9.9 (6.2)	
D5H XL (FR)	8RJ	92-96	130/—	13 900 (30,600)	1.89 (6'2") 2.49 (8'2")	3.606 (11'10") 3.08 (9'11")	PS	3.3 (2.1)	5.9 (3.7)	10.0 (6.2)				
D6	4R	47-59	85	8042 (17,730)	1.88 (6'2") 1.52 (5'0")	3.75 (12'4") 1.91 (6'3")	DD	8618 (19,000) 2.7 (1.7)	5534 (12,200) 4.2 (2.6)	3837 (8460) 5.8 (3.6)	2617 (5770) 8.0 (5.0)	1842 (4060) 10.6 (6.6)		
D6	9U	47-59	93/75	8153 (17,975)	1.88 (6'2") 1.52 (5'0")	3.75 (12'4") 1.91 (6'3")	DD	8618 (19,000) 2.7 (1.7)	5534 (12,200) 4.2 (2.6)	3837 (8460) 5.8 (3.6)	2617 (5770) 8.0 (5.0)	1842 (4060) 10.6 (6.6)		
D6B	37A	59-67	93/75	8130 (17,930)	1.52 (5'0") 2.02 (6'8")	3.85 (12'9") 1.91 (6'3")	DD							
D6B	44A	59-67	93/75	8300 (18,300)	1.88 (6'2") 2.38 (7'10")	3.85 (12'9") 1.91 (6'3")	DD	7820 (16,240) 2.7 (1.7)	4940 (10,900) 4.2 (2.6)	3220 (7090) 6.0 (3.7)	2120 (4670) 8.4 (5.2)	1450 (3190) 10.9 (6.8)		
D6C	74A	63-67	120	10 400 (23,000)	1.88 (6'2") 2.38 (7'9")	3.95 (13'0") 1.92 (6'4")	DD	12 050 (26,540) 2.4 (1.5)	8020 (17,670) 3.4 (2.1)	5300 (11,690) 4.8 (3.0)	3360 (7400) 6.8 (4.2)	2030 (4470) 9.5 (5.9)		
D6C	76A	63-67	120	10 700 (23,500)	1.88 (6'2") 2.38 (7'9")	3.95 (13'0") 1.92 (6'4")	PS							
D6C	10K	67-76	140	13 880 (30,600)	1.88 (6'2") 2.38 (7'9")	3.73 (12'3") 2.87 (9'5")	PS	4.0 (2.5)	6.9 (4.3)	10.8 (6.7)				

\*D5H models prior to Series II. Product identification number prefix still in use for current product.

**NOTE:** Power Shift models show speeds only, not drawbar pull.

**NOTE:** Track-Type Tractor weights do not include blades until 1967.

Track-Type Tractors (cont'd)

Model	Product Ident. No. Prefix	Years Built	Horse-power FW/ Drawbar	Approx. Machine Weight kg (lb)	Gauge m (ft) and Width m (ft)	Length m (ft) and Height m (ft)	Transmission	Rated Drawbar Pull — kg (lb) and Forward Speed — km/h (mph)						
								1st	2nd	3rd	4th	5th	6th	
D6 LGP	69U	72-77	140	17 010 <b>(37,500)</b>	2.11 <b>(6'11")</b> 3.02 <b>(9'11")</b>	3.94 <b>(12'11")</b> 2.97 <b>(9'9")</b>	PS							
D6C	99J	67-76	140	14 243 <b>(31,400)</b>	1.88 <b>(6'2")</b> 2.38 <b>(7'9")</b>	3.73 <b>(12'3")</b> 2.87 <b>(9'5")</b>	DD	11 500 <b>(25,360)</b>	7750 <b>(17,090)</b>	5180 <b>(11,420)</b>	3350 <b>(7380)</b>	2090 <b>(4610)</b>		
D6C LGP	69U	72-77	140	13 835 <b>(30,500)</b>	2.11 <b>(6'11")</b> 3.02 <b>(9'11")</b>	2.97 <b>(9'9")</b> 3.94 <b>(12'11")</b>	PS							
D6D	3X	77-86	140	14 290 <b>(31,500)</b>	1.88 <b>(6'2")</b> 2.36 <b>(7'9")</b>	3.73 <b>(12'3")</b> 3.06 <b>(10'0")</b>	DD	11 500 <b>(25,360)</b>	7750 <b>(17,090)</b>	5180 <b>(11,420)</b>	3350 <b>(7380)</b>	2090 <b>(4610)</b>		
D6D	4X	77-86	140	14 290 <b>(31,500)</b>	1.88 <b>(6'2")</b>	3.73 <b>(12'3")</b>	PS	4.0 <b>(2.5)</b>	6.9 <b>(4.3)</b>	10.8 <b>(6.7)</b>				
D6D LGP	6X	77-86	140	17 370 <b>(38,300)</b>	2.1 <b>(6'11")</b> 3.02 <b>(9'11")</b>	3.94 <b>(12'1")</b> 3.06 <b>(10'0")</b>	PS	4.0 <b>(2.5)</b>	6.9 <b>(4.3)</b>	10.8 <b>(6.7)</b>				
D6H	4RC*	85-90	165/—	16 950 <b>(37,367)</b>	1.88 <b>(6'2")</b> 2.64 <b>(8'8")</b>	4.069 <b>(13'4")</b> 3.114 <b>(10'3")</b>	PS	3.8 <b>(2.4)</b>	6.5 <b>(4.0)</b>	11.3 <b>(7.0)</b>				
D6H	8KB	85-88	165/—	16 954 <b>(37,377)</b>	1.88 <b>(6'2")</b> 2.64 <b>(8'8")</b>	4.069 <b>(13'4")</b> 3.114 <b>(10'3")</b>	DD	12 500 <b>(27,560)</b>	9520 <b>(20,990)</b>	7140 <b>(15,740)</b>	5440 <b>(11,990)</b>	4010 <b>(8840)</b>	2820 <b>(6220)</b>	
D6H	3ZF*	88-90	165/—	17 055 <b>(37,599)</b>	1.88 <b>(6'2")</b> 2.64 <b>(8'8")</b>	4.069 <b>(13'4")</b> 3.114 <b>(10'3")</b>	PS/DS	3.8 <b>(2.4)</b>	6.5 <b>(4.0)</b>	11.3 <b>(7.0)</b>				
D6H LGP	6FC*	87-90	165/—	19 555 <b>(43,111)</b>	2.225 <b>(7'4")</b> 3.43 <b>(11'3")</b>	4.493 <b>(14'9")</b> 3.164 <b>(10'5")</b>	PS	3.8 <b>(2.4)</b>	6.5 <b>(4.0)</b>	11.3 <b>(7.0)</b>				
D6H LGP	3YG*	88-90	165/—	19 527 <b>(43,049)</b>	2.225 <b>(7'4")</b> 3.43 <b>(11'3")</b>	4.493 <b>(14'9")</b> 3.164 <b>(10'5")</b>	PS/DS	3.8 <b>(2.4)</b>	6.5 <b>(4.0)</b>	11.3 <b>(7.0)</b>				
D6H (JPN)	2KD*	86-90	165/—	16 950 <b>(37,367)</b>	1.88 <b>(6'2")</b> 2.64 <b>(8'8")</b>	4.069 <b>(13'4")</b> 3.114 <b>(10'3")</b>	PS	3.8 <b>(2.4)</b>	6.5 <b>(4.0)</b>	11.3 <b>(7.0)</b>				

\*D6H models prior to Series II. Product identification number prefix still in use for current product.

NOTE: Power Shift models show speeds only, not drawbar pull.

NOTE: Track-Type Tractor weights do not include blades until 1967.

## Track-Type Tractors (cont'd)

Model	Product Ident. No. Prefix	Years Built	Horse-power FW/ Drawbar	Approx. Machine Weight kg (lb)	Gauge m (ft) and Width m (ft)	Length m (ft) and Height m (ft)	Transmission	Rated Drawbar Pull — kg (lb) and Forward Speed — km/h (mph)						
								1st	2nd	3rd	4th	5th	6th	
D6H (DS)	32F	92-96	123/165	18 111 <b>(39,928)</b>	1.88	4.07	PS	3.8 <b>(2.3)</b>	6.6 <b>(4.1)</b>	11.4 <b>(7.1)</b>				
	(E. Peoria) 4YF				3.36	3.12								
	(Sagami) 6CF (Grenoble)				3.36	3.12								
D6H (CB)	4RC	92-96	123/165	17 997 <b>(39,676)</b>	1.88	4.07	PS	3.8 <b>(2.3)</b>	6.6 <b>(4.1)</b>	11.4 <b>(7.1)</b>				
	(E. Peoria) 2KD				3.36	3.12								
	(Sagami) 4LG (Grenoble)				3.36	3.12								
D6H XL (DS)	9KJ	92-96	130/175	19 080 <b>(42,063)</b>	1.88	4.07	PS	3.8 <b>(2.3)</b>	6.6 <b>(4.1)</b>	11.4 <b>(7.1)</b>				
	(E. Peoria) 8SK				3.36	3.12								
	(Sagami) 9LK (Grenoble)				3.36	3.12								
D6H XL (CB)	8ZJ	92-96	130/175	18 966 <b>(41,811)</b>	1.88	4.07	PS	3.8 <b>(2.3)</b>	6.6 <b>(4.1)</b>	11.4 <b>(7.1)</b>				
	(E. Peoria) 9RK				3.36	3.12								
	(Sagami) 8KK (Grenoble)				3.36	3.12								
D6H XR (DS)	6CK	92-96	130/175	18 799 <b>(41,444)</b>	1.88	4.22	PS	3.8 <b>(2.3)</b>	6.6 <b>(4.1)</b>	11.4 <b>(7.1)</b>				
	(E. Peoria) 2TL				3.36	3.12								
	(Sagami) 1YL (Grenoble)				3.36	3.12								
D6H XR (CB)	5KK	92-96	130/175	18 799 <b>(41,444)</b>	1.88	4.22	PS	3.8 <b>(2.3)</b>	6.6 <b>(4.1)</b>	11.4 <b>(7.1)</b>				
	(E. Peoria) 7ZK				3.36	3.12								
	(Sagami) 2BL (Grenoble)				3.36	3.12								
D6H LGP (DS)	3YG	92-96	134/180	20 486 <b>(45,163)</b>	2.24	4.49	PS	3.8 <b>(2.3)</b>	6.6 <b>(4.1)</b>	11.4 <b>(7.1)</b>				
	(E. Peoria) 4GG				4.0	3.17								
	(Sagami) 5HF (Grenoble)				4.0	3.17								
D6H LGP (CB)	6FC	92-96	134/180	20 486 <b>(45,163)</b>	2.24	4.49	PS	3.8 <b>(2.3)</b>	6.6 <b>(4.1)</b>	11.4 <b>(7.1)</b>				
	(E. Peoria) 1KD				4.0	3.17								
	(Sagami) 2TG (Grenoble)				4.0	3.17								

NOTE: Power Shift models show speeds only, not drawbar pull.

NOTE: Track-Type Tractor weights do not include blades until 1967.



## Track-Type Tractors (cont'd)

Model	Product Ident. No. Prefix	Years Built	Horsepower FW/ Drawbar	Approx. Machine Weight kg (lb)	Gauge m (ft) and Width m (ft)	Length m (ft) and Height m (ft)	Transmission	Rated Drawbar Pull — kg (lb) and Forward Speed — km/h (mph)					
								1st	2nd	3rd	4th	5th	6th
D6H (JPN)	3ED*	86-92	165/—	16 954 (37,377)	1.88 (6'2") 2.64 (8'8")	4.069 (13'4") 3.114 (10'3")	DD	12 500 (27,560)	9520 (20,990)	7140 (15,740)	5440 (11,990)	4010 (8840)	2820 (6220)
D6H (JPN)	4YF*	88-90	165/—	17 055 (37,599)	1.88 (6'2") 2.64 (8'8")	4.069 (13'4") 3.114 (10'3")	PS/DS	3.8 (2.4)	6.5 (4.0)	11.3 (7.0)			
D6H LGP (JPN)	1KD*	86-90	165/—	19 555 (43,111)	2.225 (7'4") 3.43 (11'3")	4.493 (14'9") 3.164 (10'5")	PS	3.8 (2.4)	6.5 (4.0)	11.3 (7.0)			
D6H LGP (JPN)	8FC*	86-90	165/—	19 676 (43,380)	2.225 (7'4") 3.43 (11'3")	4.485 (14'9") 3.164 (10'5")	DD	12 500 (27,560)	9520 (20,990)	7140 (15,740)	5440 (11,990)	4010 (8840)	2820 (6220)
D6H LGP (JPN)	4GG*	88-90	165/—	19 527 (43,049)	2.225 (7'4") 3.43 (11'3")	4.493 (14'9") 3.164 (10'5")	PS/DS	3.8 (2.4)	6.5 (4.0)	11.3 (7.0)			
D6H (FR)	4LG*	87-90	165/—	16 950 (37,367)	1.88 (6'2") 2.64 (8'8")	4.069 (13'4") 3.114 (10'3")	PS	3.8 (2.4)	6.5 (4.0)	11.3 (7.0)			
D6H (FR)	1FJ*	88-90	165/—	16 954 (37,377)	1.88 (6'2") 2.64 (8'8")	4.069 (13'4") 3.114 (10'3")	DD	12 500 (27,560)	9520 (20,990)	7140 (15,740)	5440 (11,990)	4010 (8840)	2820 (6220)
D6H (FR)	6CF*	88-90	165/—	17 055 (37,599)	1.88 (6'2") 2.64 (8'8")	4.069 (13'4") 3.114 (10'3")	PS/DS	3.8 (2.4)	6.5 (4.0)	11.3 (7.0)			
D6H LGP (FR)	2TG*	87-90	165/—	19 555 (43,111)	2.225 (7'4") 3.43 (11'3")	4.493 (14'9") 3.164 (10'5")	PS	3.8 (2.4)	6.5 (4.0)	11.3 (7.0)			
D6H LGP (FR)	5HF*	88-90	165/—	19 527 (43,049)	2.225 (7'4") 3.43 (11'3")	4.493 (14'9") 3.164 (10'5")	PS/DS	3.8 (2.4)	6.5 (4.0)	11.3 (7.0)			
D6H (SCOT)	7PC	86-87	165/—	16 950 (37,367)	1.88 (6'2") 2.64 (8'8")	4.069 (13'4") 3.114 (10'3")	PS	3.8 (2.4)	6.5 (4.0)	11.3 (7.0)			
D6H LGP (SCOT)	8YC	86-87	165/—	19 555 (43,111)	2.225 (7'4") 3.43 (11'3")	4.493 (14'9") 3.164 (10'5")	PS	3.8 (2.4)	6.5 (4.0)	11.3 (7.0)			

\*D6H models prior to Series II. Product identification number prefix still in use for current product.

**NOTE:** Power Shift models show speeds only, not drawbar pull.

**NOTE:** Track-Type Tractor weights do not include blades until 1967.

## Track-Type Tractors (cont'd)

Model	Product Ident. No. Prefix	Years Built	Horse-power FW/ Drawbar	Approx. Machine Weight kg (lb)	Gauge m (ft) and Width m (ft)	Length m (ft) and Height m (ft)	Transmission	Rated Drawbar Pull — kg (lb) and Forward Speed — km/h (mph)						
								1st	2nd	3rd	4th	5th	6th	
D7	3T	54-55	108/90	11 770 (25,925)	1.88 (6'2") 2.64 (8'1")	4.27 (14'0") 2.06 (6'10")	DD							
D7C	17A	55-59	128/102	11 954 (26,355)	1.88 (6'2") 2.64 (8'1")	4.26 (14'0") 2.06 (6'10")	DD	11 759 (25,900)	8045 (17,720)	4521 (11,960)	3428 (7550)	2397 (5280)		
D7D	17A	59-61	140/112	12 056 (26,555)	1.88 (6'2") 2.64 (8'1")	4.26 (14'0") 2.06 (6'10")	DD	12 300 (27,100)	8600 (18,900)	5700 (12,550)	3650 (8080)	2600 (5720)		
D7E	47A	61-68	160/128	14 787 (32,590)	1.98 (6'6") 2.56 (8'5")	4.47 (14'8") 2.30 (7'7")	DD	14 741 (32,500)	10 296 (22,700)	6803 (15,000)	4259 (9390)	3070 (6770)		
D7E	48A	61-66	160/128	14 787 (32,590)	1.98 (6'6") 2.56 (8'5")	4.47 (14'8") 2.30 (7'7")	PS							
D7E	47A	66-69	180/144	15 200 (33,500)	1.98 (6'6") 2.56 (8'5")	4.47 (14'8") 2.18 (7'2")	DD	17 140 (37,750)	11 350 (25,000)	7420 (16,340)	4540 (9990)	3180 (7010)		
D7E	48A	66-69	180	15 500 (34,000)	1.98 (6'6") 2.56 (8'5")	4.47 (14'8") 2.18 (7'2")	PS							
D7F	94N	69-74	180	14 700 (32,400)	1.98 (6'6") 2.56 (8'5")	4.15 (13'8") 2.26 (7'5")	PS							
D7F	93N	69-74	180	14 700 (32,400)	1.98 (6'6") 2.56 (8'5")	4.15 (13'8") 2.26 (7'5")	DD	17 100 (37,600)	11 350 (25,000)	7450 (16,400)	4580 (10,000)	3240 (7140)		
D7G	92V	77-86	200	20 090 (44,300)	1.98 (6'6") 2.62 (8'7")	4.19 (13'9") 3.35 (11'0")	PS	3.7 (2.3)	6.4 (4.0)	10.1 (6.2)				
D7G	91V	77-86	200	20 090 (44,300)	1.98 (6'6") 2.62 (8'7")	4.19 (13'9") 3.35 (11'0")	DD	17 690 (39,010)	11 730 (25,860)	7680 (16,940)	4700 (10,370)	3320 (7320)		
D7G LGP	72W	77-86	200	22 630 (52,100)	2.18 (7'2") 3.3 (10'11")	4.22 (13'9") 3.28 (10'9")	PS	3.7 (2.3)	6.4 (4.0)	10.0 (6.2)				

\*D7H models prior to Series II. Product identification number prefix still in use for current product.

**NOTE:** Power Shift models show speeds only, not drawbar pull.

**NOTE:** Track-Type Tractor weights do not include blades until 1967.

Track-Type Tractors (cont'd)

Model	Product Ident. No. Prefix	Years Built	Horse-power FW/ Drawbar	Approx. Machine Weight kg (lb)	Gauge m (ft) and Width m (ft)	Length m (ft) and Height m (ft)	Transmission	Rated Drawbar Pull — kg (lb) and Forward Speed — km/h (mph)							
								1st	2nd	3rd	4th	5th	6th		
D7H (CB)	79Z (E. Peoria) 4AB (Sagami)	92-96	171/230	24 778 <b>(54,635)</b>	1.98 <b>(6'6")</b> 3.9 <b>(12'10")</b>	4.74 <b>(15'6")</b> 3.5 <b>(11'6")</b>	PS	3.5 <b>(2.2)</b>	6.2 <b>(3.8)</b>	10.6 <b>(6.6)</b>					
D7H (DS)	5BF (E. Peoria) 2RG (Sagami)	92-96	171/230	25 077 <b>(55,295)</b>	1.98 <b>(6'6")</b> 3.9 <b>(12'10")</b>	4.74 <b>(15'6")</b> 3.5 <b>(11'6")</b>	PS	3.5 <b>(2.2)</b>	6.2 <b>(3.8)</b>	10.6 <b>(6.6)</b>					
D7H LGP (CB)	80Z (E. Peoria) 5WB (Sagami)	92-96	171/230	27 065 <b>(59,678)</b>	2.24 <b>(7'4")</b> 4.50 <b>(14'9")</b>	4.74 <b>(15'6")</b> 3.58 <b>(11'9")</b>	PS	3.5 <b>(2.2)</b>	6.2 <b>(3.8)</b>	10.6 <b>(6.6)</b>					
D7H LGP (DS)	4FG (E. Peoria) 3XG (Sagami)	92-96	171/230	27 065 <b>(59,678)</b>	2.24 <b>(7'4")</b> 4.50 <b>(14'9")</b>	4.74 <b>(15'6")</b> 3.58 <b>(11'9")</b>	PS	3.5 <b>(2.2)</b>	6.2 <b>(3.8)</b>	10.6 <b>(6.6)</b>					
D7H XR (CB)	79Z (E. Peoria) 4AB (Sagami)	92-96	171/230	25 193 <b>(55,551)</b>	1.98 <b>(6'6")</b> 3.9 <b>(12'10")</b>	4.74 <b>(15'6")</b> 3.5 <b>(11'6")</b>	PS	3.5 <b>(2.2)</b>	6.2 <b>(3.8)</b>	10.6 <b>(6.6)</b>					
D7H XR (DS)	5BF (E. Peoria) 2RG (Sagami)	92-96	171/230	25 492 <b>(56,211)</b>	1.98 <b>(6'6")</b> 3.9 <b>(12'10")</b>	4.74 <b>(15'6")</b> 3.5 <b>(11'6")</b>	PS	3.5 <b>(2.2)</b>	6.2 <b>(3.8)</b>	10.6 <b>(6.6)</b>					
D7H	77Z	85-86	215	19 680 <b>(43,380)</b>	1.98 <b>(6'6")</b> 2.54 <b>(8'5")</b>	4.73 <b>(15'6")</b>	DD	16 834 <b>(37,113)</b> 2.7 <b>(1.7)</b>	12 861 <b>(28,353)</b> 3.5 <b>(2.2)</b>	9703 <b>(21,390)</b> 4.5 <b>(2.8)</b>	7436 <b>(16,394)</b> 5.8 <b>(3.6)</b>	5522 <b>(12,173)</b> 7.6 <b>(4.7)</b>	3940 <b>(8686)</b> 10.0 <b>(6.2)</b>		
D7H (US)	79Z*	85-90	215/—	23 647 <b>(52,134)</b>	1.981 <b>(6'6")</b> 2.869 <b>(9'5")</b>	4.619 <b>(15'2")</b> 3.421 <b>(11'3")</b>	PS	3.9 <b>(2.4)</b>	6.8 <b>(4.2)</b>	11.9 <b>(7.4)</b>					
D7H (US)	77Z	85-90	215/—	23 570 <b>(51,960)</b>	1.981 <b>(6'6")</b> 2.869 <b>(9'5")</b>	4.619 <b>(15'2")</b> 3.421 <b>(11'3")</b>	DD	16 834 <b>(37,113)</b> 2.7 <b>(1.7)</b>	12 861 <b>(28,353)</b> 3.5 <b>(2.2)</b>	9703 <b>(21,390)</b> 4.6 <b>(2.8)</b>	7436 <b>(16,394)</b> 5.8 <b>(3.6)</b>	5522 <b>(12,173)</b> 7.6 <b>(4.7)</b>	3940 <b>(8686)</b> 10.0 <b>(6.2)</b>		

\*D7H models prior to Series II. Product identification number prefix still in use for current product.

NOTE: Power Shift models show speeds only, not drawbar pull.

NOTE: Track-Type Tractor weights do not include blades until 1967.

## Track-Type Tractors (cont'd)

Model	Product Ident. No. Prefix	Years Built	Horse-power FW/ Drawbar	Approx. Machine Weight kg (lb)	Gauge m (ft) and Width m (ft)	Length m (ft) and Height m (ft)	Transmission	Rated Drawbar Pull — kg (lb) and Forward Speed — km/h (mph)							
								1st	2nd	3rd	4th	5th	6th		
D7H (US)	5BF*	88-90	215/—	24 351 (53,683)	1.981 (6'6")	4.624 (15'2")	PS/DS	3.7 (2.3)	6.4 (4.0)	11.1 (6.9)					
D7H LGP (US)	80Z*	85-90	215/—	25 237 (55,638)	2.235 (7'4")	4.619 (15'2")	PS	3.9 (2.4)	6.8 (4.2)	11.9 (7.4)					
D7H LGP (US)	4FG*	87-90	230/—	25 894 (57,086)	2.235 (7'4")	4.624 (15'2")	PS/DS	3.7 (2.3)	6.4 (4.0)	11.1 (6.9)					
D7H (JPN)	4AB*	86-90	215/—	23 647 (52,134)	1.981 (6'6")	4.619 (15'2")	PS	3.9 (2.4)	6.8 (4.2)	11.9 (7.4)					
D7H (JPN)	2SB*	86-91	215/—	23 570 (51,960)	1.981 (6'6")	4.619 (15'2")	DD	16 834 (37,113)	12 861 (28,353)	9703 (21,390)	7436 (16,394)	5522 (12,173)	3940 (8686)		
D7H (JPN)	2RG*	88-90	215/—	24 351 (53,683)	1.981 (6'6")	4.624 (15'2")	PS/DS	3.7 (2.3)	6.4 (4.0)	11.1 (6.9)					
D7H LGP (JPN)	5WB*	86-90	215/—	25 237 (55,638)	2.235 (7'4")	4.619 (15'2")	PS	3.9 (2.4)	6.8 (4.2)	11.9 (7.4)					
D7H LGP (JPN)	82Z*	86-91	215/—	25 445 (56,096)	2.235 (7'4")	4.619 (15'2")	DD	16 834 (37,113)	12 861 (28,353)	9703 (21,390)	7436 (16,394)	5522 (12,173)	3940 (8686)		
D7H LGP (JPN)	3XG*	88-90	230/—	25 894 (57,086)	2.235 (7'4")	4.624 (15'2")	PS/DS	3.7 (2.3)	6.4 (4.0)	11.1 (6.9)					

\*D7H models prior to Series II. Product identification number prefix still in use for current product.

NOTE: Power Shift models show speeds only, not drawbar pull.

NOTE: Track-Type Tractor weights do not include blades until 1967.

Track-Type Tractors (cont'd)

Model	Product Ident. No. Prefix	Years Built	Horse-power FW/ Drawbar	Approx. Machine Weight kg (lb)	Gauge m (ft) and Width m (ft)	Length m (ft) and Height m (ft)	Transmission	Rated Drawbar Pull — kg (lb) and Forward Speed — km/h (mph)						Remarks
								1st	2nd	3rd	4th	5th	6th	
D8	1H	35-41	110/95	14 790 <b>(32,600)</b>	1.98 <b>(6'6")</b> 2.64 <b>(8'8")</b>	4.64 <b>(15'3")</b> 4.64 <b>(7'6")</b>	*	9680 <b>(21,350)</b>	6870 <b>(15,150)</b>	5720 <b>(12,610)</b>	4800 <b>(10,590)</b>	3860 <b>(8520)</b>	2740 <b>(6050)</b>	RD-8 with 192 cm <b>(78")</b> gauge
D8	8R	41-45	131/113	15 490 <b>(34,160)</b>	1.98 <b>(6'6")</b> 2.64 <b>(8'8")</b>	4.64 <b>(15'3")</b> 1.85 <b>(6'1")</b>	**	13 060 <b>(28,800)</b>	9750 <b>(21,500)</b>	7940 <b>(17,500)</b>	6800 <b>(15,000)</b>	5620 <b>(12,400)</b>	3990 <b>(8800)</b>	
D8	2U	45-53	148/130	16 470 <b>(36,310)</b>	1.98 <b>(6'6")</b> 2.64 <b>(8'8")</b>	4.85 <b>(15'10")</b> 2.18 <b>(7'2")</b>	DD	13 560 <b>(29,900)</b>	9840 <b>(21,700)</b>	7120 <b>(15,700)</b>	5400 <b>(11,900)</b>	3900 <b>(8600)</b>		HP increase, DD transmission
D8	13A	53-55	185/150	16 866 <b>(37,150)</b>	1.98 <b>(6'6")</b> 2.64 <b>(8'8")</b>	4.88 <b>(16'1")</b> 2.18 <b>(7'2")</b>	DD	20 358 <b>(44,840)</b>	12 939 <b>(28,500)</b>	8926 <b>(19,660)</b>	6955 <b>(15,320)</b>	4935 <b>(10,870)</b>		
D8D, G	15A	55-57	191/155	16 310 <b>(35,925)</b>	1.98 <b>(6'6")</b> 2.58 <b>(8'6")</b>	5.23 <b>(17'2")</b> 2.23 <b>(7'8")</b>	TC							
D8E, F	14A	55-57	191/155 Belt	17 734 <b>(39,060)</b>	1.98 <b>(6'6")</b> 2.64 <b>(8'8")</b>	4.88 <b>(16'1")</b> 2.26 <b>(7'6")</b>	DD	20 439 <b>(45,020)</b>	16 135 <b>(35,540)</b>	10 964 <b>(24,150)</b>	7373 <b>(16,240)</b>	4953 <b>(10,910)</b>		
D8H	35A	59-61	235	20 924 <b>(46,032)</b>	2.13 <b>(7'0")</b> 2.87 <b>(9'1")</b>	5.20 <b>(17'1")</b> 2.39 <b>(7'10")</b>	TC							
D8H	36A	58-66	235/185	21 400 <b>(47,180)</b>	2.13 <b>(7'0")</b> 2.87 <b>(9'1")</b>	5.20 <b>(17'1")</b> 2.39 <b>(7'10")</b>	DD	19 958 <b>(44,400)</b>	15 648 <b>(34,500)</b>	10 931 <b>(24,100)</b>	8051 <b>(17,750)</b>	5869 <b>(13,000)</b>	3832 <b>(8450)</b>	
D8H	46A	58-74	270	21 863 <b>(48,210)</b>	2.13 <b>(7'0")</b> 2.87 <b>(9'1")</b>	5.20 <b>(17'1")</b> 2.39 <b>(7'10")</b>	PS							
D8K	76V	74-82	300	31 980 <b>(69,300)†</b>	2.13 <b>(7'0")</b> 3.05 <b>(10'0")</b>	5.26 <b>(17'3")</b> 2.44 <b>(8'0")</b>	DD	25 400 <b>(56,000)</b>	18 930 <b>(41,740)</b>	12 990 <b>(28,640)</b>	9370 <b>(20,650)</b>	6610 <b>(14,580)</b>	4090 <b>(9010)</b>	Turbocharged, Sealed and Lubricated Track
D8K	77V	74-82	300	31 430 <b>(70,500)*</b>	2.13 <b>(7'0")</b> 3.05 <b>(10'0")</b>	5.26 <b>(17'3")</b> 2.44 <b>(8'0")</b>	PS							
D8L	53Y 7JC 7YB	82-86 84-90 85-92	335	37 305 <b>(82,243)</b>	2.2 <b>(7'3")</b> 2.84 <b>(9'4")</b>	4.95 <b>(16'2")</b> 3.79 <b>(12'5")</b>	PS							
D8L SA	4FB	84-87	400/325	36 650 <b>(80,820)</b>	2.54 <b>(8'4")</b> 3.11 <b>(10'3")</b>		DD	31 679 <b>(69,840)</b>	23 115 <b>(50,960)</b>	17 196 <b>(37,910)</b>	12 388 <b>(27,310)</b>	9154 <b>(20,180)</b>	6428 <b>(14,170)</b>	

\* Power transmitted through dry tape flywheel clutch to selective type hinge speed gear set.

\*\* Power transmitted through flexible and over center engagement, dry flywheel clutch with metallic friction surfaces. Selective type change speed gear set.

† Approximate operating weight. Includes lubricants, coolant, full fuel tank, hydraulic control, 8S Bulldozer, ROPS canopy and operator.

All other weights listed in this column are shipping weights.

NOTE: Power Shift models show speeds only, not drawbar pull.

NOTE: Track-Type Tractor weights do not include blades until 1967.

## Track-Type Tractors (cont'd)

Model	Product Ident. No. Prefix	Years Built	Horse-power FW/ Drawbar	Approx. Machine Weight kg (lb)	Gauge m (ft) and Width m (ft)	Length m (ft) and Height m (ft)	Transmission	Rated Drawbar Pull — kg (lb) and Forward Speed — km/h (mph)						
								1st	2nd	3rd	4th	5th	6th	
D8N	9TC 5TJ	87-92	285	37 462	2.08	4.95	PS							
		92-95	285	<b>(82,590)</b>	<b>(6'10")</b>	<b>(16'3")</b>		3.05 <b>(10'0")</b>	3.43 <b>(11'3")</b>	3.5 <b>(2.2)</b>	6.2 <b>(3.9)</b>	10.8 <b>(6.7)</b>		
D9D	18A	55-56	286/230	25 772 <b>(56,765)</b>	2.29	5.46	DD	27 631	21 207	15 423	10 706	7658	4958	
					<b>(7'6")</b>	<b>(17'11")</b>		<b>(60,860)</b>	<b>(46,710)</b>	<b>(33,970)</b>	<b>(23,580)</b>	<b>(16,670)</b>	<b>(10,920)</b>	2.6 <b>(1.6)</b>
D9D	18A	56-59	320/260	26 125 <b>(57,543)</b>	2.29	5.46	DD	28 603 <b>(63,000)</b>	23 835 <b>(52,500)</b>	16 617 <b>(36,600)</b>	12 167 <b>(26,800)</b>	9171 <b>(20,200)</b>	6106 <b>(13,450)</b>	
D9D	19A	55-56	286/230	25 729 <b>(56,670)</b>	2.29	5.46	TC							
					<b>(7'6")</b>	<b>(17'11")</b>		3.03 <b>(10'0")</b>	2.67 <b>(8'9")</b>	6.6 <b>(4.1)</b>	9.0 <b>(5.6)</b>	12.6 <b>(7.8)</b>		
D9D	19A	56-59	320/260	26 238 <b>(57,990)</b>	2.29	5.46	TC							
					<b>(7'6")</b>	<b>(17'11")</b>		6.6 <b>(4.1)</b>	9.5 <b>(5.9)</b>	13.0 <b>(8.1)</b>				
D9E	50A	59-60	335	27 016 <b>(59,506)</b>	2.29	5.50	TC							
					<b>(7'6")</b>	<b>(18'1")</b>		6.8 <b>(4.2)</b>	9.7 <b>(6.0)</b>	13.2 <b>(8.2)</b>				
D9D	34A	59-61	335	27 167 <b>(59,837)</b>	2.29	5.50	PS							
					<b>(7'6")</b>	<b>(18'1")</b>		4.2 <b>(2.6)</b>	7.2 <b>(4.5)</b>	11.2 <b>(7.0)</b>				
D9E	49A	59-60	335/268	26 957 <b>(59,375)</b>	2.29	5.50	DD							
					<b>(7'6")</b>	<b>(18'1")</b>		2.7 <b>(1.7)</b>	3.5 <b>(2.2)</b>	4.8 <b>(3.0)</b>	6.4 <b>(4.0)</b>	8.2 <b>(5.1)</b>	11.4 <b>(7.1)</b>	
D9G	66A	61-74	385	31 072 <b>(68,500)</b>	2.29	5.50	PS							
					<b>(7'6")</b>	<b>(18'1")</b>		3.10 <b>(10'0")</b>	2.10 <b>(8'7")</b>	3.9 <b>(2.4)</b>	6.8 <b>(4.2)</b>	10.5 <b>(6.5)</b>		

NOTE: Power Shift models show speeds only, not drawbar pull.

NOTE: Track-Type Tractor weights do not include blades until 1967.

Track-Type Tractors (cont'd)

Model	Product Ident. No. Prefix	Years Built	Horse-power FW/ Drawbar	Approx. Machine Weight kg (lb)	Gauge m (ft) and Width m (ft)	Length m (ft) and Height m (ft)	Transmission	Rated Drawbar Pull — kg (lb) and Forward Speed — km/h (mph)						Remarks
								1st	2nd	3rd	4th	5th	6th	
S × S D9G	29N	69-74	770	86 200* (190,000)	5.8* (19'0")	8.0◀ (25'0")	PS	3.9 (2.4)	6.8 (4.2)	10.0 (6.2)	L.H. of S × S D9G			
	30N				7.3** (24'0")	2.8◀◀ (9'2")					R.H. of S × S D9G			
Dual D9G	90J	69-74	770	79 470* (175,200)	2.3* (7'6")	12.9◀ (42'6")	PS	3.9 (2.4)	6.8 (4.2)	10.5 (6.5)	Front of Dual D9G			
	91J				3.3** (10'9")	3.1◀◀ (9'11")					Rear of Dual D9G			
S × S D9H	99V	74-77	820	83 400* (183,900)	5.8* (19'0")	9.0◀ (26'1")	PS	4.0 (2.5)	6.9 (4.3)	10.8 (6.7)	L.H. of S × S D9H			
	12U				7.3** (24'0")	2.9◀◀ (9'6")					R.H. of S × S D9H			
Dual D9H	97V	74-80	820	81 100* (178,800)	2.3* (7'6")	12.9◀ (42'6")	PS	4.0 (2.5)	6.9 (4.3)	10.8 (6.7)	Front of Dual D9H			
	98V				3.3** (10'9")	3.1◀◀ (9'11")					Rear of Dual D9H			
D9H	90V	74-81	410	32 840 (72,400)	2.3* (7'6")	5.6 (18'5")	PS	4.0 (2.5)	6.9 (4.3)	10.8 (6.7)	Standard Model			
					3.0 (9'11")	2.7◀◀ (8'10")								
D9L	14Y	80-87	460	52 055 (114,656)	2.5 (8'2")	5.32 (17'5")	PS	3.9 (2.4)	7.2 (4.5)	12.4 (7.7)				
					3.11 (10'2")	4.41 (14'6")								
D9N	1JD	86-94	370	42 816 (96,196)	2.55 (7'5")	5.17 (16'11.5")	PS	3.9 (2.4)	6.9 (4.3)	12.1 (7.5)				
	6XJ	93-95	2.43 (9'7")	3.91 (12'10")										
D10	84W	78-86	700	88 245 (194,140)	2.9 (9'6")	5.92 (19'8")	PS	3.9 (2.4)	6.8 (4.2)	11.6 (7.2)	84W 114" gauge 76 × 106" gauge Width 3.45 m (11'4")			
	76X				3.65 (12'0")	4.63◀◀ (15'2")								
D10N	2YD	87-93	520	66 400 (147,405)	2.55 (8'4")	5.89 (18'4")	PS	4.0 (2.5)	7.1 (4.4)	12.5 (7.7)				
	3SK	93-96	3.30 (10'10")	4.45 (14'7")										
D11N	74Z	86-93	770	95 900 (211,000)	2.90 (9'6")	6.16 (20'3")	PS	3.9 (2.4)	6.8 (4.4)	11.6 (7.2)				
	4HK	93-96	97 450 (214,850)	3.65 (12'0")	4.65 (15'3")									
D11R	8ZR	96-97	770	98 413 (216,963)	2.90 (9'6")	6.16 (20'3")	PS	3.9 (2.4)	6.8 (4.4)	11.6 (7.2)	Electronic Finger Tip Control Steering			
					3.65 (12'0")	4.65 (15'3")								

\* Gauge of both tractors combined.

\*\* Width to outside of dozer blade.

\* Approximate weight of both machines plus Bulldozer, hydraulic controls, coolant and 5% fuel. (D10, D11N, D11R includes SS ripper)

NOTE: Power Shift models show speeds only, not drawbar pull.

NOTE: Track-Type Tractor weights do not include blades until 1967.

◀ Length including dozer blade.

◀◀ Overall height excluding stack and canopy.

**TRACK-TYPE TRACTORS MANUFACTURED OUTSIDE U.S.A.**

Source	Model	Product Ident. No. Prefix	Years Built	Horsepower Flywheel/ Drawbar	Transmission	Gauge m (ft)
U.K.	D4C	24A	60-64	63/50	DD	1.52 (5'0")
	D4D	88A	64-67	65/52	DD	1.52 (5'0")
	D6C	82A	64-68	120/93	DD	1.88 (6'2")
	D6C	83A	64-68	120/—	PS	1.88 (6'2")
	D6C	46J	71-77	140/—	DD	1.88 (6'2")
	D6C	47J	71-77	140/—	PS	1.88 (6'2")
	D8H	52A	59-61	235/—	PS	2.13 (7'0")
	D8H	22A	59-66	235/185	DD	2.13 (7'0")
	D8H	68A	60-66	235/—	PS	2.13 (7'0")
	D8K	66V	74-82	300/—	PS	2.13 (7'0")
Brazil	D4D	97F	69-78	75/—	DD	1.52 (5'0")
	D4D	74U	71-78	75/—	PS	1.52 (5'0")
	D6C	24U	71-77	120/93	PS	1.88 (6'2")
	D6C	23U	73-77	120/93	DD	1.88 (6'2")
	D6D	74W	77-92	140/—	DD	1.88 (6'2")
	D6D	75W	77-92	140/—	PS	1.88 (6'2")
	D6D	9FK	92-96	140/—	PS	1.88 (6'2")
	D6E	2MJ	92-96	155/—	PS	1.88 (6'2")
	D6D	19B	85-91	140/—	PS	1.88 (6'2")
	D8L	7JC	84-90	335/—	PS	2.2 (7'3")
D8L	7YB	85-92	335/—	PS	2.2 (7'3")	
D8N	7TK	93-95	285/—	PS	2.08 (6'10")	
Australia	D4	29A	59-61	63/50	DD	1.12 (3'8")
	D4	30A	59-60	63/50	DD	1.52 (5'0")
	D4C	54A	60-62	63/52	DD	1.12 (3'8")
	D4C	55A	60-62	65/52	DD	1.52 (5'0")
	D4D	85A	63-68	65/52	DD	1.52 (5'0")
	D5	51H	68-68	93/75	DD	1.88 (6'2")
	D5	52H	68-69	93/—	PS	1.88 (6'2")
	D6	31A	58-60	93/75	DD	1.52 (5'0")
	D6	32A	58-60	93/75	DD	1.18 (6'2")
	D6B	56A	60-66	90/73	DD	1.52 (5'0")
	D6B	57A	60-68	90/73	DD	1.88 (6'2")
	D6C	71A	63-68	120/93	DD	1.88 (6'2")
	D6C	73A	63-68	120/—	PS	1.88 (6'2")
	D6C	55J	69-72	125/—	DD	1.88 (6'2")
	D6C	56J	69-72	125/—	PS	1.88 (6'2")
France	D4C	69A	61-63	63/50	DD	1.52 (5'0")
	D4D	86A	63-68	65/52	DD	1.52 (5'0")
	D4D LGP	18J	66-68	65/52	DD	1.79 (5'10")
	D4D	58J	67-68	65/—	PS	1.52 (5'0")
	D4E	68X	78-86	80/—	DD	1.52 (5'0")
	D4E	69X	78-85	80/—	PS	1.52 (5'0")
	D4E LGP	71X	78-85	80/—	DD	1.77 (5'10")
	D4E LGP	72X	78-86	80/—	PS	1.77 (5'10")
	D5	62J	69-77	105/—	DD	1.88 (6'2")
	D5	63J	69-77	105/—	PS	1.88 (6'2")
	D5 LGP	6R	70-77	105/—	PS	2.06 (6'9")
	D5 LGP	12R	70-77	105/—	DD	2.06 (6'9")
	D5B	43X	77-85	105/—	DD	1.88 (6'2")
	D5B	44X	77-86	105/—	PS	1.88 (6'2")
	D5B LGP	45X	77-86	105/—	DD	2.06 (6'9")
	D5B LGP	46X	77-86	105/—	PS	2.06 (6'9")
	D5B	8MB	84-86	105/—	PS	1.52 (5'0")
	D5H	8RC	85-96	120/—	PS	1.80 (5'11")
	D5H LGP	1DD	86-96	130/—	PS	2.16 (7'1")
	D5H XL	8RJ	86-96	130/—	PS	1.89 (6'2")
D5H	7NC	85-96	120/—	DD	1.80 (5'11")	
D5H LGP	9HC	85-96	130/—	DD	2.16 (7'1")	



# Former Models

## Track-Type Tractors ● Made Outside U.S.A.

### TRACK-TYPE TRACTORS MANUFACTURED OUTSIDE U.S.A. (cont'd)

Source	Model	Product Ident. No. Prefix	Years Built	Horsepower Flywheel/ Drawbar	Transmission	Gauge m (ft)
Scotland	D6D	19X	78-86	140/—	DD	1.88 (6'2")
	D6D	20X	78-86	140/—	PS	1.88 (6'2")
	D6D	01Y	79-87	125/—	PS	1.88 (6'2")
Glasgow	D6H	7PC	86-87	165/—	PS	1.88 (6'2")
	D6H LGP	8YC	86-87	165/—	PS	2.23 (7'4")
Japan	D3	79U	73-79	62/—	PS	1.42 (4'8")
	D3	82U	73-78	62/—	PS	1.42 (4'8")
	D3 LGP	6N	73-79	62/—	PS	1.65 (5'5")
	D3 LGP	83U	73-79	62/—	PS	1.65 (5'5")
	D3B	23Y	79-87	65/—	PS	1.42 (4'8")
	D3B LGP	24Y	79-87	65/—	PS	1.65 (5'5")
	D3B	27Y	79-87	65/—	PS	1.42 (4'8")
	D3B LGP	28Y	79-87	65/—	PS	1.65 (5'5")
	D3B	3YC	85-87	65/—	DD	1.42 (4'8")
	D3B LGP	5MC	85-87	65/—	DD	1.65 (5'5")
	D3C	5KG	87-90	67/—	PS	1.42 (4'7")
	D3C Series II	7JG/4HJ	90-93	70/—	PS	1.42 (4'7")
	D3C LGP	1PJ	87-90	67/—	PS	1.65 (5'4")
	D3C LGP Series II	8GD/5CJ	90-93	70/—	PS	1.65 (5'4")
	D4D LGP	67A	65-68	65/52	DD	1.79 (5'10")
	D4D	91A	65-68	65/52	DD	1.52 (5'0")
	D4E	50X	77-86	80/—	DD	1.52 (5'0")
	D4E	51X	77-86	80/—	PS	1.52 (5'0")
	D4E LGP	52X	77-86	80/—	DD	1.77 (5'10")
	D4C	1RJ	87-90	78/—	PS	1.42 (4'7")
	D4C Series II	7KG	90-93	80/—	PS	1.42 (4'7")
	D4C LGP	2CJ	87-90	78/—	PS	1.65 (5'4")
	D4C LGP Series II	98G	90-93	80/—	PS	1.65 (5'4")
	D4H	8PB	85-96	90/95	PS	1.67 (5'5")
	D4H LGP	9DB	85-96	105/—	PS	2.0 (6'7")
	D4H	2AC	85-92	90/95	DD	1.67 (5'5")
	D4H LGP	3AC	85-90	90/95	DD	2.0 (6'7")
	D4H XL	8PJ	92-96	105/—	PS	1.77 (5'10")
	D4H LGP	9GJ	92-96	105/—	PS	2.0 (6'7")
	D4H LGP	4NK	92-93	105/—	DD	2.0 (6'7")
	D5	37J	67-68	93/75	DD	1.88 (6'2")
	D5 LGP	98A	67-68	93/75	DD	2.06 (6'9")
	D5	67J	68-77	105/—	DD	1.88 (6'2")
	D5	97J	71-76	105/—	PS	1.88 (6'2")
	D5 LGP	68J	68-77	105/—	DD	2.06 (6'9")
	D5B	47X	77-86	105/—	DD	1.88 (6'2")
	D5B	48X	77-86	105/—	PS	1.88 (6'2")
	D5B LGP	49X	77-86	105/—	DD	2.06 (6'9")
	D5C	6PJ	91-93	90/—	PS	1.54 (5'1")
	D5C LGP	3MK	91-93	90/—	PS	1.72 (5'8")
	D5H	3MD	86-96	120/—	PS	1.80 (5'11")
	D5H LGP	4KD	86-96	130/—	PS	2.16 (7'1")
	D5H	1YD	86-96	120/—	DD	1.80 (5'11")
	D5H LGP	2SD	86-96	130/—	DD	2.16 (7'1")
	D6B	37H	66-67	93/75	DD	1.88 (6'2")
	D6B LGP	38H	66-67	93/75	DD	2.06 (6'9")
	D6C	41A	66-68	120/93	DD	1.88 (6'2")
	D6C	96A	66-68	120/93	PS	1.88 (6'2")
	D6C	26K	68-77	125/—	DD	1.88 (6'2")
	D6C	69C	68-77	125/—	PS	1.88 (6'2")
	D6C LGP	90B	71-77	140/—	DD	2.11 (6'11")
	D6D LGP LS	6HC	86-96	160/—	DD	1.88 (6'2")
	D6D	31X	86-98	140/—	PS	1.88 (6'2")
D6D	30X	85-96	140/—	DD	1.88 (6'2")	
D6D PTNR	5YB	88-96	160/—	PS	1.88 (6'2")	
D7H	25B	85-92	215/—	DD	1.98 (6'6")	
						2.54 (8'5")
D7H LGP	82Z	85-92	215/—	DD	2.23 (7'4")	3.15 (10'4")



AGRICULTURAL TRACTORS

Model	Product Ident. No. Prefix	Years Built	Horse-power FW/ Drawbar	Approx. Machine Weight kg (lb)	Height m (ft) Gauge m (ft)	Drawbar Pull kg (lb)* and Forward Speed km/h (mph)									
						1st	2nd	3rd	4th	5th	6th	7th	8th	9th	10th
Challenger 65	7YC	87-90	270/200	14 061 (31,000)	3.24	14 825	10 393	8880	7701	6656	5708	4950	4245	2858	1725
					2.15	(32,684)	(22,912)	(19,577)	(16,978)	(14,674)	(12,583)	(10,912)	(9358)	(6300)	(3803)
					(7'1")	(2.6)	(4.0)	(4.7)	(5.3)	(6.1)	(7.0)	(8.1)	(9.3)	(12.0)	(18.1)
Challenger 65B	7YC	91-92	285/225	14 060 (31,000)	3.24	14 893	11 074	9492	8252	7138	6109	5294	4545	3057	1851
					2.15	(32,914)	(24,413)	(20,926)	(18,193)	(15,737)	(13,467)	(11,672)	(10,019)	(6740)	(4080)
					(7'1")	(2.6)	(4.0)	(4.7)	(5.3)	(6.1)	(7.0)	(8.1)	(9.3)	(12.0)	(18.1)
Challenger 65C	2ZJ	93-95	285/225	14 330 (31,530)	3.24	12 587	9574	8186	7156	6147	5230	4497	3855	2701	1637
					2.29	(27,750)	(21,106)	(18,046)	(15,775)	(13,551)	(11,530)	(9914)	(8498)	(5955)	(3610)
					(7'5")	(2.6)	(4.0)	(4.7)	(5.3)	(6.1)	(7.0)	(8.1)	(9.3)	(12.0)	(18.1)
Challenger 65D	2ZJ	95-97	300	14 909 (32,875)	3.24	12 689	10 706	9161	7934	6837	5843	5005	4256	3119	2030
					2.29	(27,975)	(23,603)	(20,197)	(17,492)	(15,072)	(12,881)	(11,034)	(9382)	(6875)	(4475)
					(7'5")	(2.6)	(4.0)	(4.7)	(5.3)	(6.1)	(7.0)	(8.1)	(9.3)	(12.0)	(18.1)
Challenger 70C	2YL	93-95	1st Gear	16 201 (35,685)	3.24	12 621	9574	8186	7156	6147	5230	4497	3855	2701	1637
			215/154		2.29	(27,825)	(21,106)	(18,046)	(15,775)	(13,551)	(11,530)	(9914)	(8498)	(5955)	(3610)
			2nd & up 285/225		(7'5")	(2.6)	(4.0)	(4.7)	(5.3)	(6.1)	(7.0)	(8.1)	(9.3)	(12.0)	(18.1)
Challenger 75	4CJ	91-92	325/256	14 060 (31,000)	3.24	15 391	12 371	10 753	9382	8073	6923	6017	5162	3588	2181
					2.15	(33,931)	(27,273)	(23,706)	(20,684)	(17,797)	(15,263)	(13,264)	(11,379)	(7910)	(4830)
					(7'1")	(2.6)	(4.0)	(4.7)	(5.3)	(6.1)	(7.0)	(8.1)	(9.3)	(12.0)	(18.1)
Challenger 75C	4KK	92-97	325/268	15 158 (33,419)	3.24	12 689	10 761	9329	8106	6932	5944	5095	4380	3075	1878
					2.29	(27,975)	(23,724)	(20,567)	(17,871)	(15,282)	(13,105)	(11,232)	(9657)	(6780)	(4140)
					(7'5")	(2.6)	(4.0)	(4.7)	(5.3)	(6.1)	(7.0)	(8.1)	(9.3)	(12.0)	(18.1)
Challenger 75D	5AR	96-97	330	14 878 (32,800)	3.24	12 884	12 562	10 919	9526	8197	7030	6109	5241	3643	2225
					2.29	(28,406)	(27,693)	(24,071)	(21,003)	(18,071)	(15,498)	(13,468)	(11,554)	(8031)	(4904)
					(7'5")	(2.6)	(4.0)	(4.7)	(5.3)	(6.1)	(7.0)	(8.1)	(9.3)	(12.0)	(18.1)
Challenger 85C	9TK	92-97	1-2 Gears	15 286 (33,700)	3.24	12 689	11 596	9544	8302	7089	6406	5490	4720	3146	2024
			325/216		2.29	(27,975)	(25,565)	(21,042)	(18,304)	(15,629)	(14,122)	(12,104)	(10,406)	(6935)	(4461)
			3-10 Gears 355/272		(7'5")	(2.8)	(4.0)	(4.9)	(5.6)	(6.5)	(7.0)	(8.1)	(9.3)	(12.6)	(18.1)
Challenger 85D	4GR	96-97	Gears	15 286 (33,700)	3.24	15 529	10 684	9599	8247	7175	6590	5705	4887	3825	2461
			1-2 330		2.29	(34,234)	(23,553)	(21,162)	(18,181)	(15,819)	(14,528)	(12,578)	(10,774)	(8432)	(5425)
			3-5 360		(7'5")	(2.5)	(3.9)	(4.8)	(5.5)	(6.4)	(7.0)	(8.0)	(9.2)	(12.6)	(18.1)
D3B SA	2PC	85-87	101	6650 (14,670)	2.71	7634	6226	5306	4531	3888					
					(8'11")	(16,830)	(13,725)	(11,700)	(9990)	(8573)					
						4.1	5.0	5.7	6.5	7.6					
D3C SA	7JF	87-92	101	7202 (15,846)	2.71	5552	4521	3827	3235	2755					
					(8'11")	(12,250)	(9960)	(8450)	(7130)	(6070)					
					1.52	4.1	5.0	5.7	6.5	7.6					
					(5'0")	(2.5)	(3.1)	(3.6)	(4.0)	(4.7)					

\*Drawbar pull figures for SA and SR models are max. at lug.

NOTE: Drawbar pull figures for the Challenger 65 is at max. power as found in University of Nebraska Tractor Test no. 1268. This test was performed on concrete. Therefore, usable drawbar pull may be less depending upon soil conditions.

## Agricultural Tractors (cont'd)

Model	Product Ident. No. Prefix	Years Built	Horse-power FW/ Drawbar	Approx. Machine Weight kg (lb)	Height m (ft) Gauge m (ft)	Drawbar Pull kg (lb)* and Forward Speed km/h (mph)									
						1st	2nd	3rd	4th	5th	6th	7th	8th	9th	10th
D4D SA	20J	66-68	—/68	6750 (14,900)	2.44 (8'0")	4590 (10,120)	3928 (8660)	3098 (6830)	2631 (5800)	2232 (4920)					
					1.52 (5'0")	4.0 (2.5)	4.7 (2.9)	5.6 (3.5)	6.4 (4.0)	7.4 (4.6)					
D4D SA	84J	66	—/68	6470 (14,270)	2.67 (8'9")	4880 (10,750)	4170 (9200)	3310 (7300)	2840 (6260)	2420 (5330)					
					1.52 (5'0")	4.0 (2.5)	4.7 (2.9)	5.6 (3.5)	6.4 (4.0)	7.4 (4.6)					
D4E SA	7PB 2CB	84-89 84-91	97	7600 (16,760)	2.71 (8'11")	5901 (13,102)	5148 (11,349)	5831 (12,859)	5002 (11,027)	4433 (9773)					
						3.4 (2.1)	4.6 (2.8)	5.5 (3.5)	6.4 (4.0)	8.3 (5.1)					
D4E SA	29X	77-84	—/74	7585 (16,722)	2.72 (8'11")	5802 (12,791)	4986 (10,993)	4007 (8835)	3814 (8408)	2896 (6384)					
					1.52 (5'0")	4.1 (2.5)	4.7 (2.9)	5.8 (3.6)	6.6 (4.1)	7.5 (4.7)					
D5 SA	21J	67-67	—/90	9300 (20,400)	2.64 (8'8") 1.88 (6'2")	6620 (14,580)	5160 (11,360)	3990 (8740)	3080 (6790)	2290 (5030)					
D5 SA	98J	67-77	—/90	9660 (21,300)	2.95 (9'8")	6120 (13,500)	5180 (11,410)	4110 (9950)	3640 (7620)	2950 (6500)	2250 (4970)				
					1.88 (6'2")	3.7 (2.3)	4.6 (2.9)	5.8 (3.6)	7.1 (4.4)	8.8 (5.5)					
D5B SA	26X	77-84	—/90	11 283 (24,875)	2.77 (9'1")	6409 (14,130)	5384 (11,870)	4323 (9530)	3688 (8130)	3180 (7010)	2486 (5480)				
					1.88 (6'2")	4.0 (2.5)	4.7 (2.9)	5.6 (3.5)	6.6 (4.1)	7.4 (4.6)	9.0 (5.6)				
D5B SA	22X	77-82	105/—	11 283 (24,875)	2.77 (9'1")	8060 (17,770)	5030 (11,100)	3410 (7520)	2290 (5060)	1480 (3260)					
					1.52 (5'0")	2.7 (1.7)	4.2 (2.6)	5.8 (3.6)	8.0 (5.0)	11.1 (6.9)					
D5B SA	24X	77-84	105/—	11 619 (25,615)	2.77 (9'1")										
					1.52 (5'0")	3.5 (2.2)	6.1 (3.8)	10.1 (6.3)							

\*Drawbar pull figures for SA and SR models are max. at lug.

**NOTE:** Drawbar pull figures for the Challenger 65 is at max. power as found in University of Nebraska Tractor Test no. 1268.

This test was performed on concrete. Therefore, usable drawbar pull may be less depending upon soil conditions.

**Agricultural Tractors (cont'd)**

Model	Product Ident. No. Prefix	Years Built	Horse-power FW/ Drawbar	Approx. Machine Weight kg (lb)	Height m (ft) Gauge m (ft)	Drawbar Pull kg (lb)* and Forward Speed km/h (mph)											
						1st	2nd	3rd	4th	5th	6th	7th	8th	9th	10th		
D6C SA	17R	70-76	140	13 064 <b>(28,800)</b>	2.67 <b>(8'9")</b>	850 <b>(18,750)</b>	6970 <b>(15,370)</b>	5880 <b>(12,780)</b>	4810 <b>(10,610)</b>	4080 <b>(9000)</b>	3190 <b>(7030)</b>	4.0 <b>(2.5)</b>	4.8 <b>(3.0)</b>	5.6 <b>(3.5)</b>	6.4 <b>(4.0)</b>	7.4 <b>(4.6)</b>	8.8 <b>(5.5)</b>
D6D SR	7XF	89-91	140	15 200 <b>(33,500)</b>	2.87 <b>(9'5")</b>	14 358 <b>(31,645)</b>	12 429 <b>(27,394)</b>	11 721 <b>(25,833)</b>	7067 <b>(15,576)</b>	6096 <b>(13,436)</b>	4931 <b>(10,868)</b>	2.0 <b>(1.2)</b>	2.9 <b>(1.8)</b>	4.1 <b>(2.5)</b>	6.5 <b>(4.0)</b>	7.4 <b>(4.6)</b>	8.9 <b>(5.5)</b>
D6D SA 123-161 kW (165-215 HP)	38C	83-91	165	14 500 <b>(32,000)</b>	2.87 <b>(9'5")</b>	10 098 <b>(22,243)</b>	8510 <b>(18,744)</b>	9210 <b>(20,287)</b>	7789 <b>(17,156)</b>	6732 <b>(14,828)</b>	5456 <b>(12,017)</b>	4.5 <b>(2.8)</b>	5.3 <b>(3.3)</b>	6.1 <b>(3.8)</b>	7.1 <b>(4.4)</b>	8.2 <b>(5.1)</b>	9.8 <b>(6.1)</b>
D6D SA 123-179 kW (165-240 HP)	19B	83-91	165	14 500 <b>(32,000)</b>	2.87 <b>(9'5")</b>	10 098 <b>(22,243)</b>	8510 <b>(18,744)</b>	7181 <b>(15,817)</b>	8732 <b>(19,234)</b>	7560 <b>(16,651)</b>	6144 <b>(13,532)</b>	4.5 <b>(2.8)</b>	5.3 <b>(3.3)</b>	6.1 <b>(3.8)</b>	7.1 <b>(4.4)</b>	8.2 <b>(5.1)</b>	9.8 <b>(6.1)</b>
D6E SR	8FJ	91-96	155/216 121/170	14 960 <b>(32,987)</b>	2.03 <b>(6'8")</b> 1.88 <b>(6'2")</b>	11 308 <b>(24,878)</b>	7771 <b>(17,097)</b>	8130 <b>(17,887)</b>	6866 <b>(15,105)</b>	5926 <b>(13,037)</b>	3135 <b>(6987)</b>	3.0 <b>(1.9)</b>	4.3 <b>(2.7)</b>	5.8 <b>(2.6)</b>	6.8 <b>(4.3)</b>	7.7 <b>(4.8)</b>	9.3 <b>(5.8)</b>
Ag 6 Generation One	05X	77-86	165/240	14 787 <b>(32,600)</b>	3.43 <b>(11'3")</b>	10 034 <b>(22,120)</b>	8455 <b>(18,639)</b>	7134 <b>(15,727)</b>	9041 <b>(19,931)</b>	7830 <b>(17,268)</b>	4.5 <b>(2.8)</b>	5.3 <b>(3.3)</b>	6.1 <b>(3.8)</b>	7.1 <b>(4.4)</b>	8.2 <b>(5.1)</b>		
Ag 6 Generation Two	05X	77-86	200/240	14 787 <b>(32,600)</b>	3.48 <b>(11'5")</b>	12 407 <b>(27,353)</b>	10 482 <b>(23,110)</b>	10 667 <b>(23,514)</b>	9091 <b>(19,931)</b>	7830 <b>(17,263)</b>	4.5 <b>(2.8)</b>	5.3 <b>(3.3)</b>	6.1 <b>(3.8)</b>	7.1 <b>(4.4)</b>	8.2 <b>(5.1)</b>		
D7G SA std. trans.	35N	80-86	250	18 462 <b>(40,700)</b>	3.2 <b>(10'6")</b>	19 101 <b>(42,110)</b>	13 622 <b>(30,030)</b>	11 358 <b>(25,040)</b>	10 015 <b>(22,080)</b>	8627 <b>(19,020)</b>	7584 <b>(16,720)</b>	3.5 <b>(2.2)</b>	4.8 <b>(3.0)</b>	5.6 <b>(3.5)</b>	6.4 <b>(4.0)</b>	7.2 <b>(4.5)</b>	8.2 <b>(5.1)</b>
D7G SA std. trans. 168-186 kW (225-250 HP)		77-86	250	18 462 <b>(40,700)</b>	3.2 <b>(10'6")</b>	16 990 <b>(37,424)</b>	12 090 <b>(26,631)</b>	11 358 <b>(25,040)</b>	10 015 <b>(22,080)</b>	8627 <b>(19,020)</b>	7584 <b>(16,720)</b>	3.5 <b>(2.2)</b>	4.8 <b>(3.0)</b>	5.6 <b>(3.5)</b>	6.4 <b>(4.0)</b>	7.2 <b>(4.5)</b>	8.2 <b>(5.1)</b>
D8L SA		84-87	400	36 650 <b>(80,820)</b>	3.87 <b>(12'8")</b> 2.2 <b>(7'3")</b>	40 252 <b>(88,740)</b>	39 466 <b>(64,960)</b>	22 013 <b>(48,530)</b>	15 953 <b>(35,170)</b>	11 880 <b>(26,190)</b>	8446 <b>(18,620)</b>	2.9 <b>(1.8)</b>	3.9 <b>(2.4)</b>	5.0 <b>(3.1)</b>	6.8 <b>(4.2)</b>	8.9 <b>(5.5)</b>	11.9 <b>(7.4)</b>

\*Drawbar pull figures for SA and SR models are max. at lug.

**NOTE:** Drawbar pull figures for the Challenger 65 is at max. power as found in University of Nebraska Tractor Test no. 1268.

This test was performed on concrete. Therefore, usable drawbar pull may be less depending upon soil conditions.



## MOTOR GRADERS

Model	Product Ident. No. Prefix	Years Built	Horsepower, Rated	Approx. Ship Wt. kg (lb)	Wheel-base m (ft)	Length m (ft)	Width m (ft)	Mold-board Length m (ft)	Turning Radius m (ft)	Controls	Maximum Speed km/h (mph)	
											Forward	Rev.
212TD	79C	54-57	50	6030 (13,290)	5.03 (16'6")	6.68 (21'11")	2.07 (6'10")	3.05 (10'0")	11.10 (36'5")	Mech.	18.1 (11.2)	4.2 (2.6)
112	3U	47-59	70	8770 (19,330)	5.72 (18'9")	7.59 (24'11")	2.39 (7'10")	3.66 (12'0")	10.87 (35'8")	Mech.	25.7 (16.0)	6.4 (4.0)
112	81C	55-59	75	9435 (20,805)	5.72 (18'9")	7.59 (24'11")	2.39 (7'10")	3.66 (12'0")	10.74 (35'3")	Mech.	25.7 (16.0)	6.4 (4.0)
112E	68E(U.S.) 91G(U.S.)	59-64 64-68	85	9500 (20,900)	5.72 (18'9")	7.62 (25'0")	2.36 (7'9")	3.66 (12'0")	10.74 (35'3")	Mech.	29.3 (18.2)	9.3 (5.8)
112F	82F(U.S.) 46D(U.S.) 74H(U.S.) 89J(U.S.) 80J(AUSTL)	60-64 64-68 67-68 68-74 69-84	100	9800 (21,600)	5.72 (18'9")	7.82 (25'8")	2.36 (7'9")	3.66 (12'0")	10.70 (35'3")	Mech.	29.9 (18.6)	9.7 (6.0)
120	89G(U.S.)	64-67	115	10 480 (23,100)	5.71 (18'9")	7.62 (25'0")	2.36 (7'9")	3.66 (12'0")	10.74 (35'3")	Mech.	32.2 (20.0)	10.3 (6.4)
120	14K(U.S.)	67-69	125	10 600 (23,500)	5.71 (18'9")	7.80 (25'8")	2.36 (7'9")	3.66 (12'0")	10.74 (35'3")	Mech.	32.2 (20.0)	41.5 (25.8)
120	10R(U.S.)	69-74	125	10 700 (23,700)	5.85 (19'2")	7.95 (26'1")	2.36 (7'9")	3.66 (12'0")	10.90 (35'9")	Mech.	32.2 (20.0)	6.6 (4.1)
120	13U(U.S.)	71-74	125	11 000 (24,300)	5.85 (19'2")	7.95 (26'1")	2.36 (7'9")	3.66 (12'0")	10.90 (35'9")	Mech.	32.2 (20.0)	6.6 (4.1)
120B	64U(BRAZ)	72-89	125	12 000 (26,460)	5.85 (19'2")	7.92 (26'0")	2.36 (7'9")	3.66 (12'0")	10.90 (35'9")	Mech.	35.4 (22.0)	23.8 (14.8)
120G	87V(U.S.) 4HD(BRAZ) 11W(AUSTL) 82V(CAN)	73-95 86-95 75-95 74-80	125	12 859 (28,350)	5.69 (18'8")	7.92 (26'0")	2.45 (8'0")	3.66 (12'0")	6.7 (22'0")	Hyd.	40.9 (25.4)	40.9 (25.4)
130G	74V(U.S.) 12W(AUSTL)	73-95 75-89	135	13 050 (28,770)	5.92 (19'5")	8.30 (27'3")	2.45 (8'0")	3.66 (12'0")	7.3 (24'0")	Hyd.	39.4 (24.5)	39.4 (24.5)
12	6M(U.S.)	39-42	66	9440 (20,820)	5.72 (18'9")	7.62 (25'0")	2.39 (7'10")	3.66 (12'0")	10.87 (35'8")	Mech.	24.5 (15.2)	6.1 (3.8)
12	9K(U.S.)	38-45	70	9590 (21,140)	5.72 (18'9")	7.62 (25'0")	2.39 (7'10")	3.66 (12'0")	10.87 (35'8")	Mech.	24.5 (15.2)	6.1 (3.8)
12	7T(U.S.)	45-47	75	9750 (21,500)	5.72 (18'9")	7.62 (25'0")	2.39 (7'10")	3.66 (12'0")	10.87 (35'8")	Mech.	24.5 (15.2)	6.1 (3.8)
12	8T(U.S.) 94C(AUSTL)	47-55 55-58	100	10 100 (22,375)	5.72 (18'9")	7.62 (25'0")	2.39 (7'10")	3.66 (12'0")	10.87 (35'8")	Mech.	31.1 (19.3)	6.6 (4.1)
12	70D-71D(U.S.) 80C(U.S.) 38E(AUSTL)	57-59 55-67 58-60	115	10 200 (22,410)	5.72 (18'9")	7.62 (25'0")	2.37 (7'10")	3.66 (12'0")	10.87 (35'8")	Mech.	31.1 (19.3)	10.1 (6.3)

## Motor Graders (cont'd)

Model	Product Ident. No. Prefix	Years Built	Horsepower, Rated	Approx. Ship Wt. kg (lb)	Wheel-base m (ft)	Length m (ft)	Width m (ft)	Mold-board Length m (ft)	Turning Radius m (ft)	Controls	Maximum Speed km/h (mph)	
											Forward	Rev.
12E	99E(U.S.) 21F(AUSTL) 17K(AUSTL)	59-65 60-68 68-75	115	11 100 <b>(24,400)</b>	5.72 <b>(18'9")</b>	8.03 <b>(26'4")</b>	2.36 <b>(7'9")</b>	3.66 <b>(12'0")</b>	10.90 <b>(35'9")</b>	Mech.	32.0 <b>(19.9)</b>	22.2 <b>(13.8)</b>
12F	73G(U.S.)	65-67	115	12 973 <b>(28,600)</b>	6.0 <b>(19'8")</b>	8.20 <b>(26'10")</b>	2.36 <b>(7'9")</b>	3.66 <b>(12'0")</b>	11.40 <b>(37'5")</b>	Hyd. Mech.	32.0 <b>(19.9)</b>	22.2 <b>(13.8)</b>
12F	89H(U.S.) 13K(U.S.)	69-73 67-73	125	12 973 <b>(28,600)</b>	6.0 <b>(19'8")</b>	8.20 <b>(26'10")</b>	2.36 <b>(7'9")</b>	3.65 <b>(12'0")</b>	11.40 <b>(37'5")</b>	Hyd. Mech.	34.3 <b>(21.3)</b>	41.5 <b>(25.8)</b>
12G	61M(U.S.) 3PL(BRAZ) 3WC(AUSTL)	73-95 93-95 85-95	135	13 554 <b>(29,860)</b>	5.92 <b>(19'5")</b>	8.30 <b>(27'3")</b>	2.45 <b>(8'0")</b>	3.66 <b>(12'0")</b>	7.3 <b>(24'0")</b>	Hyd.	39.4 <b>(24.5)</b>	39.4 <b>(24.5)</b>
140	14U(U.S.) 11R(U.S.) 55F(AUSTL) 24R(CAN)	71-74 70-74 71-75 71-74	150	13 109 <b>(28,900)</b>	5.84 <b>(19'2")</b>	7.95 <b>(26'1")</b>	2.44 <b>(8'0")</b>	3.66 <b>(12'0")</b>	10.97 <b>(36'0")</b>	Mech.	38.8 <b>(24.1)</b>	47.0 <b>(29.2)</b>
140B	61S(BRAZ)	81-87	150	13 620 <b>(30,003)</b>	6.14 <b>(20'2")</b>	8.07 <b>(26'6")</b>	2.39 <b>(7'10")</b>	3.96 <b>(13'0")</b>	11.60 <b>(38'0")</b>	Mech.	37.6 <b>(23.4)</b>	25.6 <b>(15.9)</b>
140G	72V(U.S.) 5MD(BRAZ) 13W(AUSTL) 81V(CAN)	73-95 87-95 75-95 74-80	150	14 102 <b>(31,090)</b>	5.92 <b>(19'5")</b>	8.33 <b>(27'4")</b>	2.45 <b>(8'0")</b>	3.66 <b>(12'0")</b>	7.3 <b>(24'0")</b>	Hyd.	41.0 <b>(25.5)</b>	41.0 <b>(25.5)</b>
140G AWD	72V(U.S.)	73-95	150	14 914 <b>(32,880)</b>	5.92 <b>(19'5")</b>	8.33 <b>(27'4")</b>	2.45 <b>(8'0")</b>	3.66 <b>(12'0")</b>	7.3 <b>(24'0")</b>	Hyd.	41.0 <b>(25.5)</b>	41.0 <b>(25.5)</b>
14B	78E(U.S.) 64C(U.S.)	59-59 59-69	150	13 300 <b>(29,280)</b>	5.84 <b>(19'2")</b>	8.03 <b>(26'4")</b>	2.44 <b>(8'0")</b>	3.66 <b>(12'0")</b>	10.97 <b>(36'0")</b>	Mech.	34.8 <b>(21.6)</b>	11.3 <b>(7.0)</b>
14C	35F(U.S.)	59-61	150	12 973 <b>(28,600)</b>	5.84 <b>(19'2")</b>	8.03 <b>(26'4")</b>	2.44 <b>(8'0")</b>	3.66 <b>(12'0")</b>	10.97 <b>(36'0")</b>	Mech.	34.8 <b>(21.6)</b>	11.3 <b>(7.0)</b>
14D	96F(U.S.)	61-65	150	13 700 <b>(30,300)</b>	6.15 <b>(20'2")</b>	8.33 <b>(27'4")</b>	2.44 <b>(8'0")</b>	3.96 <b>(13'0")</b>	11.58 <b>(38'0")</b>	Mech.	34.1 <b>(21.2)</b>	23.5 <b>(14.6)</b>
14E	99G(U.S.)	65-68	150	13 699 <b>(30,200)</b>	6.15 <b>(20'2")</b>	8.33 <b>(27'4")</b>	2.44 <b>(8'0")</b>	3.96 <b>(13'0")</b>	11.58 <b>(38'0")</b>	Hyd. Mech.	36.4 <b>(22.6)</b>	24.9 <b>(15.5)</b>
14E	12K(U.S.) 72G(U.S.)	67-73 69-73	150	14 300 <b>(31,600)</b>	6.10 <b>(20'2")</b>	8.30 <b>(27'4")</b>	2.44 <b>(8'0")</b>	3.96 <b>(13'0")</b>	11.60 <b>(38'0")</b>	Hyd. Mech.	39.1 <b>(24.3)</b>	47.3 <b>(29.4)</b>
14G	96U(U.S.)	73-95	200	20 688 <b>(45,610)</b>	6.45 <b>(21'2")</b>	9.21 <b>(30'3")</b>	2.83 <b>(9'3")</b>	4.27 <b>(14'0")</b>	7.9 <b>(25'11")</b>	Hyd.	43.0 <b>(26.8)</b>	50.1 <b>(31.1)</b>
16	49G(U.S.)	63-73	225	22 499 <b>(49,600)</b>	6.86 <b>(22'6")</b>	9.50 <b>(31'2")</b>	3.00 <b>(9'10")</b>	4.27 <b>(14'0")</b>	13.56 <b>(44'6")</b>	Hyd. Mech.	49.7 <b>(30.9)</b>	49.7 <b>(30.9)</b>
16G	93U(U.S.)	73-95	275	27 284 <b>(60,150)</b>	6.96 <b>(22'10")</b>	9.99 <b>(32'8")</b>	3.08 <b>(10'1")</b>	4.88 <b>(16'0")</b>	8.2 <b>(27'0")</b>	Hyd.	43.6 <b>(27.1)</b>	43.6 <b>(27.1)</b>



## HYDRAULIC EXCAVATORS (Track)

Model	Product Ident. No. Prefix COSA (US)	Years Built	Flywheel Horsepower	Approx. Operating Weight kg (lb)	Track Gauge m (ft)	Height* m (ft)	Length* m (ft)	Width m (ft)	Max. Reach** m (ft)	Lift Capacity*** kg (lb)
205 LC	(3HC) (4DC)	84-89	Deutz-67 Perkins-71	13 135 <b>(28,957)</b>	1.895 <b>(6'2.5")</b>	3.00 <b>(9'10")</b>	7.30 <b>(23'11")</b>	2.40 <b>(7'10")</b>	8.17 <b>(26'10")</b>	3290 <b>(7300)</b>
205B	5ZF	90-92	80	12 900 <b>(28,443)</b>	1.895 <b>(6'2.5")</b>	2.976 <b>(9'9")</b>	7.67 <b>(25'2")</b>	2.495 <b>(8'2")</b>	8.9 <b>(29'2")</b>	3740 <b>(8250)</b>
211 LC	(4EC) (5CC)	84-89	Deutz-84 Perkins-94	15 540 <b>(34,260)</b>	2.08 <b>(6'9.9")</b>	3.02 <b>(9'11")</b>	8.01 <b>(26'3")</b>	2.49 <b>(8'2")</b>	9.88 <b>(32'5")</b>	4240 <b>(9340)</b>
213 LC	3ZC	83-87	102	17 300 <b>(38,140)</b>	2.08 <b>(6'10")</b>	3.08 <b>(10'1")</b>	8.34 <b>(27'4")</b>	2.49 <b>(8'2")</b>	10.30 <b>(33'9.5")</b>	5127 <b>(11,305)</b>
215	(96L) (57Z) (14Z)	76-80 79-84	85 90	17 450 <b>(38,480)</b>	1.92 <b>(6'4")</b>	3.10 <b>(10'1")</b>	8.94 <b>(29'4")</b>	2.47 <b>(8'0")</b>	9.25 <b>(30'4")</b>	5090 <b>(11,200)</b>
215 SA	(57Y) (14Z)	82-84	90	19 440 <b>(42,860)</b>	2.18 <b>(7'2")</b>	3.22 <b>(10'6")</b>	8.94 <b>(29'4")</b>	2.73 <b>(8'11")</b>	9.23 <b>(30'3")</b>	5130 <b>(11,300)</b>
215B LC	(9YB)	84-87	105	18 510 <b>(40,806)</b>	1.92 <b>(6'4")</b>	3.10 <b>(10'2")</b>	8.94 <b>(29'4")</b>	2.44 <b>(8'0")</b>	9.25 <b>(30'4")</b>	5760 <b>(12,700)</b>
215C LC	(4HG)	87-89	115	19 570 <b>(43,150)</b>	1.92 <b>(6'4")</b>	3.1 <b>(10'2")</b>	8.94 <b>(29'4")</b>	2.42 <b>(7'11")</b>	9.29 <b>(30'6")</b>	7070 <b>(15,200)</b>
215D LC	(9TF)	89-92	125	19 900 <b>(43,900)</b>	1.92 <b>(6'4")</b>	3.2 <b>(10'6")</b>	9.0 <b>(24'6")</b>	2.44 <b>(8'0")</b>	9.23 <b>(30'3")</b>	6830 <b>(14,700)</b>
219	(5CF)	87-89	130	21 120 <b>(46,550)</b>	2.18 <b>(7'2")</b>	3.12 <b>(10'3")</b>	8.94 <b>(29'4")</b>	2.73 <b>(8'11")</b>	10.39 <b>(34'1")</b>	7080 <b>(15,300)</b>
219D	(5XG)	89-92	140	21 600 <b>(47,500)</b>	2.18 <b>(7'2")</b>	3.12 <b>(10'3")</b>	9.41 <b>(30'10")</b>	2.73 <b>(8'11")</b>	9.75 <b>(32'0")</b>	7670 <b>(16,500)</b>
219 LC	(5CF)	87-89	130	22 020 <b>(48,550)</b>	2.18 <b>(7'2")</b>	3.12 <b>(10'3")</b>	8.94 <b>(29'4")</b>	2.73 <b>(8'11")</b>	10.39 <b>(34'1")</b>	7080 <b>(15,300)</b>
219D LC	(5XG)	89-92	140	22 400 <b>(49,300)</b>	2.18 <b>(7'2")</b>	3.12 <b>(10'3")</b>	9.41 <b>(30'10")</b>	2.73 <b>(8'11")</b>	9.75 <b>(32'0")</b>	7670 <b>(16,500)</b>
225 LC	(51U)	72-86	135	23 900 <b>(52,700)</b>	2.64 <b>(8'8")</b>	3.17 <b>(10'5")</b>	9.83 <b>(32'3")</b>	2.99 <b>(9'10")</b>	9.58 <b>(31'5")</b>	7300 <b>(15,600)</b>
225 SA	(51U)	77-86	135	27 125 <b>(59,800)</b>	2.64 <b>(8'8")</b>	3.17 <b>(10'5")</b>	9.83 <b>(32'3")</b>	3.35 <b>(11'0")</b>	9.55 <b>(31'4")</b>	7340 <b>(15,700)</b>
225B	(2ZD) (3YD)	86-89 87-89	145	24 960 <b>(55,030)</b>	2.44 <b>(8'0")</b>	3.17 <b>(10'5")</b>	9.83 <b>(32'3")</b>	2.99 <b>(9'10")</b>	10.16 <b>(33'4")</b>	11 040 <b>(26,100)</b>
225D	(6RG)	89-91	150	25 400 <b>(55,900)</b>	2.44 <b>(8'0")</b>	3.23 <b>(10'7")</b>	9.94 <b>(32'7")</b>	2.99 <b>(9'10")</b>	10.13 <b>(33'3")</b>	—
225B LC	(2ZD) (3YD)	86-89 87-89	145	26 140 <b>(58,230)</b>	2.44 <b>(8'0")</b>	3.17 <b>(10'5")</b>	9.83 <b>(32'3")</b>	2.99 <b>(9'10")</b>	10.16 <b>(33'4")</b>	11 040 <b>(26,100)</b>
225D LC	(2SJ)	89-91	165	26 700 <b>(58,900)</b>	2.44 <b>(8'0")</b>	3.23 <b>(10'7")</b>	9.94 <b>(32'7")</b>	2.99 <b>(9'10")</b>	10.13 <b>(33'3")</b>	12 450 <b>(26,900)</b>
229	(1GF) (1AF)	86-89 86-89	145	29 140 <b>(64,830)</b>	2.64 <b>(8'8")</b>	3.38 <b>(11'1")</b>	9.83 <b>(32'3")</b>	3.45 <b>(11'4")</b>	10.11 <b>(33'2")</b>	—
229 LC Custom 180	(1GF)	86-89	180	33 540 <b>(73,940)</b>	2.64 <b>(8'8")</b>	3.38 <b>(11'1")</b>	11.02 <b>(36'2")</b>	3.45 <b>(11'4")</b>	11.35 <b>(37'3")</b>	7940 <b>(17,100)</b>
229D	(2LJ)	89-91	157	31 700 <b>(69,900)</b>	2.64 <b>(8'8")</b>	3.52 <b>(11'7")</b>	10.9 <b>(35'9")</b>	3.25 <b>(10'8")</b>	10.76 <b>(35'4")</b>	8300 <b>(18,300)</b>

\*When shipped with medium stick and bucket curled under.

\*\*Maximum reach at ground level, one-piece boom, longest stick.

\*\*\*Lift capacity at 4.6 m (15'0") over front, one-piece boom, longest stick.

## Hydraulic Excavators (cont'd)

Model	Product Ident. No. Prefix COSA (US)	Years Built	Flywheel Horsepower	Approx. Operating Weight kg (lb)	Track Gauge m (ft)	Height* m (ft)	Length* m (ft)	Width m (ft)	Max. Reach** m (ft)	Lift Capacity*** kg (lb)
231D		90-92	200	34 300 <b>(75,600)</b>	2.64 <b>(8'8")</b>	3.45 <b>(11'4")</b>	10.83 <b>(35'6")</b>	3.45 <b>(11'4")</b>	11.20 <b>(36'9")</b>	15 300 <b>(33,000)</b>
231D LC		90-92	200	35 500 <b>(78,100)</b>	2.64 <b>(8'8")</b>	3.45 <b>(11'4")</b>	10.83 <b>(35'6")</b>	3.45 <b>(11'4")</b>	11.20 <b>(36'9")</b>	15 300 <b>(33,000)</b>
235	(32K) (64R)	73-86	195	39 320 <b>(86,700)</b>	2.69 <b>(8'10")</b>	3.40 <b>(11'2")</b>	11.27 <b>(37'0")</b>	3.45 <b>(11'4")</b>	11.23 <b>(36'10")</b>	7050 <b>(17,300)</b>
235B	(7WC) (9PC)	86-88	215	40 960 <b>(89,700)</b>	2.69 <b>(8'10")</b>	3.40 <b>(11'2")</b>	11.27 <b>(37'0")</b>	3.45 <b>(11'4")</b>	11.23 <b>(36'10")</b>	9934 <b>(21,900)</b>
235C	(4DG) (5AF) (2PG) (3WG)	88-92	250	42 140 <b>(92,800)</b>	2.69 <b>(8'10")</b>	3.50 <b>(11'4")</b>	11.50 <b>(37'7")</b>	3.45 <b>(11'4")</b>	12.00 <b>(39'5")</b>	14 720 <b>(35,000)</b>
235D	(8KJ) (8TJ)	92-93	250	46 270 <b>(103,780)</b>	2.69 <b>(8'10")</b>	3.50 <b>(11'5")</b>	11.50 <b>(37'7")</b>	3.45 <b>(11'4")</b>	12.00 <b>(39'5")</b>	14 840 <b>(35,200)</b>
235D LC	(8KJ) (8TJ)	92-93	250	49 270 <b>(108,620)</b>	3.30 <b>(10'10")</b>	3.60 <b>(11'9")</b>	11.60 <b>(38'1")</b>	3.79 <b>(12'5")</b>	11.97 <b>(39'3")</b>	15 070 <b>(35,700)</b>
245	(82X) (84X)	74-88	325	65 745 <b>(144,941)</b>	3.24 <b>(10'7")</b>	4.62 <b>(15'2")</b>	13.18 <b>(43'3")</b>	3.71 <b>(12'2")</b>	14.02 <b>(46'0")</b>	14 930 <b>(32,920)</b>
245B	6MF 1SJ	88-92	360	65 200 <b>(143,500)</b>	3.24 <b>(10'7")</b>	4.78 <b>(15'8")</b>	13.13 <b>(43'1")</b>	3.61 <b>(11'10")</b>	14.02 <b>(46'0")</b>	—
245D	(4LK) (7ZJ)	92-93	385	68 420 <b>(150,520)</b>	3.24 <b>(10'7")</b>	5.46 <b>(17'11")</b>	12.82 <b>(42'0")</b>	3.61 <b>(11'10")</b>	13.84 <b>(45'9")</b>	14 640† <b>(31,600)</b>
E70	3BG 3CG	87-89	52	6500 <b>(14,300)</b>	1.65 <b>(5'5")</b>	2.59 <b>(8'6")</b>	6.02 <b>(19'9")</b>	2.25 <b>(7'5")</b>	6.67 <b>(21'10")</b>	1300 <b>(2750)</b>
E70B	7YF(JPN) 5TG(OSJ) 6AK(OSJ)	89-94 89-94 92-94	54	6760 <b>(14,900)</b>	1.75 <b>(5'9")</b>	2.56 <b>(8'5")</b>	6.09 <b>(20'0")</b>	2.32 <b>(7'7")</b>	6.72 <b>(22'1")</b>	1315 <b>(2900)</b>
E110	3FG 3GG	87-89 87-89	74	10 700 <b>(23,600)</b>	1.9 <b>(6'3")</b>	2.73 <b>(8'11")</b>	7.345 <b>(24'0")</b>	2.5 <b>(8'2")</b>	7.93 <b>(26'0")</b>	2700 <b>(5750)</b>
E110B	9HF(OSJ) 8MF(JPN) 5GK(OSJ)	90-92 90-92 90-92	79	11 600 <b>(25,600)</b>	1.99 <b>(6'6")</b>	2.70 <b>(8'10")</b>	7.25 <b>(23'9")</b>	2.495 <b>(8'2")</b>	8.10 <b>(26'7")</b>	3350 <b>(7200)</b>
E120	1LF(OSJ) 1MF(JPN)	87-89 87-89	84	12 200 <b>(26,800)</b>	1.99 <b>(6'6")</b>	2.775 <b>(9'1")</b>	7.66 <b>(25'1")</b>	2.490 <b>(8'2")</b>	8.58 <b>(28'2")</b>	3850 <b>(8300)</b>
E120B	7NF(OSJ) 6JF(JPN) 4XK(OSJ)	90-92 90-92 90-92	84	12 680 <b>(28,200)</b>	1.99 <b>(6'6")</b>	2.70 <b>(8'10")</b>	7.62 <b>(25'10")</b>	2.495 <b>(8'2")</b>	8.74 <b>(28'8")</b>	4310 <b>(9250)</b>
E140	1PF(JPN) 1NF(OSJ)	87-94	89	13 970 <b>(30,800)</b>	1.99 <b>(6'6")</b>	2.89 <b>(9'6")</b>	8.29 <b>(27'6")</b>	2.55 <b>(8'4")</b>	5.49 <b>(18'0")</b>	4380 <b>(9650)</b>
E200B	6KF(OSJ) 4SG(JPN)	87-91 87-91	118	18 800 <b>(41,400)</b>	2.20 <b>(7'3")</b>	2.97 <b>(9'9")</b>	9.48 <b>(31'1")</b>	2.83 <b>(9'4")</b>	10.63 <b>(34'10")</b>	8100 <b>(17,350)</b>
EL200B	7DF(OSJ) 5EG(JPN)	87-91 87-91	118	20 100 <b>(44,300)</b>	2.38 <b>(7'10")</b>	2.97 <b>(9'9")</b>	9.48 <b>(31'1")</b>	3.18 <b>(10'5")</b>	10.63 <b>(34'10")</b>	8150 <b>(17,600)</b>
E240	1FG(OSJ) 2HF(JPN)	87-89 87-89	148	23 000 <b>(50,700)</b>	2.39 <b>(7'10")</b>	3.02 <b>(9'11")</b>	9.73 <b>(31'11")</b>	3.19 <b>(10'6")</b>	10.6 <b>(34'9")</b>	9800 <b>(21,600)</b>
E240B	8SF(OSJ) 9PF(JPN)	89-92	148	23 000 <b>(50,700)</b>	2.39 <b>(7'10")</b>	3.02 <b>(9'11")</b>	9.73 <b>(31'11")</b>	3.19 <b>(10'6")</b>	10.6 <b>(34'9")</b>	9800 <b>(21,600)</b>
E240C	2RL(OSJ) 8MK(JPN)	92-93	148	23 000 <b>(50,700)</b>	2.39 <b>(7'10")</b>	3.02 <b>(9'11")</b>	9.73 <b>(31'11")</b>	3.19 <b>(10'6")</b>	10.6 <b>(34'9")</b>	9800 <b>(21,600)</b>

\*When shipped with medium stick and bucket curled under.

\*\*Maximum reach at ground level, one-piece boom, longest stick.

\*\*\*Lift capacity at 4.6 m (15'0") over front, one-piece boom, longest stick.

†@ 7.5 m (25'0") over front, one-piece boom, longest stick.



## Hydraulic Excavators (cont'd)

Model	Product Ident. No. Prefix COSA (US)	Years Built	Flywheel Horsepower	Approx. Operating Weight kg (lb)	Track Gauge m (ft)	Height* m (ft)	Length* m (ft)	Width m (ft)	Max. Reach** m (ft)	Lift Capacity*** kg (lb)
EL240	4JF(OSJ) 4MF(JPN)	87-89	148	23 600 <b>(52,000)</b>	2.58 <b>(8'6")</b>	3.02 <b>(9'11")</b>	9.73 <b>(31'11")</b>	3.38 <b>(11'1")</b>	10.6 <b>(34'9")</b>	11 300 <b>(24,300)</b>
EL240B	5WG(OSJ) 6MG(JPN)	89-92	148	23 600 <b>(52,000)</b>	2.58 <b>(8'6")</b>	3.02 <b>(9'11")</b>	9.73 <b>(31'11")</b>	3.38 <b>(11'1")</b>	10.6 <b>(34'9")</b>	10 320 <b>(22,750)</b>
EL240C	9PK(OSJ) 9NK(JPN)	92-93	148	23 600 <b>(52,000)</b>	2.58 <b>(8'6")</b>	3.02 <b>(9'11")</b>	9.73 <b>(31'11")</b>	3.38 <b>(11'1")</b>	10.6 <b>(34'9")</b>	10 320 <b>(22,750)</b>
E300	2CF(OSJ) 1KG(JPN)	87-89	187	30 500 <b>(67,300)</b>	2.6 <b>(8'6")</b>	3.22 <b>(10'7")</b>	10.94 <b>(35'11")</b>	3.4 <b>(11'2")</b>	11.84 <b>(38'9")</b>	12 550 <b>(27,650)</b>
E300B	1WJ(OSJ) 2HJ(JPN)	90-91	206	30 200 <b>(66,580)</b>	2.6 <b>(8'6")</b>	3.22 <b>(10'7")</b>	10.94 <b>(35'11")</b>	3.4 <b>(11'2")</b>	11.84 <b>(38'9")</b>	12 450 <b>(26,850)</b>
EL300	4NF(OSJ) 4SF(JPN)	87-89	187	31 600 <b>(69,700)</b>	2.6 <b>(8'6")</b>	3.22 <b>(10'7")</b>	10.94 <b>(35'11")</b>	3.4 <b>(11'2")</b>	11.84 <b>(38'9")</b>	12 550 <b>(27,650)</b>
EL300B	3FJ(OSJ) 1GK(JPN)	90-91	206	31 200 <b>(68,780)</b>	2.6 <b>(8'6")</b>	3.22 <b>(10'7")</b>	10.94 <b>(35'11")</b>	3.4 <b>(11'2")</b>	11.84 <b>(38'9")</b>	12 450 <b>(26,850)</b>
E450	3HG(OSJ) 3JG(JPN)	87-93	276	46 000 <b>(101,430)</b>	2.89 <b>(9'6")</b>	3.49 <b>(11'5")</b>	11.96 <b>(39'3")</b>	3.15 <b>(10'4")</b>	13.08 <b>(42'11")</b>	10 900 <b>(23,500)</b>
E650	3KG(OSJ) 3LG(JPN)	87-92	375	62 600 <b>(138,000)</b>	3.25 <b>(10'8")</b>	4.84 <b>(15'11")</b>	14.0 <b>(45'11")</b>	3.49 <b>(11'5")</b>	13.33 <b>(43'9")</b>	15 850 <b>(34,000)</b>
307	2WM 2PM(OSJ) 9ZL(JPN)	94-97	54	7600 <b>(16,760)</b>	1.75 <b>(5'9")</b>	2.9 <b>(9'6")</b>	6.3 <b>(20'8")</b>	2.4 <b>(7'10")</b>	6.38 <b>(20'11")</b>	2450 <b>(5400)</b>
307B SB	AFB	99-	49	7500 <b>(16,540)</b>	1.75 <b>(5'9")</b>	2.9 <b>(9'5")</b>	6.75 <b>(22'2")</b>	2.28 <b>(7'2")</b>	7.01 <b>(23'0")</b>	1410 <b>(3109)</b>
311	9LJ(OSJ) 5PK(JPN)	93-96	79	11 100 <b>(24,400)</b>	1.99 <b>(6'6")</b>	2.76 <b>(9'1")</b>	7.25 <b>(23'9")</b>	2.49 <b>(8'2")</b>	8.10 <b>(26'7")</b>	3100 <b>(6650)</b>
312	6GK(OSJ) 7DK(JPN)	93-96	84	12 600 <b>(27,910)</b>	1.99 <b>(6'6")</b>	2.76 <b>(9'1")</b>	7.6 <b>(24'11")</b>	2.49 <b>(8'2")</b>	8.63 <b>(28'4")</b>	4200 <b>(9260)</b>
312	6BL	93-97	84	12 600 <b>(27,780)</b>	1.99 <b>(6'6")</b>	2.76 <b>(9'1")</b>	7.6 <b>(24'11")</b>	2.49 <b>(8'2")</b>	8.63 <b>(28'3")</b>	4200 <b>(9260)</b>
312B	6SW 9NW(blade)	98-	84	13 000 <b>(28,665)</b> 13 785 <b>(30,395)</b>	1.99 <b>(6'6")</b> 1.99 <b>(6'6")</b>	2.91 <b>(9'6")</b> 2.91 <b>(9'6")</b>	7.59 <b>(24'11")</b> 7.59 <b>(24'11")</b>	2.49 <b>(8'2")</b> 2.49 <b>(8'2")</b>	8.30 <b>(27'3")</b> 8.30 <b>(27'3")</b>	4590 <b>(10,120)</b> 4940 <b>(10,890)</b>
312B L	9FS 2KW(blade)	97-	84	13 270 <b>(29,260)</b> 14 055 <b>(30,990)</b>	1.99 <b>(6'6")</b> 1.99 <b>(6'6")</b>	2.91 <b>(9'6")</b> 2.91 <b>(9'6")</b>	7.59 <b>(24'11")</b> 7.59 <b>(24'11")</b>	2.59 <b>(8'6")</b> 2.59 <b>(8'6")</b>	8.30 <b>(27'3")</b> 8.30 <b>(27'3")</b>	5000 <b>(11,025)</b> 5050 <b>(11,135)</b>
315	4YM(OSJ) 6XM(JPN)	94-97	99	15 300 <b>(33,730)</b>	1.99 <b>(6'6")</b>	2.88 <b>(9'5")</b>	8.5 <b>(28'0")</b>	2.49 <b>(8'2")</b>	8.74 <b>(28'8")</b>	5250 <b>(11,290)</b>
315 L	6YM(OSJ)	94-97	99	15 920 <b>(35,100)</b>	1.99 <b>(6'6")</b>	2.88 <b>(9'5")</b>	8.5 <b>(28'0")</b>	2.59 <b>(8'6")</b>	8.74 <b>(28'8")</b>	6320 <b>(13,570)</b>
315	3ZM	95-98	99	15 920 <b>(35,100)</b>	1.99 <b>(6'6")</b>	2.88 <b>(9'5")</b>	8.5 <b>(28'0")</b>	2.49 <b>(8'2")</b>	8.21 <b>(26'11")</b>	5300 <b>(11,300)</b>
315B L	5SW	98-	132	16 700 <b>(38,820)</b>	1.995 <b>(6'5")</b>	3.0 <b>(9'8")</b>	8.41 <b>(27'6")</b>	2.49 <b>(8'2")</b>	9.02 <b>(29'6")</b>	6720 <b>(14,817)</b>

\*When shipped with medium stick and bucket curled under.

\*\*Maximum reach at ground level, one-piece boom, longest stick.

\*\*\*Lift capacity at 4.6 m (15'0") over front, one-piece boom, longest stick.

## Hydraulic Excavators (cont'd)

Model	Product Ident. No. Prefix COSA (US)	Years Built	Flywheel Horsepower	Approx. Operating Weight kg (lb)	Track Gauge m (ft)	Height* m (ft)	Length* m (ft)	Width m (ft)	Max. Reach** m (ft)	Lift Capacity*** kg (lb)
317	4MM	95-98	99	17 260 <b>(38,050)</b>	2.15 <b>(7'1")</b>	2.88 <b>(9'5")</b>	8.5 <b>(28'0")</b>	2.75 <b>(9'0")</b>	8.62 <b>(28'3")</b>	4210 <b>(9280)</b>
317B L	9WW	98-	154	17 300 <b>(38,146)</b>	2.2 <b>(7'3")</b>	3.04 <b>(9'10")</b>	8.41 <b>(27'6")</b>	2.8 <b>(9'2")</b>	9.1 <b>(29'8")</b>	7100 <b>(15,655)</b>
317N	9SR	96-98	99	17 220 <b>(37,960)</b>	1.99 <b>(6'6")</b>	2.88 <b>(9'5")</b>	8.5 <b>(28'0")</b>	2.75 <b>(9'0")</b>	8.62 <b>(28'3")</b>	6450 <b>(14,200)</b>
317B LN	6DZ	98-	154	17 300 <b>(38,146)</b>	1.995 <b>(6'5")</b>	3.04 <b>(9'10")</b>	8.41 <b>(27'6")</b>	2.49 <b>(8'2")</b>	9.1 <b>(29'8")</b>	7100 <b>(15,655)</b>
318B L	9WW	98-	110	17 700 <b>(39,030)</b>	2.2 <b>(7'2")</b>	3.02 <b>(9'10")</b>	8.67 <b>(28'6")</b>	2.8 <b>(9'2")</b>	8.94 <b>(29'4")</b>	8440 <b>(18,610)</b>
318B L	ADC	99-	154	18 500 <b>(40,792)</b>	2.2 <b>(7'3")</b>	3.04 <b>(9'10")</b>	8.69 <b>(28'6")</b>	2.8 <b>(9'2")</b>	9.6 <b>(31'6")</b>	7600 <b>(16,760)</b>
318B LN	AEJ	99-	154	18 500 <b>(40,792)</b>	1.995 <b>(6'5")</b>	3.04 <b>(9'10")</b>	8.69 <b>(28'6")</b>	2.49 <b>(8'2")</b>	9.6 <b>(31'6")</b>	7580 <b>(16,710)</b>
318B LN	6DZ	98-	110	17 160 <b>(37,840)</b>	1.995 <b>(6'6")</b>	3.02 <b>(9'10")</b>	8.67 <b>(28'6")</b>	2.495 <b>(8'2")</b>	8.94 <b>(29'4")</b>	7590 <b>(16,735)</b>
320	7WK(OSJ) 2DL(OSJ) 8LG(OSJ) 7GJ(JPN) 3XM(JPN) 4ZJ(GOS)	91-96	128	19 120 <b>(42,150)</b>	2.2 <b>(7'3")</b>	2.93 <b>(9'7")</b>	9.37 <b>(30'9")</b>	2.8 <b>(9'2")</b>	10.63 <b>(34'9")</b>	6200 <b>(17,700)</b>
320L	1TL(OSJ) 9KK(OSJ) 8HJ(JPN) 4JM(JPN) 3XK(GOS)	91-96	128	20 370 <b>(44,910)</b>	2.38 <b>(7'10")</b>	2.93 <b>(9'7")</b>	9.37 <b>(30'9")</b>	3.18 <b>(10'5")</b>	10.63 <b>(34'9")</b>	8150 <b>(17,600)</b>
320N	1XM(OSJ) 9WG(GOS)	94-96	128	20 050 <b>(44,150)</b>	1.90 <b>(6'6")</b>	2.93 <b>(9'7")</b>	9.37 <b>(30'9")</b>	2.59 <b>(8'6")</b>	10.63 <b>(34'9")</b>	8150 <b>(17,600)</b>
320S	6KM									
320B	3MR 5BR 1XS	96-00	128	19 400 <b>(42,770)</b>	2.2 <b>(7'2.6")</b>	3.01 <b>(9'10.5")</b>	9.46 <b>(31'4")</b>	2.8 <b>(9'2.2")</b>	10.77 <b>(35'4")</b>	8600 <b>(19,000)</b>
320B L	4MR 6CR 7JR	96-00	128	20 720 <b>(45,680)</b>	2.38 <b>(7'9.7")</b>	3.01 <b>(9'10.5")</b>	9.46 <b>(31'4")</b>	3.18 <b>(10'5.2")</b>	10.77 <b>(35'4")</b>	9200 <b>(20,300)</b>
320B N	4NR 2AS	96-00	128	19 930 <b>(43,940)</b>	2.2 <b>(7'2.6")</b>	3.01 <b>(9'10.5")</b>	9.46 <b>(31'4")</b>	2.5 <b>(8'2.4")</b>	10.77 <b>(35'4")</b>	9100 <b>(20,100)</b>
320B LN	3YZ	96-00	128							
322*	7WL(OSJ) 7WL(JPN)	93-96	153	22 650 <b>(50,000)</b>	2.39 <b>(7'10")</b>	3.12 <b>(10'3")</b>	9.95 <b>(32'8")</b>	2.99 <b>(9'10")</b>	10.47 <b>(34'4")</b>	10 400 <b>(22,500)</b>
322L*	8CL(OSJ) 8CL(JPN)	93-96	153	23 950 <b>(52,800)</b>	2.59 <b>(8'6")</b>	3.12 <b>(10'3")</b>	9.95 <b>(32'8")</b>	3.39 <b>(11'1")</b>	10.47 <b>(34'4")</b>	10 400 <b>(22,500)</b>

\*When shipped with medium stick and bucket curled under.

\*\*Maximum reach at ground level, one-piece boom, longest stick.

\*\*\*Lift capacity at 4.6 m (15'0") over front, one-piece boom, longest stick.

## Hydraulic Excavators (cont'd)

Model	Product Ident. No. Prefix COSA (US)	Years Built	Flywheel Horsepower	Approx. Operating Weight kg (lb)	Track Gauge m (ft)	Height* m (ft)	Length* m (ft)	Width m (ft)	Max. Reach** m (ft)	Lift Capacity*** kg (lb)
325*	5WK(OSJ)	91-95	168	25 520	2.39	3.24	10.27	2.99	11.50	11 100
	8NL(OSJ)			<b>(56,270)</b>	<b>(7'10")</b>	<b>(10'8")</b>	<b>(33'8")</b>	<b>(9'10")</b>	<b>(37'7")</b>	<b>(24,000)</b>
	8JG(JPN)	91-95	168	25 520	2.39	3.24	10.27	2.99	11.50	11 000
325L*	5WK(JPN)	91-95	168	<b>(56,270)</b>	<b>(7'10")</b>	<b>(10'8")</b>	<b>(33'8")</b>	<b>(9'10")</b>	<b>(37'7")</b>	<b>(24,000)</b>
	6KK(OSJ)			27 010	2.59	3.24	10.27	3.39	11.50	11 650
	9KL(OSJ)	<b>(59,560)</b>	<b>(8'6")</b>	<b>(10'8")</b>	<b>(38'8")</b>	<b>(11'1")</b>	<b>(37'7")</b>	<b>(25,150)</b>		
	7CJ(JPN)	91-95	168	27 010	2.59	3.24	10.27	3.39	11.50	11 650
	6KK(JPN)			<b>(59,560)</b>	<b>(8'6")</b>	<b>(10'8")</b>	<b>(38'8")</b>	<b>(11'1")</b>	<b>(37'7")</b>	<b>(25,150)</b>
330*	9PJ(OSJ)	92-95	222	32 130	2.59	3.29	11.01	3.19	12.37	15 550
	8RL(OSJ)			<b>(70,830)</b>	<b>(8'6")</b>	<b>(10'10")</b>	<b>(36'2")</b>	<b>(10'6")</b>	<b>(40'6")</b>	<b>(33,650)</b>
	9NG(JPN)	92-95	222	32 130	2.59	3.29	11.01	3.19	12.37	15 550
330L*	9PJ(JPN)	92-95	222	<b>(70,830)</b>	<b>(8'6")</b>	<b>(10'10")</b>	<b>(36'2")</b>	<b>(10'6")</b>	<b>(40'6")</b>	<b>(33,650)</b>
	6SK(OSJ)			33 510	2.59	3.29	11.01	3.34	12.37	14 600
	9ML(OSJ)	<b>(73,880)</b>	<b>(8'6")</b>	<b>(10'10")</b>	<b>(36'2")</b>	<b>(10'11")</b>	<b>(40'6")</b>	<b>(31,500)</b>		
	6WJ(JPN)	92-95	222	33 510	2.59	3.29	11.01	3.34	12.37	14 600
	6SK(JPN)			<b>(70,830)</b>	<b>(8'6")</b>	<b>(10'10")</b>	<b>(36'2")</b>	<b>(10'11")</b>	<b>(40'6")</b>	<b>(31,500)</b>
350	7RK	93-99	286	48 040	2.55	3.75	12.2	3.2	13.45	17 750
				<b>(105,910)</b>	<b>(8'4.4")</b>	<b>(12'3.6")</b>	<b>(40'.3")</b>	<b>(10'6")</b>	<b>(44'1.5")</b>	<b>(39,100)</b>
350 L	9DK	93-99	286	49 010	2.55	3.75	12.2	3.3	13.45	17 750
				<b>(108,050)</b>	<b>(8'4.4")</b>	<b>(12'3.6")</b>	<b>(40'.3")</b>	<b>(10'9.9")</b>	<b>(44'1.5")</b>	<b>(39,100)</b>

\*When shipped with medium stick and bucket curled under.

\*\*Maximum reach at ground level, one-piece boom, longest stick.

\*\*\*Lift capacity at 4.6 m (15'0") over front, one-piece boom, longest stick.



## HYDRAULIC EXCAVATORS (Wheel)

Model	Product Ident. No. Prefix (USA)	Years Built	Flywheel Horsepower	Approx. Operating Weight kg (lb)	Height* m (ft)	Length* m (ft)	Width m (ft)	Max. Reach** m (ft)	Lift Capacity*** kg (lb)	Standard Tire Size
206	(2RC) (3GC)	84-89	Deutz-67 Perkins-71	12 185 (26,863)	3.11 (10'2")	7.38 (24'2.5")	2.40 (7'10")	8.14 (26'9")	3360 (7400)	Dual 9.00-20 12PR
212	(3JC) (5DC)	84-89	Deutz-84 Perkins-94	13 700 (30,423)	3.15 (10'4")	8.00 (26'3")	2.49 (8'2")	9.86 (32'4")	3850 (8490)	Dual 10.00-20 12PR
212B	(3PJ)	90-95	110	14 000 (30,870)	3.04 (10'0")	8.28 (27'2")	2.49 (8'2")	9.48 (31'1")	3900 (8600)	Dual 10.00-20 12PR
214	(9MB) (1KB)	84-89	Deutz-101 Perkins-102	15 600 (34,175)	3.06 (10'0")	8.28 (27'2")	2.49 (8'2")			Dual 10.00-20 12PR
214B	4CF	87-94	110	18 700 (41,230)	3.06 (10'0")	8.28 (27'2")	2.49 (8'2")	10.41 (34'2")	4200 (9260)	Dual 10.00-20 12PR
214B FT	9NF	87-94	135	18 700 (41,230)	3.06 (10'0")	8.28 (27'2")	2.49 (8'2")	10.41 (34'2")	4200 (9260)	Dual 10.00-20 12PR
224	(2JC) (5TC)	84-89	Deutz-143 Perkins-124	19 000 (41,890)	3.42 (11'3")	8.98 (29'6")	2.49 (8'2")	10.61 (34'10")	4800 (10,600)	Dual 10.00-20 12PR

\*When shipped with medium stick and bucket curled under.

\*\*Maximum reach at ground level, one-piece boom, longest stick.

\*\*\*Lift capacity at 4.6 m (15'0") over front, one-piece boom, longest stick.



## 5000 SERIES EXCAVATORS AND FRONT SHOVELS

Model	Product Ident. No. Prefix (USA)	Years Built	Flywheel Horsepower	Approx. Operating Weight kg (lb)	Rated* Capacity m <sup>3</sup> (yd <sup>3</sup> )	Breakout Force kg (lb)	Crowd Force kg (lb)	Track Gauge m (ft)	Max Reach* m (ft)	Max Load Height m (ft)	Max Digging Depth m (ft)
5130ME	5ZL	92-97	755	180 000 (397,000)	10.0 (13.0)	615 (138,400)	624 (140,300)	4.72 (15'6")	14.9 (48'11")	9.1 (29'10")	8.4 (27'7")
5130FS	5ZL	92-97	755	179 000 (395,000)	10.5 (13.7)	715 (161,000)	770 (173,000)	4.72 (15'6")	12.4 (40'8")	9.1 (29'10")	—

\*Standard boom and stick.



**LOGGING AND FOREST PRODUCT MACHINES**

Model	Product Ident. No. Prefix	Year Built	Flywheel Power kW (hp)	Overall Track Length m (ft)	Overall Length m (ft)	Overall Width m (ft)	Operating Weight kg (lb)
320B Stroke Delimber			96 <b>(128)</b>		11.96 <b>(39'3")</b>	3.66 <b>(12'0")</b>	30 390 <b>(67,000)</b>
FB221	8XD	1986	147 <b>(197)</b>	4.47 <b>(14'8")</b>	9.78 <b>(32'1")</b>	3.20 <b>(10'6")</b>	28 180 <b>(62,000)</b>
FB227	10W	1983-93	100/134 <b>(135/180)</b>	4.55 <b>(14'11")</b>	11.88 <b>(39'0")</b>	3.35 <b>(11'0")</b>	31 769 <b>(69,892)</b>
DL221	8YD	1987	98 <b>(132)</b>	4.47 <b>(14'8")</b>	—	—	22 816 <b>(50,300)</b>
LL216	8JD	1986	95 <b>(128)</b>	—	10.70 to 11.23 <b>(35'1" to 36'10")</b>	2.64 <b>(8'8")</b>	17 577 <b>(38,750)</b>
LL228	8MD	1986	131 <b>(176)</b>	—	9.7 to 11.6 <b>(32'0" to 38'0")</b>	2.62 <b>(8'7")</b>	30 391 <b>(67,000)</b>
LL231	8PD	1986	175 <b>(235)</b>	5.03 <b>(16'6")</b>	10.6 to 11.6 <b>(35'0" to 38'0")</b>	3.56 <b>(11'8")</b>	39 146 <b>(86,300)</b>



**WHEEL SKIDDERS**

Model	Product Ident. No. Prefix	Year Built	Flywheel Horsepower kW (hp)	Operating Weight kg (lb)	Ground Clearance mm (in)	Wheel Base m (ft/in)
508 Cable	9NC	87-89	71 <b>(95)</b>	7770 <b>(17,130)</b>	521 <b>(20.5)</b>	2.8 <b>(9'2")</b>
508 Grapple	2HD	87-89	71 <b>(95)</b>	8766 <b>(19,308)</b>	521 <b>(20.5)</b>	2.8 <b>(9'2")</b>
518 FB	8ZC	86-89	96 <b>(130)</b>	11 612 <b>(25,600)</b>	587 <b>(23.1)</b>	3.25 <b>(10'8")</b>
518 PS Cable	50S	71-83	90 <b>(120)</b>	7718 <b>(17,000)</b>	505.4 <b>(19.8976)</b>	2895.6 <b>(9'6")</b>
518 PS Grapple	55U	1-80/81-83	90/97 <b>(120/130)</b>	9307 <b>(20,500)</b>	505.4 <b>(19.8976)</b>	2895.6 <b>(9'6")</b>
518 Cable	94U	3-84/85-92	90/97 <b>(120/130)</b>	9988 <b>(22,000)</b>	470 <b>(18.5039)</b>	3251 <b>(10'8.4")</b>
518 Grapple	95U	81-90	97 <b>(130)</b>	11 259 <b>(24,800)</b>	470 <b>(18.5039)</b>	3251 <b>(10'8.4")</b>
518 Series II Cable	94U	91-92	dual 97/108 <b>dual (130/145)</b>	10 260 <b>(22,600)</b>	470 <b>(18.5039)</b>	3251 <b>(10'8.4")</b>
518 Series II Grapple	95U	91-92	dual 97/108 <b>dual (130/145)</b>	12 031 <b>(26,500)</b>	470 <b>(18.5039)</b>	3251 <b>(10'8.4")</b>
518C Cable	1CL	93-95	115 <b>(154)</b>	11 528 <b>(25,391)</b>	450.7 <b>(17.74406)</b>	3251 <b>(10'8.4")</b>
518C Grapple	9HJ	93-95	115 <b>(154)</b>	12 587 <b>(27,725)</b>	463.4 <b>(18.24406)</b>	3251 <b>(10'8.4")</b>



**TRACK SKIDDERS**

Model	Product Ident. No. Prefix	Year Built	Flywheel Horsepower kW (hp)	Operating Weight kg (lb)	Gauge m (ft/in)
D4 TSK Series II	8ZF	90-92	78 <b>(105)</b>	12 909 <b>(28,400)</b>	2.00 <b>(6'6")</b>
D4 TSK Series III	7PK	92-96	78 <b>(105)</b>	14 000 <b>(30,900)</b>	2.00 <b>(6'6")</b>
D5H TSK Series II	7EG	92-96	97 <b>(130)</b>	18 800 <b>(41,360)</b>	2.16 <b>(7'11")</b>



**BACKHOE LOADERS**

Model	Product Ident. No. Prefix	Year Built	Flywheel Horsepower kW (hp)	Operating Weight kg (lb)	Digging Depth mm (ft/in)	GP Bucket Capacity m³ (yd³)	MP Bucket Capacity m³ (yd³)
416	5PC	85-90	46 <b>(62)</b>	6156 <b>(13,574)</b>	4420 <b>(14'6")</b>	0.76 <b>(1.0)</b>	0.76 <b>(1.0)</b>
416 Series II	5PC	90-92	46 <b>(62)</b>	6217 <b>(13,708)</b>	4420 <b>(14'6")</b>	0.76 <b>(1.0)</b>	0.76 <b>(1.0)</b>
416B	8ZK(8SG)	92-95	59 <b>(79)</b>	6227 <b>(13,700)</b>	4420 <b>(14'6")</b>	0.76 <b>(1.0)</b>	0.96 <b>(1.25)</b>
426	7BC	86-90	52 <b>(70)</b>	6549 <b>(14,626)</b>	4720 <b>(15'6")</b>	0.96 <b>(1.25)</b>	0.76 <b>(1.0)</b>
426 Series II	7BC	90-92	52 <b>(70)</b>	7315 <b>(15,126)</b>	4720 <b>(15'6")</b>	0.96 <b>(1.25)</b>	0.76 <b>(1.0)</b>
426B	6KL(5YJ)	92-95	59 <b>(79)</b>	6790 <b>(14,970)</b>	4720 <b>(15'6")</b>	0.96 <b>(1.25)</b>	1.04 <b>(1.35)</b>
428	6TC	86-90	52 <b>(70)</b>	6963 <b>(15,350)</b>	4790 <b>(15'9")</b>	1.0 <b>(1.38)</b>	0.92 <b>(1.2)</b>
428 Series II	6TC	90-92	52 <b>(70)</b>	7143 <b>(15,750)</b>	4750 <b>(15'7")</b>	1.0 <b>(1.375)</b>	0.92 <b>(1.2)</b>
428B	7EJ	92-95	60 <b>(80)</b>	7254 <b>(15,992)</b>	4810 <b>(15'9")</b>	1.0 <b>(1.3)</b>	0.92 <b>(1.2)</b>
436	5KF	88-90	57 <b>(77)</b>	6831 <b>(15,062)</b>	4960 <b>(16'3")</b>	1.0 <b>(1.38)</b>	0.76 <b>(1.0)</b>
436 Series II	5KF	90-92	57 <b>(77)</b>	6878 <b>(15,166)</b>	4950 <b>(16'3")</b>	1.0 <b>(1.375)</b>	0.76 <b>(1.0)</b>
436B	7FL(6MJ)	92-95	63 <b>(84)</b>	6857 <b>(15,086)</b>	4950 <b>(16'3")</b>	1.0 <b>(1.38)</b>	1.04 <b>(1.35)</b>
438	3DJ	88-90	63 <b>(84)</b>	7900 <b>(17,420)</b>	4810 <b>(15'9")</b>	1.0 <b>(1.38)</b>	0.92 <b>(1.2)</b>
438 Series II	3DJ	90-92	57 <b>(77)</b>	7364 <b>(16,237)</b>	4810 <b>(15'9")</b>	1.0 <b>(1.375)</b>	0.92 <b>(1.2)</b>
438B	3KK	92-95	62.7 <b>(84)</b>	8331 <b>(18,367)</b>	4870 <b>(16'0")</b>	1.0 <b>(1.3)</b>	0.92 <b>(1.2)</b>
446	6XF	89-95	71 <b>(95)</b>	8892 <b>(19,603)</b>	5220 <b>(17'2")</b>	1.1 <b>(1.5)</b>	1.10 <b>(1.5)</b>
446B			76 <b>(102)</b>	8890 <b>(19,600)</b>	5220 <b>(17'2")</b>	1.1 <b>(1.5)</b>	1.05 <b>(1.375)</b>



## PIPELAYERS

Model	Tractor Product Ident. No. Prefix	Years Built	Engine HP	Approx. Weight kg (lb)	Counterweight kg (lb)	Max. Lift Capacity 1.2 m (4'0") Overhang kg (lb)	Speed Range km/h (mph)		Ground Clearance mm (in)	Ground Contact m <sup>2</sup> (sq. in.)
							Forward	Reverse		
MD6	9U39C	52-57	93	12 375 <b>(27,820)</b>	1590 <b>(3500)</b>	12 035 <b>(26,530)</b>	2.7—10.6 <b>(1.7—6.6)</b>	3.2—10.0 <b>(2.0—6.2)</b>	321 <b>(13")</b>	1.77 <b>(2744)</b>
561B	62A	59-66	90	14 560 <b>(32,100)</b>	2270 <b>(5000)</b>	17 500 <b>(38,800)</b>	2.7—10.6 <b>(1.7—6.6)</b>	1.8—9.9 <b>(2.0—6.2)</b>	267 <b>(11")</b>	2.02 <b>(3130)</b>
561B	62A	66-67	93	14 350 <b>(31,637)</b>	2270 <b>(5000)</b>	17 600 <b>(38,800)</b>	2.7—10.9 <b>(1.7—6.8)</b>	3.4—10.3 <b>(2.1—6.4)</b>	267 <b>(11")</b>	2.02 <b>(3130)</b>
561C	85H	66-67	93	14 700 <b>(32,500)</b>	2450 <b>(5400)</b>	18 000 <b>(40,000)</b>	2.7—11.1 <b>(1.7—6.9)</b>	3.4—10.1 <b>(2.1—6.3)</b>	395 <b>(16")</b>	2.02 <b>(3130)</b>
561C	92J	67-77	105	14 700 <b>(32,500)</b>	2450 <b>(5400)</b>	18 100 <b>(40,000)</b>	2.7—11.1 <b>(1.7—6.9)</b>	3.4—10.1 <b>(2.1—6.3)</b>	395 <b>(16")</b>	2.02 <b>(3130)</b>
561D	54X	78-89	105	15 800 <b>(35,000)</b>	2990 <b>(6600)</b>	18 100 <b>(40,000)</b>	3.5—10.1 <b>(2.2—6.3)</b>	4.2—12.2 <b>(2.6—7.6)</b>	395 <b>(16")</b>	2.02 <b>(3130)</b>
571E PS	64A	61-67	160	22 680 <b>(50,000)</b>	2360 <b>(5200)</b>	27 490 <b>(60,600)</b>	3.7—10.3 <b>(2.3—6.4)</b>	4.3—12.1 <b>(2.7—7.5)</b>	400 <b>(16")</b>	3.04 <b>(4710)</b>
571E PS	64A	66-72	180	23 100 <b>(51,000)</b>	2360 <b>(5200)</b>	27 500 <b>(60,600)</b>	3.7—10.1 <b>(2.3—6.3)</b>	4.3—11.9 <b>(2.7—7.4)</b>	400 <b>(16")</b>	3.04 <b>(4710)</b>
571F	95N	72-74	180	22 800 <b>(50,300)</b>	4350 <b>(9600)</b>	27 500 <b>(60,600)</b>	3.5—9.7 <b>(2.2—6.0)</b>	4.2—11.4 <b>(2.6—7.1)</b>	400 <b>(16")</b>	3.04 <b>(4710)</b>
571G	916W 52D(JPN)	75-81 87-96	200 200	23 040 <b>(50,800)</b>	4350 <b>(9600)</b>	27 500 <b>(60,600)</b>	3.7—10.0 <b>(2.3—6.2)</b>	4.5—11.9 <b>(2.8—7.9)</b>	399 <b>(15.7")</b>	3.04 <b>(4710)</b>
MD7	17A	51-57	140	16 200 <b>(35,815)</b>	3400 <b>(7500)</b>	24 585 <b>(54,200)</b>	2.4—9.5 <b>(1.5—5.9)</b>	2.9—8.7 <b>(1.8—5.4)</b>	394 <b>(16")</b>	3.12 <b>(4840)</b>
572C	21A	57-61	128	26 200 <b>(57,820)</b>	4720 <b>(10,405)</b>	39 000 <b>(86,000)</b>	3.2—7.7 <b>(2.0—4.8)</b>	3.9—6.1 <b>(2.4—3.8)</b>	483 <b>(19")</b>	3.30 <b>(5109)</b>
572D	21A	59	140	26 500 <b>(58,520)</b>	4940 <b>(10,900)</b>	39 000 <b>(86,000)</b>	4.2—9.7 <b>(2.6—6.0)</b>	4.8—7.7 <b>(3.0—4.8)</b>	483 <b>(19")</b>	3.30 <b>(5109)</b>
572E PS	65A	61-69	180	28 000 <b>(62,000)</b>	6000 <b>(13,000)</b>	40 800 <b>(90,000)</b>	3.7—10.1 <b>(2.3—6.3)</b>	4.3—11.9 <b>(2.7—7.4)</b>	480 <b>(19")</b>	3.45 <b>(5345)</b>
572F PS	96N	70-74	180	27 600 <b>(61,000)</b>	6440 <b>(14,200)</b>	40 800 <b>(90,000)</b>	3.5—9.7 <b>(2.2—6.0)</b>	4.2—11.4 <b>(2.6—7.1)</b>	480 <b>(19")</b>	3.45 <b>(5345)</b>
583C	16A	55-58	190	35 440 <b>(78,132)</b>	8470 <b>(18,676)</b>	58 970 <b>(130,000)</b>	3.9—8.7 <b>(2.4—5.4)</b>	3.9—8.7 <b>(2.4—5.4)</b>	533 <b>(21")</b>	4.24 <b>(6580)</b>
583H TC	38A	59-60	235	38 000 <b>(83,840)</b>	9030 <b>(19,900)</b>	62 140 <b>(137,000)</b>	4.5—10.3 <b>(2.8—6.4)</b>	4.5—10.3 <b>(2.8—6.4)</b>	537 <b>(22")</b>	4.66 <b>(7220)</b>
583H PS	61A	60-74	191	35 600 <b>(78,500)</b>	8470 <b>(18,676)</b>	58 970 <b>(130,000)</b>	3.9—8.7 <b>(2.4—5.4)</b>	3.9—8.7 <b>(2.4—5.4)</b>	533 <b>(21")</b>	4.55 <b>(7050)</b>
583H PS	61A	60-67	225	38 200 <b>(84,270)</b>	9000 <b>(19,900)</b>	62 140 <b>(137,000)</b>	4.1—11.1 <b>(2.5—6.9)</b>	4.6—12.8 <b>(8.9—8.0)</b>	537 <b>(22")</b>	4.66 <b>(7220)</b>
583H PS	61A	61	235	38 900 <b>(85,720)</b>	10 400 <b>(22,880)</b>	62 140 <b>(137,000)</b>	3.9—10.1 <b>(2.4—6.3)</b>	4.8—12.6 <b>(3.0—7.8)</b>	537 <b>(22")</b>	4.66 <b>(7220)</b>
583H	61A	74	270	40 600 <b>(89,500)</b>	10 300 <b>(22,700)</b>	63 500 <b>(140,000)</b>	3.9—10.5 <b>(2.4—6.5)</b>	4.8—13.0 <b>(3.0—8.1)</b>	533 <b>(21")</b>	4.65 <b>(7220)</b>
583K	78V	74-89	300	40 960 <b>(90,300)</b>	7840 <b>(17,290)</b>	63 500 <b>(140,000)</b>	4.0—10.9 <b>(2.5—6.8)</b>	5.0—13.5 <b>(3.1—8.4)</b>	530 <b>(21")</b>	4.65 <b>(7220)</b>

Pipelayers (cont'd)

Model	Tractor Product Ident. No. Prefix	Years Built	Engine HP	Approx. Weight kg (lb)	Counter-weight kg (lb)	Max. Lift Capacity 1.2 m (4'0") Overhang kg (lb)	Speed Range km/h (mph)		Ground Clearance mm (in)	Ground Contact m <sup>2</sup> (sq. in.)
							Forward	Reverse		
594	62H	74	385	55 400 (122,000)	12 600 (27,800)	90 700 (200,000)	3.9—10.5 (2.4—6.5)	4.8—12.7 (3.0—7.9)	640 (25")	5.72 (8865)
594H	96V	74-82	410	56 065 (123,600)	12 555 (27,680)	90 700 (200,000)	4.0—10.8 (2.5—6.7)	5.0—13.2 (3.1—8.2)	630 (25")	6.48 (10,050)



WHEEL TRACTOR-SCRAPERS

Model	Product Ident. No. Prefix	Years Built	Horse-power Max/ Rated	Capacity Struck/ Heaped m <sup>3</sup> (yd <sup>3</sup> )	Approx. Shipping Weight kg (lb)	Dimensions m (ft)				Tire Size (Standard) & ply rating Tractor & Scraper	Approx. % Weight on Drivers Loaded/ Empty	Turning Circle m (ft)
						Length	Width	Height	Width of Tread			
DW10 Tractor	1N	41-46	100*	—	6550 (14,350)	4.57 (15'0")	2.24 (7'4")	1.93 (6'4")	1.73 (5'8")	10.0 × 20-12 18.0 × 24-16	—	—
DW10 Tractor	6V	46-47	100*	—	6850 (15,100)	4.57 (15'0")	2.24 (7'4")	1.93 (6'4")	1.73 (5'8")	10.0 × 20-12 18.0 × 24-16	—	—
DW10 Tractor	1V	47-53	115*	—	7540 (16,610)	4.70 (15'5")	2.34 (7'8")	1.93 (6'4")	1.79 (5'10")	12.0 × 20-14 21.0 × 25-20	—	—
DW10 & No.10 Scraper	1V 3C	47-51	115*	6.7/8.4 (8.7/11)	15 980 (35,240)	11.23 (37'0")	3.02 (9'11")	2.69 (8'10")	1.88 (6'2")	12.0 × 20-14 21.0 × 25-20	39/44	7.92 (26'0")
DW10 & No.10 Scraper	1V 19C	52-53	115*	5.3/6.9 (7/9)	15 130 (33,365)	10.72 (35'2")	2.87 (9'5")	2.36 (7'9")	1.80 (5'11")	12.0 × 20-14 21.0 × 25-20 Scraper — 16.0 × 21-20	42/46	11.23 (37'0")
DW15 & No.10 Scraper	45C 19C	54-55	/150	5.3/6.9 (7/9)	15 960 (35,180)	11.10 (36'5")	2.87 (9'5")	2.36 (7'9")	1.80 (5'11")	12.0 × 20-14 21.0 × 25-20 Scraper — 16.0 × 21-20	42/46	10.36 (34'0")
DW15 & No.15 Scraper	45C 4W	54-55	/150	7.7/9.2 (10/12)	9400 (20,720)	11.84 (38'10")	3.18 (10'5")	2.69 (8'10")	1.93 (6'4")	12.0 × 20-14 21.0 × 25-20	40/42	11.23 (37'0")
DW15 Tractor	45C	54-55	/150	—	9510 (20,960)	5.08 (16'8")	2.39 (7'10")	2.69 (8'10")	1.98 (6'6")	12.0 × 20-14 21.0 × 25-20	—	—
DW15C & No.15 Scraper	59C or 70C	55-57	186*	7.7/9.5 (10/12.5)	19 220 (42,370)	11.84 (38'10")	3.18 (10'5")	2.69 (8'10")	1.98 (6'6")	12.0 × 12-14 21.0 × 25-20	40/42	10.36 (34'0")
DW15E & No. 428 Scraper	75D or 76D	57-59	200/172	10/14 (13/18)	20 280 (44,711)	12.22 (40'1")	3.30 (10'10")	3.05 (10'0")	1.98 (6'6")	12.0 × 20-14 26.5 × 25-20	37/41	—
DW15F & No. 428 Scraper	75D or 76D	58-59	200/172	10/14 (13/18)	20 280 (44,711)	12.22 (40'1")	3.30 (10'10")	3.05 (10'0")	1.98 (6'6")	12.0 × 20-14 26.5 × 25-20	37/41	—
DW20 & No. 20 Scraper	21C 11C	51-55	225*	14/7.6 (18/23)	12 750 (28,100)	13.23 (43'5")	3.53 (11'7")	3.10 (10'2")	2.29 (7'6")	24.0 × 29-4	37/41	11.23 (37'0")
DW20 Tractor (For W20 Wagon)	6W	51-55	225*	—	11 620 (25,610)	5.39 (17'8")	2.79 (9'2")	2.41 (7'11")	2.18 (7'2")	14.0 × 24-16 24.0 × 29-24	—	—
DW20E & No. 456 Scraper	57C 67C	55-57	300*	14/19 (18/25)	26 040 (57,400)	13.36 (43'10")	3.58 (11'9")	3.45 (11'4")	2.24 (7'4")	14.0 × 24-16 29.5 × 29-22	34/42	11.58 (38'0")
DW20F & No. 456 Scraper	87E 88E	58-60	320*	14/19 (18/25)	26 870 (59,240)	13.36 (43'10")	3.58 (11'9")	3.45 (11'4")	2.24 (7'4")	14.0 × 24-16 29.5 × 29-22	38/42	11.58 (38'0")
DW20G & No. 456 Scraper	87E 88E	58-60	345*	15/21 (19.5/27)	27 200 (59,960)	13.36 (43'10")	3.58 (11'9")	3.45 (11'4")	2.24 (7'4")	14.0 × 24-16 29.5 × 29-28	38/42	11.58 (38'0")
DW20G & No. 482 Scraper	87E 88E	58-60	345*	18.5/26 (24/34)	31 070 (68,500)	14.05 (46'1")	3.91 (12'10")	3.81 (12'6")	2.39 (7'10")	14.0 × 24-16 29.5 × 29-28	37/40	11.58 (38'0")

\*Maximum HP only available.



Wheel Tractor-Scrapers (cont'd)

Model	Product Ident. No. Prefix	Years Built	Horsepower Max/ Rated	Capacity Struck/ Heaped m <sup>3</sup> (yd <sup>3</sup> )	Approx. Shipping Weight kg (lb)	Dimensions m (ft)				Tire Size (Standard) & ply rating Tractor & Scraper	Approx. % Weight on Drivers Loaded/ Empty	Turning Circle m (ft)
						Length	Width	Height	Width of Tread			
DW21 & No. 21 Scraper	8W 8	51-55	225/*	11.5/15 (15/20)	24 790 (54,650)	12.37 (40'7")	3.53 (11'7")	3.28 (10'9")	2.13 (7'0")	24.0 × 29-24	—	10.67 (35'0")
DW21C & No. 470 Scraper	58C 69C	55-58	300/*	14/19 (18/25)	26 610 (58,670)	12.67 (41'7")	3.58 (11'9")	3.35 (11'0")	2.24 (7'4")	29.5 × 29-22	46/33	11.00 (36'0")
DW21D & No. 470 Scraper	85E 86E	58-58	320/*	14/19 (18/25)	26 310 (58,010)	12.78 (41'11")	3.58 (11'9")	3.35 (11'0")	2.24 (7'4")	29.5 × 29-22	52/67	11.00 (36'0")
DW21G & No. 470 Scraper	85E 86E	58-60	345/*	14.9/20.6 (19.5/27)	27 210 (59,980)	12.78 (41'11")	3.58 (11'9")	3.48 (11'5")	2.24 (7'4")	29.5 × 29-28	52/67	11.00 (36'0")
613A	71M	69-76	/150	8.4 (11)	13 334 (29,395)	9.67 (31'9")	2.44 (8'0")	2.85 (9'4.5")	1.89 (6'2.5")	18.0 × 25-12	49/63	9.04 (29'8")
613B	38W	76-84	/150	8.4 (11)	14 155 (31,210)	9.78 (32'1")	2.44 (8'0")	2.85 (9'4.5")	1.89 (6'2.5")	18.0 × 25-12	49/64	8.94 (29'4")
613C		84-93	175	8.4 (11)	14 670 (32,340)	10.0 (32'9")	2.44 (8'0")	3.06 (10'0")	1.89 (6'2.5")	18.00-25, 16 PR (E-2)	63/49	8.9 (29'4")
615	46Z	81-87	/250	12.23 (16)	23 400 (51,590)	11.6 (38'1")	3.048 (10'0")	3.590 (11'8")	2.21 (7'3")	26.5-25, 26 PR (E-2)	65/35	9.63 (31'7")
615C		87-93	265	12.23 (16)	23 860 (52,600)	11.6 (38'1")	3.048 (10'0")	3.59 (11'9")	2.21 (7'3")	26.5-25, 26 PR (E-2)	79/53	9.63 (31'7")
619B DD	89E 90E	59-60	/225							Turbocharged, Electric start Turbocharged, Gas start		
619C PS DD	61F 62F	60-66	280/250	10.8/14 (14/18)	21 550 (47,500)	11.05 (36'3")	3.30 (10'11")	3.76 (12'2")	2.00 (6'7")	26.5 × 29-22	55/69	9.14 (30'0")
619**	43F	64-65	/250	15.3/12.6 (20/16.5)	27 400 (60,390)	11.89 (40'0")	3.60 (11'10")	3.45 (11'4")	2.30 (7'7")	26.5 × 29-26	53/65.8	10.20 (33'6")
621	43H	65-72	/300	16.5— (21.5—)	28 400 (62,600)	12.00 (39'5")	3.60 (11'10")	3.45 (11'4")	2.19 (7'3")	29.5 × 29-22	53/65	11.50 (37'8")
621	23H	65-74	/300	10.6/15.3 (14/20)	24 900 (55,000)	11.60 (38'1")	3.50 (11'7")	3.40 (11'2")	2.10 (6'10")	29.5 × 29-22	55	13.00 (42'6")
621B	45P	73-86	/330	10.7/15.3 (14/20)	30 205 (66,590)	12.7 (41'7")	3.45 (11'4")	3.63 (11'11")	2.21 (7'3")	29.5-29, 28 PR (E-3)	55/70	11.10 (36'6")
621E	6AB 2PD	86-93	/330	15.3 (20)	30 480 (67,195)	12.93 (42'5")	3.47 (11'4")	3.71 (12'2")	2.21 (7'3")	33.25-29, 26 PR (E-3)	68/53	10.9 (35'8")
621F	4SK	93-00	330	15.3 (20)	32 090 (70,740)	12.93 (42'5")	3.47 (11'4")	3.71 (12'2")	2.21 (7'3")	33.25-29 ★★ (E-2/E-3)	68/32	10.2 (33'5")
623	52U	72-74	/300	16.8 (22)	29 900 (66,000)	11.90 (39'0")	3.50 (11'7")	3.70 (12'1")	2.20 (7'3")	29.5 × 29-28	53	13.70 (44'11")
623B	46P	73-86	/330	16.8 (22)	32 546 (71,750)	12.5 (41'1")	3.55 (11'8")	3.81 (12'6")	2.18 (7'2")	29.5-29, 28 PR (E-2)	49/63	8.90 (29'4")
623E	6CB	86-89	/330	16.8 (22)	33 317 (73,450)	12.61 (41'4")	3.55 (11'8")	3.81 (12'6")	2.21 (7'3")	29.5-29, 34 PR (E-2)	52/65	10.9 (35'9")
623E	6YF	89-93	/365	17.6 (23)	35 290 (77,800)	12.61 (41'4")	3.55 (11'8")	3.94 (12'11")	2.18 (7'2")	29.5R25	66/51	10.9 (35'8")
623F	6BK	93-98	365	17.6 (23)	35 305 (77,830)	12.61 (41'4")	3.55 (11'8")	3.94 (12'11")	2.18 (7'2")	29.5-29, 34 PR (E-2)	60/40	10.9 (35'8")
623F Series II	5EW	98-00	365	17.6 (23)	37 122 (81,840)	13.28 (43'7")	3.55 (11'8")	3.55 (11'8")	2.21 (7'3")	33.25-R29 ★★ (E-2)	65/35	8.6 (28'5")

\*Maximum HP only available.

\*\*Johnson Manufacturing Company built the J619 Elevating Scraper for Caterpillar in 1964.

Wheel Tractor-Scrapers (cont'd)

Model	Product Ident. No. Prefix	Years Built	Horse-power Max/ Rated	Capacity Struck/ Heaped m <sup>3</sup> (yd <sup>3</sup> )	Approx. Shipping Weight kg (lb)	Dimensions m (ft)				Tire Size (Standard) & ply rating Tractor & Scraper	Approx. % Weight on Drivers Loaded/ Empty	Turning Circle m (ft)
						Length	Width	Height	Width of Tread			
627	54K	68-74	/450	10.6/15.3 (14/20)	29 900 (66,000)	12.00 (36'9")	3.50 (11'7")	3.60 (11'8")	2.20 (7'3")	29.5 × 29-28	49	13.30 (43'9")
627B	14S	73-86	T/225 S/225	10.7/15.3 (14/20)	34 610 (76,300)	13.3 (43'9")	3.45 (11'4")	3.63 (11'11")	2.18 (7'2")	29.5-29, 28 PR (E-3)	49/59	11.10 (36'6")
627E	6EB	86-90	T/225 S/225	10.7/15.3 (14/20)	34 670 (76,435)	12.89 (42'3")	3.47 (11'4")	3.71 (12'2")	2.21 (7'3") 2.18 (7'2")	33.25-29, 26 PR (E-3)	59/48	10.90 (35'9")
627E	7CG	90-93	T/330 S/225	15.3 (20)	35 160 (77,500)	12.93 (42'5")	3.47 (11'4")	3.71 (12'2")	2.21 (7'3")	33.25-29, 26 PR (E-3)	59/48	10.9 (35'8")
627F Series II	1DL	93-00	T/330	15.3 (20)	37 060 (81,640)	12.9 (42'5")	3.47 (11'4")	3.71 (12'2")	2.21 (7'3")	33.25-R29 ★★ (E-2/E-3)	59/41	10.9 (35'9")
627B/PP	15S	73-86	T/225 S/225	15.3 (20)	35 660 (78,620)	14.91 (48'11")	3.45 (11'4")	3.63 (11'11")	2.18 (7'2")	29.5-29, 28 PR (E-3)	51/60	11.1 (36'6")
627E/PP	6GB	86-89	T/225 S/225	10.7/15.3 (14/20)	36 130 (79,655)	12.89 (42'3")	3.47 (11'4")	3.71 (12'2")	2.21 (7'3") 2.18 (7'2")	33.25-29, 26 PR (E-3)	60/49	10.90 (35'9")
627E/PP	7CG	90-93	T/330 S/225	15.3 (20)	36 620 (80,735)	15.2 (49'7")	3.47 (11'4")	3.71 (12'2")	2.21 (7'3")	33.25-29, 26 PR (E-3)	60/49	10.9 (35'8")
627F/PP Series II	1DL	93-00	S/225	15.3 (20)	38 103 (84,000)	15.2 (49'7")	3.47 (11'4")	3.71 (12'2")	2.21 (7'3")	33.25-R29 ★★ (E-2/E-3)	60/40	10.9 (35'9")
630A & 482C Scraper	52F	60-62	420/335	21/27 (27/35)	35 830 (79,000)	14.63 (48'0")	3.91 (12'10")	4.01 (13'2")	2.39 (7'10") Scraper	16.0 × 25-16 29.5 × 35-28 33.5 × 33-26	37/42	11.89 (39'0")
630A	52F	60-62	420/335	16/21.4 (21/28)	31 430 (69,300)	13.82 (45'4")	3.58 (11'9")	3.73 (12'3")	2.21 (7'3")	16.0 × 25-16 29.5 × 35-28	39/45	11.89 (39'0")
630B	14G	62-63	420/335	16/23 (21/30)	33 520 (73,900)	14.12 (46'4")	3.81 (12'6")	3.71 (12'2")	2.41 (7'11")	16.0-25, 16 29.5-35, 28	38/42	13.36 (43'10")
630B	14G	63-66	400/360	16/23 (21/30)	33 570 (74,000)	14.30 (46'11")	3.81 (12'6")	3.94 (12'11")	2.41 (7'11")	16.0-25, 16 29.5-35, 34	37/42	13.36 (43'10")
630B	10G	62-69	/400	16/23 (21/30)	35 750 (78,800)	14.35 (47'1")	3.81 (12'6")	3.94 (12'11")	2.40 (7'10")	16.0-25, 16 29.5-35, 34	38/44	13.36 (43'10")
631A	51F	60-62	420/335	16/21.4 (21/28)	30 250 (66,700)	12.88 (42'3")	3.58 (11'9")	3.56 (11'8")	2.21 (7'3")	29.5-35, 28	54/69	11.00 (36'0")
631B	13G	62-62	420/335	16/23 (21/30)	31 620 (69,700)	13.05 (42'10")	3.81 (12'6")	3.45 (11'5")	2.39 (7'10")	29.5-35, 28	51/67	11.31 (37'5")
631B	13G	62-66	420/360	16/23 (21/30)	31 840 (70,200)	13.29 (43'7")	3.81 (12'6")	3.63 (11'11")	2.41 (7'11")	29.5-35, 34	51/67	11.31 (37'5")
631C	67M	69-75	/415	16/23 (21/30)	36 350 (80,150)	13.54 (44'5")	3.45 (11'4")	3.91 (12'10")	2.39 (7'10")	29.5-35, 34	53/69	11.45 (37'7")
631D	24W	75-85	/450	16/23.7 (21/31)	42 370 (93,410)	14.25 (46'9")	3.96 (13'0")	4.17 (13'8")	2.46 (8'1")	33.25-35, 38 PR (E-3)	/69	12.2 (40'1")
631E	1AB	85-91	473/450	16.1/23.7 (21/31)	43 365 (95,600)	14.28 (46'10")	3.94 (12'11")	4.29 (14'1")	2.46 (8'1")	37.25-35, 30	5367	12.2 (40'1")
632	14G	62-63	420/335	21.4/29 (28/38)	37 650 (83,000)	15.21 (49'11")	4.04 (13'3")	4.00 (13'1")	2.44 (8'0")	16.0-25, 16 29.5-35, 34	36/40	13.36 (43'10")
632	14G	63-66	420/360	21.4/29 (28/38)	39 420 (86,910)	15.30 (50'2")	4.04 (13'3")	4.00 (13'1")	2.44 (8'0")	16.0-25, 16 29.5-35, 34	41/62	13.36 (43'10")

Wheel Tractor-Scrapers (cont'd)

Model	Product Ident. No. Prefix	Years Built	Horse-power Max/ Rated	Capacity Struck/ Heaped m <sup>3</sup> (yd <sup>3</sup> )	Approx. Shipping Weight kg (lb)	Dimensions m (ft)				Tire Size (Standard) & ply rating Tractor & Scraper	Approx. % Weight on Drivers Loaded/ Empty	Turning Circle m (ft)
						Length	Width	Height	Width of Tread			
633C	66M	69-75	/415	24.5 (32)	41 750 (92,050)	13.36 (43'10")	3.45 (11'4")	3.96 (13'0")	2.39 (7'10")	33.2-35, 32	53/67	11.78 (38'8")
633D	25W	75-85	450	26 (34)	47 570 (104,870)	14.40 (47'3")	3.96 (13'0")	4.24 (13'11")	2.46 (8'1")	33.25-35, 38 PR (E-3)	67	12.4 (40'7")
633E	1AB	92-96	475	26 (34)	50 800 (112,000)	14.40 (47'3")	3.96 (13'0")	4.24 (13'11")	2.46 (8'1")	37.25R35	64/36	13.15 (43'2")
633E Series II	2PS	96-00	490	26 (34)	51 100 (112,670)	14.8 (48'7")	3.96 (13'0")	4.24 (13'11")	2.46 (8'1")	37.25R35	64/36	13.15 (43'2")
637	65M	70-75	/640	16/23 (21/30)	41 300 (91,050)	13.65 (44'9.5")	3.45 (11'4")	3.93 (12'11")	2.39 (7'10")	33.25-35, 32	51/62	11.68 (38'4")
637/PP	79P	70-75	/640	16/23 (21/30)	43 700 (96,350)	15.82 (51'11")	3.45 (11'4")	3.93 (12'11")	2.39 (7'10")	33.25-35, 32	51/63	11.68 (38'4")
637D	26W	75-85	450	16.1/23.7 (21/31)	46 987 (103,590)	14.8 (48'8")	3.96 (13'0")	4.17 (13'8")	2.46 (8'1")	33.25-35, 38 PR (E-3)	50/61	12.2 (40'1")
637D/PP	27W	75-85	450	16.1/23.7 (21/31)	48 531 (106,990)	14.8 (48'8")	3.96 (13'0")	4.17 (13'8")	2.46 (8'1")	33.25-35, 38 PR (E-3)	50/61	12.2 (40'1")
637E	1FB	85-91	473/450	16.1/23.7 (21/31)	49 940 (110,100)	14.28 (46'10")	3.94 (12'11")	4.29 (14'1")	2.46 (8'1")	37.25-35, 30	49/59	12.2 (40'1")
637E/PP	1FB	85-91	473/450	16.1/23.7 (21/31)	51 485 (113,500)	15.88 (52'1")	3.94 (12'11")	4.29 (14'1")	2.46 (8'1")	37.25-35, 30	50/60	12.2 (40'1")
639D	99X	79-84	/450	26 (34)	55 030 (121,318)	14.53 (47'8")	3.96 (13'0")	4.06 (13'4")	2.46 (8'1")	37.25-35, 42 37.25-35, 42	51/59	12.4 (40'7")
641	64F	62-65	560/450	21.4/29 (28/38)	43 200 (95,300)	14.73 (48'4")	4.04 (13'3")	4.00 (13'1")	2.44 (8'0")	33.5-39, 38	51/66	12.68 (41'7")
641B	65K	69-81	/550	21.4/29 (28/38)	53 070 (117,000)	14.96 (49'1")	4.04 (13'3")	4.24 (13'11")	2.55 (8'4")	37.5-39, 36	54/69	13.00 (42'9")
650	63F	62-64	560/450	24.5/33.6 (32/44)	45 130 (99,500)	16.31 (53'6")	4.24 (13'11")	4.01 (13'2")	2.54 (8'4")S	18.0-25, 20 33.5-39, 32 37.5-39, 36	36/40	13.87 (45'6")
650B	22G	62-72	/550	24.5/33.6 (32/44)	46 100 (101,700)	17.00 (55'10")	3.80 (12'6")	4.30 (14'1")	2.65 (8'9")S	18.0-25, 20 37.5-39, 28 37.5-30, 36	52/65	14.00 (46'0")
651	33G	62-68	560/450	24.5/33.6 (32/44)	43 730 (96,400)	14.93 (49'0")	4.24 (13'11")	4.01 (13'2")	2.54 (8'4")	37.5-39, 36	51/65	13.29 (43'7")
651B	67K	69-84	/550	24.5/33.6 (32/44)	56 340 (124,200)	15.34 (51'4")	4.32 (14'2")	4.29 (14'1")	2.72 (8'11")S	37.5-39, 36 37.5-39, 36	52/67	13.5 (44'2")
657	31G	62-68	T560/450 S420/335	24.5/33.6 (32/44)	56 550 (124,700)	15.39 (50'6")	4.24 (13'11")	4.09 (13'5")	2.62 (8'7")	37.5-39, 44	48/56	13.29 (43'7")
657	46M	68-69	T—/500 S420/360	24.5/33.6 (32/44)	56 820 (125,155)	15.39 (50'6")	4.24 (13'11")	4.09 (13'5")	2.67 (8'8")	37.5-39, 44	48/55	14.57 (47'10")
657B	68K	69-84	T—/550 S—/400	24.5/33.6 (32/44)	63 100 (139,100)	15.7 (51'8")	4.32 (14'2")	4.21 (13'10")	2.67 (8'9")S	37.5-39, 44 37.5-39, 44	49/59	13.7 (45'1")
660	90F	62-64	560/450	30.6/41.3 (40/54)	49 130 (108,300)	17.04 (55'11")	4.24 (13'11")	4.37 (14'4")	2.59 (8'6")	18.0 × 25-20 37.5 × 39-28 37.5 × 51-36	37/41	13.87 (45'6")
660B	58K	70-78	/550	30.6/41.3 (40/54)	59 875 (132,000)	17.27 (56'8")	3.81 (14'2")	4.37 (14'4")	Scrapper—	18.0 × 25-20 37.5 × 39-28	41/46	14.00 (46'0")

\*Maximum HP only available.

Wheel Tractor-Scrapers (cont'd)

Model	Product Ident. No. Prefix	Years Built	Horse-power Max/ Rated	Capacity Struck/ Heaped m <sup>3</sup> (yd <sup>3</sup> )	Approx. Shipping Weight kg (lb)	Dimensions m (ft)				Tire Size (Standard) & ply rating Tractor & Scraper	Approx. % Weight on Drivers Loaded/ Empty	Turning Circle m (ft)
						Length	Width	Height	Width of Tread			
666	77F	63-69	F460/450 R420/335	30.6/41.3 (40/54)	56 700 (125,000)	17.04 (55'11")	4.24 (13'11")	4.37 (14'4")	2.59 (8'6") Scraper—	18.0 × 25-20 37.5 × 39-28 37.5 × 51-36	34/35*	13.87 (45'6")
666	64H	67-69	F—/500 R420/360	30.6/41.3 (40/54)	58 800 (129,645)	17.27 (56'8")	4.24 (13'11")	4.37 (14'4")	2.59 (8'6") Scraper—	18.0 × 25-20 37.5 × 39-28 37.5 × 51-51	35/36*	13.87 (45'6")
666B	66K	69-78	/950	30.6/41.3 (40/54)	67 630 (149,500)	17.27 (56'8")	4.31 (14'4")	4.37 (14'4")	2.59 (8'9")	18.0 × 25-20 37.5 × 39-28	39/36	14.00 (46'0")

\*Tractor & Scraper Combined.



TRACTOR-TOWED SCRAPERS

Model	Product Ident. No. Prefix	Years Built	Capacity Struck/ Heaped m <sup>3</sup> (yd <sup>3</sup> )	Weight kg (lb)	Width m (ft)	Length m (ft)	Height m (ft)	Width of Cut m (ft)
40	1W	49-59	2.8/3.4 (3.6/4.5)	3348 (7380)	2.27 (7'6")	6.40 (21'0")	1.68 (5'6")	1.82 (6'0")
60	1D	47-53	4.6/6.1 (6.0/8.0)	5579 (12,300)	2.65 (8'9")	8.43 (27'8")	2.36 (7'9")	2.13 (7'0")
60	2W	52-72	5.4/7.0 (7.0/9.0)	6100 (13,500)	2.85 (9'5")	8.52 (28'3")	2.36 (7'9")	2.40 (7'11")
70	8C	46-53	6.7/8.4 (8.7/11.0)	8527 (18,800)	3.02 (10'0")	9.50 (31'2")	2.56 (8'5")	2.43 (8'0")
70	3W	51-57	7.8/9.9 (10.2/13.0)	9140 (20,150)	3.16 (10'5")	9.53 (31'4")	2.61 (8'7")	2.59 (8'6")
80	2D	46-52	10.3/13.8 (13.5/18.0)	11 793 (26,000)	3.38 (11'2")	10.82 (35'6")	2.92 (9'7")	2.74 (9'0")
80	5W	50-56	11.5/15.3 (15.0/20.0)	13 533 (29,836)	3.50 (11'6")	10.92 (35'0")	3.09 (10'2")	2.89 (9'6")
90	9V	51-55	16.2/20.6 (21.2/27.0)	17 208 (37,937)	3.65 (12'0")	12.19 (40'0")	3.20 (10'6")	3.04 (10'0")
435C	45D	56-61	9.9/13.8 (13.0/18.0)	10 659 (23,500)	3.28 (10'10")	10.16 (33'4")	3.01 (9'11")	2.84 (9'4")
435D	45D	59-61	11.5/14.5 (15.0/19.0)	11 521 (25,400)	3.29 (10'10")	10.16 (33'4")	3.01 (9'11")	2.84 (9'4")
435E	85F	61-72	9.2/13.0 (12.0/17.0)	10 400 (22,900)	3.29 (10'10")	10.06 (33'1")	3.07 (10'1")	2.84 (9'4")
435F	45D	62-72	10.7/13.8 (14.0/18.0)	11 300 (24,900)	3.29 (10'10")	10.06 (33'1")	3.02 (9'11")	2.84 (9'4")
435G	27G	63-73	9.2/13.0 (12.0/17.0)	10 400 (22,900)	3.27 (10'9")	10.08 (33'1")	2.97 (9'9")	2.84 (9'4")

## Former Models

## Wheel Tractor-Scrapers Construction & Mining Trucks/Tractors

### Tractor-Towed Scrapers (cont'd)

Model	Product Ident. No. Prefix	Years Built	Capacity Struck/ Heaped m <sup>3</sup> (yd <sup>3</sup> )	Weight kg (lb)	Width m (ft)	Length m (ft)	Height m (ft)	Width of Cut m (ft)
463	62C	55-60	13.8/29.1 <b>(18.0/25.0)</b>	14 061 <b>(31,000)</b>	3.58 <b>(11'9")</b>	11.58 <b>(38'0")</b>	3.39 <b>(11'2")</b>	3.15 <b>(10'4")</b>
463C	62C	59-60	16.8/21.4 <b>(22.0/28.0)</b>	15 785 <b>(34,800)</b>	3.58 <b>(11'9")</b>	11.58 <b>(38'0")</b>	3.39 <b>(11'2")</b>	3.15 <b>(10'4")</b>
463E	86F	60-71	13.8/20.0 <b>(18.0/26.0)</b>	15 600 <b>(34,400)</b>	3.58 <b>(11'9")</b>	11.65 <b>(38'3")</b>	3.28 <b>(10'10")</b>	3.15 <b>(10'4")</b>
463F	62C	63-71	16.0/21.4 <b>(21.0/28.0)</b>	15 700 <b>(34,600)</b>	3.58 <b>(11'9")</b>	11.65 <b>(38'3")</b>	3.28 <b>(10'10")</b>	3.15 <b>(10'4")</b>
463G	28G	63-71	13.8/20.0 <b>(18.0/26.0)</b>	13 200 <b>(29,200)</b>	3.58 <b>(11'9")</b>	11.52 <b>(37'10")</b>	3.14 <b>(10'4")</b>	3.15 <b>(10'4")</b>
491	98C	56-64	20.6/26.0 <b>(27.0/34.0)</b>	16 964 <b>(37,400)</b>	3.65 <b>(12'0")</b>	12.13 <b>(39'10")</b>	3.96 <b>(13'0")</b>	3.16 <b>(10'5")</b>
491B	9A	61-63	20.6/26.8 <b>(27.0/35.0)</b>	20 902 <b>(46,060)</b>	3.91 <b>(12'10")</b>	12.49 <b>(41'0")</b>	3.96 <b>(13'0")</b>	3.30 <b>(10'10")</b>
491C	47E	63-70	20.6/26.8 <b>(27.0/35.0)</b>	21 600 <b>(47,500)</b>	3.91 <b>(12'10")</b>	12.64 <b>(41'6")</b>	3.96 <b>(13'0")</b>	3.30 <b>(10'10")</b>



### CONSTRUCTION & MINING TRUCKS/TRACTORS

Model	Product Ident. No. Prefix	Years Built	Flywheel Kilowatts (Horsepower)	Capacity Metric Tons (U.S. Tons)	Approx. Weight kg (lb)	Dimensions m (ft)						Tire Size
						Width	Length	Height	Loading Height	Dumping Height (55°)	Turning Circle	
768B	79S	71-78	309 <b>(415)</b>	—	22 000 <b>(48,500)</b>	3.61 <b>(11'10")</b>	6.55 <b>(21'6")</b>	3.48 <b>(11'5")</b>	—	—	18.0 <b>(59'1")</b>	18.00 × 33—24 PR
768C	02X	78-95	336 <b>(450)</b>	—	24 624 <b>(54,285)</b>	4.70 <b>(15'5")</b>	8.00 <b>(26'3")</b>	3.56 <b>(11'8")</b>	—	—	18.5 <b>(60'8")</b>	18.00R33 E-4
769	99F	62-67	298 <b>(400)</b>	31.8 <b>(35.0)</b>	25 365 <b>(55,870)</b>	3.63 <b>(11'11")</b>	7.64 <b>(25'1")</b>	4.05 <b>(13'4")</b>	3.07 <b>(10'1")</b>	7.18 <b>(26'7")</b>	16.5 <b>(54'5")</b>	18.00 × 25—32 PR
769B	99F	67-78	309 <b>(415)</b>	32.0 <b>(35.0)</b>	28 000 <b>(61,800)</b>	3.64 <b>(11'11.5")</b>	7.85 <b>(25'9")</b>	3.89 <b>(12'9")</b>	3.15 <b>(10'4")</b>	7.24 <b>(23'9")</b>	18.0 <b>(59'1")</b>	18.00 × 25—32 PR E-3
769C	01X	78-95	336 <b>(450)</b>	36.9 <b>(40.6)</b>	30 675 <b>(67,855)</b>	4.70 <b>(15'5")</b>	8.00 <b>(26'3")</b>	3.85 <b>(12'8")</b>	3.24 <b>(10'7")</b>	7.68 <b>(25'2")</b>	18.5 <b>(60'8")</b>	18.00R33 E-4
771C	3BJ	92-95	336 <b>(450)</b>	40.0 <b>(44.0)</b>	34 170 <b>(75,345)</b>	4.74 <b>(15'7")</b>	8.20 <b>(26'11")</b>	4.00 <b>(13'1")</b>	3.30 <b>(10'10")</b>	7.68 <b>(25'2")</b>	18.5 <b>(60'8")</b>	18.00R33 E-4
772	80S	71-78	447 <b>(600)</b>	—	32 100 <b>(70,800)</b>	4.06 <b>(13'4")</b>	7.11 <b>(23'4")</b>	3.68 <b>(12'1")</b>	—	—	22.1 <b>(72'6")</b>	24.00 × 35—36 PR
772B	64W	78-95	485 <b>(650)</b>	—	32 909 <b>(72,550)</b>	4.86 <b>(15'11")</b>	9.12 <b>(29'11")</b>	4.52 <b>(14'10")</b>	—	—	23.5 <b>(77'0")</b>	24.00R35 E-4
773	63G	70-78	447 <b>(600)</b>	45.4 <b>(50.0)</b>	37 800 <b>(83,360)</b>	4.06 <b>(13'4")</b>	8.71 <b>(28'7")</b>	4.27 <b>(14'0")</b>	3.61 <b>(11'10")</b>	8.36 <b>(27'5")</b>	22.1 <b>(72'6")</b>	21.00 × 35—32 PR E-3
773B	63W	78-95	485 <b>(650)</b>	54.3 <b>(59.8)</b>	38 321 <b>(84,500)</b>	4.86 <b>(15'11")</b>	9.12 <b>(29'11")</b>	4.31 <b>(14'2")</b>	3.77 <b>(12'5")</b>	8.72 <b>(28'7")</b>	23.5 <b>(77'0")</b>	24.00R35 E-4
775B	7XJ	92-95	485 <b>(650)</b>	59.5 <b>(65.5)</b>	42 324 <b>(93,325)</b>	4.91 <b>(16'2")</b>	9.33 <b>(30'7")</b>	4.31 <b>(14'2")</b>	3.86 <b>(12'8")</b>	8.72 <b>(28'8")</b>	23.5 <b>(77'7")</b>	24.00R35 E-4
776	14H	75-84	649 <b>(870)</b>	—	49 686 <b>(109,540)</b>	3.51 <b>(11'6")</b>	8.06 <b>(26'5.5")</b>	3.40 <b>(11'2")</b>	—	—	26.8 <b>(88'0")</b>	27.00 × 49—36 PR E-3
776B	6JC	84-92	649 <b>(870)</b>	—	49 896 <b>(110,000)</b>	3.51 <b>(11'6")</b>	8.06 <b>(26'6")</b>	3.40 <b>(11'2")</b>	—	—	25.8 <b>(84'6")</b>	27.00 × 49—36 PR E-3
776C	2TK	92-96	649 <b>(870)</b>	—	49 896 <b>(110,000)</b>	3.51 <b>(11'6")</b>	8.06 <b>(26'5.5")</b>	4.55 <b>(14'11")</b>	—	—	25.8 <b>(84'6")</b>	27.00R49

Construction & Mining Trucks/Tractors (cont'd)

Model	Product Ident. No. Prefix	Years Built	Flywheel Kilowatts (Horsepower)	Capacity Metric Tons (U.S. Tons)	Approx. Weight kg (lb)	Dimensions m (ft)						Tire Size
						Width	Length	Height	Loading Height	Dumping Height (55°)	Turning Circle	
777	84A	74-84	649 (870)	77.1 (85.0)	58 886 (129,820)	5.463 (17'11")	9.78 (32'1")	4.90 (16'1")	4.14 (13'7")	9.29 (30'6")	26.8 (88'0")	24.00 × 49—42 PR E-3
777B	4YC	84-92	649 (870)	86.2 (95.0)	60 055 (132,422)	5.463 (17'11")	9.79 (32'1")	4.97 (16'4")	4.17 (13'8")	9.42 (30'11")	25.8 (84'6")	24.00 × 49—48 PR E-3
777C	4XJ	92-96	649 (870)	86.2 (95.0)	61 790 (136,227)	5.463 (17'11")	9.79 (32'1")	4.97 (16'4")	4.17 (13'8")	9.42 (30'11")	25.8 (84'6")	27.00R49
784B	5RK	93-98	962 (1290)	—	89 280 (196,825)	6.74 (22'2")	9.34 (30'8")	5.47 (17'1")	—	—	33.5 (109'10")	36.00R51 E-3
785	8GB	85-92	962 (1290)	136.0 (150.0)	96 353 (212,458)	6.64 (21'9")	11.02 (36'2")	5.77 (18'11")	4.98 (16'4")	11.20 (36'9")	30.5 (100'4")	33.00 × 51
785B	6HK	92-98	962 (1290)	136.0 (150.0)	96 353 (212,458)	6.64 (21'9")	11.02 (36'2")	5.77 (18'11")	4.98 (16'4")	11.20 (36'9")	30.2 (99'2")	33.00R51
789	9ZC	86-92	1272 (1705)	177.0 (195.0)	121 922 (268,837)	7.67 (25'2")	12.18 (39'11")	6.15 (20'2")	5.21 (17'1")	11.91 (39'1")	30.2 (99'2")	37.00R57
789B	7EK	92-98	1272 (1705)	177.0 (195.0)	121 922 (268,837)	7.67 (25'2")	12.18 (39'11")	6.15 (20'2")	5.21 (17'1")	11.91 (39'1")	30.2 (99'2")	37.00R57
793	3SJ	90-92	1534 (2057)	218.0 (240.0)	143 564 (323,709)	7.60 (24'11")	12.86 (42'3")	6.43 (21'1")	5.86 (19'3")	13.21 (43'4")	30.2 (99'2")	40.00-57
793B	1HL	92-96	1534 (2057)	218.0 (240.0)	143 564 (323,709)	7.60 (24'11")	12.86 (42'3")	6.43 (21'1")	5.86 (19'3")	13.21 (43'4")	30.2 (99'2")	40.00R57



ARTICULATED TRUCKS

Model	Product Ident. No. Prefix	Years Built	Flywheel Kilowatts (Horsepower)	Capacity Metric Tons (U.S. Tons)	Approx. Weight kg (lb)	Dimensions m (ft)						Tire Size
						Width	Length	Height	Loading Height	Dumping Height (55°)	Turning Circle	
D20D	9MG	92-94	134 (180)	18.0 (20.0)	15 000 (33,070)	2.75 (9'0")	8.43 (27'8")	3.30 (10'10")	2.40 (7'11")	5.0 (16'5")	7.25 (24'0")	23.5R25
D22	*	80-82	175 (235)	20.0 (22.0)	17 700 (39,000)	3.00 (9'10")	7.85 (25'9")	3.09 (10'2")	2.44 (8'0")	5.03 (16'6")	7.87 (25'10")	26.5R25
D25	*	80	175 (235)	22.7 (25.0)	17 300 (38,000)	3.00 (9'10")	7.85 (25'9")	3.09 (10'2")	2.44 (8'0")	5.03 (16'6")	7.87 (25'10")	26.5R25
D25B	*	80-83	190 (255)	22.7 (25.0)	17 900 (39,400)	3.00 (9'10")	7.99 (26'2")	3.25 (10'8")	2.44 (8'0")	5.03 (16'6")	7.87 (25'10")	26.5R25
D25C	9YC	85-89	194 (260)	22.7 (25.0)	19 233 (42,400)	3.00 (9'10")	8.73 (28'8")	3.27 (10'9")	2.56 (8'5")	5.28 (17'4")	16.14 (52'11")	26.5R25
D30C	7ZC	85-89	194 (260)	27.2 (30.0)	21 320 (47,000)	3.30 (10'10")	8.86 (29'1")	3.33 (10'11")	2.85 (9'4")	5.46 (17'11")	16.33 (53'7")	29.5R25
D35	*	81-83	190 (255)	31.8 (35.0)	20 000 (44,000)	3.27 (10'9")	8.44 (27'8")	3.25 (10'8")	2.91 (9'7")	5.46 (17'11")	7.87 (25'10")	26.5R25 33.25R29
D35C	2GD	85-89	194 (260)	31.8 (35.0)	23 860 (52,600)	3.50 (11'6")	9.44 (31'0")	3.34 (10'11")	2.93 (9'7")	5.32 (17'5")	16.00 (52'5")	Front 29.5R25 Rear 33.5R29
D35 HP	3FD	85-89	287 (385)	31.8 (35.0)	24 950 (55,000)	3.50 (11'6")	9.80 (32'2")	3.51 (11'6")	2.93 (9'7")	5.32 (17'5")	15.78 (51'9")	Front 29.5R25 Rear 33.5R29
D40D	2JJ	89-94	287 (385)	36.3 (40.0)	28 027 (61,800)	3.48 (11'5")	9.76 (32'0")	3.56 (11'8")	3.20 (10'7")	6.00 (19'8")	7.90 (25'11")	Front 29.5R25 Rear 33.25R29

\*Information not available — DJB models.

## Articulated Trucks (cont'd)

Model	Product Ident. No. Prefix	Years Built	Flywheel Kilowatts (Horsepower)	Capacity Metric Tons (U.S. Tons)	Approx. Weight kg (lb)	Dimensions m (ft)						Tire Size
						Width	Length	Height	Loading Height	Dumping Height (55°)	Turning Circle	
D44	*	81-86	336 (450)	40.0 (44.0)	28 000 (61,600)	3.66 (12'0")	10.05 (33'0")	3.86 (12'8")	2.90 (9'6")	6.35 (20'10")	9.96 (32'8")	33.25R29
D44B	4LD	86-87	343 (460)	40.0 (44.0)	32 296 (71,200)	3.73 (12'3")	10.05 (33'0")	3.98 (13'1")	2.98 (9'9")	6.40 (21'0")	9.08 (29'9")	33.25R29
D250	*	75-78	175 (235)	25.0 (27.5)	18 500 (40,700)	2.66 (8'9")	8.82 (29'0")	3.04 (10'0")	2.61 (8'7")	6.22 (20'5")	7.67 (25'2")	23.5R25
D250B	5WD	85-91	163 (218)	22.7 (25.0)	17 963 (39,600)	2.50 (8'2.5")	9.60 (31'8.5")	3.18 (10'5")	2.55 (8'4.5")	6.23 (20'5")	7.65 (25'1")	20.5R25
D250D	6NG	92-94	160 (214)	22.8 (25.0)	17 300 (38,150)	2.50 (8'2")	9.60 (31'6")	3.21 (10'7")	2.59 (8'6")	6.22 (20'5")	7.61 (25'0")	20.5R25
D250E	5TN	95-98	194 (260)	22.7 (25.0)	20 135 (44,397)	2.74 (9'0")	9.94 (32'7")	3.35 (11'0")	2.7 (8'10")	6.2 (20'4")	7.44 (24'5")	23.5R25
D250E Series II	4PS	98-00	201 (270)	22.7 (25.0)	21 600 (47,628)	2.88 (9'5")	10.0 (32'10")	3.35 (11'0")	2.75 (9'0")	6.39 (20'11")	7.44 (24'5")	23.5R25
D275	*	78-80	175 (235)	25.0 (27.5)	18 700 (41,000)	2.66 (8'9")	8.82 (29'0")	3.17 (10'7")	2.61 (8'7")	6.22 (20'5")	7.75 (25'3")	23.5R25
D275B	*	80-82	190 (255)	25.0 (27.5)	19 200 (42,400)	2.66 (8'9")	8.96 (29'5")	3.21 (10'7")	2.61 (8'7")	6.22 (20'5")	7.75 (25'5")	23.5R25
D300	*	76-78	190 (255)	30.0 (33.0)	19 500 (42,900)	2.80 (9'2")	8.82 (29'0")	3.04 (10'0")	2.68 (8'10")	6.22 (20'5")	7.67 (25'2")	23.5R25
D300B	4SD	85-91	194 (260)	27.2 (30.0)	19 800 (43,520)	2.50 (8'2.5")	9.60 (31'8.5")	3.18 (10'5")	2.55 (8'4.5")	6.23 (20'5")	7.76 (25'6")	23.5R25
D300D	5MG	92-95	213 (285)	27.2 (30.0)	20 680 (45,600)	2.88 (9'6")	9.87 (32'5")	3.28 (10'9")	2.66 (8'9")	6.42 (21'1")	7.76 (25'5")	23.5R25
D300E	7FN	95-98	212 (285)	27.2 (30.0)	21 940 (48,369)	2.89 (9'6")	9.94 (32'7")	3.35 (11'0")	2.85 (9'4")	6.26 (20'6")	7.6 (24'10")	23.5R25
D300E Series II	5KS	98-00	212 (285)	27.2 (30.0)	22 793 (50,235)	2.91 (9'7")	10.0 (32'10")	3.35 (11'0")	2.89 (9'6")	6.44 (21'2")	7.6 (24'10")	23.5R25
D330	*	78-80	190 (255)	30.0 (33.0)	20 000 (43,000)	2.80 (9'2")	8.82 (28'11")	3.17 (10'5")	2.68 (8'9")	6.22 (20'5")	7.80 (25'7")	23.5R25
D330B	*	80-83	190 (255)	30.0 (33.0)	20 200 (44,400)	2.76 (9'1")	9.08 (29'9")	3.25 (10'8")	2.68 (8'9")	6.33 (20'9")	7.92 (26'0")	23.5R25
D350	*	78-80	190 (255)	31.8 (35.0)	21 000 (46,000)	3.00 (9'10")	8.95 (29'4")	3.21 (10'7")	2.82 (9'3")	6.35 (20'10")	7.95 (26'1")	26.5R25
D350B	*	80-83	190 (255)	31.8 (35.0)	21 400 (47,200)	3.00 (9'10")	9.09 (29'10")	3.25 (10'8")	2.85 (9'4")	6.40 (21'0")	7.95 (26'1")	26.5R25
D350C	8XC	85-89	194 (260)	31.8 (35.0)	23 315 (51,400)	3.00 (9'10")	9.93 (32'7")	3.27 (10'9")	2.91 (9'6")	6.52 (21'5")	16.16 (53'0")	26.5R25
D350D	9RF	89-94	213 (285)	31.8 (35.0)	24 595 (54,221)	3.00 (9'10")	9.95 (32'7")	3.34 (11'0")	2.93 (9'7")	6.52 (21'5")	16.06 (52'8")	26.5R25
D350E	9LR	96-99	253 (340)	31.7 (35.0)	27 871 (61,455)	3.26 (10'8")	10.38 (34'1")	3.51 (11'6")	2.94 (9'8")	6.6 (21'8")	8.21 (26'11")	26.5R25
D400	IMD	85-89	287 (385)	36.3 (40.0)	25 765 (56,800)	3.00 (9'10")	10.42 (34'2")	3.45 (11'4")	3.00 (9'10")	6.53 (21'5")	16.07 (52'9")	26.5R25
D400D	8TF	89-95	287 (385)	36.3 (40.0)	28 027 (61,800)	3.30 (10'8")	10.62 (34'10")	3.56 (11'8")	2.98 (9'9")	6.60 (21'8")	8.26 (27'2")	29.5R25
D400E	2YR	96-99	302 (405)	36.3 (40.0)	29 263 (64,495)	3.3 (10'10")	10.52 (34'6")	3.58 (11'9")	3.07 (10'1")	6.58 (21'7")	8.26 (27'1")	29.5R25
D550	*	78-86	336 (450)	50.0 (55.0)	37 800 (83,400)	3.66 (12'0")	11.35 (37'3")	3.86 (12'8")	3.30 (10'10")	7.83 (25'8")	9.65 (31'8")	33.25R29
D550B	8SD	86-87	343 (460)	50.0 (55.0)	40 370 (89,000)	3.72 (12'2.5")	11.74 (38'6")	3.97 (13'0")	3.22 (10'6")	8.28 (27'2")	8.73 (28'8")	33.25R29

\*Information not available — DJB models.



**WHEEL TRACTORS**

Model	Product Ident. No. Prefix	Years Built	Flywheel Kilowatts (Horsepower)	Approx. Oper. Wt. kg (lb)	Length (Dozer on ground) m (ft)	Tread m (ft)	Wheelbase m (ft)	Ground Clearance mm (in)	Transmission	Maximum Speeds		*
										Fwd. km/h (mph)	Rev. km/h (mph)	
814B	90P	70-81	127 (170)	18 780 (41,400)	6.49 (21'3")	2.16 (7'1")	3.10 (10'2")	356 (14")	PS 4F-4R	32.7 (20.3)	39.3 (24.4)	*
814B	16Z	81-95	161 (216)	20 927 (46,137)	6.82 (22'5")			459 (18'0")	PS 4F-4R	29.9 (18.6)	34.1 (21.2)	*
824	29G	63-65	224 (300)	31 700 (70,000)	7.04 (23'1")	2.37 (7'10")	3.35 (11'8")	470 (18.2")	PS 3F-3R	34.1 (21.2)	34.1 (21.2)	
824B	36H	65-78	224 (300)	33 330 (73,480)	7.40 (24'3.5")	2.32 (7'7.5")	3.55 (11'8")	490 (19.4")	PS 3F-3R	29.8 (18.5)	29.8 (18.5)	
824C	85X	78-95	235 (315)	30 380 (66,975)	7.69 (25'2")	2.36 (7'7.5")		477 (18'8")	PS 4F-4R	33.2 (20.6)	37.8 (23.5)	
834	43E	63-74	298 (400)	40 300 (88,800)	7.75 (25'5")	2.54 (8'4")	3.80 (12'6")	510 (20.0")	PS 3F-3R	32.8 (20.4)	35.7 (22.2)	
834B		74-00	336 (450)	46 350 (102,200)	8.72 (28'7")		3.81 (12'6")	466 (18")	PS 4F-4R	34.1 (21.2)	41.8 (25.9)	



**COMPACTORS**

Model	Product Ident. No. Prefix	Years Built	Flywheel Kilowatts (Horsepower)	Approx. Oper. Wt. kg (lb)	Drum Width m (ft)	Articulated Steering Angle, Maximum	Transmission	Maximum Speeds		*
								Fwd. km/h (mph)	Rev. km/h (mph)	
815	91P	70-81	127 (170)	17 300 (38,200)	0.97 (3'2")	44° Either Side	Power Shift 4F-4R	30.1 (18.7)	35.7 (22.2)	*
815B	17Z	81-95	161 (216)	20 035 (44,175)	0.98 (3'2")	45° Either Side	Power Shift 4F-4R	37.5 (23.3)	42.9 (26.6)	*
816	57U	72-81	127 (170)	18 550 (40,900)	1.02 (3'4")	44° Either Side	Power Shift 4F-4R	30.1 (18.6)	35.7 (22.4)	**
816B	15Z	81-95	161 (216)	20 628 (45,477)	1.02 (3'4")		Power Shift 4F-4R	35.3 (22.0)	40.4 (25.1)	**
825B	43N	70-78	224 (300)	30 075 (66,300)	1.13 (3'8.5")	44° Either Side	Power Shift	29.8 (18.5)	29.8 (18.5)	
826C	87X	78-95	235 (315)	34 920 (76,990)	1.20 (3'11")	42° Either Side	Power Shift 4F-4R	32.5 (20.2)	37.2 (23.1)	
835	44N	70-74	298 (400)	35 900 (79,100)	1.22 (4'0")	44° Either Side	Power Shift 3F-3R	32.2 (20.0)	34.8 (21.6)	
836		-00	353 (473)	45 360 (100,000)	1.4 (4'7")	44° Either Side	Power Shift 2F-2R			*

\*Turbocharged, Articulated Steering.

\*\*Turbocharged, ROPS Cab, Sleeve Metering Fuel System.





WHEEL LOADERS

Model	Product Ident. No. Prefix	Years Built	Flywheel Horse-power	Approx. Shipping Wt. kg (lb)	Rated Capacity m <sup>3</sup> (yd <sup>3</sup> )	Breakout Force kg (lb)	Width Over Tires m (ft)	Ground Clearance mm (in)	Max.Reach at max height mm (ft)	Dump Clearance at max height m (ft)	Maximum Speeds km/h (mph)		Remarks
											Fwd.	Rev.	
910	80V	73-79	65	6100 <b>(13,400)</b>	1.0 <b>(1.25)</b>	4530 <b>(10,000)</b>	2.07 <b>(6'10")</b>	405 <b>(16")</b>	860 <b>(2'10")</b>	2.46 <b>(8'1")</b>	24.1 <b>(15.0)</b>	10.6 <b>(6.6)</b>	
910	40Y	79-89	65	6658 <b>(14,679)</b>	1.0 <b>(1.25)</b>	5838 <b>(12,870)</b>	2.07 <b>(6'10")</b>	405 <b>(16")</b>	930 <b>(3'0.6")</b>	2.40 <b>(7'10")</b>	23.9 <b>(14.8)</b>	10.6 <b>(6.6)</b>	
910	41Y	79-89	65	6658 <b>(14,679)</b>	1.0 <b>(1.25)</b>	5838 <b>(12,870)</b>	2.07 <b>(6'10")</b>	405 <b>(16")</b>	930 <b>(3'0.6")</b>	2.40 <b>(7'10")</b>	23.5 <b>(14.6)</b>	24.9 <b>(15.5)</b>	
910E	1SF	89-92	78	7298 <b>(16,062)</b>	1.3 <b>(1.7)</b>	6503 <b>(14,339)</b>	2.15 <b>(7'0")</b>	343 <b>(13.5")</b>	1000 <b>(3'3.4")</b>	2.57 <b>(8'5")</b>	34.0 <b>(21.1)</b>	22.4 <b>(13.9)</b>	3114 Engine Z Bar Linkage
910F	1SF	92-95	80	7009 <b>(15,452)</b>	1.3 <b>(1.7)</b>	6443 <b>(14,207)</b>	2.15 <b>(7'0")</b>	370 <b>(14.6")</b>	981 <b>(3'3")</b>	2.60 <b>(8'6")</b>	34.0 <b>(21.1)</b>	22.4 <b>(13.9)</b>	3114 Engine Z Bar Linkage
916	2XB	86-92	85	8554 <b>(18,857)</b>	1.4 <b>(1.75)</b>	9124 <b>(20,115)</b>	2.33 <b>(7'8")</b>	322 <b>(12.7")</b>	926 <b>(3'0.5")</b>	2.65 <b>(8'9")</b>	24.8 <b>(15.4)</b>	25.0 <b>(15.5)</b>	3204 Engine Z Bar Linkage
918F	3TJ	92-94	98	8973 <b>(19,785)</b>	1.5 <b>(2.0)</b>	9795 <b>(21,598)</b>	2.33 <b>(91.6")</b>	3.18 <b>(1'1")</b>	802 <b>(2'8")</b>	2.78 <b>(9'1")</b>	37.0 <b>(23.0)</b>	24.5 <b>(15.2)</b>	3114 Engine Z Bar Linkage
920	62K	69-84	80	8440 <b>(18,600)</b>	1.2 <b>(1.5)</b>	7901 <b>(17,419)</b>	2.16 <b>(7'1")</b>	335 <b>(13")</b>	740 <b>(2'5")</b>	2.77 <b>(9'1")</b>	43.8 <b>(27.2)</b>	23.2 <b>(14.4)</b>	
922A	59A	60-62	80	7350 <b>(16,200)</b>	0.93 <b>(1.25)</b>	6850 <b>(15,100)</b>	2.12 <b>(7'0")</b>	368 <b>(15")</b>	655 <b>(2'2")</b>	2.60 <b>(8'7")</b>	30.4 <b>(18.9)</b>	32.8 <b>(20.4)</b>	
922B	88J	62-68	80	7670 <b>(16,900)</b>	1.15 <b>(1.50)</b>	9000 <b>(19,900)</b>	2.25 <b>(7'5")</b>	390 <b>(16")</b>	680 <b>(2'3")</b>	2.60 <b>(8'7")</b>	33.6 <b>(20.9)</b>	42.9 <b>(26.7)</b>	
926	94Z	84-87	105	8800 <b>(19,400)</b>	1.21 <b>(1.75)</b>	5070 <b>(11,179)</b>	2.33 <b>(7'8")</b>	341 <b>(13.5")</b>	924 <b>(3'0")</b>	2.67 <b>(8'9")</b>	30.3 <b>(18.8)</b>	32.3 <b>(20.0)</b>	
926E	94Z	87-92	110	9432 <b>(20,794)</b>	1.7 <b>(2.25)</b>	10 044 <b>(22,143)</b>	2.33 <b>(7'8")</b>	341 <b>(13.5")</b>	1003 <b>(3'3.5")</b>	2.75 <b>(9'0")</b>	34.2 <b>(21.2)</b>	36.8 <b>(22.9)</b>	3204 Engine Z Bar Linkage
928F	2XL	93-96	120	10 870 <b>(23,920)</b>	2.1 <b>(2.75)</b>	10 090 <b>(22,200)</b>	2.43 <b>(8'0")</b>	318 <b>(13")</b>	956 <b>(3'2")</b>	2.74 <b>(9'0")</b>	36.5 <b>(22.6)</b>	21.1 <b>(13.1)</b>	3116 Engine Z Bar Linkage
930	41K	68-85	100	9660 <b>(21,300)</b>	1.7 <b>(2.25)</b>	7900 <b>(17,410)</b>	2.39 <b>(7'10")</b>	348 <b>(13.7")</b>	1350 <b>(3'9")</b>	2.79 <b>(9'2")</b>	44.2 <b>(27.5)</b>	23.3 <b>(14.5)</b>	3304 Engine Z Bar Linkage
936	33Z	83-87	125	11 884 <b>(26,200)</b>	2.1 <b>(2.75)</b>	12 514 <b>(28,708)</b>	2.56 <b>(8'4.5")</b>	329 <b>(13")</b>	1055 <b>(3'0")</b>	2.80 <b>(9'2")</b>	34.4 <b>(21.4)</b>	38.4 <b>(23.9)</b>	
936E	33Z	87-92	135	12 300 <b>(27,000)</b>	2.3 <b>(3.00)</b>	12 920 <b>(28,483)</b>	2.56 <b>(8'5")</b>	379 <b>(14.9")</b>	1026 <b>(2'11")</b>	2.87 <b>(9'2")</b>	40.6 <b>(25.2)</b>	45.3 <b>(28.2)</b>	
936F	8AJ	92-94	140	12 300 <b>(27,060)</b>	2.3 <b>(3.00)</b>	12 920 <b>(28,483)</b>	2.58 <b>(8'5")</b>	379 <b>(14.9")</b>	997 <b>(3'3")</b>	2.84 <b>(9'4")</b>	42.3 <b>(26.3)</b>	46.7 <b>(29.6)</b>	3304 Engine Box Frame
938F		94-97	140	13 030 <b>(28,730)</b>	2.5 <b>(3.25)</b>	12 330 <b>(27,180)</b>	2.61 <b>(8'7")</b>	400 <b>(16")</b>	1004 <b>(3'4")</b>	2.85 <b>(9'4")</b>	37.9 <b>(23.6)</b>	22.0 <b>(13.7)</b>	3116 Engine Wet Disc Brakes Z Bar Linkage
944	87J	59-68	100	10 100 <b>(22,000)</b>	1.53 <b>(2.0)</b>	9800 <b>(21,700)</b>	2.40 <b>(7'10")</b>	450 <b>(18")</b>	905 <b>(3'0")</b>	2.96 <b>(9'9")</b>	38.5 <b>(23.9)</b>	46.6 <b>(28.9)</b>	
950	81J	68-81	130	12 930 <b>(28,500)</b>	1.53 <b>(2.07)</b>	10 320 <b>(22,760)</b>	2.41 <b>(7'11")</b>	381 <b>(15")</b>	740 <b>(2'5")</b>	2.82 <b>(9'3")</b>	35.9 <b>(22.3)</b>	42.5 <b>(26.4)</b>	Articulated Steering, 4 Wheel Drive Z Bar Linkage
950B	22Z	81-87	155	14 650 <b>(32,300)</b>	2.9 <b>(3.75)</b>	15 680 <b>(35,895)</b>	2.67 <b>(5'9")</b>	427 <b>(16.8")</b>	1125 <b>(3'8")</b>	2.95 <b>(9'8")</b>	36.4 <b>(22.6)</b>	39.4 <b>(24.5)</b>	
950E	22Z	87-91	160	15 856 <b>(34,883)</b>	3.1 <b>(4.0)</b>	13 586 <b>(29,925)</b>	2.76 <b>(9'0")</b>	400 <b>(15.7")</b>	1160 <b>(3'10")</b>	2.85 <b>(9'4")</b>	36.2 <b>(22.4)</b>	39.9 <b>(24.7)</b>	23.5-25 Std. Tires

Wheel Loaders (cont'd)

Model	Product Ident. No. Prefix	Years Built	Flywheel Horsepower	Approx. Shipping Wt. kg (lb)	Rated Capacity m <sup>3</sup> (yd <sup>3</sup> )	Breakout Force kg (lb)	Width Over Tires m (ft)	Ground Clearance mm (in)	Max. Reach at max height mm (ft)	Dump Clearance at max height m (ft)	Maximum Speeds km/h (mph)		Remarks
											Fwd.	Rev.	
950F	7ZF	90-92	170	16 086 <b>(35,463)</b>	3.1 <b>(4.0)</b>	14 954 <b>(32,974)</b>	2.76 <b>(9'0")</b>	474 <b>(18.7")</b>	1160 <b>(3'10")</b>	2.85 <b>(9'4")</b>	39.3 <b>(24.4)</b>	43.0 <b>(26.7)</b>	3116 Engine Wet Disc Brakes
950F II	5SK	93-98	170	16 880 <b>(37,220)</b>	3.1 <b>(4.0)</b>	14 960 <b>(32,980)</b>	2.76 <b>(9'0")</b>	460 <b>(18.1")</b>	1180 <b>(3'10")</b>	2.83 <b>(9'3")</b>	38.7 <b>(24.0)</b>	42.7 <b>(26.5)</b>	Integral ROPS Electronic Shift
960F	9ZJ	94-98	200	18 070 <b>(39,840)</b>	3.5 <b>(4.5)</b>	14 500 <b>(31,970)</b>	2.77 <b>(9'1")</b>	454 <b>(17.9")</b>	1030 <b>(3'5")</b>	2.92 <b>(9'6")</b>	39.4 <b>(24.5)</b>	43.2 <b>(26.8)</b>	Material Handler
966A	33A	60-63	140	13 060 <b>(28,800)</b>	2.10 <b>(2.75)</b>	13 470 <b>(29,700)</b>	2.70 <b>(8'10")</b>	450 <b>(18")</b>	900 <b>(3'0")</b>	2.95 <b>(9'8")</b>	43.0 <b>(26.7)</b>	51.5 <b>(32.3)</b>	
966B	75A	63-68	150	14 300 <b>(31,500)</b>	2.29 <b>(3.0)</b>	14 000 <b>(31,000)</b>	2.70 <b>(8'10")</b>	400 <b>(16")</b>	900 <b>(3'0")</b>	2.95 <b>(9'8")</b>	38.5 <b>(23.9)</b>	46.3 <b>(28.8)</b>	
966C	76J	68-81	170	16 730 <b>(36,890)</b>	3.1 <b>(4.0)</b>	11 600 <b>(25,578)</b>	2.77 <b>(9'1")</b>	400 <b>(15.7")</b>	1420 <b>(4'8")</b>	2.95 <b>(9'8")</b>	38.0 <b>(23.6)</b>	45.1 <b>(28.0)</b>	3306 Engine
966D	99Y	80-87	200	19 730 <b>(43,500)</b>	3.3 <b>(4.25)</b>	20 972 <b>(48,150)</b>	2.86 <b>(9'4.8")</b>	451 <b>(17.8")</b>	1230 <b>(4'0")</b>	3.14 <b>(10'3.5")</b>	34.3 <b>(21.3)</b>	38.1 <b>(23.7)</b>	3306 Engine Z Bar Linkage
966E	99Y	87-90	216	20 324 <b>(44,767)</b>	3.8 <b>(5.0)</b>	18 939 <b>(41,715)</b>	2.94 <b>(9'8")</b>	476 <b>(18.7")</b>	1290 <b>(4'3")</b>	2.97 <b>(9'9")</b>	38.2 <b>(23.7)</b>	43.6 <b>(27.0)</b>	26.5-25 Std. Tires
966F	4YG	90-93	220	20 466 <b>(45,119)</b>	3.8 <b>(5.0)</b>	20 493 <b>(45,187)</b>	2.94 <b>(9'8")</b>	476 <b>(18.7")</b>	1280 <b>(4'2")</b>	2.98 <b>(9'9")</b>	37.6 <b>(23.4)</b>	42.6 <b>(26.4)</b>	Wet Disc Brakes
966F-II	1SL	93-98	220	21 290 <b>(46,950)</b>	3.8 <b>(5.0)</b>	20 490 <b>(45,180)</b>	2.94 <b>(9'8")</b>	476 <b>(18.7")</b>	1277 <b>(4'2")</b>	2.98 <b>(9'9")</b>	38.8 <b>(24.1)</b>	43.9 <b>(27.3)</b>	Integral ROPS Electronic Shift
970F	7SK	93-98	250	23 690 <b>(52,240)</b>	4.7 <b>(6.0)</b>	16 510 <b>(36,400)</b>	2.94 <b>(9'8")</b>	482 <b>(19")</b>	1357 <b>(4'5")</b>	3.22 <b>(10'6")</b>	37.3 <b>(23.2)</b>	42.7 <b>(26.5)</b>	Material Handler New Model
980	42H	66-70	235	20 000 <b>(44,000)</b>	3.06 <b>(4.0)</b>	18 860 <b>(41,570)</b>	2.87 <b>(9'5")</b>	399 <b>(16")</b>	1190 <b>(3'11")</b>	3.07 <b>(10'1")</b>	42.0 <b>(26.1)</b>	26.7 <b>(16.6)</b>	
980B	89P	70-78	260	23 360 <b>(51,500)</b>	3.44-4.21 <b>(4.5-5.5)</b>	15 900 <b>(35,100)</b>	3.11 <b>(10'2")</b>	— <b>(—)</b>	1120 <b>(3'8")</b>	3.20 <b>(10'6")</b>	43.0 <b>(26.7)</b>	27.4 <b>(17.0)</b>	
980C	63X	79-91	270	27 559 <b>(60,755)</b>	5.2 <b>(6.75)</b>	23 188 <b>(51,121)</b>	3.15 <b>(10'4")</b>	417 <b>(16.4")</b>	1480 <b>(4'10")</b>	3.19 <b>(10'6")</b>	34.6 <b>(21.5)</b>	39.6 <b>(24.5)</b>	Dual Z Bar Linkage
980F	8CJ	91-92	275	27 580 <b>(60,800)</b>	5.3 <b>(7.0)</b>	23 188 <b>(51,121)</b>	3.15 <b>(10'4")</b>	469 <b>(18.5")</b>	1500 <b>(4'11")</b>	3.16 <b>(10'5")</b>	37.4 <b>(23.2)</b>	42.8 <b>(26.6)</b>	Electronic Shift
988	87A	63-76	325	35 800 <b>(79,000)</b>	4.6-5.4 <b>(6.0-7.0)</b>	21 380 <b>(47,130)</b>	3.20 <b>(10'7")</b>	570 <b>(22.5")</b>	1450 <b>(4'9")</b>	3.33 <b>(10'11")</b>	30.6 <b>(19.0)</b>	30.6 <b>(19.0)</b>	
988B	50W	76-93	375	43 365 <b>(95,600)</b>	5.4-6.3 <b>(7.0-8.25)</b>	36 330 <b>(80,100)</b>	3.52 <b>(11'7")</b>	474 <b>(18")</b>	2150 <b>(7'1")</b>	3.19 <b>(10'5")</b>	36.2 <b>(22.5)</b>	41.4 <b>(25.7)</b>	3408 Engine Z Bar Linkage
988F	8YG	93-95	400	43 540 <b>(95,900)</b>	5.4-6.1 <b>(7.0-8.0)</b>	37 363 <b>(82,371)</b>	3.52 <b>(11'7")</b>	496 <b>(19")</b>	1830 <b>(6'0")</b>	3.21 <b>(10'6")</b>	35.1 <b>(21.8)</b>	23.5 <b>(14.6)</b>	Bucket/HP increase STIC Steer
988F Series II	2ZR	95-00	475	45 678 <b>(100,492)</b>	6.1-6.9 <b>(8.0-9.0)</b>	37 400 <b>(82,282)</b>	3.52 <b>(11'7")</b>	496 <b>(17")</b>	1611 <b>(5'3")</b>	3.22 <b>(10'7")</b>	35.1 <b>(21.8)</b>	23.5 <b>(14.6)</b>	3048E HEUI Engine Axle Shaft Brakes
990	7HK	93-95	610	72 910 <b>(160,600)</b>	8.6 <b>(11.2)</b>	59 776 <b>(131,784)</b>	4.13 <b>(13'6")</b>	552 <b>(21.7")</b>	2070 <b>(6'10")</b>	3.99 <b>(13'1")</b>	22.5 <b>(14.0)</b>	25.0 <b>(15.5)</b>	ICTC & New Model
992	25K	68-73	550	47 670 <b>(105,100)</b>	7.65 <b>(10.0)</b>	36 900 <b>(81,360)</b>	3.93 <b>(12'11")</b>	530 <b>(21")</b>	2820 <b>(8'3")</b>	4.52 <b>(14'10")</b>	35.6 <b>(22.1)</b>	38.5 <b>(23.8)</b>	
992B	25K	73-77	550	64 320 <b>(141,800)</b>	7.65 <b>(10.0)</b>	29 330 <b>(64,660)</b>	— <b>(—)</b>	— <b>(—)</b>	1930 <b>(6'4")</b>	4.34 <b>(14'3")</b>	40.2 <b>(25.0)</b>	43.6 <b>(27.1)</b>	
992C	97X	77-81	690	85 640 <b>(188,800)</b>	9.6 <b>(12.5)</b>	66 240 <b>(146,030)</b>	4.55 <b>(14'11")</b>	533 <b>(21")</b>	2310 <b>(7'7")</b>	4.17 <b>(13'8")</b>	21.1 <b>(13.1)</b>	23.3 <b>(14.5)</b>	3412 PCT Engine Z Bar Linkage
992C	49Z	81-92	690	88 430 <b>(194,950)</b>	10.4 <b>(13.5)</b>	66 285 <b>(146,132)</b>	4.50 <b>(14'9")</b>	544 <b>(21")</b>	2310 <b>(7'7")</b>	4.17 <b>(13'8")</b>	21.0 <b>(13.0)</b>	22.9 <b>(14.2)</b>	3412 DIT Engine
992D	7MJ	92-97	710	88 690 <b>(195,125)</b>	10.7 <b>(14.0)</b>	62 670 <b>(137,870)</b>	4.50 <b>(14'9")</b>	544 <b>(21")</b>	2300 <b>(7'7")</b>	4.17 <b>(13'8")</b>	21.0 <b>(13.0)</b>	22.9 <b>(14.2)</b>	
994	9YF	90-98	1250	177 000 <b>(390,300)</b>	10.3 <b>(13.4)</b>	103 420 <b>(228,000)</b>	5.20 <b>(17'1")</b>	662 <b>(26")</b>	2692 <b>(8'10")</b>	6.20 <b>(20'4")</b>	24.7 <b>(15.0)</b>	26.6 <b>(16.5)</b>	



## TRACK LOADERS

Model	Product Ident. No. Prefix	Years Built	Flywheel Horsepower	Approx. Operating Weight kg (lb)	Rated Capacity m <sup>3</sup> (yd <sup>3</sup> )	Dimensions			Remarks
						Length** m (ft)	Width m (ft)	Height m (ft)	
931	78U	72-79	62	6940 <b>(15,300)</b>	0.77 <b>(1.0)</b>	2.74 <b>(9'0")</b>	1.78 <b>(5'10")</b>	1.96 <b>(6'5")</b>	
931 LGP	10N	75-79	62	7498 <b>(16,530)</b>	1.15 <b>(1.5)</b>	2.74 <b>(9'0")</b>	2.29 <b>(7'6")</b>	1.98 <b>(6'6")</b>	
931B	29Y	79-88	65	7362 <b>(16,230)</b>	0.8 <b>(1.0)</b>	4.13 <b>(13'9")</b>	1.84 <b>(6'0.5")</b>	2.68 <b>(8'10")</b>	
931B LGP	30Y	79-88	65	8089 <b>(17,834)</b>	0.8 <b>(1.0)</b>	3.84 <b>(12'7")</b>	2.41 <b>(7'11")</b>	2.68 <b>(8'10")</b>	
931C	2BJ1 7HF		67	7595 <b>(16,743)</b>	0.77 <b>(1.0)</b>	2.74 <b>(9'0")</b>	1.78 <b>(5'10")</b>	2.68 <b>(8'10")</b>	
931C LGP	6RF1 8AF		67	8170 <b>(18,012)</b>	0.77 <b>(1.0)</b>	2.74 <b>(9'0")</b>	1.78 <b>(5'10")</b>	2.68 <b>(8'10")</b>	
931C Series II	9AG 6AJ	90-93	70	8047 <b>(17,742)</b>	0.83 <b>(1.08)</b>	4.14 <b>(13'1")</b>	1.97 <b>(6'5")</b>	2.68 <b>(8'10")</b>	
933C	11A	55-58	50	7030 <b>(15,500)</b>	0.77 <b>(1.0)</b>	4.22 <b>(13'10")</b>	1.77 <b>(5'10")</b>	1.91 <b>(6'4")</b>	Integral loader
933E	11A	58-65	50	7640 <b>(16,850)</b>	0.77 <b>(1.0)</b>	4.22 <b>(13'10")</b>	1.77 <b>(5'10")</b>	1.40 <b>(6'3")</b>	Integral loader
933G	42A	65-68	60	7900 <b>(17,500)</b>	0.86 <b>(1.125)</b>	4.31 <b>(14'2")</b>	1.77 <b>(5'10")</b>	2.15 <b>(7'1")</b>	Patented Sealed Track
935B	30F	87-88	75	7899 <b>(17,414)</b>	1.0 <b>(1.25)</b>	4.19 <b>(13'9")</b>	1.96 <b>(6'5")</b>	2.68 <b>(8'10")</b>	
935C	8CF		78	8205 <b>(18,089)</b>	1.0 <b>(1.3)</b>	4.19 <b>(13'9")</b>	1.96 <b>(6'5")</b>	2.68 <b>(8'10")</b>	
935C Series II	SDJ	90-93	80	8759 <b>(19,311)</b>	1.0 <b>(1.3)</b>	4.37 <b>(14'4")</b>	1.97 <b>(6'5")</b>	2.68 <b>(8'10")</b>	
941	80H	68-72	70	8900 <b>(19,700)</b>	0.96 <b>(1.25)</b>	4.50 <b>(14'10")</b>	1.86 <b>(6'1")</b>	2.75 <b>(9'0")*</b>	Electric Start
941B	80H	68-81	80	11 294 <b>(24,900)</b>	1.15 <b>(1.5)</b>	4.50 <b>(14'10")</b>	1.98 <b>(6'6")</b>	2.75 <b>(9'0")*</b>	HP Increase, Hydraulic Track Adjusters
943	31Y	80-85	80	11 750 <b>(25,900)</b>	1.15 <b>(1.5)</b>	5.426 <b>(17'10")</b>	2.21 <b>(8'7")</b>	3.02 <b>(9'11")</b>	Hydrostatic drive
943	19Z	80-92	80	11 750 <b>(25,900)</b>	1.15 <b>(1.5)</b>	5.426 <b>(17'10")</b>	2.21 <b>(8'7")</b>	3.02 <b>(9'11")</b>	Hydrostatic drive made in France
951B	79H	67-71	85	10 025 <b>(22,100)</b>	1.14 <b>(1.5)</b>	4.70 <b>(15'6")</b>	1.98 <b>(6'6")</b>	2.75 <b>(9'0")*</b>	Pedal Steering
951C	86J	71-81	95	12 338 <b>(27,200)</b>	1.34 <b>(1.75)</b>	4.77 <b>(15'8")</b>	1.98 <b>(6'6")</b>	2.75 <b>(9'0")*</b>	HP Increase, Sealed & Lubricated Track
953	5Z	81-85	110	14 050 <b>(31,000)</b>	1.5 <b>(2.0)</b>	5.87 <b>(19'3")</b>	2.38 <b>(7'10")</b>	3.08 <b>(10'1")</b>	Hydrostatic drive
953	20Z	81-92	110	14 050 <b>(31,000)</b>	1.5 <b>(2.0)</b>	5.87 <b>(19'3")</b>	2.38 <b>(7'10")</b>	3.08 <b>(10'1")</b>	Hydrostatic drive

\*Height to top of stack. Others to top of seat back.

\*\*Overall length to tip of smallest General Purpose bucket.

## Track Loaders (cont'd)

Model	Product Ident. No. Prefix	Years Built	Flywheel Horsepower	Approx. Operating Weight kg (lb)	Rated Capacity m <sup>3</sup> (yd <sup>3</sup> )	Dimensions			Remarks
						Length** m (ft)	Width m (ft)	Height m (ft)	
953	76Y	81-85	110	13 800 <b>(30,500)</b>	1.5 <b>(2.0)</b>	5.87 <b>(19'3")</b>	2.38 <b>(7'10")</b>	3.08 <b>(10'1")</b>	Hydrostatic drive
953	77Y	81-85	110	13 800 <b>(30,500)</b>	1.5 <b>(2.0)</b>	5.87 <b>(19'3")</b>	2.38 <b>(7'10")</b>	3.08 <b>(10'1")</b>	Hydrostatic drive
953B	5MK	92-96	120	14 400 <b>(31,800)</b>	1.75 <b>(2.25)</b>	4.23 <b>(13'4")</b>	2.38 <b>(7'10")</b>	3.08 <b>(10'1")</b>	Hydrostatic drive
HT4	7U	50-55	54	2607 <b>(5748)</b>	0.96 <b>(1.25)</b>	4.32 <b>(14'2")</b>	2.03 <b>(6'8")</b>	1.83 <b>(6'0")</b>	Integral loader
955C	12A	55-60	70	9590 <b>(21,145)</b>	1.15 <b>(1.5)</b>	4.60 <b>(15'2")</b>	2.03 <b>(6'8")</b>	2.08 <b>(6'11")</b>	Improved undercarriage
955E	12A	58-60	70	10 160 <b>(22,400)</b>	1.15 <b>(1.5)</b>	4.60 <b>(15'2")</b>	2.03 <b>(6'8")</b>	2.09 <b>(6'11")</b>	Power shift, Turbo, oil cooled brakes
955H	60A	60-66	100	11 320 <b>(24,950)</b>	1.34 <b>(1.75)</b>	4.79 <b>(15'9")</b>	1.90 <b>(6'3")</b>	2.65 <b>(8'8")*</b>	Horsepower and bucket capacity increase
955K	61H	66-71	115	12 700 <b>(28,000)</b>	1.34 <b>(1.75)</b>	5.00 <b>(16'6")</b>	2.06 <b>(6'9")</b>	2.80 <b>(9'3")*</b>	ROPS Cab, Sealed & Lubricated Track
955L	85J	71-75	130	15 330 <b>(33,800)</b>	1.53 <b>(2.0)</b>	5.30 <b>(16'1")</b>	2.18 <b>(7'2")</b>	2.95 <b>(9'8")*</b>	
955L	13X	75-81	130	15 853 <b>(34,950)</b>	1.72 <b>(2.25)</b>	5.26 <b>(17'3")</b>	2.18 <b>(7'2")</b>	2.95 <b>(9'8")</b>	
963	6Z	81-85	150	18 250 <b>(40,250)</b>	2.0 <b>(2.6)</b>	6.35 <b>(20'10")</b>	2.50 <b>(8'2")</b>	3.30 <b>(10'10")</b>	Hydrostatic drive
963	11Z	81-85	150	18 370 <b>(40,490)</b>	2.0 <b>(2.6)</b>	6.35 <b>(20'10")</b>	2.50 <b>(8'2")</b>	3.30 <b>(10'10")</b>	Hydrostatic drive
963	18Z	82-86	150	18 250 <b>(40,250)</b>	2.0 <b>(2.6)</b>	6.35 <b>(20'10")</b>	2.50 <b>(8'2")</b>	3.30 <b>(10'10")</b>	Hydrostatic drive made in France
963	21Z	82-95	150	18 370 <b>(40,490)</b>	2.0 <b>(2.6)</b>	6.35 <b>(20'10")</b>	2.50 <b>(8'2")</b>	3.30 <b>(10'10")</b>	Hydrostatic drive made in France
963B	9BL	95-99	160	19 620 <b>(43,270)</b>	2.45 <b>(3.2)</b>	6.60 <b>(21'8")</b>	2.50 <b>(8'2")</b>	3.31 <b>(10'10")</b>	3116 engine
973	86G	81-00	210	25 040 <b>(55,200)</b>	3.2 <b>(4.2)</b>	7.12 <b>(23'4")</b>	2.85 <b>(9'4")</b>	3.42 <b>(11'3")</b>	
No. 6	10A	53-55	80	13 229 <b>(29,165)</b>	1.5 <b>(2.0)</b>	4.90 <b>(16'1")</b>	2.44 <b>(8'1")</b>	2.11 <b>(6'11")</b>	Improved undercarriage
977D	20A	55-60	100	14 430 <b>(31,795)</b>	1.72 <b>(2.25)</b>	5.19 <b>(18'0")</b>	2.44 <b>(8'0")</b>	2.22 <b>(7'4")</b>	Power shift, Turbo, oil cooled brakes
977E	20A	58-60	100	15 850 <b>(34,910)</b>	1.72 <b>(2.25)</b>	5.19 <b>(18'0")</b>	2.44 <b>(8'0")</b>	2.29 <b>(7'7")</b>	Walk-through compartment, longer roller frame
977H	53A	60-66	150	17 000 <b>(37,500)</b>	1.90 <b>(2.5)</b>	5.28 <b>(17'4")</b>	2.44 <b>(8'0")</b>	2.29 <b>(7'7")</b>	Horsepower and bucket capacity increase
977K	46H	66-78	170	19 100 <b>(42,000)</b>	1.90 <b>(2.5)</b>	5.50 <b>(18'0")</b>	2.38 <b>(7'10")</b>	3.05 <b>(10'0")*</b>	
977L	14X	78-82	190	21 780 <b>(48,010)</b>	2.10 <b>(2.75)</b>	5.59 <b>(18'4")</b>	2.38 <b>(7'10")</b>	3.32 <b>(10'11")*</b>	
983	38K	69-78	275	34 460 <b>(75,980)</b>	3.82 <b>(5.0)</b>	6.78 <b>(22'3")</b>	2.90 <b>(9'6")</b>	2.79 <b>(11'10")*</b>	
983B	58X	78-82	275	35 620 <b>(78,530)</b>	3.82 <b>(5.0)</b>	6.78 <b>(22'3")</b>	2.90 <b>(9'6")</b>	3.68 <b>(12'1")*</b>	DI engine

\*Height to top of stack. Others to top of seat back.

\*\*Overall length to tip of smallest General Purpose bucket.



## INTEGRATED TOOLCARRIERS

Model	Product Ident. No. Prefix	Years Built	Flywheel Horsepower	Approx. Operating Weight kg (lb)	Rated Capacity m <sup>3</sup> (yd <sup>3</sup> )	Breakout Force kg (lb)	Width Over Tires m (ft)	Ground Clearance mm (in)	Max Reach at Max Height mm (in)	Dump Clearance at Max Height m (ft)	Maximum Speeds km/h (mph)	
											Fwd.	Rev.
IT12	2YC	84-89	65	7393 <b>(16,299)</b>	1.0 <b>(1.25)</b>	7193 <b>(15,858)</b>	2.3 <b>(7'8")</b>	405 <b>(15.9")</b>	873 <b>(34")</b>	2.84 <b>(9'4")</b>	23.6 <b>(14.6)</b>	24.9 <b>(15.4)</b>
IT12B	1KF	89-93	78	7950 <b>(17,530)</b>	1.2 <b>(1.6)</b>	6160 <b>(13,583)</b>	2.15 <b>(7'1")</b>	343 <b>(13.5")</b>	958 <b>(37.7")</b>	2.69 <b>(8'10")</b>	34 <b>(21.1)</b>	22.4 <b>(13.9)</b>
IT12F	1KF	93-95	80	7893 <b>(17,401)</b>	1.3 <b>(1.7)</b>	6479 <b>(14,247)</b>	2.15 <b>(7'1")</b>	365 <b>(1'2")</b>	917 <b>(3'1")</b>	2.74 <b>(8'11.8")</b>	34 <b>(21.1)</b>	22.4 <b>(13.9)</b>
IT14B	3NJ	89-93	85	8333 <b>(18,374)</b>	1.2 <b>(1.6)</b>	7525 <b>(16,593)</b>	2.15 <b>(7'1")</b>	344 <b>(13.6")</b>	958 <b>(37.7")</b>	2.70 <b>(8'11")</b>	37.3 <b>(23.2)</b>	24.4 <b>(15.2)</b>
IT14F	4EL	93-95	85	7999 <b>(17,635)</b>	1.3 <b>(1.7)</b>	7170 <b>(15,808)</b>	2.15 <b>(7'1")</b>	365 <b>(1'2")</b>	918 <b>(3'1")</b>	2.74 <b>(9'0")</b>	37.3 <b>(23.2)</b>	24.4 <b>(15.2)</b>
IT18	9NB	84-86	85	8660 <b>(19,092)</b>	1.2 <b>(1.5)</b>	9105 <b>(20,108)</b>	2.4 <b>(7'10")</b>	285 <b>(11.2")</b>	990 <b>(39")</b>	2.84 <b>(9'4")</b>	25 <b>(15.5)</b>	25 <b>(15.5)</b>
IT18B	4ZD	86-92	95	9770 <b>(21,540)</b>	1.3 <b>(1.75)</b>	10 500 <b>(21,350)</b>	2.28 <b>(7'6")</b>	324 <b>(12.8")</b>	993 <b>(39")</b>	2.89 <b>(9'6")</b>	26.4 <b>(16.4)</b>	27.7 <b>(17.2)</b>
IT18F	6ZF	92-94	105	9959 <b>(21,960)</b>	1.6 <b>(2.0)</b>	8880 <b>(19,580)</b>	2.33 <b>(7'8")</b>	321 <b>(1'1")</b>	1089 <b>(3'7")</b>	2.75 <b>(9'0")</b>	37 <b>(23)</b>	24.5 <b>(15.2)</b>
IT28	2KC	84-86	105	9560 <b>(21,076)</b>	1.5 <b>(2.0)</b>	9505 <b>(20,955)</b>	2.4 <b>(7'10")</b>	285 <b>(11.2")</b>	1044 <b>(41")</b>	2.82 <b>(9'3")</b>	30.8 <b>(18.8)</b>	32.3 <b>(20.0)</b>
IT28B	1HF	86-93	110	10 580 <b>(23,325)</b>	1.7 <b>(2.25)</b>	10 456 <b>(23,050)</b>	2.32 <b>(7'7")</b>	324 <b>(12.8")</b>	1091 <b>(43")</b>	2.73 <b>(8'11")</b>	34.4 <b>(21.4)</b>	37.2 <b>(23.1)</b>
IT28F	3CL	93-96	125	11 430 <b>(25,200)</b>	2.0 <b>(2.6)</b>	9840 <b>(21,700)</b>	2.43 <b>(8'0")</b>	317 <b>(12")</b>	1093 <b>(43")</b>	2.72 <b>(8'11")</b>	35.4 <b>(21.9)</b>	21.4 <b>(13.5)</b>
950F CT	5SK	94-98	170	16 600 <b>(36,580)</b>	3.1 <b>(4.0)</b>	13 590 <b>(29,950)</b>	2.87 <b>(9'5")</b>	460 <b>(18")</b>	1714 <b>(68")</b>	2.845 <b>(9'4")</b>	38.7 <b>(24.0)</b>	42.7 <b>(26.5)</b>

- Cold Planers
- Reclaimers & Stabilizers



**PAVING PRODUCTS — COLD PLANERS**

Model	Product Ident. No. Prefix	Years Built	kW Flywheel (Horsepower)	Approximate Operating Weight kg (lb)	General Dimensions (Shipping)		
					Height mm (ft)	Length mm (ft)	Width mm (ft)
PR-75	6RC	85-92	52 <b>(77)</b>	5900 <b>(13,000)</b>	2690 <b>(8'10")</b>	3050 <b>(10'0")</b>	2130 <b>(7'0")</b>
PR-105		85-92	67 <b>(90)</b>	7711 <b>(17,000)</b>	2921 <b>(9'7")</b>	3581 <b>(11'9")</b>	2515 <b>(8'3")</b>
PR-275		—	201 <b>(270)</b>	17 237 <b>(38,000)</b>	2896 <b>(9'6")</b>	5740 <b>(18'10")</b>	2438 <b>(8'0")</b>
PR-450		85-92	336 <b>(450)</b>	28 308 <b>(58,000)</b>	4270 <b>(14'0")</b>	13 280 <b>(43'8")</b>	2870 <b>(9'5")</b>
PR-450C		92-97	336 <b>(450)</b>	28 308 <b>(58,000)</b>	3810 <b>(12'6")</b>	13 200 <b>(43'6")</b>	2490 <b>(8'2")</b>
PR-750B		85-92	559 <b>(750)</b>	42 638 <b>(94,000)</b>	3734 <b>(12'3")</b>	16 500 <b>(54'0")</b>	3575 <b>(11'9")</b>
PR-1000		Cutter	559 <b>(750)</b>	46 780 <b>(103,130)</b>	3810 <b>(12'6")</b>	16 590 <b>(54'5")</b>	4877 <b>(16'0")</b>
		Track	186 <b>(250)</b>				



**PAVING PRODUCTS — RECLAIMERS & STABILIZERS**

Model	Product Ident. No. Prefix	Years Built	kW Flywheel (Horsepower)	Approximate Operating Weight kg (lb)	General Dimensions (Shipping)		
					Height mm (ft)	Length mm (ft)	Width mm (ft)
SS-250	6DD	85-96	250 <b>(335)</b>	13 300 <b>(29,300)</b>	3220 <b>(10'7")</b>	8780 <b>(28'10")</b>	2900 <b>(9'7")</b>
RR-250	6ED	85-96	250 <b>(335)</b>	17 876 <b>(39,300)</b>	3220 <b>(10'7")</b>	8780 <b>(28'10")</b>	2900 <b>(9'7")</b>
RM-350	5FK	92-97	321 <b>(430)</b>	21 440 <b>(47,200)</b>	3404 <b>(11'2")</b>	9577 <b>(31'5")</b>	2997 <b>(9'10")</b>
SM-350	1RM	92-97	321 <b>(430)</b>	18 440 <b>(40,600)</b>	3404 <b>(11'2")</b>	9577 <b>(31'5")</b>	2997 <b>(9'10")</b>



**PAVING PRODUCTS — UNITIZED VENTURI-MIXERS & UNITIZED DRUM-MIXERS**

Drum Dimensions			Performance		
Model	Diameter mm (ft)	Length m (ft)	Gross Volume m <sup>3</sup> (ft <sup>3</sup> )	Production Range/hr. metric tons (tons)	Air Flow m <sup>3</sup> /min (ft <sup>3</sup> /min)
UVM-500	1829/1524 (6'0"/5'0")	7.9 (26'0")	14.17 (500)	68-109 (75-120)	300-481 (10,600-17,000)
UDM-600	1829 (6'0")	6.7 (22'0")	17.00 (600)	82 (89)	354.25 (12,500)
UDM-900	2134/1829 (7'0"/6'0")	9.1 (30'0")	25.48 (900)	68-227 (75-250)	311-793 (11,000-28,000)
UVM-1000	2134 (7'0")	9.754 (32'0")	28.34 (1000)	82-272 (90-300)	425-1076 (15,000-38,000)
UVM-1400	2286 (7'6")	10.973 (36'0")	39.64 (1400)	100-358 (110-395)	481-1274 (17,000-45,000)
UVM-1700	2591 (8'6")	11.582 (38'0")	48.14 (1700)	122-480 (135-450)	651-1614 (23,000-57,000)



**PAVING PRODUCTS — PORTABLE VENTURI-MIXERS**

Drum Dimensions			Performance		
Model	Diameter mm (ft)	Length m (ft)	Gross Volume m <sup>3</sup> (ft <sup>3</sup> )	Production Range/hr. metric tons (tons)	Air Flow m <sup>3</sup> /min (ft <sup>3</sup> /min)
PVM-1100	2134 (7'0")	10.97 (36'0")	31.15 (1100)	82-295 (90-325)	425-1133 (15,000-40,000)
PVM-1500	2286 (7'6")	12.19 (40'0")	42.48 (1500)	100-363 (110-400)	510-1274 (18,000-45,000)
PVM-2000	2591 (8'6")	12.80 (42'0")	56.64 (2000)	122-454 (135-500)	680-1699 (24,000-60,000)
PVM-2500	2896 (9'6")	12.80 (42'0")	70.79 (2500)	136-499 (150-550)	793-2110 (28,000-74,500)
PVM-2900	3048 (10'0")	13.41 (44'0")	82.12 (2900)	168-553 (185-610)	906-2265 (32,000-80,000)
PVM-3300	3200 (10'6")	13.41 (44'0")	93.45 (3300)	181-612 (200-675)	991-2464 (35,000-87,000)

- Paving Products
- Stationary Venturi-Mixers
- SlipForm Pavers

## Former Models



### PAVING PRODUCTS — STATIONARY VENTURI-MIXERS

21

#### Drum Dimensions

#### Performance

Model	Diameter mm (ft)	Length m (ft)	Gross Volume m <sup>3</sup> (ft <sup>3</sup> )	Production Range/hr. metric tons (tons)	Air Flow m <sup>3</sup> /min (ft <sup>3</sup> /min)
SVM-1100	2134 (7'0")	10.97 (36'0")	31.15 (1100)	82-295 (90-325)	425-1133 (15,000-40,000)
SVM-1500	2286 (7'6")	12.19 (40'0")	42.48 (1500)	100-363 (110-400)	510-1274 (18,000-45,000)
SVM-2000	2591 (8'6")	12.80 (42'0")	56.64 (2000)	122-454 (135-500)	680-1699 (24,000-60,000)
SVM-2500	2896 (9'6")	12.80 (42'0")	70.79 (2500)	136-499 (150-550)	793-2110 (28,000-74,500)
SVM-2900	3048 (10'0")	13.41 (44'0")	82.12 (2900)	168-553 (185-610)	906-2265 (32,000-80,000)
SVM-3600	3200 (10'6")	14.63 (48'0")	101.94 (3600)	190-623 (210-685)	1020-2565 (36,000-90,000)



### PAVING PRODUCTS — SLIPFORM PAVERS

Model	Product Ident. No. Prefix	Years Built	Flywheel Horsepower	Approx. Operating Weight kg (lb)	Standard Paving Width m (ft)	Shipping Dimensions (Min.)			Remarks
						Length m (ft)	Width m (ft)	Height m (ft)	
SF-175	5ZC	—	142	9072 (20,000)	2.1 (7'0")	6.6 (21'6")	2.4 (8'0")	2.8 (9'4")	
SF-250	6XC	—	208	24 494 (54,000)	3.6 (12'0")	3.0 (10'0")	3.7 (12'0")		
SF-250B	—	—	250	27 216 (60,000)	3.7-7.3 (12'0"-24'0")	1.5 (5'0")	3.66 (12'0")	3.20 (10'6")	
SF-350	—	—	290	40 824 (90,000)	3.6-7.3 (12'0"-24'0")	1.04 (3'5")	3.0 (10'0")	2.9 (9'8")	
SF-450	7GC	73-83	400	43 546* (96,000) 53 525** (118,000)	3.66-7.62 (12'0"-25'0")	9.35 (30'8")	3.05 (10'0")	2.90 (9'6")	
SF-500	8DC	—	400	52 164 (115,000)	7.6 (25'0")	8.9 (29'2½")	3.0 (10'0")	3.0*** (10'2")	
SF-550	5PD	—	400	52 164 (115,000)	5.5-8.5 (18'0"-28'0")	7 (23'0")	3.7 (12'0")	2.9 (9'8")	

\*Weight of 7.62 m (25'0") machine.

\*\*Weight of 11.58 m (38'0") machine.

\*\*\*Machine legs and track shipped separately.



## Former Models

### Paving Products

- Placer-Spreader-Trimmer ● Texturing/Curing
- Belt Placer ● Trimmer Reclaimer
- Tube Finisher



### PAVING PRODUCTS — PLACER-SPREADER-TRIMMER, BELT PLACER

Model	Product Ident. No. Prefix	Years Built	Flywheel Horsepower	Approximate Operating Weight kg (lb)	General Dimensions		
					Height m (ft)	Length m (ft)	Width m (ft)
PST-300	8EC	—	250	38 193 <b>(84,200)</b>	2.64 <b>(8'8")</b>	10.57 <b>(34'8")</b>	9.02 <b>(29'7")</b>
BP-100	1EF	—	102	11 340 <b>(22,000)</b>	3.27 <b>(10'9")</b>	2.49 <b>(8'2")</b>	2.49 <b>(8'2")</b>



### PAVING PRODUCTS — TUBE FINISHER, TEXTURING/CURING

Model	Product Ident. No. Prefix	Years Built	Flywheel Horsepower	Approximate Operating Weight kg (lb)	General Dimensions (Shipping)		
					Height mm (ft)	Length mm (ft)	Width mm (ft)
TF-250	6YC	—	52	5897 <b>(13,000)</b>	2489 <b>(8'2")</b>	8484 <b>(27'10")</b>	2438 <b>(8'0")</b>
TC-250	7HC	—	56	5897 <b>(13,000)</b>	2489 <b>(8'2")</b>	8484 <b>(27'10")</b>	2438 <b>(8'0")</b>



### PAVING PRODUCTS — TRIMMER-RECLAIMER

Model	Product Ident. No. Prefix	Years Built	Flywheel Horsepower	Approximate Operating Weight kg (lb)	General Dimensions (Shipping)		
					Height mm (ft)	Length m (ft)	Width mm (ft)
TR-225B	6WC	—	250	21 319 <b>(47,000)</b>	3200 <b>(10'6")</b>	13.9 <b>(45'9.5")</b>	2896 <b>(9'6")</b>
TR-500	8CC	—	375	46 267 <b>(102,000)</b>	3099 <b>(10'2")</b>	8.9 <b>(29'2¾")</b>	3048 <b>(10'0")</b>



PAVING PRODUCTS — ASPHALT PAVERS & WINDROW ELEVATORS

Model	Product Ident. No. Prefix	Years Built	Flywheel kW (hp)	Approx. Op. Weight kg (lb)	Drive	Screed Width mm (ft)	Hopper Capacity m <sup>3</sup> (ft <sup>3</sup> )	Maximum Op. Speed m/min (ft/min)
AP-800	1BF	86-89	76 (102)	11 903 (26,350)	Wheel	2438 (8'0")	5.8 (206)	95 (312)
AB-800B	1BF	89-93	76 (102)	11 903 (26,350)	Wheel	2438 (8'0")	5.8 (206)	95 (312)
AP-1050	1JG	89-96	116 (155)	14 878 (32,800)	Track	3048 (10'0")	6.2 (215)	57 (186)
AP-1200	2JD	85-89	108 (145)	13 608 (30,000)	Wheel	3048 (10'0")	6.2 (220)	21.4 (13.3)
WE601B	TEC	85-91	78 (102)	3856 (8500)	NA	1524 (5'0")	NA	NA
AP-200	6AD	85-91	26 (35)	4080 (9000)	Track	2743 (9'0")	5.4 (6)	0-54 (0-776)
BG-200A	NA	89-91	35 (47)	6750 (14,900)	Wheel	1803 (5'11")	3.26 (116)	56 (180)
BG-210	NA	90-91	79 (106)	10 192 (22,500)	Wheel	2438 (8'0")	4.76 (170)	84 (275)
BG-220	NA	84-87	58 (78)	9752 (21,500)	Wheel	2438 (8'0")	3.7 (130)	88 (289)
BG-220B	4ZM	91-94	80 (108)	12 483 (27,525)	Wheel	2438 (8'0")	4.3 (155)	88 (289)
BG-225	NA	84-87	58 (78)	11 339 (25,000)	Track	2438 (8'0")	3.7 (130)	58 (188)
BG-225B	NA		118 (158)	16 400 (36,200)	Track	2438 (8'0")	4.3 (155)	57 (189)
BG-240	NA	85-86	72 (96)	13 154 (29,000)	Wheel	3048 (10'0")	3.7 (130)	81 (265)
BG-240B	7RL	87-99	86 (115)	15 200 (33,500)	Wheel	3048 (10'0")	6.5 (230)	81 (265)
BG-245	NA	85-87	72 (96)	14 514 (32,000)	Track	3048 (10'0")	5.8 (206)	58 (189)
BG-245B	3XL	87-96	116 (155)	16 080 (35,450)	Track	3048 (10'0")	5.8 (206)	55 (182)
BG-260	NA	85-87	106 (142)	14 514 (32,000)	Wheel	3048 (10'0")	5.8 (206)	77 (253)
BG-260B	NA		116 (155)	14 740 (32,500)	Wheel	3048 (10'0")	5.8 (206)	90 (296)
BG-265	NA	85-87	106 (142)	16 782 (37,000)	Track	3048 (10'0")	5.8 (206)	50 (164)
BG-265B	7XK	87-98	145 (195)	18 380 (40,570)	Track	3048 (10'0")	5.8 (206)	50 (164)
BG-270B	NA		145 (195)	15 510 (34,200)	Wheel	3048 (10'0")	6.5 (230)	90 (296)
BG-610	NA	85	58 (78)	4394 (9700)	NA	1524 (5'0")	NA	NA
BG-610A	NA	86-90	58 (78)	4911 (10,840)	NA	1524 (5'0")	NA	NA
BG-710	NA		111 (149)	13 380 (29,500)	NA	3048 (10'0")	10.0 (80)	98 (320)
BG-750	NA	87-97	116 (155)	17 010 (37,500)	Wheel	4270 (14'0")	10.0 (80)	0-24.1 (0-15.0)
MTP-1260	NA	86-90	58 (78)	4911 (10,840)	NA	3048 (10'0")	7.7 (275)	58 (189)
MTP-1265	NA	88-91	167 (224)	25 368 (56,000)	NA	3048 (10'0")	11.2 (400)	50 (164)



**PAVING PRODUCTS — SINGLE DRUM VIBRATORY COMPACTORS**

Model	Product Ident. No. Prefix	Years Built	Flywheel kW (hp)	Approx. Op. Weight kg (lb)	Drive	Drum Width mm (in)	Dynamic Force kg (lb)	Maximum Op. Speed km/h (mph)
CS-323	1TM	85-95	57 <b>(77)</b>	4173 <b>(9200)</b>	Wheel/ Drum	1219 <b>(48")</b>	5760 <b>(12,700)</b>	0-10.9 <b>(0-6.8)</b>
CP-323	6JD	85-95	57 <b>(77)</b>	4218 <b>(9300)</b>	Wheel/ Drum	1219 <b>(48")</b>	5760 <b>(12,700)</b>	0-10.9 <b>(0-6.8)</b>
CS-431	6MD	85-87	52 <b>(70)</b>	6110 <b>(13,480)</b>	Wheel	1680 <b>(66")</b>	7260 <b>(16,000)</b>	21 <b>(13)</b>
CS-431B	1XF	88-94	76.5 <b>(102)</b>	6312 <b>(13,915)</b>	Wheel	1680 <b>(66")</b>	11 235 <b>(24,746)</b>	12.8 <b>(8.0)</b>
CS-433	6ND	85-87	60 <b>(80)</b>	6720 <b>(14,820)</b>	Wheel/ Drum	1524 <b>(60")</b>	7260 <b>(16,000)</b>	10 <b>(6)</b>
CP-433	6NP	85-87	60 <b>(80)</b>	6750 <b>(14,870)</b>	Wheel/ Drum	1524 <b>(60")</b>	7260 <b>(16,000)</b>	10 <b>(6)</b>
CS-433B	4FK	88-94	76.5 <b>(102)</b>	6448 <b>(14,215)</b>	Wheel/ Drum	1680 <b>(66")</b>	11 235 <b>(24,746)</b>	12.8 <b>(8.0)</b>
CP-433B	1MG	88-94	76.5 <b>(102)</b>	6668 <b>(15,225)</b>	Wheel/ Drum	1680 <b>(66")</b>	11 235 <b>(24,746)</b>	12.8 <b>(8.0)</b>
CS-531	3WM	93-95	108 <b>(145)</b>	9310 <b>(20,500)</b>	Wheel	2134 <b>(84")</b>	22 680 <b>(50,000)</b>	12.8 <b>(8.0)</b>
CS-531C	5ZN	95-00	108 <b>(145)</b>	9300 <b>(20,450)</b>	Wheel	2134 <b>(84")</b>	24 091 <b>(53,000)</b>	12.8 <b>(8.0)</b>
CS-533	3BL	93-95	108 <b>(145)</b>	10 110 <b>(22,500)</b>	Wheel/ Drum	2134 <b>(84")</b>	22 680 <b>(50,000)</b>	12.8 <b>(8.0)</b>
CS-533C	2WN	95-00	108 <b>(145)</b>	9500 <b>(20,900)</b>	Wheel/ Drum	2134 <b>(84")</b>	24 091 <b>(53,000)</b>	12.8 <b>(8.0)</b>
CP-533	3ZL	93-95	108 <b>(145)</b>	11 470 <b>(25,250)</b>	Wheel/ Drum	2134 <b>(84")</b>	22 680 <b>(50,000)</b>	12.8 <b>(8.0)</b>
CP-533C	3XN	95-00	108 <b>(145)</b>	10 180 <b>(22,400)</b>	Wheel/ Drum	2134 <b>(84")</b>	24 091 <b>(53,000)</b>	12.8 <b>(8.0)</b>
CS-551	6ZD 8AD	85-89	115 <b>(155)</b>	10 428 <b>(22,990)</b>	Wheel	2130 <b>(84")</b>	18 150 <b>(40,000)</b>	12.1 <b>(7.5)</b>
CS-553	7AD	85-89	115 <b>(155)</b>	10 782 <b>(23,770)</b>	Wheel/ Drum	2130 <b>(84")</b>	18 150 <b>(40,000)</b>	10.5 <b>(6.5)</b>
CP-553	7BD	85-89	115 <b>(155)</b>	12 247 <b>(27,000)</b>	Wheel/ Drum	2130 <b>(84")</b>	22 680 <b>(50,000)</b>	10.5 <b>(6.5)</b>
CS-563	8XF	89-95	108 <b>(145)</b>	11 130 <b>(24,500)</b>	Wheel/ Drum	2134 <b>(84")</b>	22 680 <b>(50,000)</b>	12.8 <b>(8.0)</b>
CS-563C	4KN	95-00	108 <b>(145)</b>	11 215 <b>(24,700)</b>	Wheel/ Drum	2134 <b>(84")</b>	24 091 <b>(53,000)</b>	12.8 <b>(8.0)</b>
CP-563	1YJ	89-95	108 <b>(145)</b>	11 580 <b>(25,800)</b>	Wheel/ Drum	2134 <b>(84")</b>	22 680 <b>(50,000)</b>	12.8 <b>(8.0)</b>
CP-563C	5JN	95-00	108 <b>(145)</b>	11 670 <b>(25,700)</b>	Wheel/ Drum	2134 <b>(84")</b>	24 091 <b>(53,000)</b>	12.8 <b>(8.0)</b>
CS-573C	6LN	95-00	108 <b>(145)</b>	13 800 <b>(30,360)</b>	Wheel/ Drum	2134 <b>(84")</b>	24 091 <b>(53,000)</b>	12.8 <b>(8.0)</b>
CS-583	8YJ	91-95	108 <b>(145)</b>	15 040 <b>(33,090)</b>	Wheel/ Drum	2134 <b>(84")</b>	22 680 <b>(50,000)</b>	12.8 <b>(8.0)</b>
CS-583C	7MN	95-00	108 <b>(145)</b>	15 230 <b>(33,500)</b>	Wheel/ Drum	2134 <b>(84")</b>	24 091 <b>(53,000)</b>	12.8 <b>(8.0)</b>

- Paving Products
- Single Drum Vibratory Compactors
  - Double Drum & Combi Vibratory Compactors
  - Pneumatic Tire Compactors

**Former Models**

**Paving Products — Single Drum Vibratory Compactors (cont'd)**

Model	Product Ident. No. Prefix	Years Built	Flywheel kW (hp)	Approx. Op. Weight kg (lb)	Drive	Drum Width mm (in)	Dynamic Force kg (lb)	Maximum Op. Speed km/h (mph)
CS-643	7FD	85-87	100 (134)	14 900 (32,855)	Wheel/ Drum	2200 (86")	16 800 (37,044)	15.5 (9.6)
CP-643	7GD	85-87	100 (134)	16 300 (35,942)	Wheel/ Drum	2200 (86")	12 600 (27,783)	15.5 (9.6)
CS-653	7HD	85-91	100 (134)	17 100 (37,690)	Wheel/ Drum	2200 (86")	22 230 (48,995)	15.5 (9.6)
CP-653	7JD	85-91	100 (134)	18 500 (40,774)	Wheel/ Drum	2200 (86")	22 230 (48,995)	15.5 (9.6)
TSF-54	7KD	85-88	26 (35)	2131 (4700)	Towed	1370 (54")	6810 (15,000)	Towed
TSM-54	7LD	86-88	26 (35)	2160 (4760)	Towed	1370 (54")	6810 (15,000)	Towed



**PAVING PRODUCTS — DOUBLE DRUM, COMBI AND PNEUMATIC TIRE COMPACTORS**

Model	Product Ident. No. Prefix	Years Built	Flywheel kW (hp)	Approx. Op. Weight kg (lb)	Drive	Drum Width mm (in)	Dynamic Force kg (lb)	Maximum Op. Speed km/h (mph)
CB-214	6FD	85-88	24 (33)	2300 (5070)	Drum (2)	1000 (39.4")	2041 (4500)	10.6 (6.6)
CB-214B	6LF	88-93	24 (33)	2300 (5072)	Drum (2)	990 (39")	2018 (4450)	10.4 (6.5)
CB-214C	6LF	93-00	25 (33)	2320 (5115)	Drum (2)	1000 (39.4")	2592 (5715)	10.5 (6.5)
CB-224	6GD	85-88	24 (33)	2450 (5400)	Drum (2)	1200 (47.2")	2450 (5400)	10.6 (6.6)
CB-224B	6LF	88-93	24 (33)	2450 (5402)	Drum (2)	1199 (47.2")	2449 (5400)	10.4 (6.5)
CB-224C	6LF	93-00	25 (33)	2420 (5335)	Drum (2)	1200 (47.2")	2920 (6570)	10.5 (6.5)
CB-314	6HD	85-89	41 (55)	3357 (7400)	Drum	1120 (44")	2770 (6100)	8 (5)
CB-414	6KD	85-89	52 (70)	5780 (12,750)	Drum	1397 (55")	6350 (14,000)	13.7 (8.5)
CB-424	6LD	85-89	54 (73.5)	6220 (13,710)	Drum (2)	1397 (55")	4485 (9885)	11.0 (6.8)
CB-434	3TF	89-94	60 (80)	6610 (14,540)	Drum (2)	1422 (56")	7620 (16,800)	11.6 (7.2)
CB-434B*	6AL	94-95	60 (80)	6577 (14,500)	Drums	1422 (56")	7620 (16,800)	0-11.6 (0-7.2)
CB-514	6YD	85-88	68 (91)	9730 (21,450)	Drum (2)	1730 (68")	9073 (20,000)	11 (7)
CB-614	7CD	85-93	115 (155)	11 340 (25,000)	Drum (2)	1980 (78")	9525 (21,000)	11.2 (7)
CB-521	6RD	85-87	61 (82)	8800 (19,404)	Wheel	1700 (67")	5300 (11,687)	15 (9.3)
CB-522	6SD	85-87	45 (62)	10 100 (22,271)	Drum (2)	1700 (67")	10 350 (22,822)	8 (5)
CB-523	6TD	85-87	61 (82)	8800 (19,404)	Wheel/ Drum	1700 (67")	5300 (11,687)	13 (8)

## Former Models

### Paving Products

- Double Drum & Combi Vibratory Compactors
- Pneumatic Tire Compactors
- Underground Mining

### Paving Products — Double Drum, Combi and Pneumatic Tire Compactors (cont'd)

Model	Product Ident. No. Prefix	Years Built	Flywheel kW (hp)	Approx. Op. Weight kg (lb)	Drive	Drum Width mm (in)	Dynamic Force kg (lb)	Maximum Op. Speed km/h (mph)
CB-524	6WD	85-87	61 (82)	9500 (20,948)	Drum (2)	1700 (67")	10 350 (22,822)	11 (6.8)
CB-534	6EG2YF	87-93	93 (125)	9117 (20,100)	Drum (2)	1700 (67")	11 800 (26,019)	11.2 (7)
CB-534B	4JL	93-95	80 (107)	9117 (20,100)	Drums	1676 (66")	12 043 (26,550)	0-11.3 (0-7.0)
CB-634	5CL	94-95	108 (145)		Drums	2134 (84")	12 043 (26,550)	0-9.2 (0-5.7)
PF-200		85-92	49 (66)	7000 (15,430)	Wheel Pneumatic	1700 (67")	NA	24 (14.9)
PS-110	7MD	85-96	57 (77)	12 500 (27,550)	Wheel Pneumatic	2134 (84")	NA	38.6 (24)
PS-130	7ND	85-96	57 (77)	12 500 (27,550)	Wheel Pneumatic	1700 (67")	NA	38.6 (24)
PS-150	7PD	85-96	57 (77)	15 050 (37,300)	Wheel Pneumatic	1700 (67")	NA	38.6 (24)
PS-180	7PD	85-96	57 (77)	16 950 (37,000)	Wheel Pneumatic	1727 (68")	NA	38.6 (24)
PS-300		85-95	77	21 000	Wheel	1900	NA	26.5
PF-300		85-95	(102)	(46,200)	Pneumatic	(75")		(16.4)



### UNDERGROUND MINING

LHD Model	Product Ident. No. Prefix (USA)	Years Built	Flywheel Power kW (hp)	Approx. Operating Weight kg (lb)	Max Capacity kg (lb)	Length m (ft)	Height m (ft)	Bucket Width mm (ft)	Breakout Force kg (lb)	Maximum Speeds km/h (mph)	
										Forward	Reverse
R1500	NA	NA	178 (239)	25 100 (55,360)	9000 (19,850)	9.19 (30'2")	2.30 (7'7")	2480 (8'2")	18 460 (140,700)	30.4 (18.9)	33.0 (20.5)
R1700 II			231 (310)	34 500 (76,100)	12 000 (26,460)	10.42 (34'2")	2.53 (8'4")	2820 (9'3")	23 430 (51,660)	29.3 (18.2)	33.3 (20.7)
R2800	NA	NA	231 (310)	42 660 (94,070)	16 200 (35,720)	10.70 (35'1")	2.68 (8'10")	3000 (9'10")	26 540 (68,530)	29.3 (18.2)	33.3 (20.7)

# ESTIMATING OWNING & OPERATING COSTS

## CONTENTS

Estimating form . . . . . 22-2

Explanation of form:

    Estimating Owning Costs . . . . . 22-5

        Guide for selecting ownership period . . . 22-6

        Agricultural tractors depreciation . . . . 22-10

    ① Delivered price . . . . . 22-10

    ② Residual value at replacement . . . . . 22-10

    ③ Value to be recovered through work . . . . 22-11

    ④ Interest . . . . . 22-11

    ⑤ Insurance . . . . . 22-11

    ⑥ Taxes . . . . . 22-11

    ⑧ Fuel consumption . . . . . 22-12

    ⑨ Lube oils, filters, grease tables . . . . . 22-22

    ⑩ Tires:

        Tire life estimator curves . . . . . 22-29

        Goodyear life estimating system . . . . . 22-32

    ⑩ Undercarriage . . . . . 22-33

        Basic factors and conditions

        multipliers . . . . . 22-34

    ⑪ Repair reserve . . . . . 22-35

        Cost estimating bar graphs . . . . . 22-37

    ⑫ Special wear items . . . . . 22-44

    ⑮ Operator's hourly wage . . . . . 22-44

O & O Cost Examples

    Example I: Track-Type Tractor . . . . . 22-44

    Example II: Wheel Loader . . . . . 22-46

    O & O form with example figures . . . . . 22-47

Quick estimators . . . . . 22-50

### General

Machine users must balance Productivity and Costs to achieve optimum performance ... that is, achieve the desired production at the lowest possible cost. The approach most often used to measure machine performance is this simple equation:

$$\frac{\text{Lowest Possible Hourly Costs}}{\text{Highest Possible Hourly Productivity}} = \frac{\text{Top Machine Performance}}$$

Most sections of this Handbook deal with the productivity of Caterpillar machines. This section considers the cost aspect of performance.

Hourly Owning and Operating Costs for a given machine can vary widely because they are influenced by many factors: the type of work the machine does, local prices of fuel and lubricants, shipping costs from the factory, interest rates, etc. No attempt is made in this handbook to provide precise hourly costs for each model. Users must be able to estimate with a reasonable degree of accuracy what a machine will cost per hour to own and operate in a given application and locality. Therefore, this section provides a suggested method of estimating hourly owning and operating costs as well as data on Caterpillar-built machines which, when coupled with local conditions, will permit accurate estimates.

The method suggested follows several basic principles:

- No prices are provided for any items. For reliable estimates, these must always be obtained locally.
- Calculations are based on the complete machine. Separate estimates are not necessary for the basic machine, dozer, control, etc.
- The multiplier factors provided will work equally well in any currency expressed in decimals.
- Because of different standards of comparison, what may seem a severe application to one machine owner may appear only average to another. Therefore, to better describe machine use, operating conditions and applications are defined in zones.
- Unless otherwise specified, the word "hour" when used in this section means clock or operating hours, not Service Meter Units.

**HOURLY OWNING AND OPERATING COST ESTIMATE**

DATE \_\_\_\_\_

(1) (2)

Machine Designation ..... \_\_\_\_\_  
 Estimated Ownership Period (Years) ..... \_\_\_\_\_  
 Estimated Usage (Hours/Year) ..... \_\_\_\_\_  
 Ownership Usage (Total Hours) ..... \_\_\_\_\_

**OWNING COSTS**

1. a. Delivered Price (including attachments) ..... \_\_\_\_\_  
 b. Less Tire Replacement Cost if desired ..... \_\_\_\_\_  
 c. Delivered Price Less Tires ..... \_\_\_\_\_  
 2. Less Residual Value at Replacement ..... (\_\_\_\_%) \_\_\_\_\_ (\_\_\_\_%) \_\_\_\_\_  
 (See subsection 2A on back)

3. a. Value to be recovered through work ..... \_\_\_\_\_  
 (line 1c less line 2)

b. Cost Per Hour:

Value (1) \_\_\_\_\_ (2) \_\_\_\_\_  
 Hours

4. Interest Costs  $\frac{N + 1}{2N} \times \text{Del. Price} \times \frac{\text{Simple Int.}}{\% \text{ Rate}}$  = \_\_\_\_\_  
 N = No. Yrs. Hours/Year  
 (1)  $\frac{+ 1}{+ 1} \times \text{_____} \times \text{_____} \%$  (2)  $\frac{+ 1}{+ 1} \times \text{_____} \times \text{_____} \%$   
 \_\_\_\_\_ = \_\_\_\_\_ = \_\_\_\_\_  
 \_\_\_\_\_ Hours/Yr. \_\_\_\_\_ Hours/Yr.

5. Insurance  $\frac{N + 1}{2N} \times \text{Del. Price} \times \frac{\text{Insurance}}{\% \text{ Rate}}$  = \_\_\_\_\_  
 N = No. Yrs. Hours/Year  
 (1)  $\frac{+ 1}{+ 1} \times \text{_____} \times \text{_____} \%$  (2)  $\frac{+ 1}{+ 1} \times \text{_____} \times \text{_____} \%$   
 \_\_\_\_\_ = \_\_\_\_\_ = \_\_\_\_\_  
 \_\_\_\_\_ Hours/Yr. \_\_\_\_\_ Hours/Yr.

Or

\$ \_\_\_\_\_ Per Yr. ÷ \_\_\_\_\_ Hours/Yr. =

(1) (2)

6. Property Tax  $\frac{N + 1}{2N} \times \text{Del. Price} \times \text{Tax Rate \%}$   
 N = No. Yrs.  $\frac{\text{Hours/Year}}{\text{Hours/Year}} =$

(1)  $\frac{+ 1}{\text{Hours/Yr.}} \times \text{_____} \times \text{_____ \%}$  (2)  $\frac{+ 1}{\text{Hours/Yr.}} \times \text{_____} \times \text{_____ \%}$   
 \_\_\_\_\_ = \_\_\_\_\_ = \_\_\_\_\_

Or

\$ \_\_\_\_\_ Per Yr.  $\div$  \_\_\_\_\_ Hours/Yr. =

7. TOTAL HOURLY OWNING COST  
 (add lines 3b, 4, 5, and 6) .....

**OPERATING COSTS**

8. Fuel: Unit Price  $\times$  Consumption  
 (1) \_\_\_\_\_  $\times$  \_\_\_\_\_ = \_\_\_\_\_  
 (2) \_\_\_\_\_  $\times$  \_\_\_\_\_ = \_\_\_\_\_

9. Lube Oils, Filters, Grease:  
 (See subsection 9A on back) .....

10. a. Tires: Replacement Cost  $\div$  Life in Hours  
 $\frac{\text{Cost}}{\text{Life}}$  (1) \_\_\_\_\_ (2) \_\_\_\_\_ .....

b. Undercarriage  
 (Impact + Abrasiveness + Z Factor)  $\times$  Basic Factor  
 (1) ( \_\_\_\_\_ + \_\_\_\_\_ + \_\_\_\_\_ ) = \_\_\_\_\_  $\times$  \_\_\_\_\_ = \_\_\_\_\_  
 (2) ( \_\_\_\_\_ + \_\_\_\_\_ + \_\_\_\_\_ ) = \_\_\_\_\_  $\times$  \_\_\_\_\_ = \_\_\_\_\_  
 (Total) (Factor)

11. Repair Reserve  
 (Extended Use Multiplier  $\times$  Basic Repair Factor)  
 (1) \_\_\_\_\_  $\times$  \_\_\_\_\_ = (2) \_\_\_\_\_  $\times$  \_\_\_\_\_ = \_\_\_\_\_

12. Special Wear Items: Cost  $\div$  Life .....    
 (See subsection 12A on back)

13. TOTAL OPERATING COSTS  
 (add lines 8, 9, 10a (or 10b), 11 and 12) .....

14. MACHINE OWNING PLUS OPERATING  
 (add lines 7 and 13) .....

15. OPERATOR'S HOURLY WAGE (include fringes) .....

16. TOTAL OWNING AND OPERATING COST .....



**SUBSECTION 2A: Residual Value at Replacement**

Gross Selling Price	(1) (___%) _____	(2) (___%) _____
Less: a. Commission	_____	_____
b. Make-ready costs	_____	_____
c. Inflation during ownership period*	_____	_____
Net Residual Value	_____ (___%)	_____ (___%) of original delivered price
(Enter on line 2)		

\*When used equipment auction prices are used to estimate residual value, the effect of inflation during the ownership period should be removed to show in constant value what part of the asset must be recovered through work.

**SUBSECTION 9A: Lube Oils, Filters, Grease**

	Unit Price	×	Consumption =	Cost/Hour				
Engine	(1) _____	×	_____ =	_____	(2) _____	×	_____ =	_____
Transmission	_____	×	_____ =	_____	_____	×	_____ =	_____
Final Drives	_____	×	_____ =	_____	_____	×	_____ =	_____
Hydraulics	_____	×	_____ =	_____	_____	×	_____ =	_____
Grease	_____	×	_____ =	_____	_____	×	_____ =	_____
Filters	_____	×	_____ =	_____	_____	×	_____ =	_____
			Total (1) _____		(2) _____			

(Enter total on line 9 or use Quick Estimator Tables)

**SUBSECTION 12A: Special Items**

(cutting edges, ground engaging tools, bucket teeth, excavator stick repair, etc.)

(1)	Cost	Life	Cost/Hour	(2)			
1.	_____ ÷	_____ =	_____	1.	_____ ÷	_____ =	_____
2.	_____ ÷	_____ =	_____	2.	_____ ÷	_____ =	_____
3.	_____ ÷	_____ =	_____	3.	_____ ÷	_____ =	_____
4.	_____ ÷	_____ =	_____	4.	_____ ÷	_____ =	_____
5.	_____ ÷	_____ =	_____	5.	_____ ÷	_____ =	_____
6.	_____ ÷	_____ =	_____	6.	_____ ÷	_____ =	_____
		Total (1) _____		(2) _____			

(Enter total on line 12)

**REPAIR RESERVE CONVERSION FACTORS (line 11)**

For use in countries outside the United States where parts and service costs might differ from those used in charts and tables:

Labor Rate Ratio (1)	_____	(2)	_____
Parts Cost Ratio (1)	_____	(2)	_____

1-7

**ESTIMATING OWNING COSTS***(Line Items 1 through 7)*

To protect his equipment investment and be able to replace it, the machine owner must recover over the machine's useful life an amount equal to the loss in resale value plus the other costs of owning the equipment including interest, insurance and taxes.

The machine owner, for accounting purposes, estimates resale value loss in advance, and recovers his original equipment investment by establishing depreciation schedules according to the various uses of the equipment. Proper financial and tax assistance is highly recommended when establishing depreciation schedules.

**The machine depreciation method suggested in this handbook is not based on or related to any tax considerations, but rather is a simple straight line write-off based solely on the number of years or hours the owner expects to use the machine gainfully.** Considering today's economic conditions worldwide and the trend toward larger, more expensive equipment, many users choose to keep these units on the job well after they have been fully depreciated for tax purposes. On the other hand, tax incentives in many areas may favor trading a machine well before it approaches the limits of its useful life.

Accordingly, it is imperative that careful consideration be given the selection of depreciation periods, and that for owning and operating cost calculations they be based on useful life rather than tax write-off life. The table of machine operating conditions (next page) only suggests such useful life periods in clock or operating hours. Recognize, however, that factors other than operating conditions can influence machine depreciation periods — an owner's wish to accelerate recovery of his investment, purchase of a machine for a job of specific duration, local customs, local economic conditions, availability of foreign exchange to buy a replacement, and many others.

Maintenance practices are not considered in this table but play an important part in determining economic machine life. For example, operating conditions may suggest a 12,000 hour depreciation period for a machine, but poor maintenance could make it uneconomical to retain the unit beyond 10,000 hours. Good, regular maintenance often can extend economical machine life.

Therefore, a knowledge of the intended use, operating conditions and maintenance practices, plus any special factors, is essential in establishing expected machine life for depreciation purposes.

**GUIDE FOR SELECTING OWNERSHIP PERIOD BASED ON APPLICATION AND OPERATING CONDITIONS**

	<b>ZONE A Moderate</b>	<b>ZONE B Average</b>	<b>ZONE C Severe</b>
<b>TRACK-TYPE TRACTORS</b>	Pulling scrapers, most agricultural drawbar, stockpile, coalpile. No impact. Intermittent full throttle operation.	Production dozing in clays, sands, gravels. Pushloading scrapers, borrow pit ripping, most landclearing applications. Medium impact conditions. Production landfill work.	Heavy rock ripping. Pushloading and dozing in hard rock. Work on rock surfaces. Continuous high impact conditions.
D3C-D5C	10,000 Hr	8,000 Hr	NA
D5M-D6M	15,000 Hr	12,000 Hr	NA
D6R-D7R	20,000 Hr	15,000 Hr	10,000 Hr
D8R	25,000 Hr	20,000 Hr	15,000 Hr
D9R	35,000 Hr	25,000 Hr	20,000 Hr
D10R/D11R	50,000 Hr	40,000 Hr	30,000 Hr
<b>AGRICULTURAL TRACTORS</b>	Pulling combines, grain wagons and grain carts.	Pulling field cultivators, moldboard plows, chisel plows, discing, primary and finishing tillage.	Pulling layer scrapers, used in construction applications, ripping, dozing.
CHALLENGER 35, 45 & 55	10,000 Hr	8,000 Hr	N/A
CHALLENGER 65E-95E	12,000 Hr	10,000 Hr	8,000 Hr
'SR' TRACTORS	14,000 Hr	12,000 Hr	10,000 Hr
<b>MOTOR GRADERS</b>	Light road maintenance. Finishing. Plant and road mix work. Light snowplowing. Large amounts of traveling.	Haul road maintenance. Road construction, ditching. Loose fill spreading. Landforming, landleveling. Summer road maintenance with medium to heavy winter snow removal. Elevating grader use.	Maintenance of hard packed roads with embedded rock. Heavy fill spreading. Ripping-scarifying of asphalt or concrete. Continuous high load factor. High impact.
120H Thru 16H 24H	20,000 Hr 40,000 Hr	15,000 Hr 35,000 Hr	12,000 Hr 30,000 Hr
<b>EXCAVATORS</b>	Utility construction, low density material, rehandling and scrap handling applications.	Continuous digging in sandy clay/sandy gravel, site development and lumber yard applications.	Continuous digging in rock/natural bed clay, high impact, using hammer, working in forests or quarries.
M312-M320, 307B 311B-318B L	10,000 Hr 12,000 Hr	8,000 Hr 10,000 Hr	6,000 Hr 8,000 Hr
<b>EXCAVATORS</b>	Shallow depth utility construction where excavator sets pipe and digs only 3 or 4 hours/shift. Free flowing, low density material and little or no impact. Most scrap handling arrangements.	Mass excavation or trenching where machine digs all the time in natural bed clay soils. Some traveling and steady, full throttle operation. Most log loading applications.	Continuous trenching or truck loading in rock or shot rock soils. Large amount of travel over rough ground. Machine continuously working on rock floor with constant high load factor and high impact.
320B, 322B 325B, 330B 345B, 365B, 375	15,000 Hr 15,000 Hr 20,000 Hr	12,000 Hr 12,000 Hr 18,000 Hr	10,000 Hr 10,000 Hr 15,000 Hr
<b>5000 SERIES EXCAVATORS</b>	Continuous loading in loose banks or stockpile. Good underfoot conditions. (Might be considered similar to "normal" wheel loader conditions.)	Continuous loading in well-shot rock or fairly tight bank. Good underfoot conditions; dry floor, little impact or sliding on undercarriage.	Continuous loading in poorly-shot rock, virgin or lightly-blasted tight banks. Adverse underfoot conditions: rough floors; high impact sliding on undercarriage.
5080 5110B 5130B & 5230	20,000 Hr 30,000 Hr 50,000 Hr	18,000 Hr 25,000 Hr 40,000 Hr	15,000 Hr 30,000 Hr 30,000 Hr

	<b>ZONE A Moderate</b>	<b>ZONE B Average</b>	<b>ZONE C Severe</b>
<b>FELLER BUNCHERS</b>	Continuous felling and stacking in good underfoot conditions. Flat ground uniform trees below 305 mm (12 inches).  18,000 Hr	Continuous cycling in good underfoot conditions. Rolling terrain, some trees up to 508 mm (20 inches) or some hardwoods.  15,000 Hr	Continuous cycling in steep terrain over stumps and fallen trees. Most trees 508 mm (20 inches) or larger hardwoods.  10,000 Hr
<b>BACKHOE LOADERS</b>	Light duty utility applications in light to medium soil. Trenching depths less 1.83 m (6 ft.)  12,000 Hr	Utility applications in medium to heavy soil. Occasional use of constant flow implements. Dig depths to 3.05 m (10 ft.)  10,000 Hr	Production applications or digging in rock. Regular use of constant flow implements. Dig depths over 3.05 m (10 ft.)  5,000 Hr
<b>FOREST PRODUCTS</b>	Intermittent skidding for short distances, no decking. Good underfoot conditions: level terrain, dry floor, few if any stumps.	Continuous turning, steady skidding for medium distances with moderate decking. Good underfooting: dry floor with few stumps and gradual rolling terrain.	Continuous turning, steady skidding for long distances with frequent decking. Poor underfoot conditions: wet floor, steep slopes and numerous stumps.
Harvesters	*	*	*
Forwarders	*	*	*
Wheel Skidders	10,000 Hr	8,000 Hr	7,200 Hr
Track Skidders	12,000 Hr	10,000 Hr	8,000 Hr
Forestry Machine	*	*	*
Knuckleboom Loaders	*	*	*
<b>PIPELAYERS</b>	Little or no use in mud, water or on rock. Use on level, regular surfaces.	Typical pipelayer use in operating conditions ranging from very good to severe.	Continuous use in deep mud or water or on rock surfaces.
561M-572R	20,000 Hr	15,000 Hr	10,000 Hr
583R-589	25,000 Hr	20,000 Hr	15,000 Hr
<b>WHEEL TRACTOR- SCRAPERS</b>	Level or favorable hauls on good haul roads. No impact. Easy-loading materials.	Varying loading and haul road conditions. Long and short hauls. Adverse and favorable grades. Some impact. Typical road-building use on a variety of jobs.	High impact condition, such as loading ripped rock. Overloading. Continuous high total resistance conditions. Rough haul roads.
613C Series II, 611, 615C Series II 621G-627G, 631E-657E	12,000 Hr 22,000 Hr	10,000 Hr 17,000 Hr	8,000 Hr 12,000 Hr
<b>CONSTRUCTION &amp; MINING TRUCKS &amp; TRACTORS</b>	Continuous operation at an average gross weight less than recommended. Excellent haul roads. No overloading, low load factor. (See Hourly Fuel Consumption section for definition).	Continuous operation at an average gross weight approaching recommended. Minimal overloading, good haul roads, moderate load factor. (See Hourly Fuel Consumption section for definition).	Continuous operation at or above maximum recommended gross weight. Overloading, poor haul roads, high load factor. (See Hourly Fuel Consumption section for definition). Note — Continual loading beyond recommended maximum gross weight will further reduce Zone C hours.
769D-777D	50,000 Hr	40,000 Hr	30,000 Hr
784C-797	60,000 Hr	50,000 Hr	40,000 Hr

\*Insufficient data.

	<b>ZONE A Moderate</b>	<b>ZONE B Average</b>	<b>ZONE C Severe</b>
<b>ARTICULATED TRUCKS</b>	Earthmoving and stockpile use with well matched loading equipment. Short to medium hauls on well-maintained level haul roads. Free flowing material. Few impact loads.  15,000 Hr	Varying load and haul road conditions. High rolling resistance and poor traction during part of the job. Some adverse grades. Some impact loads. Typical use in road-building, dam construction, open-pit mining, etc.  10,000 Hr	Continuous use on very poorly maintained haul roads, high rolling resistance and poor traction. Frequent adverse grades and high impact loads. Poorly-matched loading equipment with continuous over-loading.  8,000 Hr
<b>WHEEL TRACTORS &amp; COMPACTORS</b>	Light utility work. Stockpile work. Pulling compactors. Dozing loose fill. No impact.  15,000 Hr	Production dozing, pushloading in clays, sands, silts, loose gravels. Shovel clean-up.  12,000 Hr	Production dozing in rock. Push-loading in rocky, bouldery borrow pits. High impact conditions. Land-fill compactor work.  8,000 Hr
<b>WHEEL LOADERS</b>	Intermittent truck loading from stockpile, hopper charging on firm, smooth surfaces. Free flowing, low density materials. Utility work in governmental and industrial applications. Light snowplowing. Load and carry on good surface for short distances with no grades.  902-908 914G-972G 980G-992G 994D  * 12,000 Hr 15,000 Hr 60,000 Hr	Continuous truck loading from stockpile. Low to medium density materials in properly sized bucket. Hopper charging in low to medium rolling resistance. Loading from bank in good digging. Load and carry on poor surfaces and slight adverse grades.  * 10,000 Hr 12,000 Hr 50,000 Hr	Loading shot rock (large loaders). Handling high density materials with counterweighted machine. Steady loading from very tight banks. Continuous work on rough or very soft surfaces. Load and carry in hard digging; travel longer distances on poor surfaces with adverse grades.  * 8,000 Hr 10,000 Hr 40,000 Hr
<b>TRACK LOADERS</b>	Site clearing of small vegetation, stripping top soil, carrying to stockpile. Intermittent truck loading from stockpile. Free flowing, low density materials with standard bucket. No impact. Backfilling and grading.  933C-939C 953C 963C-973C  8,000 Hr 10,000 Hr 12,000 Hr	Bank excavation, intermittent ripping, basement digging of natural bed clays, sands, silts, gravels. Some traveling. Steady full throttle operation.  6,000 Hr 8,000 Hr 10,000 Hr	Loading shot rock, cobbles, glacial till, caliche. Steel mill work. High density materials in standard bucket. Continuous work on rock surfaces. Large amount of ripping of tight, rocky materials. High impact conditions.  Not Recommended 6,000 Hr 8,000 Hr
<b>INTEGRATED TOOLCARRIERS</b>	Intermittent truck loading from stockpile, hopper charging on firm, smooth surfaces. Free flowing, low density materials. Utility work in governmental and industrial applications. Light snow-plowing. Load and carry on good surface for short distances with no grades.  12,000 Hr	Continuous truck loading from stockpile. Low to medium density materials in properly sized bucket. Hopper charging in low to medium rolling resistance. Loading from bank in good digging. Load and carry on poor surfaces and slight adverse grades.  10,000 Hr	Loading shot rock (large loaders). Handling high density materials with counterweighted machine. Steady loading from very tight banks. Continuous work on rough or very soft surfaces. Load and carry in hard digging; travel longer distances on poor surfaces with adverse grades.  8,000 Hr

\*Insufficient data.

	<b>ZONE A Moderate</b>	<b>ZONE B Average</b>	<b>ZONE C Severe</b>
<b>UNDERGROUND ARTICULATED TRUCKS</b>	<p>Continuous operation at &lt;80% of maximum recommended gross weight. Short to medium haul distances: 300–1000 meters (990–3300 feet)</p> <p>Well-maintained, level haul roads. Very few tray impacts. Low load factor.</p>	<p>Intermittent operation at maximum recommended gross weight. Medium to longer haul distances: 1000–5000 meters (3300–16,000 ft)</p> <p>Varying haul road conditions and/or grades. Occasional tray impacts. Medium load factor.</p>	<p>Continuous operation at maximum recommended gross weight. Long haul distances: &gt;5000 meters (&gt;16,000 feet)</p> <p>Poor haul road conditions and/or steep grades. Frequent tray impacts. High load factor.</p>
<b>AD40, AE40</b>	40,000 Hr	30,000 Hr	15,000 Hr
<b>UNDERGROUND LOAD HAUL DUMP UNITS</b>	<p>Dig and carry operation from stock piles to ground level transfer station. Low density, free flowing ore and waste. Excellent draw point floor surfaces. Short haul distances: 25–100 meters (80–330 feet)</p> <p>Level roads with good surface conditions. Low load factor.</p>	<p>Intermittent development/production loading into trucks/transfer station. Good digging with well shot, low to medium density ore and waste. Average draw point floor surfaces. Medium haul distances: 100–200 meters (330–660 feet)</p> <p>Poor road surfaces with slightly adverse grades. Medium load factor.</p>	<p>Continuous production loading of trucks at or near maximum load height. Difficult digging. Loading haul trucks. Rough draw point surfaces. Long haul distances: 200–300 meters (650–990 feet)</p> <p>Poor haul roads with adverse grades. High load factor.</p>
<b>R1300, R1600, R1700, R2900</b>	25,000 Hr	20,000 Hr	15,000 Hr
<b>UNDERGROUND RIGID TRUCKS</b>	<p>Continuous operation at &lt;80% of maximum recommended gross weight. Short to medium haul distances: 300–1000 meters (990–3300 feet)</p> <p>Well-maintained, level haul roads. Very few tray impacts. Low load factor.</p>	<p>Intermittent operation at maximum recommended gross weight. Medium to longer haul distances: 1000–5000 meters (3300–16,000 ft)</p> <p>Varying haul road conditions and/or grades. Occasional tray impacts. Medium load factor.</p>	<p>Continuous operation at maximum recommended gross weight. Long haul distances: &gt;5000 meters (&gt;16,000 feet)</p> <p>Poor haul road conditions and/or steep grades. Frequent tray impacts. High load factor.</p>
<b>69D Dumper, 69D Ejector, 73D Dumper</b>	40,000 Hr	30,000 Hr	20,000 Hr

- ① Delivered Price
- ② Residual Value at Replacement

**AGRICULTURAL TRACTOR DEPRECIATION AND REPAIR COSTS**

Unlike construction tractors which often are depreciated over 10,000 hours, the expected useful life of a Caterpillar steel tracked tractor in agriculture can range up to and beyond 20,000 hours (about eighteen years). The Challenger Tractor Line expected life is about 10,000 hours.

The tractor’s decline in value is always a significant portion of the machinery cost in farming. The actual market value of any tractor is determined by many variables ... machine age and condition, rate of change in size and farm operations in the area, popularity of given makes of tractors in the community, etc.

Whatever the variables, the decline in value is greater the first year than the second, greater the second year than the third, etc. The shorter the machine’s work life, the higher the percentage of its value lost in a year.

Although the percentage of loss each year depends on the life of the machine, it’s a general rule that 40 to 50% of the value will be lost in the first quarter of the machine’s life. By the halfway point of lifetime, from 70 to 75% of value will be lost.

The sum of digits is a common, easily used method for predicting the farm tractor’s depreciation value.

Assume a machine’s total life is 18 years. Assign each of those years a value, beginning with 18 for the first year, 17 for the second, 16 for the third, etc. The sum of all 18 digits is 171 which when divided into the initial new machine value, will give a specific monetary figure. The first year, 18 units of value are written off, 17 the second year, etc.

The resale value loss for the first four-year’s of machine life progresses as follows:

End of Year	Largest Remaining Digit	Loss of Value In Year	Loss of Value To Date	Remaining Value
1	18	18/171 or 10.5%	10.5%	89.5%
2	17	17/171 or 9.9%	(10.5 + 9.9) 20.4%	79.6%
3	16	16/171 or 9.3%	(20.4 + 9.3) 29.7%	70.3%
4	15	15/171 or 8.7%	(29.7 + 8.7) 38.4%	61.6%

*Repairs* — The reverse of the sum of digits formula can be used to predict repair costs for agricultural tractors.

Again, assuming an 18-year life, the sum of the digits would be 171. But the digit assigned the first year would be 1, the second year 2, etc.

**NOTE:** The digital method applied to depreciation yields an eventual 100% of the purchase price. The American Society of Agricultural Engineers recommends repair costs for crawler tractors be figured at 78% and wheel tractors at 120% of purchase price.

**1 DELIVERED PRICE**

*(Line Item 1a, b and c)*

Delivered price should include all costs of putting a machine on the user’s job including transportation and any applicable sales taxes.

On rubber tired machines, tires are considered a wear item and covered as an operating expense. Accordingly, some users may wish to deduct tire costs from the delivered price particularly for larger machines.

**2 RESIDUAL VALUE AT REPLACEMENT**

*(Line Item 2 and Subsection 2A)*

Any piece of earthmoving machinery will have some residual value at trade-in. While many owners prefer to depreciate their equipment to zero value, others recognize the residual resale or trade-in value. This is at the estimator’s option, but as in the discussion of depreciation, today’s higher equipment costs almost dictate that resale value be considered in determining the net depreciable investment. And if machines are traded early for tax incentive purposes, resale value becomes even more significant.

For many owners, potential resale or trade-in value is a key factor in their purchasing decisions, since this is a means of reducing the investment they must recover through depreciation charges. The high resale value of Caterpillar built machines can reduce hourly depreciation charges, lower total hourly owning costs and improve the owner’s competitive position.

### ③ Value to be Recovered Through Work

#### ④ Interest

#### ⑤ Insurance

#### ⑥ Taxes

## Owning & Operating Costs

When resale or trade-in value is used in estimating hourly owning and operating costs, local conditions must be considered, as used equipment values vary widely around the world. However, in any given used equipment business, factors which have greatest influence on resale or trade-in value are the number of hours on the machine at the time of sale or trade, the type of jobs and operating conditions in which it worked, and the physical condition of the machine. Your local Cat Dealer is your best source for determining current used equipment values.

Subsection 2A can be used to calculate the estimated residual value. If recent auction prices for used machines are used as a guide, then the value (or percentage) should be adjusted downward to remove the effect of inflation. Governmental indices on construction equipment costs or Dealer price records can be used to calculate the amount of inflation for the appropriate useful life. Another way to estimate residual value is comparing the current used machine value to the current new machine price provided major product changes haven't occurred.

### ③ VALUE TO BE RECOVERED THROUGH WORK

*(Line Item 3a and b)*

The delivered price less the estimated residual value results in the value to be recovered through work, divided by the total usage hours, gives the hourly cost to protect the asset's value.

### ④ INTEREST

*(Line Item 4)*

Many owners charge interest as part of hourly owning and operating costs, others consider it as general overhead in their overall operation. When charged to specific machines, interest is usually based on the owner's average annual investment in the unit.

Interest is considered to be the cost of using capital. The interest on capital used to purchase a machine must be considered, whether the machine is purchased outright or financed.

If the machine will be used for N years (where N is the number of years of use), calculate the average annual investment during the use period and apply the interest rate and expected annual usage:

$$\frac{\left[ \frac{N + 1}{2N} \times \text{Delivered Price} \right] \times \text{Simple Interest \% rate}}{\text{hours/year}}$$

### ⑤-⑥ INSURANCE AND TAXES

*(Line Items 5 and 6)*

Insurance cost and property taxes can be calculated in one of two ways. If the specific annual cost is known this figure should be multiplied by the estimated usage (hours/years) and used. However, when the specific interest and tax costs for each machine are not known, the following formulas can be applied:

$$\frac{\frac{\text{Insurance}}{N = \text{No. Years}} \left[ \frac{N + 1}{2N} \times \text{Delivered Price} \right] \times \text{Insurance rate \%}}{\text{hours/year}}$$

$$\frac{\frac{\text{Property Tax}}{N = \text{No. Years}} \left[ \frac{N + 1}{2N} \times \text{Delivered Price} \right] \times \text{Tax rate \%}}{\text{hours/year}}$$



8-13

**ESTIMATING OPERATING COSTS***(Line Items 8 through 13)*

8

**FUEL CONSUMPTION***(Line Item 8)*

Fuel consumption can be closely measured in the field. However, if no opportunity exists to do this, consumption can be predicted when the machine application is known.

Application determines engine load factor which in turn controls engine fuel consumption. An engine continuously producing full rated horsepower is operating at a load factor of 1.0. Earthmoving machines may reach a 1.0 load factor intermittently, but seldom operate at this level for extended periods of time. Periods spent at idle, dozer and pusher travel in reverse, haul units traveling empty, close maneuvering at part throttle and operating downhill are examples of conditions which reduce load factor.

The following tables provide hourly fuel consumption estimates at various load factors for Caterpillar built machines. Since machine uses vary, application guides are also provided to aid in estimating load factor.

To estimate hourly fuel cost, select the load factor based on application and find hourly consumption. Then:

$$\text{Hourly consumption} \times \text{Local Unit Price of Fuel} = \text{Hourly Fuel Cost}$$

When using these tables, keep in mind the many variables which can affect fuel consumption. Two operators of different temperament or attitude operating identical machines side by side in the same material can have as much as 10-12% difference in their consumption rates. However, the ranges shown should be applicable across a wide spectrum of conditions. Your Caterpillar dealer representative can help select the most reasonable estimate for your specific situation; we suggest you call on him.

Keep in mind also that a fuel consumption study measured over a short period of operation will give higher fuel consumption than shown here because: (1) the study will be at 100% efficiency, without breaks or idle time, and (2) the operators will know they're "under the gun" to produce and look good. On the other hand, these tables allow for "normal" inefficiencies in the working cycle and will more closely relate to "normal" day to day operation.

⑧ Hourly Fuel Consumption Tables  
 ● Track-Type Tractors  
 ● Agricultural Tractors

Owning & Operating Costs

FUEL CONSUMPTION TABLES & LOAD FACTOR GUIDES

TRACK-TYPE TRACTORS

Model	Low		Medium		High	
	liter	U.S. gal	liter	U.S. gal	liter	U.S. gal
D3C & LGP Series III	4-7½	1-2	7½-11	2-3	9½-13	2½-3½
D4C & LGP Series III	5½-9½	1½-2½	9½-13	2½-3½	11-15	3-4
D5C & LGP Series III	5½-9½	1½-2½	9½-13	2½-3½	13-17	3½-4½
D4E	5½-9½	1½-2½	9½-13	2½-3½	11-15	3-4
D5M XL & LGP	6-10½	1½-3	10½-14½	3-4	12½-17	3½-4½
D5B	9½-13	2½-3½	11-17	3-4½	15-21	4-5½
D6M XL & LGP	11-15	3-4	12½-19½	3½-5	17-24	4½-6½
D6G	11-20½	3½-5	15½-21	4-6	23-28½	6-7½
D6R XL, XR & LGP	13-22½	3½-6	17½-25	4½-6½	25-30½	6½-8½
D7G Series II*	19-25	5-6½	26-34	7-9	32-40	8½-10½
D7R XR & LGP	19-23	5-6	25-28	6½-7½	32-36	8½-10
D8R & LGP	23-28	6-7½	28-38	7½-10	38-51	10-13½
D9R	36-47	9½-12½	47-58	12½-15½	60-76	16-20
D10R	44-59	11½-15½	59-76	15½-20	76-93	20-24½
D11R	62-87	16½-23	87-112	23-29½	112-134	29½-35½

\*D7G fuel consumption data is based on a precombustion chamber equipped engine. Fuel consumption for a direct injection equipped D7G should be approximately 10% less.

AGRICULTURAL TRACTORS

Model	Low		Medium		High	
	liter	U.S. gal	liter	U.S. gal	liter	U.S. gal
D4E SR	5½-9½	1½-2½	9½-13	2½-3½	11-15	3-4
D6G SR	11-19	3-5	15-21	4-5½	21-26	5½-7
Challenger 35	9½-21	2½-5½	21-32	5½-8½	32-42	8½-11
Challenger 45	9½-23	2½-6	23-38	6-10	38-45	10-12
Challenger 55	11-26	3-7	26-42	7-11	42-53	11-14
Challenger 65E	23-30	6-8	26-38	7-10	38-57	10-15
Challenger 75E	26-34	7-9	34-45	9-12	45-64	12-17
Challenger 85E	26-38	7-10	38-53	10-14	53-68	14-18
Challenger 95E	26-42	7-11	42-57	11-15	57-76	15-20

LOAD FACTOR GUIDE

High: Steady ripping, shuttle pushloading and downhill dozing. Agricultural drawbar work at full throttle, engine lugged to max. power most of the time. Little or no idling or travel in reverse.

Medium: Production dozing, pulling scrapers, most pushloading. Agricultural drawbar work at full throttle but not always lugging engine. Some idling and some travel with no load.

Low: Considerable idling or travel with no load.

- Motor Graders
- Excavators & Feller Bunchers

**MOTOR GRADERS**

Model	Low		Medium		High	
	liter	U.S. gal	liter	U.S. gal	liter	U.S. gal
120H*	9-13	2.4-3.4	13-17	3.4-4.5	17-21	4.5-5.5
135H*	10-14	2.6-3.7	14-18	3.7-4.8	18-22	4.8-5.9
12H	11-16	2.9-4.2	16-21	4.2-5.5	21-26	5.5-6.7
140H*	12-17	3.1-4.4	17-22	4.4-5.7	22-26	5.7-7.0
143H**	12-17	3.2-4.6	17-22	4.6-5.9	22-28	5.9-7.3
160H*	14-20	3.7-5.3	20-26	5.3-6.8	26-32	6.8-8.4
163H**	14-21	3.8-5.4	20-27	5.4-7.0	27-33	7.0-8.6
14H	15-22	4.0-5.8	22-28	5.8-7.5	28-35	7.5-9.2
16H	19-27	5.0-7.1	27-35	7.1-9.2	35-43	9.2-11.3
24H	32-46	8.6-12.2	46-60	12.2-15.8	60-74	15.8-19.4

\*Multiply consumption by 1.10 when equipped with Variable Horsepower or Engine Power Management.

\*\*Multiply consumption by 1.15 when operating in All Wheel Drive.

**LOAD FACTOR GUIDE**

High: Ditching, fill spreading, spreading base material, ripping, heavy road maintenance, snow plowing.

Medium: Average road maintenance, road mix work, scarifying, snow plowing.

Low: Finish grading, light maintenance, road travel.

**EXCAVATORS**

Model	Low		Medium		High	
	liter	U.S. gal	liter	U.S. gal	liter	U.S. gal
301.5	*	*	*	*	*	*
302.5	*	*	*	*	*	*
307B/307B SB	3-5	¾-1¼	5-8	1¼-2	7-10	1¾-2½
311B	4-6	1-1½	6-9	1½-2¼	9-12	2¼-3½
312B/312B L	4-6	1-1½	6-9	1½-2½	10-13	2¼-3½
313B CR	*	*	*	*	*	*
315B	5-9	1¼-2¼	9-13	2¼-3½	13-15	3½-4
317B L	6-10	1½-2½	10-13	2½-3½	14-17	3¾-4½
318B L	8-12	2-3½	12-14	3½-3¾	15-19	4-5
M312	5-9	1¼-2¼	9-12	2¼-3½	12-15	3½-4
M315	6-10	1¾-2½	10-13	2½-3½	13-16	3½-4½
M318	8-12	2-3½	12-16	3½-4	17-19	4½-5
M320	9-13	2-3½	13-17	3½-4½	17-20	4½-5½
320C	9-13	2½-3½	13-15	3½-4	15-19	4-5
322B	11-15	3-4	16-18	4¼-4¾	18-23	4¾-6¼
325B	13-16	3½-4¼	18-21	4¾-5½	25-27	6¾-7¼
330B	18-24	4¾-6½	24-30	6½-8	34-38	9-10
345B	25-30	5½-8	35-40	9¼-10½	45-50	11¾-13¼
365B	34-38	9-10	45-51	12-13½	61-67	16-17¾
375	40-44	10½-11¾	53-59	14-15¾	71-77	18¾-20½
5110B	69-74	18-19	84-89	22-24	103-108	27-28
5130B	91-95	24-25	110-114	29-30	129-132	34-35
5230	163-193	43-51	193-204	51-54	208-227	55-60

\*Insufficient data.

**LOAD FACTOR GUIDE**

High: Most pipeline applications in hard rocky material. Digging 90-95% of the daily work schedule.

Medium: Most residential sewer applications in natural bed clay. Digging 60-85% of the daily work schedule. Most log loading applications.

Low: Most utility, urban applications in sandy loam. Digging less than 50% of the daily work schedule. Scrap handling applications.

⑧ Hourly Fuel Consumption Tables  
 ● Front Shovels ● Pipelayers  
 ● Wheel Tractor-Scrapers

Owning & Operating Costs

**FRONT SHOVELS**

Model	Low		Medium		High	
	liter	U.S. gal	liter	U.S. gal	liter	U.S. gal
5080	36-42	10-11	46-53	12-14	62-74	18-20
5130B	91-95	24-25	110-114	29-30	129-132	34-35
5230	163-193	43-51	193-204	51-54	208-227	55-60

**LOAD FACTOR GUIDE**

High: Steady cycling in hard to dig material.

Medium: Steady cycling with frequent periods at idle.

Low: Light easy work. Considerable idling.

**PIPELAYERS**

Model	Low		Medium		High	
	liter	U.S. gal	liter	U.S. gal	liter	U.S. gal
561M	4-7½	1-2	7½-11	2-3	9½-13	2½-3½
572R	7½-11	2-3	13-17	3½-4½	17-21	4½-5½
583R	9½-13	2½-3½	16½-20	4½-5½	22½-26	6½-7½
589	17-21	4½-5½	26-30	7-8	34-40	9-10½

**LOAD FACTOR GUIDE**

Pipelayer load factor depends largely on amount of time spent at idle speed.

**WHEEL TRACTOR-SCRAPERS**

Model	Low		Medium		High	
	liter	U.S. gal	liter	U.S. gal	liter	U.S. gal
613C Series II	15-19	4-5	21-25	5½-6½	27½-34	7½-9
611	23-26	6-7	30-36	8-9½	42-47½	11-12½
615C Series II	23-26	6-7	30-36	8-9½	42-47½	11-12½
621G	27-32	7-8½	38-44	10-11½	49-57	13-15
623G	30-36	8-9½	40-46	10½-12	53-59	14-15½
627G	45½-51	12-13½	64-70	17-18½	85-89½	22½-23½
631E Series II	40-45	10½-12	53-59	14-15½	72-78	19-20½
637E Series II	64-70	17-18½	87-93	23-24½	113½-121	30-32
651E	47-57	12½-15	66-76	17½-20	87-95	23-25
657E	87-98	23-26	116-125½	30½-33	153-163	40½-43

**LOAD FACTOR GUIDE**

High: Continuous high total resistance conditions with steady cycling.

Medium: Typical road building use.

Low: Average use but with considerable idling, favorable grades, low rolling resistance and easy loading material.

**BACKHOE LOADERS**

Model	Low		Medium		High	
	liter	U.S. gal	liter	U.S. gal	liter	U.S. gal
416C (NA)	4.5-6.4	1.2-1.7	6.4-8.3	1.7-2.2	8.3-10.2	2.2-2.7
428C (NA)	4.5-6.4	1.2-1.7	6.4-8.3	1.7-2.2	8.3-10.2	2.2-2.7
416C (T)	5.3-7.2	1.4-1.9	7.2-9.1	1.9-2.4	9.1-11.4	2.4-3.0
428C (T)	5.3-7.2	1.4-1.9	7.2-9.1	1.9-2.4	9.1-11.4	2.4-3.0
426C	5.3-7.2	1.4-1.9	7.2-9.1	1.9-2.4	9.1-11.4	2.4-3.0
436C	6.1-8.3	1.6-2.2	8.3-10.2	2.2-2.7	10.2-12.5	2.7-3.3
438C	6.1-8.3	1.6-2.2	8.3-10.2	2.2-2.7	10.2-12.5	2.7-3.3
446B	7.6-9.8	2.0-2.6	9.8-12.1	2.6-3.2	12.1-14.4	3.2-3.8

NA = Naturally Aspirated  
 T = Turbocharged

**LOAD FACTOR GUIDE**

- High: Production work with long cycles and/or constant flow implements.
- Medium: General work with regular cycles in medium applications.
- Low: Utility work with intermittent cycles in light to medium applications.

**FOREST PRODUCTS**

Model	Low		Medium		High	
	liter	U.S. gal	liter	U.S. gal	liter	U.S. gal
525B	10-14	2¾-3¾	14-18	3¾-4¾	18-25	4¾-6½
535B	*	*	*	*	*	*
545	*	*	*	*	*	*
517	7-13	1½-3½	13-18	3½-5	15-21	4-5½
527	14-19	3¾-5	19-24	5-6¼	24-32	6¼-8½
550	*	*	*	*	*	*
570	*	*	*	*	*	*
580	*	*	*	*	*	*
554	*	*	*	*	*	*
574	*	*	*	*	*	*
320C FM	*	*	*	*	*	*
539	*	*	*	*	*	*

\*Insufficient data.

**LOAD FACTOR GUIDE — 525**

- High: Skidding loads over 6800 kg (15,000 lb) in steep terrain (over 10%) with high skidding resistance.
- Medium: Skidding loads up to 6800 kg (15,000 lb) in moderate terrain (5-10%) with average skidding resistance.
- Low: Skidding loads less than 4500 kg (10,000 lb) in flat terrain (0-5%) with low skidding resistance.

**LOAD FACTOR GUIDE — 517**

- High: Skidding loads over 4536 kg (10,000 lb) in steep terrain (over 30%) with high skidding resistance.
- Medium: Skidding loads up to 4536 kg (10,000 lb) in moderate terrain (8-30%) with medium skidding resistance.
- Low: Skidding loads less than 4536 kg (10,000 lb) in flat terrain (0-8%) with low skidding resistance.

**LOAD FACTOR GUIDE — 527**

- High: Skidding loads over 6360 kg (14,000 lb) in steep terrain (over 30%) with high skidding resistance.
- Medium: Skidding loads up to 6360 kg (14,000 lb) in moderate terrain (8-30%) with medium skidding resistance.
- Low: Skidding loads less than 6360 kg (14,000 lb) in flat terrain (0-8%) with low skidding resistance.

- ⑧ Hourly Fuel Consumption Tables
- Construction & Mining Trucks/Tractors
  - Articulated Dump Trucks ● Telehandlers

## Owning & Operating Costs

### CONSTRUCTION & MINING TRUCKS & TRACTORS

Model	Low		Medium		High	
	liter	U.S. gal	liter	U.S. gal	liter	U.S. gal
769D	20.8-30.3	5½-8	30.3-40	8-10½	40-68	10½-14
771D	22.7-32.2	6-8½	32.2-41.6	8½-11	41.6-55	11-14½
773D	24.5-36	6½-9½	36-53	9½-14	53-68	14-18
775D	30.3-41.6	8-11	41.6-56.8	11-15	56.8-73.8	15-19½
776D	53.0-73.8	14-19½	73.8-96.5	19½-25½	96.5-117.3	25½-31
777D	36.0-53.0	9½-14	53.0-73.8	14-19½	73.8-96.5	19½-25½
784C/785C	53.0-79.5	14-21	79.5-109.8	21-29	100.8-145.7	29-38½
789C	68.1-102.2	18-27	102.2-141.9	27-37½	141.9-185.5	37½-49
793C	86-129	23-34	129-172	34-45½	172-215	45½-57
797	121-183	32-48	183-244	48-64½	244-304	64½-80

NOTE: Load factors above 50% may be experienced in many applications.

#### LOAD FACTOR GUIDE

Low: 20%-30%    Medium: 30%-40%    High: 40%-50%

### ARTICULATED TRUCKS

Model	Low		Medium		High	
	liter	U.S. gal	liter	U.S. gal	liter	U.S. gal
D25D	13.1-18.3	3.5-4.8	18.3-25.7	4.8-6.8	25.7-37.1	6.8-9.8
D30D	14.7-20.4	3.9-5.4	20.4-28.7	5.4-7.6	28.7-41.5	7.6-11.0
725	10.6-14.8	2.8-3.9	14.8-20.8	3.9-5.5	20.8-30.1	5.5-8.0
730	11.7-16.3	3.1-4.3	16.3-23.0	4.3-6.1	23.0-33.2	6.1-8.8
D350E Series II	14.4-20.0	3.8-5.3	20.0-28.1	5.3-7.4	28.1-40.6	7.4-10.7
D400E Series II	15.8-22.0	4.2-5.8	22.0-31.0	5.8-8.2	31.0-44.7	8.2-11.8
D400E Series II Ejector	16.3-22.7	4.3-6.0	22.7-31.9	6.0-8.4	31.9-46.0	8.4-12.2

#### LOAD FACTOR GUIDE

High: Long haul time with frequent adverse grades. Continuous use on very poorly maintained haul roads with high rolling resistance.

Medium: Normal load and haul time. Varying load and haul road conditions. Some adverse grades. Some high rolling resistance.

Low: Large amount of idling. Short to medium hauls on well maintained level haul roads. Minimum total resistance.

### TELEHANDLERS

Model	Intermittent		Continuous	
	liter	U.S. gal	liter	U.S. gal
TH62	5.0-7.0	1.3-1.8	8.0-13.0	2.0-3.3
TH63	5.0-7.0	1.3-1.8	8.0-13.0	2.0-3.3
TH82	5.0-7.0	1.3-1.8	8.0-13.0	2.0-3.3
TH83	5.0-7.0	1.3-1.8	8.0-13.0	2.0-3.3
TH103	6.0-9.0	1.5-2.0	9.0-13.0	2.2-3.3

#### LOAD FACTOR GUIDE

Continuous: Continuous loading/cycling applications.

Intermittent: Average loading/cycle applications with periods at idle.

- Wheel Tractors & Compactors
- Compaction Equipment

**WHEEL TRACTORS & COMPACTORS**

Model	Low		Medium		High	
	liter	U.S. gal	liter	U.S. gal	liter	U.S. gal
814F	21-25	5½-6½	26-30	7-8	36-40	9½-10½
815F	26-30	7-8	36-42	9½-11	44-47	11½-12½
816F	26-30	7-8	36-42	9½-11	44-47	11½-12½
824G	28-32	7½-8½	38-44	10-11½	51-57	13½-15
825G	36-42	9½-11	51-57	13½-15	60-66	16-17½
826G	36-42	9½-11	51-57	13½-15	60-66	16-17½
834G	40-45	10½-12	53-59	14-15½	72-78	19-20½
836G	28-34	7½-9	38-42	10-11	45-53	12-14
844	41-49	11-13	53-61	14-16	64-72	17-19
854G	53-61	14-16	68-76	18-20	83-91	22-24

**LOAD FACTOR GUIDE**

High: Heavy dozing, compacting heavy material. Heavy landfill work.

Medium: Production dozing, most pushloading, shovel cleanup, normal compaction.

Low: Considerable idling or travel with no load.

**COMPACTION EQUIPMENT**

Model	Low		Medium		High	
	liter	U.S. gal	liter	U.S. gal	liter	U.S. gal
CS-323C	8-11	2-3	11-13	3-3½	11-15	3-4
CS-431C	8-11	2-3	11-13	3-3½	11-15	3-4
CS-433C	11	3	11-13	3-3½	13-15	3½-4
CS-531D	*	*	*	*	*	*
CS-533D	*	*	*	*	*	*
CS-563D	13	3½	13-15	3½-4	15-21	4-5½
CS-573	13	3½	13-15	3½-4	15-21	4-5½
CS-583D	15-17	4-4½	17-19	4½-5	19-23	5-6
CP-323C	9-13	2½-3½	13-15	3½-4	15-19	4-5
CP-433C	13	3½	15-17	4-4½	17-19	4½-5
CP-533D	15	4	17-19	4½-5	19-25	5-6½
CP-563D	15	4	17-19	4½-5	21-25	5½-6½
CB-214D	2-3	½-1	2½-3½	½-1	3-4	¾-1½
CB-224D	2-4	½-1	3-4	½-1	3½-4½	¾-1½
CB-225D	2-3	½-1	2½-3½	½-1	3-4	¾-1½
CB-334D	3.8-5.7	1-1.5	5.7-7	1.5-1.8	7-10	1.8-2.6
CB-335D	3.5-5.5	0.9-1.4	5.5-6.5	1.4-1.7	6.5-9	1.7-2.4
CB-434C	11-13	3-3½	13-17	3½-4½	17-19	4½-5
CB-534C	13	3½	15-17	4-4½	17-23	4½-6
CB-535B	13	3½	15-17	4-4½	17-23	4½-6
CB-544	11-13	3-3½	13-17	3½-4½	17-19	4½-5
CB-545	11-13	3-3½	13-17	3½-4½	17-19	4½-5
CB-634C	13-15	3½-4	15-19	4-5	19-21	5-5½
PF-300B	13	3½	15-17	4-4½	17-23	4½-6
PS-300B	13	3½	15-17	4-4½	17-23	4½-6
PS-500	13-15	3½-4	15-19	4-5	19-21	5-5½

\*Insufficient data.

**LOAD FACTOR GUIDE**

High: Vibration 80-100%, heavy cohesive soil, 305 mm (12") lifts or more.

Medium: Vibration 50-80%, granular soil, 100 mm-305 mm (4"-12") lifts.

Low: Vibration 30-50%, asphalt mix, 51 mm-100 mm (2"-4") lifts.

⑧ Hourly Fuel Consumption Tables

- Asphalt Pavers
- Wheel Loaders & Integrated Toolcarriers

Owning & Operating Costs

**ASPHALT PAVERS**

Model	Low		Medium		High	
	liter	U.S. gal	liter	U.S. gal	liter	U.S. gal
BG-210B	11-13	3-3½	13-15	3½-4	15-19	4-5
AP-800C	11-15	3-4	15-19	4-5	17-19	4½-5
AP-900B	13-17	3½-4½	17-21	4½-5½	19-25	5-6½
AP-1000B	18-20	4¾-5¼	22-24	5¾-6¼	25-27	6½-7¼
AP-650B	11-15	3-4	15-19	4-5	19-21	5-5½
AP-1050B	19-21	5-5½	23-25	6-6½	26-28	6¾-7½
AP-1055B	19-21	5-5½	23-25	6-6½	26-28	6¾-7½
BG-650	11-13	3-3½	13-17	3½-4½	17-19	4½-5
BG-730	13-17	3½-4½	17-19	4½-5	19-25	5-6½

**LOAD FACTOR GUIDE**

- High: Wide width, deep lift paving.
- Medium: 3-4 m (10'-12') width, 50-75 mm (2"-3") lift.
- Low: Narrow width paving — low production.

**WHEEL LOADERS & INTEGRATED TOOLCARRIERS**

Model	Low		Medium		High	
	liter	U.S. gal	liter	U.S. gal	liter	U.S. gal
902	*	*	*	*	*	*
906	*	*	*	*	*	*
908	*	*	*	*	*	*
914G, IT14G	5-6½	1-2	8-10½	2-2¾	11½-13	3-3½
924G	5½-7½	1½-2	9½-12	2½-3	13-15	3½-4
928G, IT28G	7½-11	2-3	11-15	3-4	15-19	4-5
938G, IT38G	9-12½	2-3	13-17	3½-4½	18-22	4¾-5¾
950G	11-15	3-4	17-21	4½-5½	23-28	6-7½
962G, IT62G	12-16	3-4	18-22	5-6	24-29	6½-8
966G	17-21	4½-5½	23-28	6-7½	32-38	8½-10
972G	19-23	5-6	25-30	6½-8	35-41	9-11
980G	23-26	6-7	30-36	8-9½	42-47	11-12½
988G	30-38	8-10	40-45	10½-12	57-62	15-16½
990 Series II	45-53	12-14	60½-68	16-18	79½-87	21-23
992G	58-66	15-17	83-91	22-24	116-125	30-33
994D	102-109½	27-29	129-144	34-38	163-178	43-47

\*Insufficient data.

**LOAD FACTOR GUIDE**

- Note: The above table lists general fuel rates (i.e. fuel burned per hour) based on the following load factors. Machine utilization and job efficiency should be used in conjunction with these load factors to properly evaluate fuel consumption. However, fuel efficiency (i.e. tons of material moved per unit of fuel burned) is the best indicator of the impact of fuel consumption on owning and operating costs.
- High: Continuous and aggressive tight truck loading, hard bank excavation, and shot rock loading from a face.
- Medium: Maximum productivity in aggregate truck loading and hopper charging. Assumes the normal tramming and load & carry associated with the high productivity stockpile load-out and batch plant applications.
- Low: Light utility, construction, low production aggregate truck loading, and most logging applications where there is considerable idling, empty travel, and load & carry.



- Track Loaders
- Underground Mining

**TRACK LOADERS**

Model	Low		Medium		High	
	liter	U.S. gal	liter	U.S. gal	liter	U.S. gal
933C	3½-7½	1-2	7½-11	2-3	9½-13	2½-3½
939C	5½-9½	1½-2½	9½-13	2½-3½	13-17	3½-4½
953C	10-15	2½-4	15-20	4-5	20-25	5-7
963C	13-17	3½-4½	19-23	5-6	23-28	6-7½
973C	19-23	5-6	28-34	7½-9	36-42	9½-11

**LOAD FACTOR GUIDE**

High: Continuous excavating and loading from bank. Land clearing.

Medium: Bank or stockpile loading with idling periods. Load and carry.

Low: Large amounts of idling in any application.

**ARTICULATED TRUCKS**

Model	Low		Medium		High	
	liter	U.S. gal	liter	U.S. gal	liter	U.S. gal
AE40 Series II	18.9-34	5-9	34-52.9	9-14	52.9-68.1	14-18
AD45	*	*	*	*	*	*
AD55	*	*	*	*	*	*

\*Insufficient data.

**LOAD FACTOR GUIDE**

High: Continuous operation at the recommended maximum gross weight over long haulage distances, with adverse grades and poorly maintained roads.

Medium: Normal operation with average gross weight less than the recommended maximum gross weight on good haul roads with some adverse grades.

Low: Short to medium haulage distances with less than the recommended maximum gross weight on well maintained level haul roads. Considerable amount of idle time.

**LOAD HAUL DUMP UNITS (LHDs)**

Model	Low		Medium		High	
	liter	U.S. gal	liter	U.S. gal	liter	U.S. gal
R1300	11.3-15.1	3-4	15.1-18.9	4-5	18.9-30.2	5-8
R1600	15.1-22.7	4-6	22.7-28.3	6-7.5	28.3-39.7	7.5-10.5
R1700G	22.7-26.4	6-7	26.4-34	6-9	34-45.4	9-12
R2900	30.2-37.8	8-10	37.8-45.4	10-12	45.4-56.7	12-15

**LOAD FACTOR GUIDE**

- High: Continuous loading cycle. Continuous loading of poorly broken ore from draw points. Long haulage distances. Adverse grades. Little or no idle time.
- Medium: Steady loading cycle. Medium haulage distances. Well maintained roads. Adverse grades. Frequent periods of idling.
- Low: Intermittent load cycle. Loading well broken, low density ore and waste. Short haulage distances. Long periods of idle time.

**RIGID FRAME TRUCKS**

Model	Low		Medium		High	
	liter	U.S. gal	liter	U.S. gal	liter	U.S. gal
69D Dump	20.8-30.3	5.5-8	30.3-40	8-10.5	40-68	10.5-14
69D Ejector	20.8-30.3	5.5-8	30.3-40	8-10.5	40-68	10.5-14
73D Dump	22.7-32.2	6-8.5	36-53	9.5-14	53-68	14-18

**LOAD FACTOR GUIDE**

- High: 40%-50%
  - Medium: 30%-40%
  - Low: 20%-30%
- } Refer to ECM Load Factor

9 LUBE OILS, FILTERS, GREASE

(Line Item 9 and Subsection 9A)

Hourly costs of lube oils and grease can be approximately estimated by taking consumptions from the table below and applying local prices.

See the page following these tables for instructions on how to estimate local hourly filter costs.

**NOTE:** These figures are based upon machines operating in ideal conditions without *loss* of lubricants. They were computed by dividing recommended change intervals (in hours) into tank capacity. Make-up quantities are *not* included in these computations.

**APPROXIMATE HOURLY CONSUMPTION OF LUBRICANTS**  
(When operating in heavy dust, deep mud or water, increase the quantities by 25%.)

Model	Crankcase		Transmission		Final Drives		Hydraulic Control		Lubricant Changes*	Grease Fittings**
	liter	U.S. gal	liter	U.S. gal	liter	U.S. gal	liter	U.S. gal		
<b>Track-Type Tractors</b>										
D3C/D4C Series III	0.045	<b>0.012</b>	0.011	<b>0.003</b>	0.009	<b>0.002</b>	0.015	<b>0.004</b>	16	320
D5C Series III	0.045	<b>0.012</b>	0.011	<b>0.003</b>	0.012	<b>0.003</b>	0.015	<b>0.004</b>	16	320
D4E	0.076	<b>0.020</b>	0.039	<b>0.010</b>	0.018	<b>0.005</b>	0.011	<b>0.003</b>	11	864
D5M	0.076	<b>0.020</b>	0.120	<b>0.032</b>	0.006	<b>0.002</b>	0.018	<b>0.005</b>	12	336
D5B	0.108	<b>0.029</b>	0.076	<b>0.020</b>	0.022	<b>0.006</b>	0.024	<b>0.006</b>	9	916
D6M	0.104	<b>0.027</b>	0.120	<b>0.032</b>	0.007	<b>0.002</b>	0.015	<b>0.004</b>	11	152
D6G	0.108	<b>0.029</b>	0.095	<b>0.025</b>	0.038	<b>0.010</b>	0.025	<b>0.006</b>	12	132
D6R	0.110	<b>0.029</b>	0.148	<b>0.039</b>	0.014	<b>0.004</b>	0.040	<b>0.011</b>	13	32
D7G	0.110	<b>0.029</b>	0.070	<b>0.019</b>	0.034	<b>0.009</b>	0.046	<b>0.012</b>	14	560
D7R	0.110	<b>0.029</b>	0.178	<b>0.047</b>	0.013	<b>0.003</b>	0.030	<b>0.007</b>	10	20
D8R	0.130	<b>0.034</b>	0.144	<b>0.038</b>	0.014	<b>0.004</b>	0.036	<b>0.010</b>	13.7	580
D9R	0.182	<b>0.048</b>	0.164	<b>0.043</b>	0.015	<b>0.004</b>	0.039	<b>0.010</b>	13.3	580
D10R	0.272	<b>0.072</b>	0.189	<b>0.050</b>	0.023	<b>0.006</b>	0.054	<b>0.014</b>	13.3	628
D11R	0.424	<b>0.112</b>	0.344	<b>0.091</b>	0.030	<b>0.008</b>	0.106	<b>0.028</b>	13.3	816
<b>Agricultural Tractors</b>										
D4E SR	0.038	<b>0.010</b>	0.039	<b>0.010</b>	0.018	<b>0.005</b>	0.011	<b>0.003</b>	11	864
D6G SR	0.109	<b>0.029</b>	0.045	<b>0.012</b>	0.038	<b>0.010</b>	0.024	<b>0.006</b>	13	428
Challenger 35	0.130	<b>0.034</b>	0.121	<b>0.032</b>	***	***	***	***	10	160
Challenger 45	0.130	<b>0.034</b>	0.121	<b>0.032</b>	***	***	***	***	10	160
Challenger 55	0.130	<b>0.034</b>	0.121	<b>0.032</b>	***	***	***	***	10	160
Challenger 65E	0.104	<b>0.027</b>	0.055	<b>0.015</b>	0.197	<b>0.052</b>	0.110	<b>0.029</b>	14	12
Challenger 75E	0.136	<b>0.036</b>	0.055	<b>0.015</b>	0.197	<b>0.052</b>	0.120	<b>0.032</b>	14	12
Challenger 85E	0.136	<b>0.036</b>	0.055	<b>0.015</b>	0.197	<b>0.052</b>	0.120	<b>0.032</b>	14	12
Challenger 95E	0.136	<b>0.036</b>	0.055	<b>0.015</b>	0.197	<b>0.052</b>	0.120	<b>0.032</b>	14	12
<b>Motor Graders</b>										
120H	0.092	<b>0.024</b>	0.047	<b>0.012</b>	0.049	<b>0.013</b>	0.019	<b>0.005</b>	12	876
135H	0.092	<b>0.024</b>	0.047	<b>0.012</b>	0.061	<b>0.016</b>	0.019	<b>0.005</b>	12	876
12H	0.108	<b>0.029</b>	0.047	<b>0.012</b>	0.065	<b>0.017</b>	0.019	<b>0.005</b>	12	876
140H	0.108	<b>0.029</b>	0.047	<b>0.012</b>	0.065	<b>0.017</b>	0.019	<b>0.005</b>	12	876
143H	0.108	<b>0.029</b>	0.047	<b>0.012</b>	0.065	<b>0.017</b>	0.019	<b>0.005</b>	12	876
160H	0.108	<b>0.029</b>	0.047	<b>0.012</b>	0.080	<b>0.021</b>	0.019	<b>0.005</b>	12	876
163H	0.108	<b>0.029</b>	0.047	<b>0.012</b>	0.080	<b>0.021</b>	0.019	<b>0.005</b>	12	876
14H	0.108	<b>0.029</b>	0.083	<b>0.022</b>	0.098	<b>0.026</b>	0.032	<b>0.015</b>	12	916
16H	0.136	<b>0.036</b>	0.140	<b>0.037</b>	0.121	<b>0.032</b>	0.032	<b>0.015</b>	12	916
24H	0.272	<b>0.072</b>	0.224	<b>0.060</b>	0.330	<b>0.087</b>	0.127	<b>0.034</b>	20	2056

\*Total number of lubricant changes (crankcase, transmission, final drives and hydraulic) over a 2000 hour period. Total may vary depending upon the sulfur content of your diesel fuel. Always consult your machine's Lube and Maintenance Guide.

\*\*Total number of grease fittings you can expect to service over a 2000 hour period. Total can vary depending upon how your machine is equipped.

\*\*\*Common sump with transmission.

**APPROXIMATE HOURLY CONSUMPTION OF LUBRICANTS**

Model	Crankcase		Transmission†		Final Drives††		Hydraulic Control		Lubricant Changes*	Grease Fittings**
	liter	U.S. gal	liter	U.S. gal	liter	U.S. gal	liter	U.S. gal		
<b>Excavators &amp; Front Shovels</b>										
301.5	NA		NA		NA		NA		NA	NA
302.5	NA		NA		NA		NA		NA	NA
307B	0.032	<b>0.008</b>	—	—	0.003	<b>0.001</b>	0.047	<b>0.012</b>	15	969
307B SB	0.032	<b>0.008</b>	—	—	0.003	<b>0.001</b>	0.047	<b>0.012</b>	15	1067
311B	0.059	<b>0.016</b>	—	—	0.005	<b>0.001</b>	0.079	<b>0.021</b>	15	863
312B	0.059	<b>0.016</b>	—	—	0.005	<b>0.001</b>	0.081	<b>0.021</b>	15	863
312B L	0.060	<b>0.016</b>	—	—	0.005	<b>0.001</b>	0.094	<b>0.025</b>	15	863
312B/312B L (France)	0.017	<b>0.004</b>	—	—	0.005	<b>0.001</b>	0.076	<b>0.020</b>	11	863
313B CR	0.077	<b>0.020</b>	—	—	0.005	<b>0.001</b>	0.095	<b>0.025</b>	15	863
315B	0.059	<b>0.016</b>	—	—	0.005	<b>0.001</b>	0.094	<b>0.025</b>	15	912
315B L (France)	0.034	<b>0.009</b>	—	—	0.006	<b>0.001</b>	0.094	<b>0.025</b>	14	912
317B L/317B LN	0.059	<b>0.016</b>	—	—	0.005	<b>0.001</b>	0.094	<b>0.025</b>	15	912
318B L/318B LN	0.059	<b>0.016</b>	—	—	0.005	<b>0.001</b>	0.094	<b>0.025</b>	15	912
M312	0.034	<b>0.009</b>	0.03	<b>0.008</b>	0.008	<b>0.002</b>	0.058	<b>0.015</b>	17	1088
M315	0.034	<b>0.009</b>	0.03	<b>0.008</b>	0.008	<b>0.002</b>	0.058	<b>0.015</b>	17	1088
M318	0.080	<b>0.021</b>	0.03	<b>0.008</b>	0.008	<b>0.002</b>	0.067	<b>0.018</b>	17	1088
M320	0.080	<b>0.021</b>	0.03	<b>0.008</b>	0.008	<b>0.002</b>	0.067	<b>0.018</b>	17	1088
320C	0.060	<b>0.016</b>	—	—	0.020	<b>0.005</b>	0.100	<b>0.026</b>	10	368
322B	0.086	<b>0.023</b>	—	—	0.020	<b>0.005</b>	0.133	<b>0.035</b>	14	910
325B	0.080	<b>0.021</b>	—	—	0.016	<b>0.004</b>	0.155	<b>0.041</b>	14	910
330B	0.120	<b>0.032</b>	—	—	0.030	<b>0.007</b>	0.200	<b>0.053</b>	14	926
345B Series II	0.120	<b>0.032</b>	—	—	0.026	<b>0.007</b>	0.265	<b>0.070</b>	14	926
365B	0.120	<b>0.032</b>	—	—	0.030	<b>0.007</b>	0.335	<b>0.089</b>	14	924
375	0.260	<b>0.069</b>	—	—	0.050	<b>0.013</b>	0.498	<b>0.132</b>	14	1991
5080 FS	0.260	<b>0.069</b>	—	—	0.050	<b>0.013</b>	0.498	<b>0.132</b>	11	1492
5110B ME	0.244	<b>0.064</b>	—	—	0.056	<b>0.0146</b>	0.540	<b>0.143</b>	14	Auto Lube*
5130B FS	0.250	<b>0.066</b>	0.077	<b>0.020</b>	0.392	<b>0.103</b>	0.600	<b>0.159</b>	20	Auto Lube*
5130B ME	0.250	<b>0.066</b>	0.077	<b>0.020</b>	0.392	<b>0.103</b>	0.600	<b>0.159</b>	20	2800 + Auto Lube*
5230 FS	0.864	<b>0.228</b>	0.090	<b>0.024</b>	0.499	<b>0.131</b>	0.830	<b>0.169</b>	22	Auto Lube*
5230 ME	0.864	<b>0.228</b>	0.090	<b>0.024</b>	0.499	<b>0.131</b>	0.830	<b>0.169</b>	22	2800 + Auto Lube*

\*Total number of lubricant changes (crankcase, transmission, final drives and hydraulic) over a 2000 hour period. Total may vary depending upon the sulfur content of your diesel fuel. Always consult your machine's Lube and Maintenance Guide.

\*\*The number shown here refers to the total number of grease fittings you can expect to service over a 2000 hour period. Total can vary depending upon how your machine is equipped.

†Includes hydraulic pump drive (Excavators).

††Includes travel drives and swing drive (Excavators).

NOTE: ME includes manual hose reel for bucket pin lube.

**AUTO LUBE\* APPROXIMATE HOURLY CONSUMPTION OF GREASE**

Model	Kg/hr Grease	lb/hr Grease	Grease Canister Refills*	Auto Lube Interval (minutes)	Number Of Injectors	Grease Canister Size (lb)
5110B ME	0.14	0.33	6	10	21	120
5130B FS	0.34	0.75	13	10	48	120
5130B ME	0.27	0.60	10	10	36	120
5230 FS	0.47	1.04	5	10	48	400
5230 ME	0.33	0.73	4	10	38	400

\*Total number of times you can expect to refill the auto lube grease canister in a 2000 hour period.

NOTE: These figures are based on auto lube system as set from the factory.

APPROXIMATE HOURLY CONSUMPTION OF LUBRICANTS

Model	Crankcase		Transmission		Final Drives		Hydraulic Control		Lubricant Changes*	Grease Fittings**
	liter	U.S. gal	liter	U.S. gal	liter	U.S. gal	liter	U.S. gal		
<b>Backhoe Loaders</b>										
416C	0.017	<b>0.004</b>	0.010	<b>0.002</b>	0.018	<b>0.005</b>	0.015	<b>0.004</b>	11	8012
426C	0.017	<b>0.004</b>	0.010	<b>0.002</b>	0.018	<b>0.005</b>	0.015	<b>0.004</b>	11	8012
428C	0.017	<b>0.004</b>	0.010	<b>0.002</b>	0.018	<b>0.005</b>	0.015	<b>0.004</b>	11	8012
436C	0.017	<b>0.004</b>	0.010	<b>0.002</b>	0.018	<b>0.005</b>	0.015	<b>0.004</b>	11	8012
438C	0.017	<b>0.004</b>	0.010	<b>0.002</b>	0.018	<b>0.005</b>	0.015	<b>0.004</b>	11	8012
446B	0.027	<b>0.006</b>	0.026	<b>0.005</b>	0.029	<b>0.008</b>	0.022	<b>0.006</b>	11	8092
<b>Forest Products</b>										
525B	0.076	<b>0.020</b>	0.053	<b>0.014</b>	0.045	<b>0.012</b>	0.034	<b>0.009</b>	13	2436
535B	***	***	***	***	***	***	***	***	***	***
545	***	***	***	***	***	***	***	***	***	***
517	0.034	<b>0.009</b>	0.117	<b>0.031</b>	0.014	<b>0.003</b>	0.023	<b>0.006</b>	12	2336
527	0.044	<b>0.011</b>	0.132	<b>0.034</b>	0.014	<b>0.003</b>	0.034	<b>0.009</b>	11	2152
550	***	***	***	***	***	***	***	***	***	***
570	***	***	***	***	***	***	***	***	***	***
580	***	***	***	***	***	***	***	***	***	***
554	***	***	***	***	***	***	***	***	***	***
574	***	***	***	***	***	***	***	***	***	***
320C FM	***	***	***	***	***	***	***	***	***	***
539	***	***	***	***	***	***	***	***	***	***
<b>Pipelayers</b>										
561M	0.102	<b>0.027</b>	0.106	<b>0.028</b>	0.006	<b>0.002</b>	0.030	<b>0.008</b>	16	3400
572R	0.132	<b>0.035</b>	0.117	<b>0.031</b>	0.038	<b>0.010</b>	0.072	<b>0.019</b>	13	3632
583R	0.132	<b>0.035</b>	0.155	<b>0.041</b>	0.011	<b>0.003</b>	0.083	<b>0.022</b>	14	2268
589	0.171	<b>0.045</b>	0.167	<b>0.044</b>	0.023	<b>0.006</b>	0.114	<b>0.030</b>	16	2464
<b>Wheel-Tractor Scrapers</b>										
613C Series II	0.104	<b>0.027</b>	0.035	<b>0.009</b>	0.015	<b>0.004</b>	0.049	<b>0.013</b>	12	5808
611	0.108	<b>0.028</b>	0.036	<b>0.009</b>	0.031	<b>0.008</b>	0.080	<b>0.021</b>	12	5168
615C Series II	0.104	<b>0.027</b>	0.035	<b>0.009</b>	0.015	<b>0.004</b>	0.049	<b>0.013</b>	12	9404
621G	0.108	<b>0.028</b>	0.140	<b>0.036</b>	0.080	<b>0.021</b>	0.066	<b>0.017</b>	12	1224
623G	0.108	<b>0.028</b>	0.140	<b>0.036</b>	0.080	<b>0.021</b>	0.066	<b>0.017</b>	12	1884
627G	0.216	<b>0.056</b>	0.212	<b>0.055</b>	0.104	<b>0.027</b>	0.095	<b>0.025</b>	23	1224
631E Series II	0.180	<b>0.047</b>	0.127	<b>0.033</b>	0.093	<b>0.024</b>	0.095	<b>0.025</b>	12	1368
637E Series II	0.288	<b>0.075</b>	0.176	<b>0.046</b>	0.124	<b>0.032</b>	0.095	<b>0.025</b>	23	1368
651E	0.272	<b>0.071</b>	0.138	<b>0.036</b>	0.098	<b>0.025</b>	0.095	<b>0.025</b>	12	1368
657E	0.452	<b>0.118</b>	0.259	<b>0.067</b>	0.211	<b>0.055</b>	0.095	<b>0.025</b>	23	1368

\*Total number of lubricant changes (crankcase, transmission, final drives and hydraulic) over a 2000 hour period. Total may vary depending upon the sulfur content of your diesel fuel. Always consult your machine's Lube and Maintenance Guide.

\*\*Total number of grease fittings you can expect to service over a 2000 hour period. Total can vary depending upon how your machine is equipped.

\*\*\*Insufficient data.

NOTE: Lubricant changes shown for the tandem powered 627G, 637E Series II and 657E include both tractor and scraper engines.

**APPROXIMATE HOURLY CONSUMPTION OF LUBRICANTS**

Model	Crankcase		Transmission		Final Drives†		Hydraulic Control††		Lubricant Changes*	Grease Fittings**
	liter	U.S. gal	liter	U.S. gal	liter	U.S. gal	liter	U.S. gal		
<b>Construction/Mining Trucks/Tractors</b>										
769D	0.182	<b>0.048</b>	0.083	<b>0.022</b>	0.083	<b>0.022</b>	0.276	<b>0.073</b>	20	552
771D	0.182	<b>0.048</b>	0.083	<b>0.022</b>	0.083	<b>0.022</b>	0.276	<b>0.073</b>	20	552
773D	0.273	<b>0.072</b>	0.083	<b>0.022</b>	0.155	<b>0.041</b>	0.276	<b>0.073</b>	20	552
775D	0.273	<b>0.072</b>	0.083	<b>0.022</b>	0.155	<b>0.041</b>	0.276	<b>0.073</b>	20	552
776D	0.500	<b>0.132</b>	0.083	<b>0.022</b>	0.326	<b>0.086</b>	0.302	<b>0.080</b>	20	1056
777D	0.500	<b>0.132</b>	0.083	<b>0.022</b>	0.326	<b>0.086</b>	0.302	<b>0.080</b>	20	632
784C	0.531	<b>0.140</b>	0.076	<b>0.020</b>	0.292	<b>0.077</b>	0.337	<b>0.101</b>	16.7	Auto Lube*
785C	0.531	<b>0.140</b>	0.076	<b>0.020</b>	0.292	<b>0.077</b>	0.337	<b>0.101</b>	16.7	Auto Lube*
789C	0.796	<b>0.210</b>	0.076	<b>0.020</b>	0.375	<b>0.099</b>	0.531	<b>0.157</b>	16.7	Auto Lube*
793C	0.584	<b>0.154</b>	0.076	<b>0.020</b>	0.445	<b>0.118</b>	0.580	<b>0.170</b>	12.7	Auto Lube*
797	0.910	<b>0.240</b>	0.629	<b>0.166</b>	0.587	<b>0.155</b>	0.921	<b>0.243</b>	14.3	Auto Lube*

\*Total number of lubricant changes (crankcase, transmission, final drives and hydraulic) over a 2000 hour period. Total may vary depending upon the sulfur content of your diesel fuel. Always consult your machine's Lube and Maintenance Guide.  
 \*\*Total number of grease fittings you can expect to service over a 2000 hour period. Total can vary depending upon how your machine is equipped.  
 †Includes differential.  
 ††Includes brakes, converter hoist system and steering system.

**AUTO LUBE\* APPROXIMATE HOURLY CONSUMPTION OF GREASE**

Model	Kg/hr Grease	lb/hr Grease	Grease Canister Refills*	Auto Lube Interval (minutes)	Number Of Injectors	Grease Canister Size (lb)
784C/785C	0.022	0.010	1	60	27	60
789C	0.022	0.010	1	60	27	60
793C	0.023	0.011	1	60	29	60
797	0.045	0.020	2	60	18	60

\*Total number of times you can expect to refill the auto lube grease canister in a 2000 hour period.  
 NOTE: These figures are based on auto lube system as set from the factory.

**APPROXIMATE HOURLY CONSUMPTION OF LUBRICANTS**

Model	Crankcase		Transmission		Final Drives		Hydraulic Control		Lubricant Changes*	Grease Fittings**
	liter	U.S. gal	liter	U.S. gal	liter	U.S. gal	liter	U.S. gal		
<b>Underground Articulated Trucks</b>										
AE40 Series II	0.182	<b>0.048</b>	0.085	<b>0.022</b>	0.095	<b>0.025</b>	0.584	<b>0.154</b>	18	5200
AD45	***	***	***	***	***	***	***	***	***	***
AD55	***	***	***	***	***	***	***	***	***	***
<b>L.H.D.s</b>										
R1300	0.100	<b>0.026</b>	0.045	<b>0.012</b>	0.080	<b>0.021</b>	0.044	<b>0.011</b>	13	3888
R1600	0.112	<b>0.029</b>	0.036	<b>0.009</b>	0.140	<b>0.037</b>	0.061	<b>0.016</b>	13	4288
R1700G	0.112	<b>0.029</b>	0.036	<b>0.036</b>	0.142	<b>0.037</b>	0.132	<b>0.035</b>	13	4288
R2900	0.152	<b>0.010</b>	0.062	<b>0.165</b>	0.246	<b>0.680</b>	0.130	<b>0.345</b>	13	4296
<b>Underground Rigid Trucks</b>										
69D – Dumper	0.182	<b>0.048</b>	0.083	<b>0.022</b>	0.083	<b>0.022</b>	0.276	<b>0.073</b>	20	552
69D – Ejector	0.182	<b>0.048</b>	0.083	<b>0.022</b>	0.083	<b>0.022</b>	0.276	<b>0.073</b>	20	552
73D – Dumper	0.273	<b>0.072</b>	0.083	<b>0.022</b>	0.155	<b>0.041</b>	0.276	<b>0.073</b>	20	552

\*Total number of lubricant changes (crankcase, transmission, final drives and hydraulic) over a 2000 hour period.  
 \*\*Total number of grease fittings you can expect to service over a 2000 hour period.  
 \*\*\*Insufficient data.

APPROXIMATE HOURLY CONSUMPTION OF LUBRICANTS

Model	Crankcase		Transmission		Final Drives†		Hydraulic Control		Lubricant Changes*	Grease Fittings**
	liter	U.S. gal	liter	U.S. gal	liter	U.S. gal	liter	U.S. gal		
<b>Articulated Trucks</b>										
D25D	0.136	<b>0.036</b>	0.038	<b>0.010</b>	0.068	<b>0.018</b>	0.100	<b>0.026</b>	15	2488
D30D	0.136	<b>0.036</b>	0.038	<b>0.010</b>	0.068	<b>0.018</b>	0.100	<b>0.026</b>	15	3688
725	0.062	<b>0.016</b>	0.036	<b>0.010</b>	0.065	<b>0.017</b>	0.038	<b>0.010</b>	19	4600
730	0.062	<b>0.016</b>	0.036	<b>0.010</b>	0.065	<b>0.017</b>	0.038	<b>0.010</b>	19	4600
D350E Series II	0.136	<b>0.036</b>	0.055	<b>0.015</b>	0.227	<b>0.060</b>	0.125	<b>0.033</b>	17	2816
D400E Series II	0.136	<b>0.036</b>	0.055	<b>0.015</b>	0.236	<b>0.062</b>	0.125	<b>0.033</b>	17	2816
D400E Series II Ejector	0.136	<b>0.036</b>	0.055	<b>0.015</b>	0.236	<b>0.062</b>	0.163	<b>0.043</b>	17	4016
<b>Wheel Tractors &amp; Compactors</b>										
814F	0.112	<b>0.029</b>	0.059	<b>0.015</b>	0.033	<b>0.008</b>	0.043	<b>0.011</b>	12	190
815F	0.112	<b>0.029</b>	0.059	<b>0.015</b>	0.033	<b>0.008</b>	0.043	<b>0.011</b>	12	190
816F	0.112	<b>0.029</b>	0.059	<b>0.015</b>	0.033	<b>0.008</b>	0.043	<b>0.011</b>	12	190
824G	0.136	<b>0.036</b>	0.062	<b>0.016</b>	0.045	<b>0.011</b>	0.044	<b>0.011</b>	12	136
825G	0.136	<b>0.036</b>	0.062	<b>0.016</b>	0.045	<b>0.011</b>	0.044	<b>0.011</b>	12	136
826G	0.136	<b>0.036</b>	0.062	<b>0.016</b>	0.045	<b>0.011</b>	0.044	<b>0.011</b>	12	136
834G	0.120	<b>0.032</b>	0.083	<b>0.022</b>	0.073	<b>0.019</b>	0.071	<b>0.019</b>	8	182
836G	0.120	<b>0.032</b>	0.083	<b>0.022</b>	0.073	<b>0.019</b>	0.071	<b>0.019</b>	8	146
844	0.288	<b>0.075</b>	0.070	<b>0.018</b>	0.218	<b>0.057</b>	0.152	<b>0.040</b>	15	266
854G	0.408	<b>0.108</b>	0.169	<b>0.045</b>	0.353	<b>0.093</b>	0.243	<b>0.054</b>	15	76
<b>Wheel Loaders &amp; Integrated Toolcarriers</b>										
902	***	***	***	***	***	***	***	***	***	***
906	***	***	***	***	***	***	***	***	***	***
908	***	***	***	***	***	***	***	***	***	***
914G	0.014	<b>0.004</b>	0.069	<b>0.018</b>	0.013	<b>0.004</b>	—	—	7	600
IT14G	0.014	<b>0.004</b>	0.069	<b>0.018</b>	0.013	<b>0.004</b>	—	—	7	600
924F	0.040	<b>0.010</b>	0.023	<b>0.006</b>	0.020	<b>0.006</b>	0.026	<b>0.007</b>	12	504
IT24F	0.040	<b>0.010</b>	0.023	<b>0.006</b>	0.020	<b>0.006</b>	0.026	<b>0.007</b>	12	484
928G	0.080	<b>0.021</b>	0.034	<b>0.009</b>	0.026	<b>0.007</b>	0.035	<b>0.009</b>	12	444
IT28G	0.080	<b>0.021</b>	0.034	<b>0.009</b>	0.026	<b>0.007</b>	0.035	<b>0.009</b>	12	784
938G	0.080	<b>0.021</b>	0.030	<b>0.008</b>	0.026	<b>0.007</b>	0.045	<b>0.012</b>	13	464
IT38G	0.080	<b>0.021</b>	0.030	<b>0.008</b>	0.026	<b>0.007</b>	0.045	<b>0.012</b>	13	464
950G	0.120	<b>0.032</b>	0.034	<b>0.009</b>	0.036	<b>0.010</b>	0.076	<b>0.020</b>	13	444
962G, IT62G	0.120	<b>0.032</b>	0.034	<b>0.009</b>	0.036	<b>0.010</b>	0.076	<b>0.020</b>	13	444
966G	0.112	<b>0.030</b>	0.050	<b>0.013</b>	0.064	<b>0.017</b>	0.104	<b>0.027</b>	13	464
972G	0.112	<b>0.030</b>	0.050	<b>0.013</b>	0.064	<b>0.017</b>	0.104	<b>0.027</b>	13	464
980G	0.112	<b>0.030</b>	0.062	<b>0.016</b>	0.084	<b>0.022</b>	0.104	<b>0.027</b>	13	774
988G	0.240	<b>0.064</b>	0.070	<b>0.018</b>	0.146	<b>0.039</b>	0.134	<b>0.035</b>	13	2526
990 Series II	0.288	<b>0.075</b>	0.070	<b>0.018</b>	0.218	<b>0.057</b>	0.152	<b>0.040</b>	15	266
992G	0.408	<b>0.108</b>	0.169	<b>0.045</b>	0.353	<b>0.093</b>	0.243	<b>0.054</b>	15	76
994D	0.800	<b>0.208</b>	0.291	<b>0.076</b>	0.621	<b>0.164</b>	0.450	<b>0.119</b>	17	3694
<b>Telehandlers</b>										
TH62	0.016	<b>0.004</b>	0.030	<b>0.008</b>	0.008	<b>0.002</b>	0.095	<b>0.025</b>	14	1760
TH63	0.016	<b>0.004</b>	0.030	<b>0.008</b>	0.008	<b>0.002</b>	0.095	<b>0.025</b>	14	2000
TH82	0.016	<b>0.004</b>	0.030	<b>0.008</b>	0.008	<b>0.002</b>	0.095	<b>0.025</b>	14	1760
TH83	0.016	<b>0.004</b>	0.030	<b>0.008</b>	0.008	<b>0.002</b>	0.095	<b>0.025</b>	14	2000
TH103	0.016	<b>0.004</b>	0.030	<b>0.008</b>	0.008	<b>0.002</b>	0.095	<b>0.025</b>	14	2000
<b>Track Loaders</b>										
933C	0.048	<b>0.012</b>	0.014	<b>0.004</b>	0.008	<b>0.002</b>	0.026	<b>0.007</b>	14	720
939C	0.049	<b>0.013</b>	0.015	<b>0.004</b>	0.008	<b>0.002</b>	0.026	<b>0.007</b>	16	720
953C	0.084	<b>0.022</b>	0.054	<b>0.014</b>	0.015	<b>0.004</b>	****	****	9	732
963C	0.084	<b>0.022</b>	0.072	<b>0.018</b>	0.015	<b>0.004</b>	****	****	9	332
973C	0.110	<b>0.029</b>	0.019	<b>0.005</b>	0.029	<b>0.008</b>	0.030	<b>0.008</b>	11	400

\*Total number of lubricant changes (crankcase, transmission, final drives and hydraulic) over a 2000 hour period (500 for 834G & 836G). Total may vary depending upon the sulfur content of your diesel fuel. Always consult your machine's Lube and Maintenance Guide.

\*\*The number shown here refers to the total number of grease fittings you can expect to service over a 2000 hour period. Total can vary depending upon how your machine is equipped.

\*\*\*Insufficient data.

\*\*\*\*Included with hydrostatic drive.

†Includes differential (Wheel Loaders, Integrated Toolcarriers and Articulated Trucks).

**GUIDE FOR ESTIMATING LOCAL HOURLY COST OF FILTERS**

The approximate hourly filter costs were determined by using the following formula:

Filters	Change Interval*	#Filters	Cost**	#Filters/2000 hr.	Total Cost
Engine	250 hr.	_____	\$ _____	_____	\$ _____
Transmission	500	_____	_____	_____	_____
Hydraulic	500	_____	_____	_____	_____
Fuel — primary	2000	_____	_____	_____	_____
— final	500	_____	_____	_____	_____
Air — primary	2000	_____	_____	_____	_____
— secondary	1000	_____	_____	_____	_____
Total Filter					_____
Cost/2000 hr. = \$ _____					

Total Cost \$ \_\_\_\_\_ ÷ 2000 hr. = \$ \_\_\_\_\_ Hourly Filter Cost.

\*Recommended change interval may vary with machine and sulfur content of diesel fuel. Always consult Lube & Maintenance Guide.  
\*\*Cost of filter is suggested consumer list price. For the small excavators and the 613C, we assumed an average of \$6.50 per filter.

**NOTE:** The approximate hourly filter costs do not include labor. To determine your labor cost you can apply your hourly labor rate to 5 minutes per each filter change. For example, if your labor rate is \$50.00 per hour then your labor cost for one filter change would be \$4.17.

Model	Approx. Hourly Filter Cost	Filters	Model	Approx. Hourly Filter Cost	Filters
<b>Track-Type Tractors</b>			<b>Agricultural Tractors</b>		
D3C Series III	0.08	23	D4E SR	0.09	23
D4C Series III	0.08	23	D6G SR	0.12	27
D5C Series III	0.08	23	Challenger 35	0.31	37
D4E	0.09	23	Challenger 45	0.31	37
D5M	0.25	35	Challenger 55	0.31	37
D5B	0.11	26	Challenger 65E	0.63	36
D6M	0.27	35	Challenger 75E	0.63	36
D6G	0.09	24	Challenger 85E	0.72	36
D6R	0.13	24	Challenger 95E	0.72	36
D7G	0.10	24	<b>Motor Graders</b>		
D7R	0.08	24	120H	0.16	26
D8R	0.35	33	135H	0.16	26
D9R	0.47	51	12H	0.12	22
D10R	0.52	47	140H	0.12	22
D11R	0.62	53	143H	0.19	26
			160H	0.12	22
			163H	0.19	26
			14H	0.12	22
			16H	0.16	22
			24H	0.67	58

Model	Approx. Hourly Filter Cost	Filters	Model	Approx. Hourly Filter Cost	Filters
<b>Backhoe Loaders</b>			<b>Telehandlers</b>		
416C	0.16	16	TH62	0.29	22
426C	0.16	16	TH63	0.29	22
428C	0.16	16	TH82	0.29	22
436C	0.16	16	TH83	0.29	22
438C	0.16	16	TH103	0.29	22
446B	0.17	16	<b>Articulated Trucks</b>		
<b>Forest Products</b>			D25D	0.19	32
525B	0.21	30	D30D	0.19	32
535B	*	*	725	0.37	26
545	*	*	730	0.37	26
517	0.09	24	D350E Series II	0.50	44
527	0.10	24	D400E Series II	0.57	44
550	*	*	<b>Wheel Tractors &amp; Compactors</b>		
570	*	*	814F	0.13	28
580	*	*	815F, 816F	0.14	28
554	*	*	824G, 825G		
574	*	*	826G	0.18	28
320C FM	*	*	834G	0.26	36
539	*	*	844	0.11	40
<b>Pipelayers</b>			854G	0.13	29
561M	0.25	35	836G	0.11	32
572R	0.20	27	<b>Wheel Loaders &amp; Integrated Toolcarriers</b>		
583R	0.31	33	902	*	*
589	0.39	43	906	*	*
<b>5000 Series</b>			908	*	*
5110B	*	*	914G	0.27	23
5130B	0.89	88	IT14G	0.27	23
5230	1.49	140	924F	0.15	24
<b>Wheel Tractor-Scrapers</b>			IT24F	0.15	24
613C Series II	0.14	28	928G	0.24	26
611	0.14	28	IT28G	0.24	26
615C Series II	0.17	28	938G	0.22	25
621G	0.22	28	IT38G	0.22	25
623G	0.18	24	950G	0.28	25
627G	0.29	40	962G, IT62G	0.28	25
631E Series II	0.32	40	966G	0.26	25
637E Series II	0.46	56	972G	0.26	25
651E	0.33	40	980G	0.39	37
657E	0.53	57	988G	0.44	28
<b>Construction &amp; Mining Trucks &amp; Tractors</b>			990 Series II	0.43	56
769D, 771D	0.31	43	992G	0.70	47
773D, 775D	0.32	47	994D	1.31	94
776D, 777D	0.42	50	<b>Track Loaders</b>		
784C	0.61	80	933C	0.08	28
785C	0.61	80	939C	0.08	30
789C	0.76	88	953C	0.29	34
793C	0.72	72	963C	0.31	36
797	2.09	123	973C	0.31	36

\*Insufficient data.  
◀Total number of filters changed over a 2000 hour period. Includes engine crankcase, transmission, hydraulic, fuel (primary and final) and air (primary and secondary). Some models include coolant conditioner and cab air filters. Telehandlers do not include air filters.



# Owning & Operating Costs

- ⑨ Lube Oils, Filters, Grease
- Filters

## GUIDE FOR ESTIMATING LOCAL HOURLY COST OF FILTERS

The approximate hourly filter costs were determined by using the following formula:

Filters	Interval*	Change #Filters	Cost**	#Filters/ 2000 hr.	Total Cost
Engine	250 hr.	_____	\$ _____	_____	\$ _____
Transmission	500	_____	_____	_____	_____
Hydraulic	500	_____	_____	_____	_____
Fuel — primary	2000	_____	_____	_____	_____
— final	500	_____	_____	_____	_____
Air — primary	2000	_____	_____	_____	_____
— secondary	1000	_____	_____	_____	_____
				Total Filter	
				Cost/2000 hr. = \$ _____	

Total Cost \$ \_\_\_\_\_ ÷ 2000 hr. = \$ \_\_\_\_\_ Hourly Filter Cost.

\*Recommended change interval may vary with machine and sulfur content of diesel fuel. Always consult Lube & Maintenance Guide.  
 \*\*Cost of filter is suggested consumer list price.

**NOTE:** The approximate hourly filter costs do *not* include labor. To determine your labor cost you can apply your hourly labor rate to 5 minutes per each filter change. For example, if your labor rate is \$50.00 per hour then your labor cost for one filter change would be \$4.17.

## UNDERGROUND MINING

Total Number of Filters Changed Over 2000 Hr.

Model	R1300	R1600	R1700G	R2900	AE40 II	AD45	AD55	69D	73D
<b>Filter</b>									
Engine									
Fuel	8	8	8	8	**	**	8	16	
Oil	8	8	8	8	16	**	**	16	16
Air Cleaner	12	12	12	12	12	**	**	24	24
Water Separator	2	8	8	8	2	**	**	2	2
Hydraulic	8	8	16	16	—	**	**	—	—
Brake	—	—	4	—	4	**	**	4	4
Transmission	4	4	4	4	4	**	**	4	4
Coolant	—	—	4	—	—	**	**	8	—
Pilot	—	—	—	4	4	**	**	—	—
Torque Converter	—	—	—	—	4	**	**	4	4
Steering	—	—	—	—	4	**	**	4	4
Total Number Change	40	48	64	60	58	**	**	74	74

Model	Filters◀	Model	Filters◀
301.5	**	M318	20
302.5	**	M320	20
307B/307B SB	26	320C	23
311B	29	322B	35
312B (3064)	29	325B	35
312B (3054)	27	330B	27
313B CR	26	345B Series II	27
315B	29	365B	30
315B L (3054)	30	375	48
317B	32	5080	46
318B L*	32	5110B	70
M312	14	5130B	88
M315	16	5230	140

\*France sourced. \*\*Insufficient data.  
 ◀Total number of filters changed over a 2000 hour period. Includes engine crankcase, transmission, hydraulic, fuel (primary and final) and air (primary and secondary).

## EXCAVATORS

Total Number of Filters Changed Over 2000 Hr.

Model	307B/307B SB	311B	312B (3064)	312B (3054)	313B CR	315B	315B L (3054)	317B	318B L (3046)	M312	M315	M318	M320	320C	322B	325B	330B	345B Series II	365B	375	5080
<b>Filter</b>																					
Engine																					
Fuel	5	5	5	4	5	5	4	5	5	4	4	8	8	4	4	4	4	4	4	8	8
Oil	9	9	9	5	9	9	8	9	9	8	8	8	8	4	8	8	8	8	8	8	8
Air Cleaner	1	1	1	4	1	1	4	4	4	0	0	0	0	1	1	1	1	1	4	1	0
Water Separator	—	—	—	—	—	—	—	—	—	—	—	—	—	8	8	—	—	—	—	—	—
Hydraulic																					
Return	5	3	3	3	5	3	3	3	3	1	2	2	2	3	3	3	3	3	3	15	15
Drain	—	5	5	5	—	5	5	5	5	—	—	—	—	5	5	5	5	5	5	10	10
By-Pass	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Pilot	5	5	5	5	5	5	5	5	5	1	2	2	2	5	5	5	5	5	5	5	5
Screen	1	1	1	1	1	1	1	1	1	—	—	—	—	1	1	1	1	1	1	1	—
Total Number Change	26	29	29	27	26	29	30	32	32	14	16	20	20	23	35	35	27	27	30	48	46

**10a** **TIRES**

(Line Item 10a)

Tire costs are an important part of the hourly cost of any wheel machine. The best estimate of this item is obtained when tire life figures based on experience are used with prices the machine owner actually pays for the replacement tires.

For cases in which tire experience is not available, use the following tire life estimator curves.

**Tire Life Estimators**

- Curves do not allow for additional life from recapping. They assume new tires run to destruction, but this is not necessarily recommended.
- Based on standard machine tires. Optional tires will shift these curves either up or down.
- Sudden failure (blow out) due to exceeding Ton-MPH (tkm/h) limitations is not considered. Nor are premature failures due to puncture.
- Application Zones:

*Zone A:* almost all tires actually wear through the tread from abrasion.


*Zone B:* tires wear out normally but others fail prematurely due to rock cuts, impacts and non-repairable punctures.

*Zone C:* few, if any, tires wear through the tread due to non-repairable damages, usually from rock cuts, impacts and continuous overloading.


**NOTE:** Tire life can often be increased by using extra tread and extra deep tread tires.

**NOTE:** Premature failure could occur at any time due to puncture.


**MOTOR GRADERS**

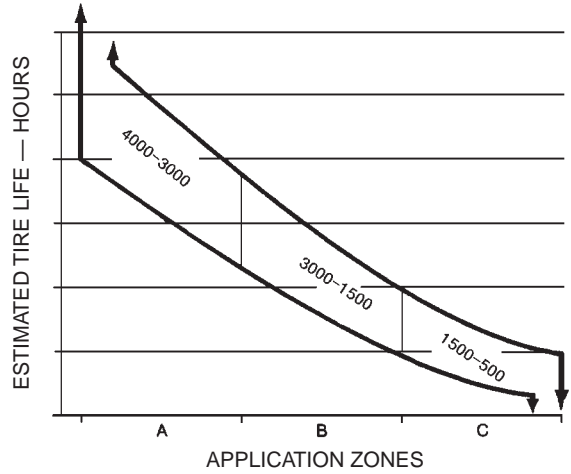


**SKIDDERS**

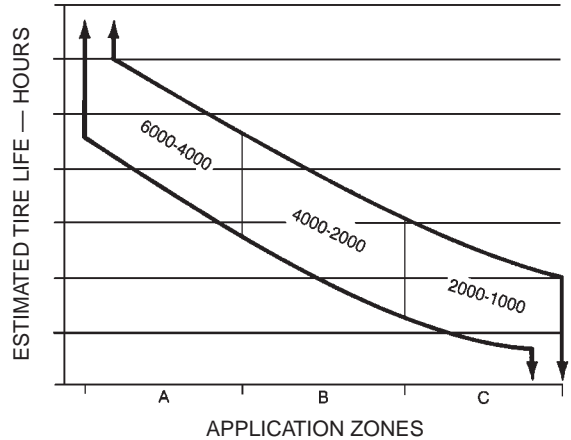


**SKID STEER LOADERS**

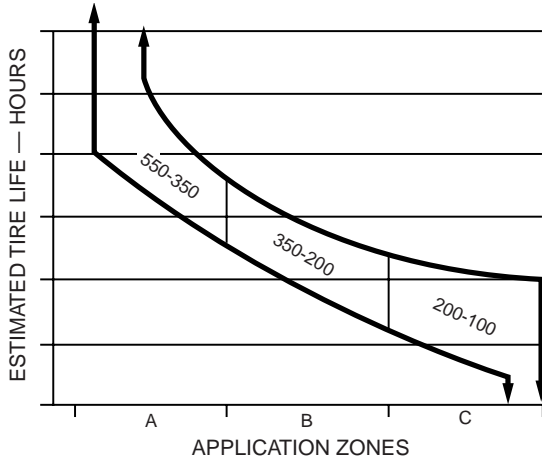


**LOAD HAUL DUMP UNITS**

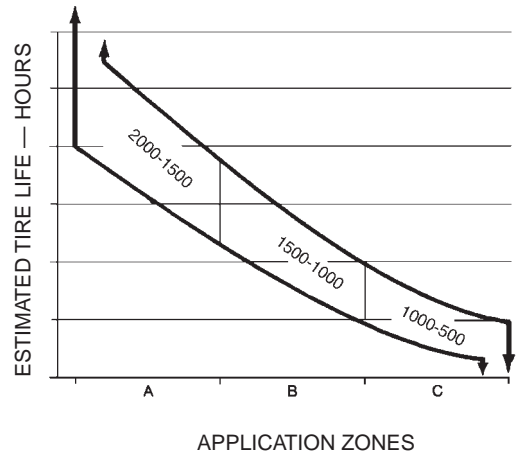

**WHEEL TRACTOR-SCRAPERS**

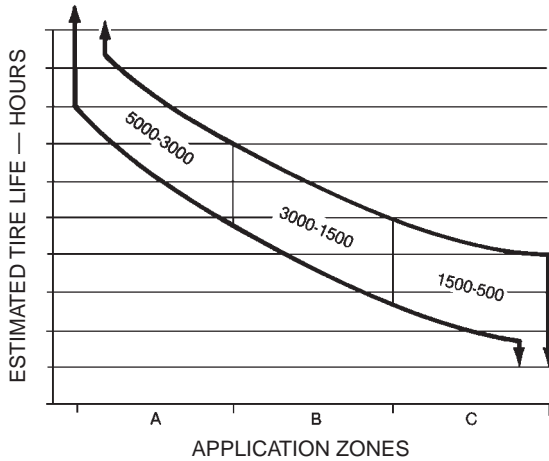


**CONSTRUCTION & MINING TRUCKS**

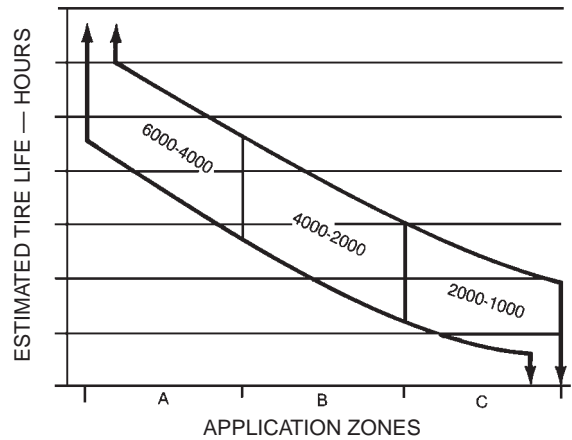


**Key:**

- Zone A — Almost all tires actually wear through the tread due to abrasion.
- Zone B — Some tires wear out normally while others fail prematurely due to rock cuts, impacts and non-repairable punctures.
- Zone C — Few, if any, tires wear through the tread because of non-repairable damages, usually from rock cuts, impacts or continuous overloading.


**UNDERGROUND TRUCKS**

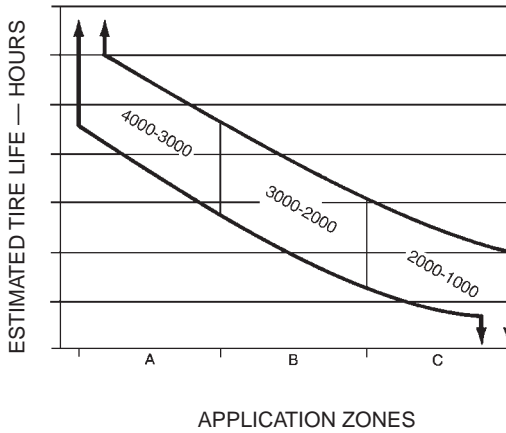


**TRACTORS/WAGONS**

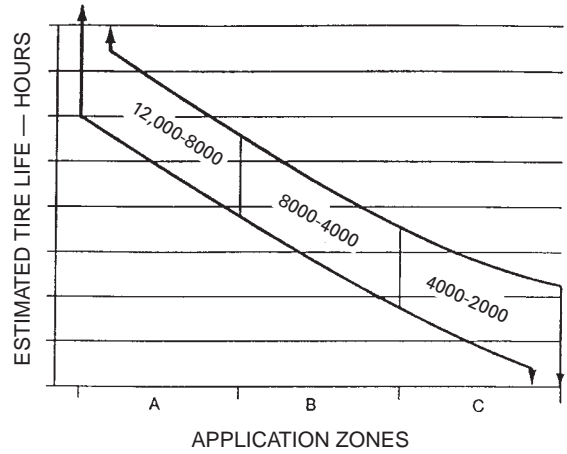

**ARTICULATED TRUCKS**

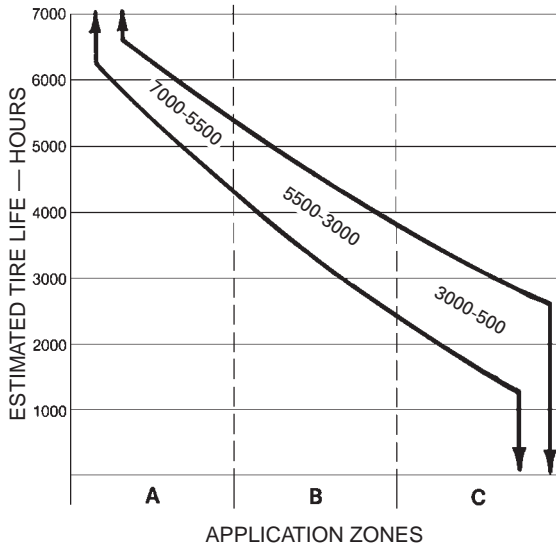

**WHEEL TRACTORS  
WHEEL LOADERS**

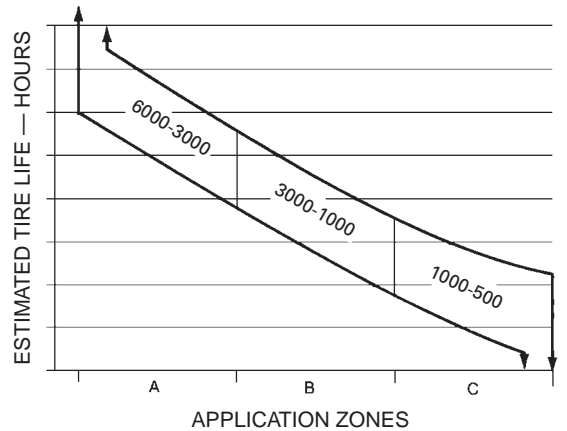

**Key:**

- Zone A — Almost all tires actually wear through the tread due to abrasion.
- Zone B — Some tires wear out normally, others fail prematurely due to rock cuts, impacts, and non-repairable punctures.
- Zone C — Few, if any, tires wear through the tread because of non-repairable damages, usually from rock cuts, impacts, or continuous overloading.

Application Tire Life	Tires Cost Per Hour - Basic Factors		
	Zone A 8000-5000	Zone B 5000-2500	Zone C 2500-500
Model			
990			
992G			
994D	\$20-\$40	\$30-\$80	\$60-\$400

**GOODYEAR LIFE ESTIMATING SYSTEM**

As an additional assist in estimating *hauling unit* tire life, Goodyear Tire and Rubber Co. has furnished the following information which is included here with their permission. READ THE PREAMBLE CAREFULLY.

“... at present, there is no completely accurate, fool-proof method of forecasting tire life. Tire engineers have many theoretical methods ... but these generally are so involved and time consuming that they are impractical for field use.

“However, the tire industry has made many surveys of tire performance and arrived at a system which can give rough *estimates* of tire life. Studies done by the major tire companies and by at least two major equipment manufacturers are in close agreement.

“The table [which follows] shows how to apply this system ...”

**ESTIMATED TIRE SERVICE LIFE OF HAULING UNITS (Trucks & Scrapers)**

No.	Condition	Factor
I	<b>Maintenance</b>	
	Excellent	1.090
	Average	0.981
	Poor	0.763
II	<b>Speeds (Maximum)</b>	
	10 mph ~ 16 km/h	1.090
	20 mph ~ 32 km/h	0.872
	30 mph ~ 48 km/h	0.763
III	<b>Surface Conditions</b>	
	Soft Earth — No Rock	1.090
	Soft Earth — Some Rock	0.981
	Well Maintained — Gravel Road	0.981
	Poorly Maintained — Gravel Road	0.763
	Blasted — Sharp Rock	0.654
IV	<b>Wheel Positions</b>	
	Trailing	1.090
	Front	0.981
	Driver (Rear Dump)	0.872
	(Bottom Dump)	0.763
	(Self Propelled Scraper)	0.654

No.	Condition	Factor
V	<b>Loads</b> (See No. VIII note)	
	T&RA/ETRTO* Recommended Loading	1.090
	20% Overload	0.872
	40% Overload	0.545
VI	<b>Curves</b>	
	None	1.090
	Medium	0.981
	Severe	0.872
VII	<b>Grades</b> (Drive Tires Only)	
	Level	1.090
	5% Max.	0.981
	15% Max.	0.763
VIII	<b>Other Miscellaneous Combinations</b> (See note below)	
	None	1.090
	Medium	0.981
	Severe	0.872
	<b>Condition VIII</b> is to be used when overloading is present in combination with one or more of the primary conditions of maintenance, speeds, surface conditions and curves. The combination of severe levels in these conditions, together with an overload, will create a new and more serious condition which will contribute to early tire failure to a larger extent than will the individual factors of each condition.	

\*Tire and Rim Association/European Tire and Rim Technical Organization.

Type of Tire	Base Average Life		
	Hours	Miles	km
E-3 Std. Bias Tread	2510	25,100	40 400
E-4 Bias Xtra Tread	3510	35,100	56 500
E-4 Radial Xtra Tread	4200	42,000	67 600

Using Base Hours (or Miles), multiply by the appropriate factor for *each* condition to obtain approximate estimated hours (or miles) as the final product.

*Example:* An off-highway truck equipped with E-4 drive tires running on a well maintained haul road having easy curves and minimum grades and receiving “average” tire maintenance attention but being 20% overloaded:

Condition: I II III IV V VI VII VIII  
 Factor: 0.981 × 0.872 × 0.981 × 0.872 × 0.872 × 0.981 × 0.981 × 0.981  
 × 3510 base hours = 2114 hours (say 2100 hours)

As can be seen, this system requires the careful application of strictly subjective judgments, and can be expected to result in conservative estimates. Keep in mind, however, **that the system is offered only as an aid in estimating and not as a rigid set of rules.**

On the other hand, if tire life on a given job is considered less than satisfactory, an analysis of these factors may point to conditions which can be improved to the betterment of tire life.

Replacement tire prices should always be obtained from local tire company sources.

Since tires are considered a wear item in this method of estimating owning and operating costs, total tire replacement cost is deducted from machine delivered price to arrive at a net figure for depreciation purposes. Outlay for tires is then included as an item in operating costs:

$$\text{Hourly Tire Cost} = \frac{\text{Replacement Cost of Tires}}{\text{Estimating Tire Life in Hours}}$$

Recapping can sometimes lower hourly tire cost. Considerations are availability of molds, local recapping costs, and experience with recap life.

**10b UNDERCARRIAGE**  
(Line Item 10b)

Undercarriage expense can be a major portion of the operating costs for track-type machines, and these costs can vary *independently* of basic machine costs. That is, the undercarriage can be employed in an extremely abrasive, high-wear environment while the basic machine may be in an essentially easy application, and vice-versa. For that reason, it is recommended that the hourly cost of undercarriage be calculated separately as a wear item rather than being included in the repair reserve for the basic machine. Notice that the repair reserves (Line Item 11) **DO NOT** include provision for undercarriage replacement.

Three primary conditions affect probable life-expectancy of track-type undercarriage:

- 1. Impact.** The most measurable effect of impact is structural — that is bending, chipping, cracking, spalling, roll-over, etc., and problems with hardware and pin and bushing retention.

*Impact ratings:*

*High* — Non-penetrable hard surfaces with 150 mm (6") or higher bumps.

*Moderate* — Partially penetrable surfaces and bumps of 75-150 mm (3-6") height.

*Low* — Completely penetrable surfaces (which provide full shoe plate support) with few bumps.

- 2. Abrasiveness.** The tendency of the underfoot materials to grind away the wear surfaces of track components.

*Abrasiveness ratings:*

*High* — Saturated wet soils containing a high proportion of hard, angular or sharp sand or rock particles.

*Moderate* — Slightly or intermittently damp soils containing a low proportion of hard, angular or sharp particles.

*Low* — Dry soils or rock containing a low proportion of hard, angular or sharp sand or rock chip particles.

Impact and abrasiveness in combination can accelerate wear rates beyond their individual effects when considered alone, thus further reducing component life. This should be taken into account in determining impact and abrasiveness ratings or, if preferred, the combination can be included in selecting the "Z" factor.

- 3. "Z" factor.** Represents the combined effect on component life of the many intangible environmental, operational and maintenance considerations on a given job.

*Environment and Terrain.* Earth which may not be abrasive itself can pack in sprocket teeth, causing interference and high stress as the teeth engage the bushings. Corrosive chemicals in the materials being moved or in the natural soil can affect wear rates, while moisture and temperature can exaggerate the effect. Temperature alone can play its own role — hot slag and hard-frozen soils being but the extremes. Constant sidehill work can increase wear on the sides of components.

*Operation.* Some operator practices tend to increase track wear and cost if not controlled on the job. Such practices include high-speed operation, particularly in reverse; tight turns or constant corrections in direction; and stalling the tractor under load forcing the tracks to slip.

*Maintenance.* Good maintenance — proper track tension, daily cleaning when working in sticky materials, etc. — combined with periodic wear measurement and timely attention to recommended services (CTS) can extend component life and lower costs by minimizing the effects of these and other adverse conditions.

While impact and abrasion should not be too difficult to judge, selection of the proper “Z” factor will require careful analysis of job conditions such as weather, tendency for soil packing, side-hill loading, corrosive environment, etc.; operational factors such as high-speed reverse, amount of travel, tight turns, track slippage under overload, etc.; and maintenance considerations such as proper tensioning, use of Custom Track Service, etc.

Selection of the “Z” multiplier is strictly a matter of judgement and common sense, but its effect on cost can be the difference between profit on a controlled job and heavy loss where control is allowed to slip. To assist in arriving at an appropriate value for the “Z” factor, consider that proper maintenance — or the lack thereof — will represent about 50% of its effect, environment and terrain 30%, and operator practices 20%. For large excavators the amount of travel is the critical part of the “Z” factor. A good operator working under good field conditions can be counterbalanced by poor maintenance practices to yield a fairly high “Z” factor. On the other hand, close attention to maintenance, tension and alignment can more than offset a bad underfoot condition resulting in severe sprocket packing, and lead to selection of a moderate to low “Z” factor. Obviously, flexibility in selection of a “Z” factor has been built into the system, and use of this flexibility is encouraged. Further, a considerable measure of control can be maintained over the “Z” factor, and any reduction of its effects is money in the bank. Your Caterpillar Dealer CTS man can be invaluable in this endeavor as well as helping you establish a comprehensive undercarriage cost control program.

**Estimating Undercarriage Cost**

The guide below gives a basic factor for the various track-type machines and a series of conditions multipliers to modify the basic cost according to the anticipated impact, abrasive and miscellaneous (“Z”) conditions under which the unit will be operating.

- Step 1. Select machine and its corresponding basic factor.
- Step 2. Determine range for impact, abrasiveness and “Z” conditions.
- Step 3. Add selected conditions multipliers and apply sum to basic factor.

The result will be the estimated hourly cost for undercarriage in that application.

Undercarriage Basic Factors			
Model	Basic Factor		
5230	19.0		
D11R	17.0		
5130B	15.0		
D10R	12.5		
D9R	10.0		
D8R	8.5		
973, 589, D7R LGP	9.0		
D7R, 963C, 583R, D6R LGP, D7R XR	8.0		
375, 5080	6.4		
D6R, 953C, 572R, D6M LGP, D6R XL, D6R XR	6.2		
365B	6.1		
345B Series II	5.3		
D5M LGP, D6 SR, D6M XL, 517, 527	5.0		
330B	4.4		
D3C (All), D4C (All), D5C (All), 933 (All), 939, 561M	3.7		
325B	3.4		
315B, 317B, 318B L, 322B	3.0		
D4 SR, 320C	2.5		
307B, 311B, 312B	2.2		
Conditions Multipliers			
	Impact	Abrasiveness	“Z”
High	0.3	0.4	1.0
Moderate	0.2	0.2	0.5
Low	0.1	0.1	0.2

*Example:* D10R in high impact, non-abrasive material with a moderate “Z” factor.

$$\begin{aligned}
 \text{D10R Basic Factor} &= 12.5 \\
 \text{Multipliers:} & \quad \text{I} = 0.3 \\
 & \quad \text{A} = 0.1 \\
 & \quad \text{Z} = 0.5
 \end{aligned}$$

$$\text{Hourly undercarriage cost} = 12.5 (0.3 + 0.1 + 0.5) = \mathbf{\$11.25/hour}$$

- NOTE:** 1. Conditions Multipliers may be selected in any combination. Thus, a multiplier of 0.4 (all low-range multipliers) represents the best of the best, while 1.7 (all high range multipliers) would be the worst of the worst conditions.
2. The hourly undercarriage cost estimate resulting from this method will be made up of *approximately* 70% parts cost and 30% labor charges. The cost of undercarriage components is based on published U.S. Consumers List Prices and may be adjusted as needed for import duties, exchange rates, etc. outside the United States. Labor has been figured at \$50.00 (U.S.) per shop hour.
  3. For further information and guidance, refer to the current issue of the Caterpillar Custom Track Service Handbook.
  4. This formula for estimating undercarriage cost should not be used for tractors working in stockpile coal handling applications. Undercarriage costs are nominal in stockpile coal handling, and using this formula will result in estimating cost substantially above actual costs.

11

**REPAIR RESERVE**

*(Line Item 11)*

Repairs are normally the largest single item in operating costs and include all parts and direct labor (except operator's wages) chargeable to the machine. Shop overhead can be absorbed in general overhead or charged to machines as a percent of direct labor cost, whichever is the owner's normal practice.

Hourly repair costs for a single machine normally follow an upward stairstep pattern since major outlays for repairs usually come in spurts. However, when broad averages are considered, the stairstep becomes a smooth, upward curve. Since this hourly repair cost curve starts low and gradually rises over time, hourly operating costs must be adjusted upward as the unit ages. Alternatively an average repair cost can be used which provides a straight line graph. Most owners prefer the average method, and it is the one suggested here.

Since repair costs are low initially and rise gradually, averaging them produces extra funds at first which are reserved to cover future higher costs.

Machine applications, operating conditions and maintenance attention determine repair costs. In any specific application, actual cost experience on similar work provides the best basis for establishing the hourly repair reserve. When local records are inadequate or not available, the hourly repair reserve charts following this discussion may be used. Turn for a moment to these charts and examine their general format.

**These average costs are taken from a variety of applications and every attempt was made to assure accuracy. Recognize that any one application may vary considerably from these averages. They are only marginally useful in predicting costs since few jobs are 'average'. The use of these averages would be especially questioned when special attachments such as rippers are used, and when a machine is moving from job to job. For these reasons, we suggest the use of these averages for comparative purposes and gross estimates only. Your Caterpillar dealer has the ability to make more accurate repair cost estimates and we suggest you use his experience and expertise if you need help in estimating operating costs.**

Applying these basic factors and multipliers will result in the average hourly cost over the entire period. This should produce an excess in the early hours (or a "sinking fund") to cover normal increases in actual repair costs as the machine ages.

The cost applies to the machine as described in each individual chart, but does not cover the following:

- Dozer blade (although hydraulics are included)
- Bucket (although hydraulics are included)
- Ground engaging tools
- Undercarriage
- Tires, Chopper Blades or Tamping Feet Assemblies and Rims





- Labor for daily and periodic maintenance
- Material/supply items for daily and periodic maintenance
- Fuel, oil and grease
- Service truck mileage costs
- Serviceman's travel costs
- Machine transportation to and from shop
- Cost of performing Technical Analysis or Scheduled Oil Sampling
- Operator
- Risk or insurance
- Parts and labor price escalation
- Attachments

The basic repair factors are based on the first 10,000 hours of service, parts at published U.S. Consumers List Prices, and labor at a total selling price of \$60.00 (U.S.) per hour. Extended use multipliers are given for those cases where a machine is to be used beyond 10,000 hours; the adjusted cost-per hour will apply to the *entire* use period, not just the additional hours. For applications outside the United States where import duties and other expenses have a large effect on parts prices, and for other areas where labor charges (remember to include shop and tool overhead in addition to mechanic's wages!) differ greatly from the \$60.00 base, an approximate breakdown of the total factor by percentages for parts and labor also are given. This breakdown should permit easy adjustment to local conditions.

As stated, repair costs are affected by application, operation, maintenance, and age of the equipment. The most significant effects on cost will be those factors affecting major component life. A second significant factor is whether the repair is performed before or after catastrophic failure. Repair before a major component fails can be one-third of an after failure repair with only a moderate sacrifice in life (see graphs). Repairing a major component just prior to failure achieves optimum cost per hour. Oil analysis and other diagnostic tools, maintenance inspections and indicators, and operator notes are vital to determine the optimum repair point and thereby achieving lower hourly repair costs. Maintenance practices are significant because they affect component longevity and the percentage of scheduled, before failure repairs.

Another important factor in using repair reserve estimates is the Service Meter Unit (SMU) or hour basis. The cost estimate should be flexed depending on the machine's duty cycle. Fuel consumption is often a good indicator of duty cycle, and this factor may override the application zone. All of these factors are significant in estimating repair costs. Weigh them carefully prior to using the repair reserve tables.

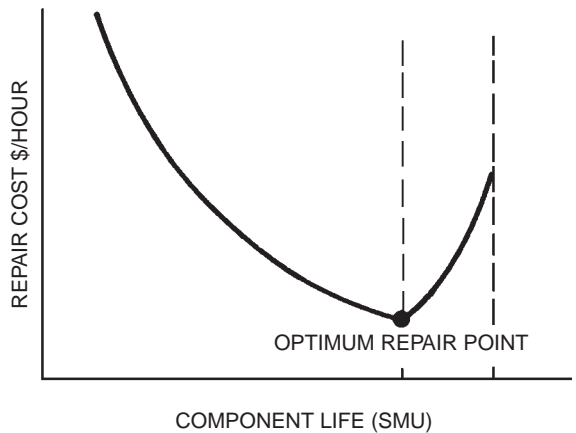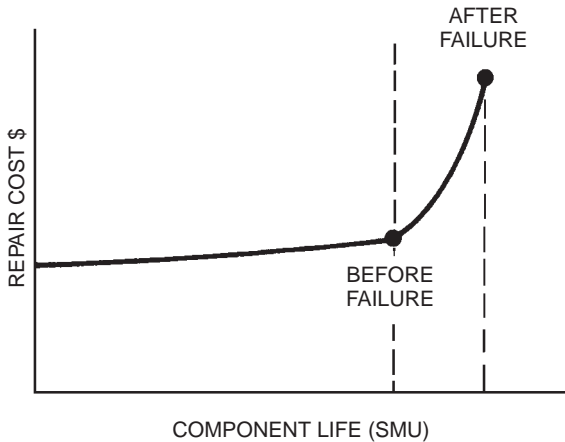

**INSTRUCTIONS** — To estimate hourly repair costs, enter the chart for the machine in question and determine the basic factor for the applicable job conditions. Operating conditions zones for each bar are:



These generally conform to the definitions given earlier in the section on depreciation. If the unit is to be used more than 10,000 hours, apply the Extended-life Multiplier for that period.

*Example:*

1 — A 988F Wheel Loader loading well-shot rock on a hard, level quarry floor will be used for seven years or about 15,000 hours.

Basic Repair Factor = 9.50  
 Extended-life Multiplier = 1.10  
 Estimated Repair Cost =  $9.50 \times 1.10 =$   
**\$10.45/Hour**

2 — A D6R is used about 1600 hours per year on general utility and clean-up work for a contractor who does not baby his equipment, but does insist on careful operation, and has an excellent preventive maintenance program. He intends to trade at the end of five years. He can be considered to be at the lower end of the “normal” or B zone, if not slightly less.

Basic Repair Factor = 5.00  
 Total Use:  
 5 years @ 1600 hr/yr = **8000** hours  
 Extended-use Multiplier = 1.0  
 Estimated Repair Cost =  $5.00 \times 1.0 =$   
**\$5.00/Hour**

*Repair Reserve charts follow ...▶*

**TRACK-TYPE TRACTORS**



**Cost distribution**

D3 to D7 — 60% Parts  
 40% Labor  
 D8 to D11 — 70% Parts  
 30% Labor

**Extended-life Multipliers**

0-10,000 hours 1.0  
 0-15,000 1.1  
 0-20,000 1.3

Includes basic tractor equipped with ROPS canopy, straight bulldozer and hydraulic control.

**NOTE:** Repair time may be less on Elevated Sprocket Tractors due to modular design of power train components.

**AGRICULTURAL TRACTORS (basic configuration)**



**Cost distribution**

60% Parts  
 40% Labor

**MOTOR GRADERS**



**Cost distribution**

**12H Thru 163H**

65% Parts  
 35% Labor

**14H & 16H**


65% Parts  
 35% Labor

**24H**


60% Parts  
 40% Labor

**Extended-life Multipliers**


0-10,000 hours 1.00  
 0-15,000 1.10  
 0-20,000 1.33  
 0-10,000 hours 0.80  
 0-15,000 1.00  
 0-20,000 1.33  
 0-15,000 hours 0.78  
 0-20,000 1.00  
 0-30,000 1.05  
 0-40,000 1.20

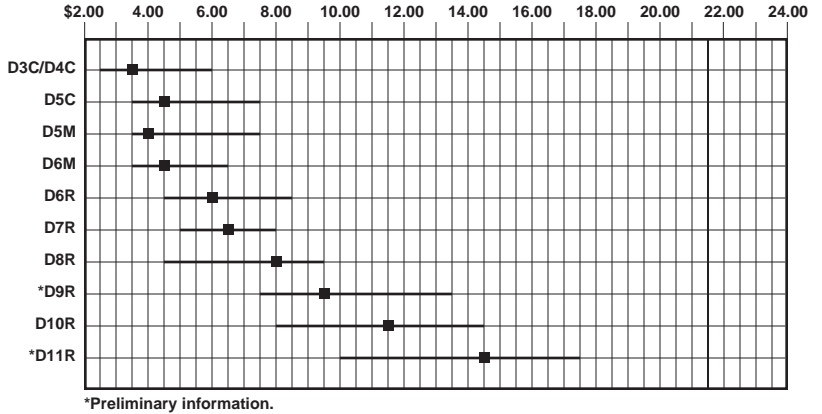

\*Preliminary information.

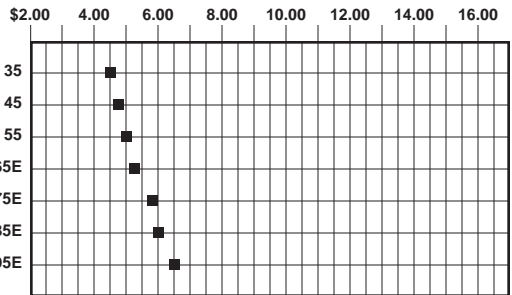

\*Preliminary information.

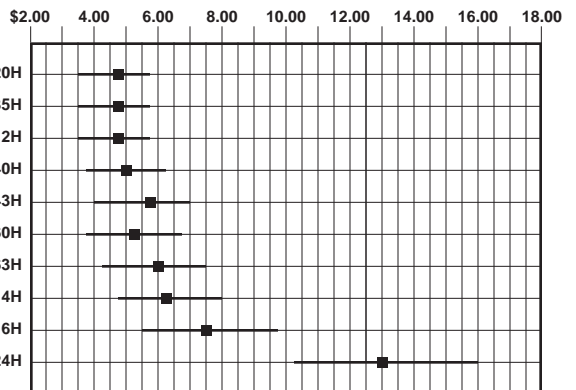

Includes basic motor grader equipped with ROPS cab.

**EXCAVATORS**



**Cost distribution**

50% Parts  
50% Labor

**Extended-life Multipliers**

(Not available)

**Extended-life Multipliers**

0-10,000 hours	0.40
0-20,000	0.80
0-30,000	1.00
0-40,000	1.21
0-60,000	1.25

Includes basic excavator equipped with largest bucket, one-piece boom and medium stick. Logger with standard feller buncher.

**5130 & 5230**

**Cost distribution**

70% Parts  
30% Labor

Includes standard bucket and stick.

**FOREST PRODUCTS**



**Cost distribution**


55% Parts  
45% Labor

**Extended-life Multipliers**

(Not available)

Includes basic skidder equipped with ROPS canopy, arch, fairlead and winch. Grapple skidders with Cat grapple.


\$2.00 4.00 6.00 8.00 10.00 12.00 14.00 16.00 18.00 20.00

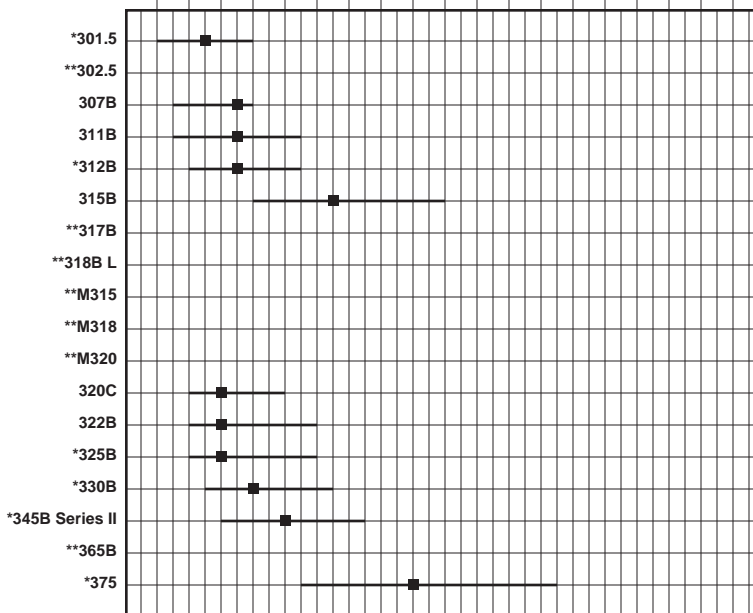

\*Preliminary information.

\*\*Insufficient data.


\$20.00 40.00 60.00 80.00



\*Preliminary information.


\*\*Insufficient data.

\$2.00 4.00 6.00 8.00 10.00

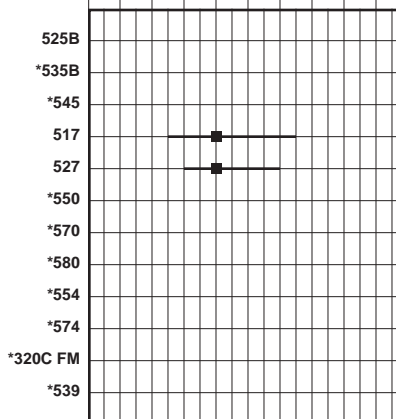

\*Insufficient data.

**PIPELAYERS**

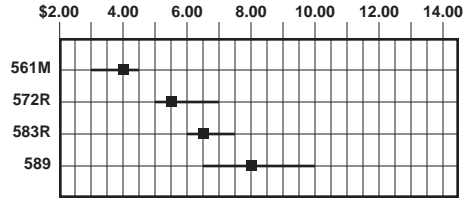

**Cost distribution**


60% Parts  
40% Labor

**Extended-life Multipliers**

(Not available)

Includes basic pipelayer equipped with counterweight and boom.

**WHEEL-TRACTOR SCRAPERS**

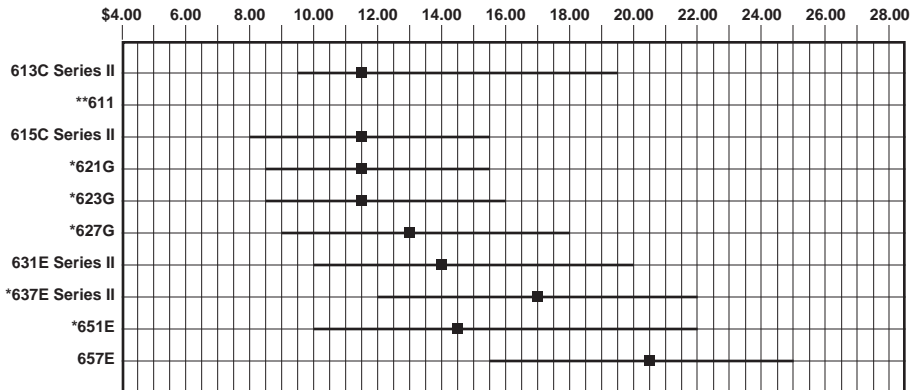

\*Preliminary information.

\*\*Insufficient data.

**Cost distribution:**


60% Parts  
40% Labor

**Extended-life Multipliers:**

Period	Single-engine	Tandem & Elevator
0-10,000	1.00	1.00 (1.03 for Push-Pull)
0-15,000	1.06	1.08
0-20,000	1.21	1.24

Includes standard wheel tractor equipped with standard scraper.

**CONSTRUCTION & MINING TRUCKS**

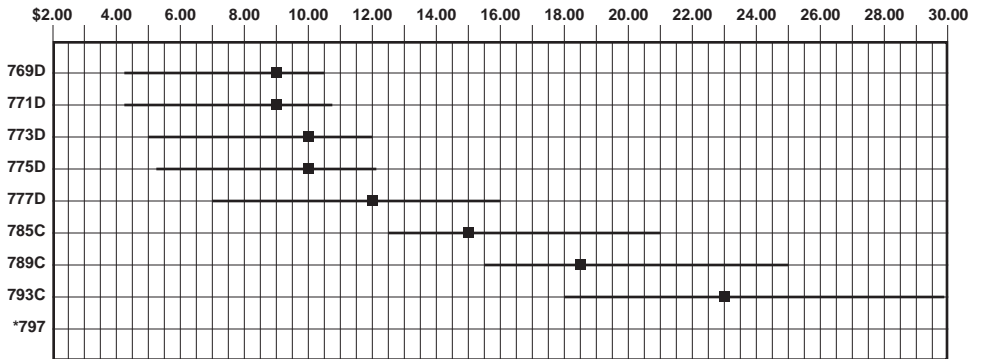

\*Insufficient data.

**Cost distribution**

**769-777**

- 55% Parts
- 45% Labor

**785-793**

- 70% Parts
- 30% Labor

**Extended-life Multipliers**

0-10,000 hours	0.20
0-20,000	1.00
0-30,000	1.18
0-40,000	1.50
0-60,000	1.50

Includes basic truck equipped with standard earth body (785/789 — Option I Body) without liners. Off-highway tractors' hourly repair costs are approximately 9% less than trucks.

**ARTICULATED TRUCKS**




**Cost distribution**

- 55% Parts
- 45% Labor

**Extended-life Multipliers**

0-10,000 hours	1.00
0-15,000	1.05
0-20,000	Not Available

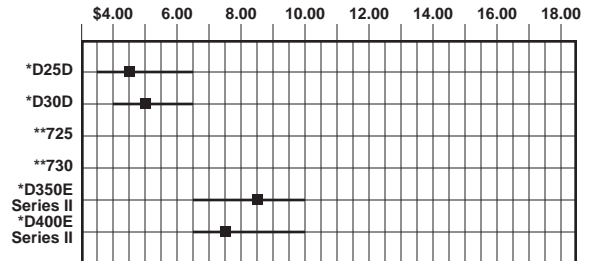

\*Preliminary information.

\*\*Insufficient data.

**WHEEL TRACTORS & SOIL/LANDFILL COMPACTORS**



**Cost distribution**  
60% Parts  
40% Labor



**Extended-life Multipliers**  
(Not available)


**Includes:** 814F thru 854G — Basic tractor equipped with ROPS canopy and bulldozer.  
815F & 825G — Basic compactor equipped with ROPS canopy and fill-spreading bulldozer.  
816F & 826G — Basic Landfill Compactor equipped with ROPS cab and landfill bulldozer.

**WHEEL LOADERS & INTEGRATED TOOLCARRIERS**




Cost distribution	Extended-life Multipliers
<b>914G-992G</b>	
60% Parts	0-10,000 hours 1.00
40% Labor	0-15,000 1.10
<b>994D</b>	
75% Parts	0-10,000 0.25
25% Labor	0-20,000 0.54
	0-30,000 1.00
	0-40,000 1.07
	0-60,000 1.25


Includes basic wheel loader equipped with ROPS cab and General Purpose bucket (988 and 992 with Spade nose rock bucket).

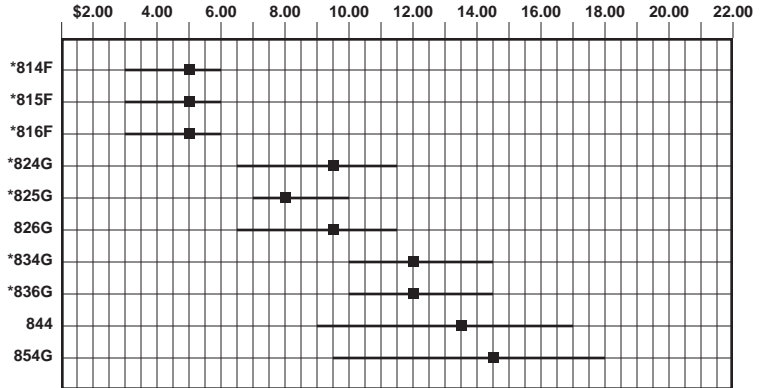

\*Preliminary information.

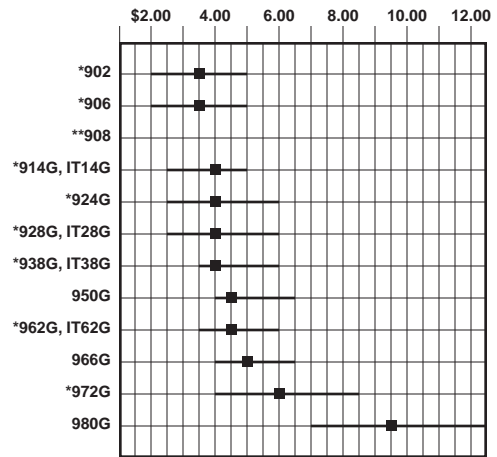

\*Preliminary information.  
\*\*Insufficient data.

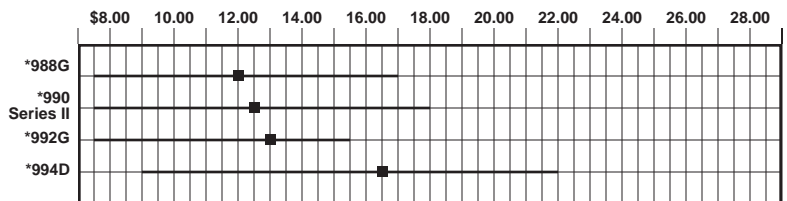

\*Preliminary information.

**TRACK LOADERS**




**Cost distribution**

55% Parts  
45% Labor

**Extended-life Multipliers**

0-10,000 hours 1.00  
0-15,000 1.13

Includes basic track loader equipped with ROPS canopy and General Purpose bucket.

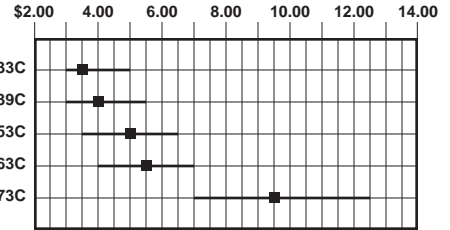

\*Preliminary information.

**UNDERGROUND LOAD HAUL DUMP UNITS**


**Cost distribution**

**R1300-R2900**  
60% Parts  
40% Labor

**Extended-life Multipliers**

0-10,000 hours 1.00  
0-20,000 1.17

Includes basic LHD. Equipped with FOPS cab and standard bucket.

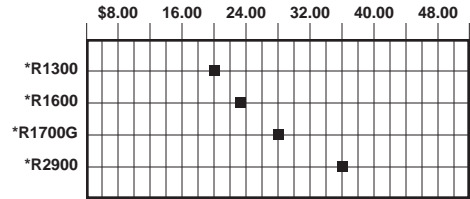

\*Preliminary information.

**UNDERGROUND ARTICULATED TRUCKS**


**Cost distribution**

**AD40-AE40**  
60% Parts  
40% Labor

**Extended-life Multipliers**

0-10,000 hours 1.00  
0-20,000 1.16

Includes basic Underground Articulated Truck equipped with FOPS cab and standard dump body (AD40) or standard ejector body (AE40).

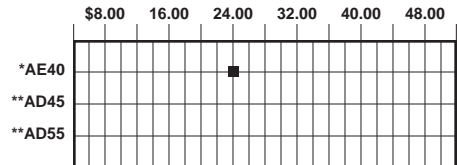

\*Preliminary information.  
\*\*Insufficient data.

**UNDERGROUND RIGID FRAME TRUCKS**

**Cost distribution**


**69D – Dump**  
**69D – Ejector**  
**73D – Dump**

60% Parts  
40% Labor

**Extended-life Multipliers**

0-10,000 hours 1.00  
0-20,000 1.10

Includes basic truck equipped with standard underground dump body or standard underground ejector body.

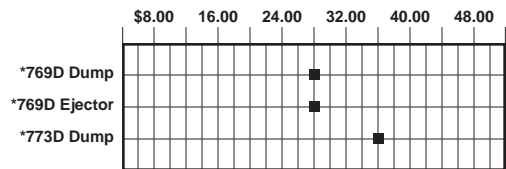

\*Preliminary information.



## Owning & Operating Costs

- ⑫ Special Wear Items
  - ⑮ Operator's Hourly Wage
- Owning & Operating Examples
- Track-Type Tractor

12

### SPECIAL WEAR ITEMS

(Line Item 12 and Subsection 12A)

All costs for high-wear items such as cutting edges, ripper tips, bucket teeth, body liners, router bits, etc., and welding costs on booms and sticks should be included here. These costs will vary widely depending on applications, materials and operating techniques. Consult your Caterpillar Dealer Parts Department for estimated life under your job conditions.

15

### OPERATOR'S HOURLY WAGE

(Line Item 15)

This item should be based on local wage scales and should include the hourly cost of fringe benefits.

## EXAMPLES OF FIGURING OWNING AND OPERATING COSTS

### Example I: ESTIMATING HOURLY OWNING AND OPERATING COSTS OF A TRACK-TYPE TRACTOR

Assume a power shift track-type tractor with straight bulldozer, hydraulic control, tilt cylinder and three-shank ripper, is purchased by a contractor for \$135,000, delivered price at job site.

Application will be production dozing of bank gravel. Minimal ripping will be required to loosen material.

In the following calculations, refer as necessary to the source material already reviewed.

#### OWNING COSTS —

#### To Determine Residual Value at Replacement

Enter delivered price, \$135,000, in space (A). (See example form at end of this discussion.) Since the machine being considered is a track-type tractor, no tires are involved. This particular owner's experience is that at trade-in time, the tractor will be worth approximately 35% of its original value. This \$47,250 trade-in value is entered in space (B) leaving a net of \$87,750 to be recovered through work.

Enter the value to be recovered through work in space (C).

Indicated ownership period is 7 years with annual usage of 1200 hours per year or 8400 hours of total ownership usage.

Divide the Net Value from space (C), \$87,750, by Ownership Usage, 8400 hours, and enter result \$10.45 in space (D).

#### Interest, Insurance, Taxes

In this example, local rates are assumed as follows:

Interest	16%
Insurance	1%
Taxes	1%
	18%

Using the following formula:

$N = 7:$

$$\frac{\left[ \frac{7+1}{2 \times 7} \times \$135,000 \right] \times 0.16}{1200} = \$10.29$$

Enter \$10.29 in space (E).

Insurance and property taxes can also be calculated using the same formula as shown for the interest cost, and entering them on lines 5 and 6.

Items 3b, 4, 5 and 6 can now be added and the result, \$22.02 entered in space (H) Total Hourly Owning Costs.

#### OPERATING COSTS —

#### Fuel

See fuel consumption tables. The intended application, production dozing, indicates a medium load factor. Assume that the estimated fuel consumption from the table is 18.1 liter/hr (4.8 U.S. gal/hr.). Cost of fuel in this locality is \$0.34/liter (\$1.25/U.S. gal.).

Consumption	Unit Cost	Total
18 liter/hr ×	\$0.34 liter	= \$6.12
5 gal/hr ×	\$1.25 gal.	= \$6.25

Enter this figure in space (I).

**Lube Oils, Filters, Grease**

For these items, you can use the lubricants consumption tables and the filter cost calculator for a detailed estimate. Assume the table shows an approximate hourly cost for lube oils, filters and grease (materials and labor) for this tractor of \$0.46. Enter this figure in space (J).

**Tires**

Since this example considers a track-type tractor, space (K) is left blank.

**Undercarriage**

Our estimating reference gives an undercarriage cost Basic Factor of 6.2 for this tractor. It is anticipated that with some ripping on the job, impact loading of track components will be medium, indicating an “T” multiplier of 0.2. The gravel-sand mix in the bank, being dry, should be only moderately abrasive for an “A” multiplier of 0.2. In analyzing the miscellaneous conditions: there is enough clay in the bank to produce some packing of the sprockets; the operator is careful, but is forced into some tight turns because of space limitations; there is good drainage in the pit; track tension is checked weekly; and all track-type equipment on the job is enrolled in the Custom Track Service program. Accordingly, the “Z” multiplier is judged to be somewhat greater than low level — 0.3 in this case.

It should be noted that in applying particularly the “Z” factor, rather wide flexibility is provided and was used in the above example. Such flexibility is intended and its use encouraged.

Then:

$$\text{Cost per hour} = \text{Basic Factor} \times (I + A + Z)$$

$$\text{Basic Factor} = 6.2$$

$$\text{Conditions Multipliers: } I = 0.2$$

$$A = 0.2$$

$$Z = 0.3$$

$$\text{Cost per hour } 6.2 (0.2 + 0.2 + 0.3) = \$4.34 \text{ which is entered in space (L).}$$

**Repairs**

In determining the depreciation period, we established the intended use of the machine as a Zone B application. The Repair Reserve graph for track-type tractors indicates that the mid-range for our tractor is approximately 4.50 on the basis of 10,000 hours of use. The tractor is to be used over 8400 hours, so the Extended-life Multiplier in this case is 1.0.

Therefore, Repair Reserve =  $1.0 \times 4.50 = \$4.50$  per hour, which is entered in space (M).

**Special Items**

Assuming the tractor is equipped with a three-shank ripper and an “S” dozer, allowance must be made for ripper tips, shank protectors, and dozer cutting edges.

Assume your knowledge of the operation indicates the ripper will be used only about 20% of total tractor operating time. Estimated tip life while in use is 30 hours. Therefore, tips will be replaced:

$$\frac{30 \text{ Hours}}{0.20} = \text{each } 150 \text{ hours of tractor operation}$$

Shank protector life is estimated at three times tip life or 450 hours of tractor operation. In this medium duty application, no shank replacement is expected in the 8400 hour depreciation period of the tractor.

Cutting edge life is estimated to be 500 hours.

Using local prices for these items, hourly costs are estimated as follows:

$$\text{Tips: } \frac{3 @ \$35.00 \text{ ea.}}{150 \text{ hr.}} = \$0.70 \text{ per hour}$$

$$\text{Shank Protectors: } \frac{3 @ \$55.00 \text{ ea.}}{450 \text{ hr.}} = \$0.37 \text{ per hour}$$

$$\text{Cutting Edges: } \frac{\$125 \text{ per set}}{500 \text{ hr.}} = \$0.25 \text{ per hour}$$

The total of these, \$1.32; is entered in space (N). Items 8, 9, 10b, 11 and 12 can now be added and the result, \$15.63, is entered in space (O), Total Hourly Operating Costs.

**Operator’s Hourly Wage**

Assume this is \$20.00 including fringe benefits. This figure is entered in space (P).

Total Owning Costs, Total Operating Costs and Operator’s Hourly Wage are now added together and the result, \$57.65, is entered in space (Q). The itemized estimate of Hourly Owning and Operating Costs is now complete.

**Example II: ESTIMATING HOURLY OWNING AND OPERATING COSTS OF A WHEELED VEHICLE**

With only a few simple changes, owning and operating costs for a wheeled vehicle are calculated using the same format as that used for the Track-Type Tractor. Only the differences will be explained as we look at example calculations for a wheel loader.

**OWNING COSTS —**

**To Determine Residual Value at Replacement**

Enter delivered price in space (A). The cost of tires is deducted since they will be treated as a wear item. For purposes of illustration, the Wheel Loader is estimated to have a potential 48% trade-in value (B) at the end of the 5 year/7500 hour ownership usage, leaving a net value to be recovered through work of \$34,320 (C).

**Interest, Insurance, Taxes**

Refer to the formulas using the same rates as before and 1500 operating hours per year. The factor 4.22 is applied to the interest cost (E).

Insurance and property taxes can also be calculated using the same formula as shown for the interest cost.

The sum of lines 3b, 4, 5 and 6 gives the total hourly owning cost, line 7.

**OPERATING COSTS —**

**Fuel**

See the fuel consumption tables and apply the actual cost of purchasing fuel in the project area (I).

**Lube Oils, Filters, Etc.**

Use either the item-by-item worksheet or the summary tables. Enter the total item in space (J) on line 9.

**Tires**

Use the tire replacement cost and the best estimate of tire life based on experience and anticipated job conditions.

**Repairs**

Find the applicable basic repair factor for Zone B application from the bar charts (4.00). Again, the use period for the Wheel Loader is 7500 hours, so the Extended-life Multiplier is 1.0.

Therefore, Repair Reserve =  $1.0 \times 4.00 = \$4.00$  per hour.

**Special Items**

Ground engaging tools, welding, etc. are covered here. Use current costs for cutting edges and similar items. Use your best estimate of the hours of life which can be expected from them based on previous experience in like materials. Enter the total on line 12.

The total of lines 8 through 13 represents hourly operating costs.

**Operator's Hourly Wage**

To give a true picture of operator cost, include fringe benefits as well as direct hourly wages (line 15).

**TOTAL O&O**

The total of lines 7, 13 and 15 is the total hourly owning and operating cost of the machine. Keep in mind that this is an estimate and can change radically from project to project. For the greatest accuracy, the hourly cost reflected in actual on-the-job cost records should be used.



**HOURLY OWNING AND OPERATING COST ESTIMATE**

DATE \_\_\_\_\_

	(1)	(2)
	Track-type Tractor	Wheel Loader
Machine Designation .....		
Estimated Ownership Period (Years) .....	7	5
Estimated Usage (Hours/Year) .....	1200	1500
Ownership Usage (Total Hours) .....	8400	7500

**OWNING COSTS**

	(1)	(2)
1. a. Delivered Price (including attachments) .....	135,000 (A)	70,000
b. Less Tire Replacement Cost if desired .....		4000
c. Delivered Price Less Tires .....	135,000	66,000
2. Less Residual Value at Replacement .....	(35%) 47,250 (B)	(48%) 31,680
(See subsection 2A on back)		
3. a. Value to be recovered through work .....	87,750 (C)	34,320
(line 1c less line 2)		
b. Cost Per Hour:		
Value	(1) 87,750	(2) 34,320
Hours	8400	7500
	10.45 (D)	4.58
4. Interest Costs		
$N = \text{No. Yrs.} \quad \frac{N + 1}{2N} \times \text{Del. Price} \times \frac{\text{Simple Int. \% Rate}}{\text{Hours/Year}} =$		
(1) $\frac{7 + 1}{14} \times \frac{135,000}{1200 \text{ Hours/Yr.}} \times 16\%$	10.29 (E)	4.22
(2) $\frac{5 + 1}{10} \times \frac{66,000}{1500 \text{ Hours/Yr.}} \times 16\%$		
5. Insurance		
$N = \text{No. Yrs.} \quad \frac{N + 1}{2N} \times \text{Del. Price} \times \frac{\text{Insurance \% Rate}}{\text{Hours/Year}} =$		
(1) $\frac{7 + 1}{14} \times \frac{135,000}{1200 \text{ Hours/Yr.}} \times 1\%$	0.64 (F)	0.26
(2) $\frac{5 + 1}{10} \times \frac{66,000}{1500 \text{ Hours/Yr.}} \times 1\%$		

Or

\$ \_\_\_\_\_ Per Yr. ÷ \_\_\_\_\_ Hours/Yr. =

*Estimating form continues next page*

	(1)	(2)
6. Property Tax $N = \text{No. Yrs.} \quad \frac{N + 1}{2N} \times \text{Del. Price} \times \text{Tax Rate \%} =$ $\frac{\text{Hours/Year}}{\text{Hours/Year}} =$ (1) $\frac{7 + 1}{14} \times \frac{135,000}{1200} \times \frac{1}{100} \% =$ $\frac{1200 \text{ Hours/Yr.}}{1200 \text{ Hours/Yr.}} =$ (2) $\frac{5 + 1}{10} \times \frac{66,000}{1500} \times \frac{1}{100} \% =$ $\frac{1500 \text{ Hours/Yr.}}{1500 \text{ Hours/Yr.}} =$	0.64 (G)	0.26
Or \$ _____ Per Yr. ÷ _____ Hours/Yr. =		
7. TOTAL HOURLY OWNING COST (add lines 3b, 4, 5, and 6) .....	22.02 (H)	9.32
<b>OPERATING COSTS</b>		
8. Fuel: (1) $\frac{\text{Unit Price}}{1.25} \times \frac{\text{Consumption}}{5} =$ (2) $\frac{1.25}{1.25} \times \frac{4}{4} =$	6.25 (I)	5.00
9. Lube Oils, Filters, Grease: (See subsection 9A on back) .....	0.46 (J)	0.43
10. a. Tires: Replacement Cost ÷ Life in Hours $\frac{\text{Cost}}{\text{Life}} \quad (1) \frac{\text{_____}}{\text{_____}} \quad (2) \frac{4000}{3500} \dots\dots\dots$	(K)	1.14
b. Undercarriage (Impact + Abrasiveness + Z Factor) × Basic Factor (1) $(0.2 + 0.2 + 0.3) = 0.7 \times 6.2 =$ (2) $(\text{_____} + \text{_____} + \text{_____}) = \text{_____} \times \text{_____} =$ $\text{(Total)} \quad \text{(Factor)}$	4.34 (L)	
11. Repair Reserve (Extended Use Multiplier × Basic Repair Factor) (1) $1.0 \times 4.5 =$ (2) $1.0 \times 4.0 =$	4.50 (M)	4.00
12. Special Wear Items: Cost ÷ Life .....	1.32 (N)	0.60
13. TOTAL OPERATING COSTS (add lines 8, 9, 10a (or 10b), 11 and 12) .....	16.87 (O)	11.17
14. MACHINE OWNING PLUS OPERATING (add lines 7 and 13) .....	38.89	20.49
15. OPERATOR'S HOURLY WAGE (include fringes) .....	20.00 (P)	20.00
16. TOTAL OWNING AND OPERATING COST .....	58.89 (Q)	40.49

**SUBSECTION 2A: Residual Value at Replacement**

Gross Selling Price	(1) (____%) _____	(2) (____%) _____
Less: a. Commission	_____	_____
b. Make-ready costs	_____	_____
c. Inflation during ownership period*	_____	_____
Net Residual Value	47,250 (35%)	31,680 (48%) of original delivered price
(Enter on line 2)		

\*When used equipment auction prices are used to estimate residual value, the effect of inflation during the ownership period should be removed to show in constant value what part of the asset must be recovered through work.

**SUBSECTION 9A: Lube Oils, Filters, Grease**

	Unit Price	×	Consumption	=	Cost/Hour					
Engine	(1) _____	×	_____	=	_____	(2) _____	×	_____	=	_____
Transmission	_____	×	_____	=	_____	_____	×	_____	=	_____
Final Drives	_____	×	_____	=	_____	_____	×	_____	=	_____
Hydraulics	_____	×	_____	=	_____	_____	×	_____	=	_____
Grease	_____	×	_____	=	_____	_____	×	_____	=	_____
Filters	_____	×	_____	=	_____	_____	×	_____	=	_____
			Total	(1) _____		(2) _____				

(Enter total on line 9 or use Quick Estimator Tables)

**SUBSECTION 12A: Special Items**

**(cutting edges, ground engaging tools, bucket teeth, excavator stick repair, etc.)**

(1)	Cost	Life	Cost/Hour	(2)			
1.	105 ÷	150	= 0.70	1.	_____ ÷	_____	= _____
2.	165 ÷	450	= 0.37	2.	_____ ÷	_____	= _____
3.	125 ÷	500	= 0.25	3.	_____ ÷	_____	= _____
4.	_____ ÷	_____	= _____	4.	_____ ÷	_____	= _____
5.	_____ ÷	_____	= _____	5.	_____ ÷	_____	= _____
6.	_____ ÷	_____	= _____	6.	_____ ÷	_____	= _____
		Total	(1) \$1.32	(2)	_____		

(Enter total on line 12)

**REPAIR RESERVE CONVERSION FACTORS (line 11)**

For use in countries outside the United States where parts and service costs might differ from those used in charts and tables:

Labor Rate Ratio	(1) _____	(2) _____
Parts Cost Ratio	(1) _____	(2) _____

**QUICK ESTIMATOR HOURLY OWNING AND OPERATING COSTS**

**NOTE:** Hourly Owning and Operating Costs for a given model of machinery vary widely because they are influenced by many factors: the type of work the machine does, local prices for fuel and lubricants, shipping costs from the factory, interest rates, operator’s wages, tire or track life, rock versus earth, hours per year, etc. Use the following figures as **QUICK GUIDELINES ONLY**. When precise owning & operating cost estimates are required, calculate them using the format on the preceding pages and your particular conditions.

Quick estimator figures shown are based on the following assumptions:

- List prices f.o.b. factory.
- Machines equipped as indicated (certain attachments included may not be normal in some areas).
- Ownership period: Guide for selecting ownership period based on application and operating conditions.
- The basic repair factors are based on the first 10,000 hours of service.
- Parts at published U.S. Consumers List Prices.
- Labor for repairs at a total selling price of \$50.00 (U.S.) per hour.
- **MODERATE:** Zone A, or moderate job conditions. Typical U.S.A. Auction Results for the machine used in computing resale and depreciation.
- **AVERAGE:** Zone B, or average job conditions. Typical U.S.A. Auction Results for the machine used in computing resale and depreciation.
- **SEVERE:** Zone C, or severe job conditions. Typical U.S.A. Auction Results for the machine used in computing resale and depreciation and is adjusted for machine condition.
- Lubricants and hydraulic oil at \$6.35 per U.S. Gal. plus labor.
- Grease at \$0.71 per fitting (includes labor).
- Filters at U.S. Consumer’s List Prices plus labor.
- Fuel at \$1.25 per U.S. Gal.
- Figures include average tire costs at 50% list price.
- **ALL FIGURES EXCLUDE INTEREST, INSURANCE, TAXES AND OPERATOR** (due to wide variance around the world).

**Track-Type Tractors** *Example equipment:* straight bulldozer with tilt cylinder, hydraulic control, ROPS canopy, crankcase and track roller guards, front pull hook, light system, and vandalism protection.

	O&O/hr.		
	Moderate	Average	Severe
D3C Series III	\$ 9.00	\$ 14.00	\$ 22.00
D4C Series III	11.00	16.00	25.00
D5C Series III	12.00	16.00	25.00
D5M	20.00	25.00	30.00
D5B	18.00	21.00	35.00
D6M	25.00	31.00	37.00
D6G	23.00	30.00	50.00
D6R	27.00	35.00	43.00
D7G	32.00	41.00	63.00
D7R	36.00	46.00	56.00
D8R	46.00	61.00	73.00
D9R	69.00	86.00	107.00
D10R	86.00	104.00	131.00
D11R	120.00	135.00	165.00

**Agricultural Tractors** *Example equipment:* programmable monitor, 544 kg (1200 lb) front counterweight, additional light group, 132 Lpm (35 gpm) implement pump and high torque steering motor.

	O&O/hr.		
	Moderate	Average	Severe
D4E SR	\$15.00	\$20.00	\$30.00
D6G SR	22.00	29.00	45.00
Challenger 35	15.00	20.00	30.00
Challenger 45	18.00	23.00	33.00
Challenger 55	20.00	25.00	35.00
Challenger 65E	21.00	26.00	36.00
Challenger 75E	22.00	28.00	38.00
Challenger 85E	22.00	30.00	39.00
Challenger 95E	23.00	31.00	40.00

**Motor Graders** *Example equipment:* hydraulic side-shift with tip, ROPS cab, heater, front lights, vandalism protection.

	O&O/hr.		
	Moderate	Average	Severe
120H	\$17.00	\$22.00	\$28.00
135H	18.00	23.00	29.00
12H	21.00	25.00	31.00
140H	22.00	26.00	33.00
143H	23.00	29.00	37.00
160H	23.00	29.00	37.00
163H	24.00	32.00	40.00
14H	27.00	35.00	46.00
16H	37.00	48.00	64.00
24H	55.00	71.00	87.00

**Excavators, Feller Bunchers and Front Shovels**

*Example equipment:* largest undercarriage (or standard tires), largest bucket or standard feller buncher, medium stick, one-piece boom.

	Moderate	O&O/hr. Average	Severe
301.5	*	*	*
302.5	*	*	*
307B/307B SB	*	*	*
311B	*	*	*
312B	*	*	*
313B CR	*	*	*
315B	*	*	*
317B	*	*	*
318B L/318B LN	*	*	*
320C	\$19.00	\$22.00	\$34.00
322B	19.00	25.00	38.00
325B	19.00	29.00	46.00
330B	27.00	32.00	51.00
345B Series II	37.00	49.00	72.00
365B L	*	*	*
375	62.00	80.00	124.00
5080	65.00	83.00	130.00
5110B	*	*	*
5130B	*	*	*
5230	*	*	*

\*Insufficient data.

**Backhoe Loaders**

	Moderate	O&O/hr. Average	Severe
416C	\$14.00	\$16.00	\$20.00
426C	15.00	19.00	22.00
428C	15.00	19.00	22.00
436C	16.00	20.00	24.00
438C	18.00	21.00	25.00
446B	18.00	22.00	26.00

**Forest Products** *Example equipment:* dual function arch, 100" sorting head, 30.5-32 tires, standard blade.

	Moderate	O&O/hr. Average	Severe
525B	19.00	28.00	40.00
535B	*	*	*
545	*	*	*
517	*	*	*
527	33.00	40.00	50.00
550	*	*	*
570	*	*	*
580	*	*	*
554	*	*	*
574	*	*	*
320C FM	*	*	*
539	*	*	*

\*Insufficient data.

**Pipelayers** *Example equipment:* front pull hook, lighting system and standard vandalism protection.

	Moderate	O&O/hr. Average	Severe
561M	\$17.00	\$20.00	\$23.00
572R	30.00	36.00	54.00
583R	*	*	*
589	*	*	*

\*Insufficient data.

**Wheel-Tractor Scrapers** *Example equipment:* standard tractor, standard scraper, standard tires.

	Moderate	O&O/hr. Average	Severe
613C Series II	\$ 28.00	\$ 35.00	\$ 49.00
611	34.00	46.00	72.00
615C Series II	38.00	48.00	66.00
621G	40.00	53.00	83.00
623G	46.00	57.00	87.00
627G	54.00	71.00	105.00
627F PP	55.00	73.00	108.00
631E Series II	64.00	87.00	137.00
637E Series II	89.00	118.00	179.00
637E Series II PP	91.00	121.00	184.00
651E	83.00	109.00	168.00
657E	108.00	146.00	218.00
657E PP	110.00	150.00	224.00

**Construction & Mining Trucks and Tractors** *Example equipment:* body liners on trucks, downshift inhibitor, standard E-3 tires, standard body (Option I — 785/789/793) with liners and standard tires. Tractors do not include trailer.

	Moderate	O&O/hr. Average	Severe
769D	\$ 36.00	\$ 45.00	\$ 58.00
771D	37.00	46.00	58.00
773D	48.00	61.00	80.00
775D	50.00	63.00	82.00
776D	56.00	82.00	119.00
777D	58.00	80.00	109.00
784C	*	*	*
785C	76.00	102.00	138.00
789C	101.00	135.00	175.00
793C	121.00	161.00	206.00
797	193.00	241.00	309.00

\*Insufficient data.



## Articulated Trucks

	O&O/hr.		
	Moderate	Average	Severe
D25D	\$33.00	\$37.00	\$46.00
D30D	38.00	42.00	52.00
725	27.00	37.00	53.00
730	31.00	43.00	60.00
D350E Series II	46.00	52.00	63.00
D400E Series II	51.00	56.00	70.00
D400E Series II Ejector	54.00	60.00	74.00

## Telehandlers

	O&O/hr.		
	Moderate	Average	Severe
TH62	\$15.00	\$18.00	\$22.00
TH63	16.00	19.00	23.00
TH82	16.00	19.00	23.00
TH83	17.00	20.00	24.00
TH103	18.00	21.00	25.00

**Wheel Tractors** *Example equipment:* straight bulldozer, ROPS cab, lighting system, vandalism protection, standard tires.

	O&O/hr.		
	Moderate	Average	Severe
814F	\$28.00	\$32.00	\$48.00
824G	34.00	41.00	70.00
834G	51.00	58.00	92.00
844	*	*	*
854G	*	*	*

\*Insufficient data.

**Compactors** *Example equipment:* fill spreading bulldozer, ROPS canopy, lighting system, vandalism protection.

	O&O/hr.		
	Moderate	Average	Severe
815F	\$28.00	\$34.00	\$ 52.00
816F	32.00	38.00	52.00
825G	36.00	48.00	70.00
826C	48.00	56.00	82.00
836G	56.00	74.00	104.00

**Wheel Loaders** *Example equipment:* 980 and up, standard ROPS sound suppressed cab, heater and air-conditioner. 966 and down, standard ROPS sound suppressed cab, standard tires and smallest bucket with teeth.

	O&O/hr.		
	Moderate	Average	Severe
902	*	*	*
906	*	*	*
908	*	*	*
914G	\$ 14.00	\$ 15.00	\$ 16.00
IT14G	14.00	15.00	16.00
924G	14.00	18.00	24.00
924G Hook On	15.00	20.00	25.00
928G	16.00	21.00	28.00
IT28G	18.00	24.00	30.00
938G	20.00	25.00	34.00
IT38G	22.00	27.00	36.00
950G	24.00	31.00	41.00
962G	25.00	32.00	44.00
IT62G	27.00	35.00	46.00
966G	31.00	41.00	62.00
972G	32.00	44.00	66.00
980G	38.00	54.00	75.00
988G	60.00	81.00	109.00
990 Series II	75.00	100.00	140.00
992G	105.00	125.00	171.00
994D	142.00	185.00	228.00

\*Insufficient data.

## Windrow Elevators

	O&O/hr.		
	Moderate	Average	Severe
BG-650	\$18.00	\$20.00	\$26.00

**Track Loaders** *Example equipment:* canopy, track roller guards, front pull hook, lighting system, vandalism protection and GP bucket with teeth and segments.

	O&O/hr.		
	Moderate	Average	Severe
933C	\$12.00	\$18.00	\$26.00
939C	14.00	19.00	28.00
953C	21.00	30.00	41.00
963C	25.00	36.00	50.00
973C	36.00	49.00	62.00

**Paving Compactors** *Example equipment:* standard equipment with working lights and all CP models equipped with leveling blades.

	O&O/hr.		
	Moderate	Average	Severe
CB-214D	\$ 5.00	\$ 7.00	\$10.00
CB-224D	7.00	10.00	16.00
CB-434C	15.00	20.00	24.00
CB-534C	18.00	24.00	26.00
CB-535B	18.00	24.00	26.00
CB-544	18.00	24.00	26.00
CB-545	18.00	24.00	26.00
CB-634C	20.00	26.00	29.00
CS-323C	11.00	18.00	22.00
CS-431C	15.00	19.00	24.00
CS-433C	16.00	22.00	31.00
CS-563D	14.00	29.00	36.00
CS-583D	16.00	29.00	36.00
CP-323C	16.00	22.00	30.00
CP-433C	18.00	29.00	35.00
CP-563D	25.00	32.00	42.00
PS-150B	6.00	11.00	18.00
PS-200B	8.00	14.00	18.00
PS-300B	12.00	18.00	22.00
PF-300B	12.00	18.00	22.00
PS-500	14.00	19.00	22.00
CB-225D	5.00	7.00	10.00
CB-334D	9.00	12.00	20.00
CB-335D	9.00	12.00	20.00
PF-290B	11.00	17.00	21.00
PS-360B	11.00	17.00	21.00

**Road Reclaimer** *Example equipment:* standard equipment with reclamation rotor.

	O&O/hr.		
	Moderate	Average	Severe
RR-250B	\$141.00	\$167.00	\$213.00
SS-250B	95.00	99.00	139.00
RM-350B	164.00	190.00	236.00

**Asphalt Pavers** *Example equipment:* hydraulic extendable screed, push roller, paddle feeders, lights.

	O&O/hr.		
	Moderate	Average	Severe
AP-650B	\$49.00	\$55.00	\$66.00
AP-1050B	52.00	58.00	70.00
AP-1055B	55.00	61.00	72.00
AP-800C	43.00	48.00	57.00
AP-900B	45.00	50.00	59.00
AP-1000B	48.00	52.00	61.00

**Cold Planers** *Example equipment:* standard equipment with stated rotor size.

	O&O/hr.		
	Moderate	Average	Severe
PM-565B (83" rotor)	\$274.00	\$351.00	\$444.00

**PM-565B ESTIMATED\* PRODUCTION TABLE  
(83" ROTOR) AVERAGE APPLICATION/  
SOFT LIMESTONE AGGREGATE/  
\$274.00/O&O COST PER HR.**

Depth Of Cut	Travel Speed	Square Yards/ Hour (50 Min Hour)	Cost Per sq/yd	115 lbs/cu/ft
				86 lbs/sq/ yd/inch/ depth US Tons
1"	130 FPM	4995	0.05	287
3"	90 FPM	3460	0.08	597
5"	60 FPM	2305	0.12	663
7"	35 FPM	1345	0.20	543
10"	25 FPM	960	0.29	550

**MODERATE APPLICATION  
HARD LIMESTONE AGGREGATE  
\$351.00/O&O COST PER HR.**

Depth Of Cut	Travel Speed	Square Yards/ Hour (50 Min Hour)	Cost Per sq/yd	115 lbs/cu/ft
				86 lbs/sq/ yd/inch/ depth US Tons
1"	100 FPM	3840	0.09	220
3"	70 FPM	2690	0.13	463
5"	40 FPM	1535	0.23	440
7"	30 FPM	1155	0.30	465
10"	20 FPM	770	0.46	440

**SEVERE APPLICATION  
RIVER ROCK & GRANITE/AGGREGATE  
\$444.00/O&O COST PER HR.**

Depth Of Cut	Travel Speed	Square Yards/ Hour (50 Min Hour)	Cost Per sq/yd	115 lbs/cu/ft
				86 lbs/ sq/yd/ inch/depth US Tons
1"	70 FPM	2690	0.16	154
3"	50 FPM	1920	0.23	331
5"	30 FPM	1155	0.38	333
7"	25 FPM	960	0.46	385
10"	15 FPM	575	0.77	330

\*Production and costs are estimates that are dependent on number of variables. Factors include, but are not limited to the following: percent asphalt, content, material density, ambient temperature, asphalt condition, aggregate type.

**PM465 ESTIMATED\* PRODUCTION TABLE  
 (79" ROTOR) AVERAGE APPLICATION/  
 SOFT LIMESTONE AGGREGATE/  
 \$230.00/O&O COST PER HR.**

Depth Of Cut	Travel Speed	Square Yards/ Hour (50 Min Hour)	Cost Per sq/yd	115 lbs/cu/ft
				86 lbs/sq/ yd/inch/ depth US Tons
1"	110 FPM	4025	0.06	230
3"	70 FPM	2202.3	0.10	440
5"	35 FPM	1280	0.18	368
7"	25 FPM	915	0.25	364
10"	15 FPM	550	0.42	315

**MODERATE APPLICATION  
 HARD LIMESTONE AGGREGATE  
 \$295.00/O&O COST PER HR.**

Depth Of Cut	Travel Speed	Square Yards/ Hour (50 Min Hour)	Cost Per sq/yd	115 lbs/cu/ft
				86 lbs/sq/ yd/inch/ depth US Tons
1"	85 FPM	3110	0.09	178
3"	60 FPM	2195	0.13	377
5"	30 FPM	1100	0.27	315
7"	20 FPM	730	0.40	294
10"	10 FPM	365	0.81	210

**SEVERE APPLICATION  
 RIVER ROCK & GRANITE/AGGREGATE  
 \$374.00/O&O COST PER HR.**

Depth Of Cut	Travel Speed	Square Yards/ Hour (50 Min Hour)	Cost Per sq/yd	115 lbs/cu/ft
				86 lbs/ sq/yd/ inch/depth US Tons
1"	50 FPM	1830	0.20	105
3"	30 FPM	1100	0.33	189
5"	20 FPM	730	0.51	210
7"	10 FPM	365	1.02	147
10"	5 FPM	183	2.04	105

\*Production and costs are estimates that are dependent on number of variables. Factors include, but are not limited to the following: percent asphalt, content, material density, ambient temperature, asphalt condition, aggregate type.





## CONTENTS

Selection, application, maintenance . . . . .	23-1
Tire construction . . . . .	23-2
Bias ply . . . . .	23-2
Radial ply . . . . .	23-3
Tire types . . . . .	23-3
Tire size nomenclature . . . . .	23-3
Code identification for	
off-highway tires . . . . .	23-4
Manufacturers' designations —	
Firestone, Continental General,	
Goodyear, Bridgestone, Michelin . . . . .	23-5
Radial tire identification:	
Michelin, Goodyear . . . . .	23-7
Bridgestone . . . . .	23-8
Ton-Miles Per Hour rating system . . . . .	23-8
Tire Drive-Away Recommendations . . . . .	23-9
T-km/h (Ton-MPH) ratings	
— Goodyear bias ply . . . . .	23-10
— Bridgestone bias ply . . . . .	23-12
— Goodyear radial ply . . . . .	23-14
— Bridgestone radial ply . . . . .	23-16
— Michelin radial ply . . . . .	23-19
Tire and Rim Association ratings . . . . .	23-21
Tire selection . . . . .	23-21
Guide . . . . .	23-23
Standard cold inflation pressures . . . . .	23-23
Liquid ballasting table . . . . .	23-32

## SELECTION, APPLICATION, MAINTENANCE

Proper tire selection, application and maintenance continue to be the most important factors in earthmoving economics. Wheel tractors, loaders, scrapers, trucks, motor graders, etc. are earthmoving equipment whose productivity and payload unit cost may depend more on tire performance than any other factor.

Off-the-road tires must operate under a wide variety of conditions ranging from dry “potato dirt” through wet severe shot rock. Speed conditions vary from less than 1 mph average to 72 kmh (45 mph). Gradients may vary from 75% favorable to 30% adverse. Climatic conditions, operator skills, maintenance practices, etc. all may have a profound effect on tire life and unit costs.

Although one specific tire construction may be acceptable in a variety of applications, no one tire can meet all requirements on any one machine and perhaps not even one job. The many differences in tire requirements on earthmoving machines have resulted in a wide variety of tread and carcass designs being made available. The optimum tire selection for a specific machine on a given job should be a joint decision between the user and tire supplier. Several tire manufacturers have technical and application representatives in the field for proper guidance in tire selection.

When job conditions change, it may be desirable to select a different tire configuration to meet the new requirements.


## TIRE CONSTRUCTION

The pneumatic tire is essentially a flexible pressure vessel utilizing structural members (nylon, steel cable, etc.) to contain the hoop tension resulting from the inflation pressure. Rubber is utilized as a protective coating and sealant over the structural members and makes up the tread pattern which provides the wearing medium at the ground interface. The following brief explanation of the various tire constructions will assist you in selecting tires for your specific application.

Two distinct tire constructions approved on all Caterpillar machines are the BIAS PLY and RADIAL PLY tires. The following is a brief explanation of the principal features of these two constructions.

### Bias Ply


1. *Beads* — The tire beads consist of steel wire-bundles (3 or 4 in larger tires) which are forced laterally by tire inflation pressure to wedge the tire firmly on the rim's tapered bead seat. The nylon plies tie into the bead bundles. The forces inherent in the tire are transmitted from the rim through the bead bundles into the nylon.
2. *Body plies* — Layers of rubber-cushioned nylon cord comprise the tire carcass. Alternating plies of cord cross the tread centerline at an angle (bias). The term "ply rating" is an index of tire strength and not the actual number of tire plies.

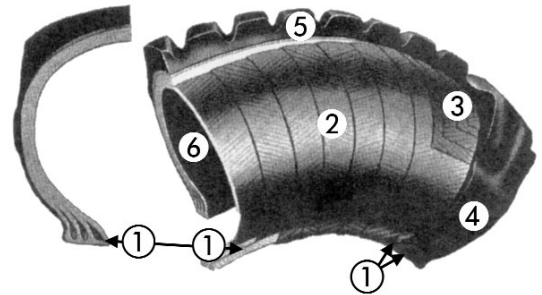

Bias Ply Construction

3. *Breakers or tread plies* — These, if used, are confined to the tire's tread area and are intended to improve carcass strength and provide additional protection to the body plies. Some "work" tires employ steel breakers or belts to further protect the carcass.
4. *Sidewalls* — These are the protective rubber layers covering the body plies in the sidewall.
5. *Tread* — The wearing part of the tire which contacts the ground. It transmits the machine weight to the ground and provides traction and flotation.
6. *Inner liner* — This is the sealing medium which retains the air and, combined with the "O" ring seal and rim base, eliminates the need for inner tubes and flaps.
7. *Tubes and flaps (not shown)* — Required if the tire is not of tubeless construction with an inner liner.
8. *Undertread* — Protective rubber cushion lying between tread and body ply.

## Radial Ply

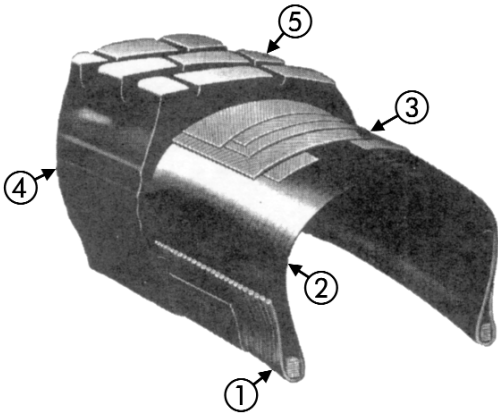

Radial Ply Construction

1. *Beads* — A single bead bundle of steel cables or steel strip (spiraled like a clock spring) comprise the bead at each rim interface.
2. *Radial carcass* — This consists of a single layer or ply of steel cables laid archwise (on the radian) bead to bead.
3. *Belts* — Several layers or plies of steel cable form the belts which underlie the tread area around the tire circumference. The cable in each belt crosses the tread centerline at an angle with the angle being reversed from the preceding belt.
4. *Sidewalls*.
5. *Tread*.
6. *Undertread* — Protective rubber cushion lying between tread and steel belts.

## TIRE TYPES

Off-the-road tires are classified by application in one of the following three categories:

1. *Transport tire* — For earthmoving machines that transport material such as trucks and wheel tractors.
2. *Work tire* — Normally applied to slow moving earth-moving machines such as graders and loaders.
3. *Load and carry* — Wheel loaders engaged in transporting as well as digging.

## TIRE SIZE NOMENCLATURE

Tire size nomenclature is derived from the approximate cross section width and rim diameter with various systems being available:


1. A wide base tire, for example, is designated as a 29.5-35 with the approximate cross section width being the first number (inches) and the rim diameter the second number (inches). Industry standards permit this tire's width to be a maximum of 824 mm (32.45") in service.
2. A standard base tire, for example, is designated as a 24.00-35 with the approximate cross section width being the first number (inches) and the rim diameter the second number (inches). Industry standards permit this tire width to be a maximum 718 mm (28.27") in service.
3. A low profile tire, for example, is designated as a 40/65-39 (formerly 65/40-39 or 40-39) with the approximate cross section width being the first (40) number (inches) and the rim diameter the third (39) number (inches). The second number (65 actually is 0.65) is the aspect ratio (section height divided by section width).

If designated 40/65 R39, then the R denotes radial construction.

The wide base tire has an aspect ratio of approximately 0.83 and the standard base 0.95. The "low profile tire" has an aspect ratio of 0.65.

When comparing a wide base tire to a standard base tire, it must be remembered a larger first number on a wide base tire with the same rim diameter does not mean the wide base is larger in overall diameter. For example, the 18.00-25 standard base tire is larger in diameter than the 20.5-25 wide base. It is comparable in overall diameter to the 23.5-25 wide base.



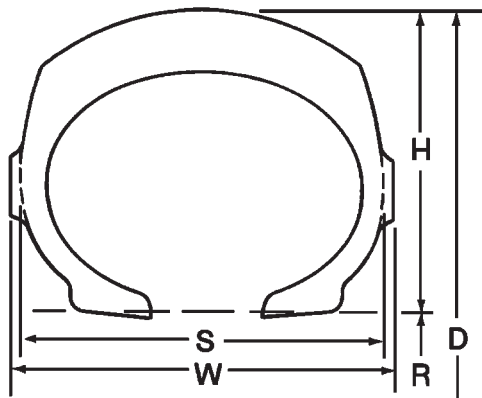

Tire cross-section

- D = Tire Overall Diameter
- R = Nominal Rim Diameter
- H = Tire Section Height
- S = Tire Section Width
- W = Tire Width (includes ornamental ribs)
- $\frac{H}{S}$  = Aspect Ratio

**CODE IDENTIFICATION FOR OFF-HIGHWAY TIRES**

The tire industry has adopted a code identification system to be used for off-the-road tires. This identification system will reduce the confusion caused by the trade names for each type of tire offered by each tire manufacturer. The industry code identification is divided into six main categories by types of service as follows:

- C** — Compactor Service
- E** — Earthmover Service
- G** — Grader Service
- L** — Loader & Dozer Service
- LS** — Log-Skidder Service
- ML** — Mining & Logging Service

The sub-categories are designated by numerals, as follows:

Code Identification		% Tread Depth
<b>Compactor</b>		
C-1	Smooth	100
C-2	Grooved	100
<b>Earthmover</b>		
E-1	Rib	100
E-2	Traction	100
E-3	Rock	100
E-4	Rock Deep Tread	150
E-7	Flotation	80
<b>Grader</b>		
G-1	Rib	100
G-2	Traction	100
G-3	Rock	100
G-4	Rock Deep Tread	150
<b>Loader &amp; Dozer</b>		
L-2	Traction	100
L-3	Rock	100
L-4	Rock Deep Tread	150
L-5	Rock Extra Deep Tread	250
L-3S	Smooth	100
L-4S	Smooth Deep Tread	150
L-5S	Smooth Extra Deep Tread	250
L-5/L-5S	Half Tread Extra Deep	250
<b>Mining &amp; Logging</b>		
ML-1	Rib	100
ML-2	Traction	100
ML-3	Rock	100
ML-4	Rock Deep Tread	150
<b>Log-Skidders</b>		
LS-1	Regular Tread	100
LS-2	Intermediate Tread	125
LS-3	Deep Tread	150
HF-4	Extra Deep Tread	250

**NOTE:** On some Michelin tires the designation R or T may follow the TRA code to designate rock or traction type tire.

Tire and Rim Assoc. Code	Tread Type	FIRESTONE	CONTINENTAL GENERAL	GOODYEAR	BRIDGESTONE	MICHELIN
<b>Compactor</b>						
<b>C-1</b>	Smooth Compactor	Plain Roller		Smooth Compactor	Road Roller	X LISSE X LC
<b>C-2</b>	Grooved Compactor			All Weather Compactor	Alligator 2	
<b>Earthmover</b>						
<b>E-1</b>	Rib	Rib Excavator	Rock Rib LCM	Hard Rock RIB		XRIB
<b>E-2</b>	Traction	Super Ground Grip	All Duty DTL TL100	Earthmover Sure Grip Sure Grip Lug	Fast Grip, G-Lug VKT, VFT, VGT, VHB, VSB	XV, XL, XMP, XG, XH, XS, XR
<b>E-3</b>	Rock	Rock Grip Excavator Super Rock Grip E67	ND LCM CM 100 SL 100 XG-3 LCM EA3	Hard Rock Lug Hard Rock Lug-8 Super Hard Rock Lug Super Hard Rock Lug-8 HRL-3B GP-2B RL-2+ RL-3J RL-3 RL-2F RL-3+ RT-3A	R-Lug, W-Lug E-Lug, VE Block V-LUG 2, VMT, VEL, VRL, VLT	XK, XR XRDN XH XADN XAD65-1 XHAD XZH
<b>E-4</b>	Rock Deep Tread	Super Rock Grip Deep Tread Rock Master Deep Tread Power Lug Deep Tread	ND Super LCM Super LCM CM 150 CRL 150 XG-4	HRL-4B RL-4 RL-4J RL-4H/4H II RL-4J II RL-4A RL-4B GP-4B GP-4D	R-Lug S, E-Lug S  E-Lug S2 VELS, VRLS VMTS, VALS VZTS, VMTP VLTS	XHDI, XDT XKDI XRS XADT
<b>E-5</b>	Rock Extra Deep Tread	Super Deep Tread				
<b>E-7</b>	Flotation	All Non-Skid EM Sand Champion Sand & Highway	Super Sand Flotation	SRB-7A	Alligator, VJSJ Sand Clipper 2 S-Lug	XS XRIB
<b>Grader</b>						
<b>G-1</b>	Rib	Rib Road Builder		RBG-IA	Rib Grader	
<b>G-2</b>	Traction	Super Ground Grip Road Builder	Loader Grader Loader Grader II TG2 TGL2	SGG-2A AS-3A SG-2B	Fast Grip, G-Lug VKT, VSW, VUT	XTL, XMPS, X SNOPLUS, XGL2, XR
<b>G-3</b>	Rock	Rock Grip Road Builder	ND LCM Grader	RKG-3A	R-Lug	XH, XHAD XLD70-1, XRDN
<b>G-4</b>	Rock Deep Tread	Super Rock Grip Deep Tread Road Builder		SGG-4B	R-Lug 5	XR1, XLDD1 XLD70-1+

Tire and Rim Assoc. Code	Tread Type	FIRESTONE	CONTINENTAL GENERAL	GOODYEAR	BRIDGESTONE	MICHELIN
<b>Log-Skidder</b>						
<b>LS-1</b>	Regular		Tree Logger Armor			
<b>LS-2</b>	Intermediate	Forestry Special	Timber Skid		Timber Grip S Fast Grip	
<b>LS-3</b>	Deep	Champion Spade Grip Logger	Timber Skid II			
<b>HF-4</b>			Timber Skid Flotation			
<b>Loader &amp; Dozer</b>						
<b>L-2</b>	Traction	Super Ground Grip LD	Loader Grader II LD Loader Grader LD All Duty TGL2	Sure Grip Loader Sure Grip Lug D&L SGL E/L-2A RL-2+ RL-2F	Fast Grip, VKT  V-Grip, VSW, VUT S-Lug G-Lug	XTL, XGL 2 XF, XM27, XM47 X SNOPLUS XMPS, XR
<b>L-3</b>	Rock	Super Rock Grip LD	LD ND LCM LD 100 LDR3	Super Hard Rock Loader Super Hard Rock Lug D&L Super Hard Rock Lug 8-D&L HRL E/L-3A GP-2B RL-2+	R-Lug, VMT V-Lug 2, VLT	XRDN, XH, XHAD XHF, XK, XR XLD70-1
<b>L-4</b>	Rock Deep Tread	Super Rock Grip Deep Tread LD	LD-150 CRB  LD-150 Belted	Super Hard Rock Lug Xtra Tred D&L Nylosteel NRL D/L-4A Belted HRL D/L 4G RL-4K GP-4B	R-Lug S, VALS N-Lug, VCH R-Lug S2 VLTS VSNT	XRD1, XLDD1, XMINE D1 XKD1 XLD70-1+
<b>L-5</b>	Rock Extra Deep Tread	Super Deep Tread LD GSR	LD-250 CRB LD-250 Belted	Super Xtra Tred D&L Nylosteel NRL D/L-5A Belted RL-5K	D-Lug M-Lug S VSDL VSDT	XRD2, XLDD2 XMINE D2
<b>L-3S</b>	Smooth Tread	Plain Tread LD				
<b>L-4S</b>	Smooth Deep Tread	Plain Tread LD		SMO D/L-4A	Smooth Tread M	
<b>L-5S</b>	Smooth Extra Deep Tread	Plain Tread LD	LD-250 Super Smooth CRB LD-250 Super Smooth Belted	SMO D/L-5A	Smooth Tread MS VSMS	XSMD 2
<b>L-5/L-5S</b>	Half Smooth	Half Tread LD	LD-250 Haf Trac CRB LD-250 Haf Trac Belted		D-Lug 2	

## RADIAL TIRE IDENTIFICATION

### Code Identification for Michelin Tires

All Michelin earthmover tires are radial construction, designated by the "X" marking. They contain a single steel radial ply with a series of steel belts placed around the tire's circumference which reinforce and stabilize the tread.

Following are the tread designs currently available from Michelin with the different internal constructions depending on the application.

- Type A4** Highly resistant to cutting, hacking and abrasion.
- Type A** Highly resistant to cutting, hacking and abrasion for use at average speeds higher than type A4.
- Type B4** A compromise between resistance to abrasion and heat generation for less aggressive surfaces (from 49").
- Type B** Designed for low heat generation on long runs and in intensive service conditions.
- Type C4** Engineered to cope with high-speed travel on long hauls.
- Type C** Specially designed to cope with the highest-speed hauls.

The current combinations of tread patterns, construction, and tread depths offered, and primary TRA codes are:

Tread Design	Type A4	Type A	Type B	Type C	Primary TRA Codes
XH	—	x	—	x	L3, G3, E3
XF	—	x	—	—	L2
XMP	—	—	—	—	E2
XMPS	—	—	—	—	G2
XTL	—	x	—	—	L2, G2
XGL2	—	x	—	—	L2, G2
XG	—	—	—	x	E2
XV	—	—	—	x	E2
XLDD1	—	x	—	—	L4
XLDD2	—	x	—	—	L5
XK	—	x	x	—	E3
XRDN	—	x	x	—	L3, E3
XRD1	—	x	—	—	L4
XRD2	—	x	—	—	L5
XL	—	—	x	—	E2
XS	—	—	x	—	E7
XKD1	x	x	x	—	E4
XMINED1	—	x	—	—	L4
XMINED2	—	x	—	—	L5
XSMD2	—	x	—	—	L5S
XLISSE	—	—	—	—	C1

Tread Design	Type A4	Type A	Type B	Primary Type C	TRA Codes
XR	—	x	x	—	E3, G3
XADN	—	—	x	—	E3
XADT	—	—	x	—	E4
X SNOPLUS	—	—	—	—	L2, G2
XDT	x	—	x	—	E4 (T)
XRIB	—	x	—	—	E1
XAD65-1	—	—	x	—	E3/E4
XLD70-1	—	x	—	—	L3/L4
XHF	—	x	—	—	L3
XRS	—	—	x	—	E4 (R)

Since Michelin radial tires contain a single steel casing ply, they utilize the industry method of designating radial tire strength in terms of "stars." Their system consists of a one star, two star, and three star rating as an indication of the tire's carrying capacity. The one star is the lightest construction, generally used on work and slow moving transport machines. Two star tires are used on most medium and high speed transport machines. Three star construction provides the greatest carrying capacity for a given size and is only available in small standard base tires.

This combination of tread designs and types of construction provides a range of radial tires which cover most earthmoving applications. We recommend that in applying steel radial tires to your machines you provide all site condition data to the tire manufacturer. Obtain his recommendations as to which tire will provide the most economical operation.

### Code Identification for Goodyear Radial Tires

All Goodyear steel radial earthmover tires have been designated *Unisteel* followed by a three or four digit alpha-numeric code that identifies the particular tread. The currently active codes are:

RL-2+	E 2/3 and L 2/3		
RL-2F	E2 and L2	RL-4H/HII	E4
RL-3	E3	RL-4J	E4
RL-3+	E3	RL-4JII	E4
RL-3J	E3 and L3	GP-2B	E3
RT-3A	E3		
RL-4	E4		L3
RL-4A	E4	SG-2B	G2
RL-4B	E4	RL-4K	L4
GP-4B	E4	GP-4B	L4
GP-4D	E4	RL-5K	L5

The RL stands for Rock Lug and indicates that the upper sidewall has rock protection. The number in the code corresponds to the tire industry identification system (2-traction, 3-rock, etc). The fourth digit, if any, is used to designate tread design differences for the same basic tread type (F-directional tread).

The carcass strength is indicated by a star rating system instead of the ply rating system. These symbols indicate the recommended inflation for a particular tire load.

Following the star rating code is Goodyear's Custom Compound and Construction code. For a tire designated "2S" the 2 indicates a heat resistant compound and the S indicates standard construction and an H indicates heavy duty construction. The higher the number the greater the abrasion and cut resistance with a corresponding lower T-km/h (TON-mph) rating.

#### Code Identification for Bridgestone Radial Tires

The Bridgestone steel radial earthmover has been designated as V-Steel. The current nomenclature is:

V-Steel Ultra Traction	(VUT)	G2/L2
V-Steel K-Traction	(VKT)	E2/L2/G2
V-Steel F-Traction	(VFT)	E2
V-Steel L-Traction	(VLT)	E3/L3
V-Steel M-Traction	(VMT)	E3/L3
V-Steel G-Traction	(VGT)	E2
V-Steel M-Traction S	(VMTS)	E4
V-Steel R-Lug	(VRL)	E3
V-Steel R-Lug S	(VRLS)	E4
V-Steel A-Lug S	(VALS)	E4/L4
V-Steel H-Block	(VHB)	E2
V-Steel E-Lug	(VEL)	E3
V-Steel E-Lug S	(VELS)	E4
V-Steel D-Lug	(VSDL)	L5
V-Steel Smooth Tread MS	(VSMS)	L5S
V-Steel Snow Wedge	(VSW)	L2/G2
V-Steel Container Handler	(VCH)	L4
V-Steel Jamal	(VSJ)	E7
V-Steel Z-Traction S	(VZTS)	E4
V-Steel M-Traction Premium	(VMTP)	E4
V-Steel L-Traction S	(VLTS)	E4
V-Steel N-Traction	(VSNT)	L4
V-Steel D-Traction	(VSDT)	L5

Bridgestone has multiple tread compounds, with the three most commonly used being: type 1A = standard, type 2A = cut resistant and type 3A = heat resistant. The carcass strength, i.e., load carrying capacity of tire is indicated by star rating system; 1-star, 2-star and 3-star. All Bridgestone radial tires conform to the international tire standard of TRA and ETRTO.

## TON-MILES PER HOUR

Tire selection and machine operating practices have, in some cases, become the critical factors in the over-all success of earthmoving ventures. One of the most serious problems occur when tires are operated at temperatures above their capabilities. Separation and related failures occur. To help you avoid temperature related failures, Caterpillar has been instrumental in developing the *Ton-Miles Per Hour*, (Ton-MPH) method of rating tires.

### Heat and Tire Failure

Tire manufacturing requires heat in the vulcanizing process converting crude rubber and additives into a homogeneous compound. The heat required is typically above 132°C (270°F).

A tire also generates heat as it rolls and flexes. Heat generated faster than it can be radiated into the atmosphere gradually builds within the tire and reaches maximum level at the outermost ply or belt.

Over time, enough heat can develop from over-flexing to actually reverse the vulcanizing process or "revert" the rubber causing ply separation and tire failure. Only a brief time at reversion temperature initiates the failure. Experience shows that few pure heat separation cases occur. Most so-called heat separations are in tires operating below the reversion level.

As a tire's operating temperature increases the rubber and textiles within significantly lose strength. The tire becomes more susceptible to failures from cornering, braking, impact, cut through, fatigue and heat separation. If operating tires at higher temperatures is absolutely necessary, it is essential the machines be operated to reduce the probability of premature tire failure. No hard cornering without super-elevation, no panic braking, etc.

The Ton-MPH formula was developed to predict tire temperature buildup. The system is a method of rating tires in proportion to the amount of work they can do from a temperature standpoint. It utilizes the product of *load* × *speed* to derive an index of the tire temperature buildup. Maximum tire level-off temperatures of 107°C (225°F) for fabric cord tires and 93°C (200°F) for steel wire tires are the limits Caterpillar recommends. Even at these temperatures, failures may be initiated by overstressing the tires.

It is possible by using a needle type pyrometer to measure temperature at any desired point within the tire carcass. However, the instrumentation and the technique does not lend itself to general field use. The greatest difficulty is locating the thickest (therefore the hottest) tread bar in any given tire using giant calipers. The tire must then be drilled along the centerline of this bar from shoulder to shoulder at 52 mm (2") intervals. These 3.18 mm (1/8") diameter holes extend down through the tread and undertread to the topmost reinforcement. This procedure is fully described under SAE Recommended practice J1015.

The Ton-MPH rating system as given in this SAE specification is approved by most tire manufacturers. Michelin, in addition to providing Ton-MPH ratings has developed their own speed/load carrying rating system and we recommend that Michelin be consulted where high tire temperatures are a concern.

Heat generation in a specific tire at recommended pressure depends on three factors:

- the weight the tire is carrying (flex per revolution),
- the speed the tire is traveling over the ground (flexures over a period of time), and
- the air temperature surrounding the tire (ambient temperature) and road surface temperature.

Once a tire manufacturer has determined a tire's temperature characteristics and expressed them in Ton-MPH, the above listed specific job conditions can be used to determine any tire's maximum work capacity. These conditions provide on site ability to predict and avoid costly tire separations.

### Ton-Mile-Per-Hour Rating System

The tire TMPH can be matched to the site TMPH as well as compared with TMPH values of different makes and types of tires.

#### TMPH Job Rate

Average Tire Load × Average Speed for the shift

#### Average Tire Load

$$\frac{\text{"Empty" tire load} + \text{"loaded" tire load}}{2}$$

#### Average Speed

$$\frac{\text{Round trip distance in miles} \times \text{number of trips}}{\text{Total Hours (in the shift)}}$$

For excessive haul length (20 miles or more) consult your tire representative for modification to the TMPH value.

To use in the metric system, change miles to kilometers and use metric tons.

It should be noted that prolonged operation at high carcass temperatures can fatigue the nylon at the flex points in the sidewalls.

The following are the most recent Ton-MPH ratings as made available by Goodyear, Michelin and Bridgestone, and are subject to change on their part at any time. Other tire manufacturers' Ton-MPH ratings will be included in future handbook editions when and if made available. For latest Ton-MPH ratings, consult specific tire manufacturer at time of machine and/or tire purchase.

### Load-and-Carry T-km/h (Ton-MPH)

The wheel loader, when used in load-and-carry applications, may encounter temperature problems similar to those normally associated only with tires on scrapers, trucks and wagons. **Do not place the vehicle in load-and-carry applications without first consulting the tire manufacturer, or obtaining T-km/h (Ton-MPH) ratings and pressure recommendations from the tire manufacturer.**

### Conventional and Radial Steel Cord Tire Options

Tire options now provide types to operate in conditions ranging from rock and abrasive materials, to jobs with high speed hauls in good materials.

The best tire type can be different for the drive tires than for other tires on the same machine. T-km/h (Ton-MPH) should be calculated for all tires.

### Tire Drive-Away Recommendations

Heat separation can be a problem during machine delivery and moving machines from one job to another. Whenever roading earthmoving machines, *check your supplier for the tire manufacturer's recommended speed limitations on the specific tires involved.*

Some tire manufacturers also recommend that vehicles equipped with extra tread depth or special compounded tires should not be roaded without their specific approval. Our tests support this recommendation, especially for L-3, L-4, E-4 and L-5 tires.

# Tires

## T-km/h (Ton-MPH) Rating

- Goodyear Bias Ply Conventional Sizes

### T-km/h (Ton-MPH) RATINGS AT 38° C (100° F) AMBIENT TEMPERATURE

For Haul Lengths of 32 km (20 Miles) or Less One Way

*Because of the variance between specific tires it is recommended that at the time of purchase you check with your tire supplier for the manufacturer's specific T-km/h (Ton-MPH) ratings for the tires purchased.*

#### GOODYEAR BIAS PLY CONSTRUCTION CONVENTIONAL SIZES

Industry Code	E-1		E-2	E-3		E-4			E-7
Tread Design	Hard Rock Rib HRR-1A		Sure Grip SGL-2A	Hard Rock Lug HRL-3A Hard Rock Lug-8 HRL-3B		Hard Rock Lug XT HRL-4A Hard Rock Lug XT-8 HRL-4B			Sand Rib SRB-7A
Custom Code	2S	4S	4S	2S	4S	2S	4S	6S	4S
16.00-25 TKPH TMPH	182 125	131 90			102 70	131 90	95 65		
18.00-25 TKPH TMPH			146 100	182 125	131 90		117 80		234 160
18.00-33 TKPH TMPH				219 150	161 110		146 100	124 85	
21.00-25 TKPH TMPH									270 185
24.00-35 TKPH TMPH					255 175		234 160	204 140	
27.00-49 TKPH TMPH						460 315	328 225	277 190	
36.00-51 TKPH TMPH						679 465	489 335		628 430

**T-km/h (Ton-MPH) RATINGS**  
**AT 38° C (100° F) AMBIENT TEMPERATURE**  
**For Haul Lengths of 32 km (20 Miles) or Less One Way**

**GOODYEAR BIAS PLY CONSTRUCTION WIDE BASE SIZES**

Industry Code		E-2	E-3			E-7
Tread Design		Sure Grip Lug SGL E/L 2A	Super Hard Rock Lug HRL E/L 3A	Super Hard Lug 8 HRL-3B	HRL-3F	Sand Rib SRB-7A
Custom Code		4S	2S	4S	3S	4S
20.5-25	TKPH TMPH	109 75		95 65		
23.5-25	TKPH TMPH	131 90		102 70		
26.5-25	TKPH TMPH	153 105		131 90		
29.5-25	TKPH TMPH	182 125		168 115		248 170
29.5-29	TKPH TMPH	197 135	255 175	182 125	190 130	
29.5-35	TKPH TMPH			212 145	234 160	
33.25-29	TKPH TMPH				204 140	
33.25-35	TKPH TMPH				248 170	234 160
33.5-33	TKPH TMPH				248 170	234 160
37.25-35	TKPH TMPH				321 220	307 210
37.5-33	TKPH TMPH			299 205	321 220	307 210
37.5-39	TKPH TMPH				350 240	328 225



**Tires**

T-km/h (Ton-MPH) Rating  
 ● Bridgestone Conventional Size

**T-km/h (Ton-MPH) RATINGS  
 AT 38° C (100° F) AMBIENT TEMPERATURE  
 For Haul Lengths of 32 km (20 Miles) or Less One Way  
 Maximum Speed Not to Exceed 48 km (30 Miles) per Hour**

*Because of the variance between specific tires it is recommended that at the time of purchase you check with your tire supplier for the manufacturer's specific T-km/h (Ton-MPH) ratings for the tires purchased.*

**BRIDGESTONE BIAS CONVENTIONAL SIZES**

Industry Code		E-3			E-4			E-4		
Tread Design		RL			RLS			ELS/ELS2		
Custom Code		E2A	E1A	E3A	E2A	E1A	E3A	E2A	E1A	E3A
12.00-24/25	TKPH TMPH	66 45								
14.00-24/25	TKPH TMPH	109 75								
16.00-24/25	TKPH TMPH	139 95			111 76					
18.00-25	TKPH TMPH	173 119		263 180	153 105			153 105		
18.00-33	TKPH TMPH	190 130	212 145		161 110	182 125		161 110	182 125	
21.00-35	TKPH TMPH		270 185		204 140	226 155	321 220	204 140		
24.00-35	TKPH TMPH	291 199	328 225		234 160	277 190	394 270			
24.00-49	TKPH TMPH		431 295		292 200	343 235	482 330			
27.00-49	TKPH TMPH				336 230	406 278	547 375			

**T-km/h (Ton-MPH) RATINGS**  
**AT 38° C (100° F) AMBIENT TEMPERATURE**  
**For Haul Lengths of 32 km (20 Miles) or Less One Way**  
**Maximum Speed Not to Exceed 48 km (30 Miles) per Hour**

**BRIDGESTONE BIAS WIDE BASE SIZES**

Industry Code		E-2			E-3			E-4		
Tread Design		FG			RL/VL2			RLS		
Custom Code		E2A	E1A	E3A	E2A	E1A	E3A	E2A	E1A	E3A
15.5-25	TKPH TMPH				51 35					
17.5-25	TKPH TMPH				58 40					
20.5-25	TKPH TMPH				73 50			51 35		
23.5-25	TKPH TMPH				102 70			66 45		
26.5-25	TKPH TMPH				124 85			80 55		
29.5-25	TKPH TMPH				131 90			88 60		
29.5-29	TKPH TMPH				204 140			139 95		
29.5-35	TKPH TMPH				255 175					
33.25-35	TKPH TMPH					292 200				
37.25-39	TKPH TMPH					358 245	467 320			
37.5-39	TKPH TMPH				325 223	372 255	489 335			

**Tires**

**T-km/h (Ton-MPH) Rating**

- Goodyear Radial Ply — Conventional Sizes

**T-km/h (Ton-MPH) RATINGS  
AT 38° C (100° F) AMBIENT TEMPERATURE**

**For Haul Lengths of 32 km (20 Miles) or Less One Way**

**GOODYEAR RADIAL PLY CONSTRUCTION CONVENTIONAL SIZES**

Industry Code		E-2		E-2/E-3		E-3		E-4					
		RL-2F		GP-2B		RL-3+		RL-4H RL-4HII			RL-4J RL-4JII		
Tread Design		RL-2F		GP-2B		RL-3+		RL-4H RL-4HII			RL-4J RL-4JII		
Custom Code		2S	4S	2S	4S	2S	4S	2S	4S	6S	2S	4S	6S
14.00R25	TKPH TMPH										124 85	95 65	
16.00R25	TKPH TMPH	190 130	146 100	220 150		168 115	124 85						
18.00R25	TKPH TMPH	248 170	190 130			226 155	168 115				190 130	146 100	
18.00R33	TKPH TMPH	292 200	219 150			263 180	197 135				226 155	175 120	131 90
24.00R35	TKPH TMPH					438 300	335 230				394 270	299 205	234 160
27.00R49	TKPH TMPH			730 500	562 385	628 430	474 325	547 327	423 290	328 225	547 375	423 290	328 225
33.00R51	TKPH TMPH							715 490	540 370	321 220			
36.00R51	TKPH TMPH							788 540	598 410	358 245	788 540	598 410	358 245
37.00R57	TKPH TMPH							1022 700	781 535	460 315	1095 750	730 500	490 335
40.00R57	TKPH TMPH							1145 785	875 600	518 355			

**T-km/h (Ton-MPH) RATINGS**  
**AT 38° C (100° F) AMBIENT TEMPERATURE**  
**For Haul Lengths of 32 km (20 Miles) or Less One Way**

**GOODYEAR RADIAL PLY CONSTRUCTION WIDE BASE SIZES**

Industry Code	E-2						E-3		
	TL-3B	RL-2+		RL-2F		GP-2B	RL-3	RL-3F	RL-3J
Tread Design									
Custom Code	2S	2S	4S	2S	4S	4S	4S	4S	4S
15.5R25 TKPH TMPH				146 100	109 75				
17.5R25 TKPH TMPH	190 130	146 100	109 75			151 105			124 85
20.5R25 TKPH TMPH		175 120	131 90			168 115			146 100
23.5R25 TKPH TMPH		197 135	146 100			197 135			160 110
26.5R25 TKPH TMPH		226 155	168 115			226 155			
26.5R29 TKPH TMPH									
29.5R25 TKPH TMPH		270 185	204 140			270 185			
29.5R29 TKPH TMPH		306 210	233 160	379 260	284 195		270 185		
33.25R35 TKPH TMPH				474 325	357 245				335 230
37.25R35 TKPH TMPH				547 375	416 285				379 260
37.5R39 TKPH TMPH				613 420	460 315				430 295
40.5/75R39 TKPH TMPH						445 305			
22/65R25 TKPH TMPH	284 195								
25/65R25 TKPH TMPH			182 125					182 125	
30/65R25 TKPH TMPH			160 110						

**T-km/h (Ton-MPH) RATINGS**  
**AT 38° C (100° F) AMBIENT TEMPERATURE**  
**For Haul Lengths of 32 km (20 Miles) or Less One Way**  
**Maximum Speed Not to Exceed 48 km (30 Miles) per Hour**

**BRIDGESTONE RADIAL PLY**

Industry Code	E-4			E-4			E-4			E-4			E-4		
Tread Design	VMTS			VMTP			VRLS			VELS			VZTS		
Custom Code	E2A	E1A	E3A	E2A	E1A	E3A	E2A	E1A	E3A	E2A	E1A	E3A	E2A	E1A	E3A
14.00R24/25 TKPH	91	119	136				85	112	128						
TMPH	62	82	93				58	77	88						
16.00R25 TKPH	123	157	179				112	146	168						
TMPH	84	108	123				77	100	115						
18.00R25 TKPH	169	209	244							144	179	209			
TMPH	116	143	167							99	123	143			
18.00R33 TKPH	199	246	287	185	229	267				170	211	246			
TMPH	136	168	197	127	157	183				116	145	168			
21.00R35 TKPH	265	328	383	237	293	342				227	281	328			
TMPH	182	225	262	162	201	234				155	192	225			
24.00R35 TKPH	338	418	489	314	388	453	314	388	453						
TMPH	232	286	335	215	266	310	215	266	310						
24.00R49 TKPH	398	492	575	361	446	522	341	421	492						
TMPH	273	337	394	247	305	358	234	288	337						
27.00R49 TKPH	486	600	702	440	544	636	415	513	600						
TMPH	333	411	481	301	372	436	284	351	411						
33.00R51 TKPH	660	802	953	591	700	855	558	679	807						
TMPH	452	549	653	405	479	586	382	465	553						
36.00R51 TKPH							642	781	927					845	
TMPH							440	535	635					579	
37.00R57 TKPH							694	845	1003				694		1003
TMPH							475	579	687				475		687
40.00R57 TKPH										773	940	1117	773	940	1117
TMPH										529	644	765	529	644	765
46/90R57										Consult Bridgestone					

**NOTE:** For cycle lengths of 5 km (3 miles) or less (round trip), multiply the T-km/h (Ton-MPH) value in this table by 1.12.

**T-km/h (Ton-MPH) RATINGS**  
**AT 38° C (100° F) AMBIENT TEMPERATURE**  
**For Haul Lengths of 32 km (20 Miles) or Less One Way**  
**Maximum Speed Not to Exceed 48 km (30 Miles) per Hour**

**BRIDGESTONE RADIAL PLY**

Industry Code		E-2/E-3			E-3			E-3		
Tread Design		VKT/VFT			VRL/VEL			VMT		
Custom Code		E2A	E1A	E3A	E2A	E1A	E3A	E2A	E1A	E3A
14.00R24/25	TKPH TMPH	106 73	141 97	159 109						
16.00R24/25	TKPH TMPH	134 92	179 123	202 138						
18.00R25	TKPH TMPH	193 132	239 164	280 192	181 124	224 153	262 179			
18.00R33	TKPH TMPH	227 155	281 192	328 225	213 146	263 180	307 210			
21.00R35	TKPH TMPH	302 207	374 256	437 299	284 195	351 240	410 281			
24.00R35	TKPH TMPH	386 264	477 327	558 382	362 248	448 307	524 359			
27.00R49	TKPH TMPH	557 382	688 471	804 551	521 357	644 441	753 516			
33.00R51	TKPH TMPH							837 573	1018 697	1209 828
36.00R51	TKPH TMPH							974 667	1185 812	1407 964
40.00R57	TKPH TMPH							1204 825	1463 1002	1739 1191

**NOTE:** For cycle lengths of 5 km (3 miles) or less (round trip), multiply the T-km/h (Ton-MPH) value in this table by 1.12.

**T-km/h (Ton-MPH) RATINGS**  
**AT 38° C (100° F) AMBIENT TEMPERATURE**  
**For Haul Lengths of 32 km (20 Miles) or Less One Way**  
**Maximum Speed Not to Exceed 48 km (30 Miles) per Hour**

**BRIDGESTONE RADIAL PLY**

Industry Code		E-2			E-2/E-3			E-3			E-4			E-4		
Tread Design		VKT			VMT/VLT			VRL			VALS			VLTS		
Custom Code		E2A	E1A	E3A	E2A	E1A	E3A	E2A	E1A	E3A	E2A	E1A	E3A	E2A	E1A	E3A
17.5R25	TKPH TMPH	95 65			90 62	144 99										
20.5R25	TKPH TMPH	160 110	206 141		149 102	194 133					114 78			126 86		
23.5R25	TKPH TMPH	205 140	263 180		190 130	248 170					146 100			161 110		
26.5R25	TKPH TMPH	257 176	312 214		220 151	293 201					165 113			186 127		
29.5R25	TKPH TMPH	310 212	376 258		266 182	354 242	399 273							225 154		
29.5R29	TKPH TMPH	330 226	401 275								212 145	257 174				
33.25R29	TKPH TMPH	407 279	494 338					319 218	435 298							
29.5R35	TKPH TMPH							279 191	380 260							
33.25R35	TKPH TMPH	441 302						346 237	472 323							
37.25R35	TKPH TMPH	530 363	644 441	720 493				413 283	563 386							
37.5R39	TKPH TMPH		696 477													
40.5/75R39	TKPH TMPH							495 339	675 462	765 524						
25/65R25	TKPH TMPH	162 111														
30/65R25	TKPH TMPH				225 154											

**NOTE:** For cycle lengths of 5 km (3 miles) or less (round trip), multiply the T-km/h (Ton-MPH) value in this table by 1.12.

**T-km/h (Ton-MPH) RATINGS**  
**AT 38° C (100° F) AMBIENT TEMPERATURE**  
**For Haul Cycles Less than 5 km (3 Miles) Round Trip\***

**MICHELIN RADIAL PLY CONSTRUCTION STANDARD BASE TIRES**

Industry Code	Tread Design	E-2	E-3		E-4						
		XV	XR	XK	XDT			XKD1			
Type		C	B	B	A4	A	B	A4	A	B4	B
18.00R33	TKPH	436	305	279	157	192	262	122	157		227
	TMPH	299	209	191	108	132	179	84	108		155
24.00R35	TKPH	740	518	474	266	326	444	207	266		385
	TMPH	507	355	325	182	223	304	142	182		264
27.00R49	TKPH	1090	763	698	392	480	654		392	480	567
	TMPH	747	523	478	269	329	448		269	329	388
33.00R51	TKPH				558		929		496	620	744
	TMPH				382		637		340	425	510
36.00R51	TKPH		1295	1184					592	740	888
	TMPH		887	811					406	507	608
37.00R57	TKPH								678	848	1018
	TMPH								464	581	697
40.00R57	TKPH								768	960	1152
	TMPH								526	658	789
44/80R57	TKPH							Consult Michelin			
	TMPH										
55/80R63	TKPH							Consult Michelin			
	TMPH										

23

\*Consult Michelin for TKPH (TMPH) ratings for haul cycles greater than 5 km (3 m).  
 NOTE: Additional tread compounds are available to meet specific T-km/h (TMPH).



# Tires

T-km/h (Ton-MPH) Rating  
 ISO Load Index Speed Symbol  
 ● Michelin Radial Ply — Wide Base Sizes

## T-km/h (Ton-MPH) RATINGS AT 38° C (100° F) AMBIENT TEMPERATURE

For Haul Cycles Less than 5 km (3 Miles) Round Trip\*

### MICHELIN RADIAL PLY CONSTRUCTION WIDE BASE SIZES

Industry Code		E-3			E-4
Tread Design		XR	XRDN		XRS
Type		B	A	B	B
25/65R25 Low Profile	TKPH	217			
	<b>TMPH</b>	<b>149</b>			
29.5R29	TKPH	420			
	<b>TMPH</b>	<b>288</b>			
33.25R29	TKPH	518			
	<b>TMPH</b>	<b>355</b>			
33.5R33	TKPH	560			
	<b>TMPH</b>	<b>384</b>			
37.5R33	TKPH	680			
	<b>TMPH</b>	<b>466</b>			
29.5R35	TKPH	448			
	<b>TMPH</b>	<b>307</b>			
33.25R35	TKPH	560			
	<b>TMPH</b>	<b>384</b>			
37.25R35	TKPH	661			415
	<b>TMPH</b>	<b>453</b>			<b>284</b>
37.5R39	TKPH	721			
	<b>TMPH</b>	<b>494</b>			
40.5/75R39	TKPH		534	766	
	<b>TMPH</b>		<b>366</b>	<b>525</b>	

\*Consult Michelin for TKPH (TMPH) ratings on haul cycles greater than 5 km (3 m).

## ISO Load Index Speed Symbol AT 38° C (100° F) AMBIENT TEMPERATURE

For Haul Lengths Greater than 5 km (3 Miles) Round Trip

### MICHELIN RADIAL PLY CONSTRUCTION WIDE BASE SIZES

Industry Code	E-3	E-3 (DT)	E-3
Tread Design	XADN	XADT	XAD65-1
Type			
20.5R25	177B	177B	
23.5R25	185B	185B	
26.5R25	193B*	193B	
29.5R25	200B*	200B	
750/65R25 Low Profile			190B

\*E speed option available via special field request.

## TIRE AND RIM ASSOCIATION RATINGS

While the T-km/h (Ton-MPH) Rating System provides a method to determine the tire's work capacity, Tire and Rim Association Ratings provide a guide for evaluating a tire's structural capacity. These two rating systems should be used in conjunction to evaluate tire performance.

## TIRE SELECTION

Selecting the optimum tire for a given application is particularly critical for earthmoving. The machines have the capability to outperform the tires and, unless proper practices are observed, very costly premature tire failures can occur. Job conditions vary greatly throughout the world, as well as within any given job site, and selecting the optimum tire requires careful consideration of all factors involved. In general, the tire manufacturer should be consulted before making the selection for any given application. In some cases, the tire manufacturer can fabricate tires specifically tailored for a given job site.

For those applications where wear is extremely slow, especially as a result of only occasional operation throughout the year, the cheapest lightweight tire needs to be given strong consideration.

As job conditions become severe, the following factors should be evaluated in selecting a tire:

### *Transport or Load-and-carry —*

- T-km/h (Ton-MPH) (primary consideration)
- Minimum approved ply rating or greater
- Largest optional size
- Thickest tread commensurate with T-km/h (Ton-MPH)
- Largest practical bar to gap ratio
- Most cut resistant tread commensurate with T-km/h (Ton-MPH)
- Belted construction

### *Grader —*

- Tire load rating suitable for maximum equipped machine weight (See Tire Load Worksheet)
- Application specific tire (snow, construction, road maintenance, mining, general purpose, all season)
- Bias or radial based on initial cost, puncture resistance, rolling resistance, life to retread/repair

## Tire Load Worksheet (Motor Graders)

A. Total machine operating weight:  
 Base operating weight 1a \_\_\_\_\_  
 Attachments #1 \_\_\_\_\_  
                   #2 \_\_\_\_\_  
                   #3 \_\_\_\_\_  
                   Sum of #1-3) 2a \_\_\_\_\_

Total machine operating weight  
 Sum of 1a. & 2a.) 3a \_\_\_\_\_

B. Load on rear of machine  
 \_\_\_\_\_ (.7) × (3a.) \_\_\_\_\_ = 1b. \_\_\_\_\_

C. Load per tandem tire  
 (1b.) \_\_\_\_\_ / 4 \_\_\_\_\_ = 1c. \_\_\_\_\_

D. Load on front of machine  
 \_\_\_\_\_ .3 × (3a.) \_\_\_\_\_ = 1d. \_\_\_\_\_

E. Load per front tire  
 (1d.) \_\_\_\_\_ / 2 \_\_\_\_\_ = 1e. \_\_\_\_\_

F. Controlling tire load  
 the greater of 1c. or 1e. 1f. \_\_\_\_\_

G. Tire load rating 1g. \_\_\_\_\_

Tire acceptability check:

Tire load < tire load rating  
 1f. \_\_\_\_\_ < 1g. \_\_\_\_\_

### *Loader or Dozer —*

- Minimum approved ply rating or greater
- Largest optional size
- Thickest tread
- Thickest available undertread
- Butressed shoulder
- Most cut resistant tread
- Largest practical bar to gap ratio
- Belted construction
- Lowest aspect ratio

All tires should be operated at the tire manufacturer's recommended inflation pressure for a given application. Inflation pressure should be checked every working day with an accurate Bourden-tube type gauge. This gauge should be checked against a known standard such as a dead weight tester at least once a month.

Excess loads may result from factors such as varying material density, field modifications to equipment, mud accumulation, load transfer, etc. Only under these conditions may the actual in service tire load exceed the rated machine load. When excess loads are encountered, cold inflation pressures **must** be increased to compensate for higher loads. Increase tire inflation pressure 2% for each 1% increase in load.

	Maximum Excess Load	Pressure
Bias Ply	15%	30%
Radial Ply	7%	14%

The above loads will result in reduced tire performance and must be approved by the tire manufacturer.

The use of chains is difficult to justify except under a few conditions. Chains are very costly and heavy, and require more maintenance than most operations can provide. On some models sufficient clearance does not exist for chains with all tire combinations. Extensive modifications may be required if chains are needed for the job.

Foam filling tires is normally not recommended due to high cost and lack of local filling facilities. Its use should be confined to loader and dozer applications where penetrations occur almost daily. If foam is used be sure to adhere to recommended equivalent pressures of nitrogen and use highest available ply rating. Consult tire manufacturer for specific warranty concerns.

**TIRE SELECTION GUIDE**

Material	Road or ground condition	Treads	
		Wheel Tractor-Scrapers	Wheel Tractors or Wheel Loaders
Silt and clay, No Rock, High moisture content.	Good varying to poor. High rolling resistance.	Traction Type (E-2).	Traction Type (L-2).
Silt and Clay, Some rock, Variable moisture content.	Good varying to poor.	Rock-type (E-3) best unless traction is a problem — then use traction tires (E-2). Rock-type offers more resistance to cutting.	Rock-type (L-3, L-4 or L-5) best unless traction is a problem — then use traction (L-2) tires. Rock-type offers more resistance to cutting.
Silty or clayey gravel and sand, Low moisture content.	Excellent to good. Firm surface.	Rock-type (E-3) offers better wear.	Rock-type (L-3, L-4 or L-5) offers better wear.
Silty or clayey gravel and sand, High moisture content.	Poor, rutted, pot holes.	Rock-type (E-3).	Rock-type (L-3, L-4 or L-5).
Blasted rock.	Hard surface, rough.	Rock-type (E-3 or L-3 and L-4 if possible).	Rock-type (L-5 or L-5S).
Sand Very low silt or clay content.	Good to fair surface.	Rock-type (E-3 or L-3S and L-4S if possible) with low pressure. Creates minimum soil disturbance resulting improved flotation.	Rock-type (L-3 or L-3S) with low pressure. Creates minimum soil disturbance resulting in improved flotation.

**TIRE SUPPLIER RECOMMENDED COLD INFLATION PRESSURES**

The following tables present Caterpillar and the *tire suppliers'* recommended cold inflation pressures for tires on Caterpillar machines. An asterisk (\*) indicates the standard tire size and ply rating.

The inflation pressure is based on a ready-to-work vehicle weight with no attachments, rated payload, and average operating conditions. **Pressures for each application may need to be varied from those shown and should always be obtained from your tire supplier.**

Pressures for all tires apply to rib, traction, rock, deep tread, and super deep tread tires.

**NOTE:** Caterpillar now recommends using dry nitrogen (N<sub>2</sub>) gas for both tire inflation and pressure adjustments on all current and past production machines.

**EXCAVATORS — Bias Ply**

For complete tire data and inflation pressures, see the Excavator section in this handbook.

**SKIDDERS — Bias Ply**

Tire Size	Ply Rating	Pressure			
		Front		Rear	
		kPa	psi	kPa	psi
<b>28L-26</b>	14	207	<b>30</b>	207	<b>30</b>
<b>35.5L-32</b>	16	172	<b>25</b>	172	<b>25</b>
<b>24.5-32</b>	16	172	<b>25</b>	172	<b>25</b>
<b>30.5L-32</b>	16	172	<b>25</b>	172	<b>25</b>

**FORWARDERS & HARVESTERS — Bias Ply**

Tire Size	Ply Rating	Pressure			
		Front		Rear	
		kPa	psi	kPa	psi
<b>600/65-32</b>	14	241	<b>35</b>	241	<b>35</b>
<b>700/65-32</b>	14	241	<b>35</b>	241	<b>35</b>
<b>600/55-26.5</b>	16	330	<b>48</b>	330	<b>48</b>
<b>700/50-26.5</b>	16	400	<b>58</b>	400	<b>58</b>
<b>700/40-22.5</b>	12	172	<b>25</b>	172	<b>25</b>
<b>700/45-22.5</b>	16	172	<b>25</b>	172	<b>25</b>
<b>600/50-22.5</b>	12	207	<b>30</b>	207	<b>30</b>
<b>600/56-22.5</b>	16	276	<b>40</b>	276	<b>40</b>

**MOTOR GRADERS — Bias Ply**

Model	Tire Size	Ply Rating	Pressure			
			Front		Rear	
			kPa	psi	kPa	psi
120H	13.00-24TG*	10*, 12	241	35	241	35
	14.00-24TG	10, 12	241	35	241	35
	15.5-25	10, 12	241	35	241	35
	17.5-25	12	241	35	241	35
135H	13.00-24TG*	10*, 12	241	35	241	35
	14.00-24TG	10, 12	241	35	241	35
	15.5-25	12	276	40	276	40
	17.5-25	12	241	35	241	35
12H	13.00-24TG*	12	310	45	310	45
	14.00-24TG	10, 12	241	35	241	35
	15.5-25	12	241	35	241	35
	17.5-25	12	276	40	276	40
140H	14.00-24TG*	10*, 12	241	35	241	35
	17.5-25	12	241	35	241	35
143H	14.00-24TG*	10*, 12	241	35	241	35
	17.5-25	12	241	35	241	35
160H	14.00-24TG*	10, 12*	241	35	241	35
	17.5-25	12	241	35	241	35
163H	14.00-24TG*	12	241	35	241	35
	17.5-25	12	241	35	241	35

\*Standard tire and ply rating. Refer to Tire Load Worksheet to determine proper ply rating.

**MOTOR GRADERS — Bias Ply (continued)**

Model	Tire Size	Ply Rating	Pressure			
			Front		Rear	
			kPa	psi	kPa	psi
14H	16.00-24TG*	16	310	45	310	45
	20.5-25	16	241	35	241	35
16H	18.00-25*	16	241	35	241	35
	23.5-25	16	241	35	241	35

\*Standard tire and ply rating.

**WHEEL TRACTORS — Bias Ply**

Model	Tire Size	Ply Rating or Strength Index	Pressure			
			Front		Rear	
			kPa	psi	kPa	psi
814F	23.5-25*	12	207	30	207	30
	26.5-25	14	172	25	172	25
824G	29.5-25*	22	241	35	241	35
834B	35/65-33*	24	241	35	241	35

**WHEEL TRACTOR — Radial Ply**

814F	23.5R25	★	276	40	276	40
	26.5R25	★	241	35	241	35
824G	29.5R25	★	345	50	345	50
834B	35/65R33	★	345	50	345	50

\*Standard tire, ply rating, and inflation pressures.

**MOTOR GRADERS — Michelin, Goodyear and Bridgestone/Firestone Radial Ply**

Model	Tire Size	Strength Rating	Michelin Pressure				Goodyear Pressure				Bridgestone Pressure			
			Front		Rear		Front		Rear		Front		Rear	
			kPa	psi	kPa	psi	kPa	psi	kPa	psi	kPa	psi	kPa	psi
120H	13.00R24TG	★	310	45	310	45	310	45	310	45	310	45	310	45
	14.00R24TG	★	310	45	310	45	310	45	310	45	310	45	310	45
	15.5R25	★	310	45	310	45	310	45	310	45	310	45	310	45
135H	13.00R24TG	★	310	45	310	45	310	45	310	45	310	45	310	45
	14.00R24TG	★	310	45	310	45	310	45	310	45	310	45	310	45
	15.5R25	★	310	45	310	45	310	45	310	45	310	45	310	45
12H	13.00R24TG	★	310	45	310	45	310	45	310	45	310	45	310	45
	14.00R24TG	★	310	45	310	45	310	45	310	45	310	45	310	45
	15.5R25	★	310	45	310	45	310	45	310	45	310	45	310	45
140H	14.00R24TG	★	310	45	310	45	310	45	310	45	310	45	310	45
	17.5R25	★	310	45	310	45	310	45	310	45	310	45	310	45
160H	14.00R24TG	★	310	45	310	45	310	45	310	45	310	45	310	45
	17.5R25	★	310	45	310	45	310	45	310	45	310	45	310	45
143H	14.00R24TG	★	310	45	310	45	310	45	310	45	310	45	310	45
	17.5R25	★	310	45	310	45	310	45	310	45	310	45	310	45
163H	14.00R24TG	★	310	45	310	45	310	45	310	45	310	45	310	45
	17.5R25	★	310	45	310	45	310	45	310	45	310	45	310	45
14H	16.00R24TG	★	310	45	310	45	310	45	310	45	310	45	310	45
	20.5R25	★	310	45	310	45	310	45	310	45	310	45	310	45
16H	18.00R25	★	310	45	310	45	310	45	310	45	310	45	310	45
	23.5R25	★	310	45	310	45	310	45	310	45	310	45	310	45
24H	29.5R29	★	Consult Michelin				—	—	—	—	310	45	310	45
	29.5R29	★★					310	45	310	45	310	45	310	45

**BACKHOE LOADERS (Front)**

Tire Size	Ply/Star Rating	Pressure	
		kPa	psi
9x16 F2	10	414	60
11Lx16 F3	10	345	50
	12	448	65
14.5/75x16.1 F3	10	276	40
12.5/80-18 I3 SG LUG	10	310	45
12.5x20 R4	10	345	50
340/80R18 IT510	★	345	50
335/80R18 XM27 139	★	345	50
15-19.5 SSSG	8	276	40
	12	414	60

**BACKHOE LOADERS (Rear)**

Tire Size	Ply/Star Rating	Pressure	
		kPa	psi
16.9x24 R4	8	207	30
	10	207	30
19.5x24 IT525	8	172	25
	10	207	30
19.5LR24 IT510	★	276	40
16.9x28 R4	10	207	30
	12	276	40
16.9/14x28 R1	12	241	35
16.9R28 IT510	★	276	40
16.9R28 XM27	★	276	40
18.4/15x26 R4	12	241	35
18.4/15R26 XM27	★	276	40
21Lx24 IT525	12	241	35

**PAVING PRODUCTS — Bias Ply and Radial****Pneumatic Tires**

Model	Tire Size	Ply Rating	Tire Inflation Pressure <sup>1,2</sup>			
			Front		Rear	
			kPa	psi	kPa	psi
CB-225D	9.5/65 — 15	6	—	—	325	47
CB-335D	7.5 x 16	6	—	—	550	80
CB-535B	17/80R24 (R24)	Radial	—	—	1000	145
CB-545	13/80R20 (E20)	Radial	—	—	1000	145
CS-323C	11.2 x 24	6	—	—	138	20
CS-431C	14.9 x 24	6	—	—	138	20
CS-433C	14.9 x 24	6	—	—	138	20
CS-531D	23.1 x 26	8	—	—	138	20
CS-533D	23.1 x 26	8	—	—	138	20
CS-563D	23.1 x 26	8	—	—	138	20
CS-583D	23.1 x 26	8	—	—	138	20
CP-323C	11.2 x 24	6	—	—	138	20
CP-433C	14.9 x 24	6	—	—	138	20
CP-533D	23.1 x 26	8	—	—	138	20
CP-563D	23.1 x 26	8	—	—	138	20
PS-150B	8.5 x 15	6	276	40	414	60
		12	345	50	758	110
		14	345	50	896	130
PS-200B	7.5 x 15	12	345	50	758	110
		14	345	50	896	130
PF-290B	14/70 — 20	12	241	35	448	65
PF-300B & PS-300B	13/80R20 (E20)	Radial	200	29	1000	145
	14/80R20 (F20)	Radial	200	29	1000	145
PS-360B	14/70 — 20	12	241	35	448	65
		20	345	50	758	110
PS-500	17/80R24 (R24)	Radial	200	29	1000	145
RR-250B	23.5-25	16	241	35	—	—
	15.5-25	10	—	—	379	50
SS-250B	28L-26	10	207	30	—	—
	14.9-24	6	—	—	207	30
RM-350B	23.5-25	16	448	65	—	—
	19.5-24	12	—	—	241	35
AP-800C	16.00-24	12	—	—	345	50
AP-900	18.00-25	16	—	—	345	50
AP-1000B	18.00-25	16	—	—	379	55

<sup>1</sup>Inflation pressures are maximum rated pressures.<sup>2</sup>Pressure varies application for Pneumatic Tire Compactors (PS and PF series).

**PAVING PRODUCTS — BALLAST CONFIGURATIONS**

Model	Load	Ballast Configuration					
		Empty	Water Only	Steel Only	Wet Sand Only	Steel & Water	Steel & Wet Sand
PS-150B	Wheel Load	539 kg 1197 lb	968 kg 2134 lb	*	1438 kg 3171 lb	*	*
	Machine Weight	4885 kg 10,775 lb	8710 kg 19,205 lb	*	12 940 kg 28,535 lb	*	*
PS-150B (11-wheel)	Wheel Load	450 kg 993 lb	798 kg 1760 lb	*	1183 kg 2608 lb	*	*
	Machine Weight	4955 kg 10,925 lb	8780 kg 19,355 lb	*	13 010 kg 28,685 lb	*	*
PS-200B	Wheel Load	551 kg 1214 lb	976 kg 2151 lb	1254 kg 2758 lb	1446 kg 3187 lb	1605 kg 3530 lb	2016 kg 4444 lb
	Machine Weight	4955 kg 10,925 lb	8780 kg 19,355 lb	11 284 kg 24,825 lb	13 010 kg 28,685 lb	14 443 kg 31,774 lb	18 145 kg 40,000 lb
PF-290B	Wheel Load	1230 kg 2705 lb	1958 kg 4308 lb	2238 kg 4924 lb	*	2894 kg 6366 lb	*
	Machine Weight	8607 kg 18,935 lb	13 707 kg 30,155 lb	15 669 kg 34,471 lb	*	20 256 kg 44,563 lb	*
PF-300B & PS-300B	Wheel Load	2000 kg 4409 lb	*	3000 kg 6600 lb	*	*	*
	Machine Weight	14 000 kg 30,860 lb	*	21 000 kg 46,200 lb	*	*	*
PS-360B	Wheel Load	1215 kg 2675 lb	1930 kg 4250 lb	1500 kg 3165 lb	2645 kg 5830 lb	2855 kg 6300 lb	3570 kg 7870 lb
	Machine Weight	8500 kg 18,740 lb	1930 kg 4250 lb	10 050 kg 22,155 lb	18 500 kg 40,785 lb	20 000 kg 44,090 lb	25 000 kg 55,115 lb
PS-500	Wheel Load	1789 kg 3936 lb	*	3667 kg 8067 lb	*	*	*
	Machine Weight	16 100 kg 35,420 lb	*	33 000 kg 72,600 lb	*	*	*

\*Configuration not available.

**WHEEL TRACTOR-SCRAPERS — Bias Ply**

Model	Tire Size	Ply Rating	Pressure			
			Front		Rear	
			kPa	psi	kPa	psi
613C Series II	23.5-25	20	310	45	310	45
611, 615C Series II	29.5-25	28	345	50	310	45
	29.5-25	34	448	65	379	55
621G	33.25-29	26	379	55	310	45
	29.5-29	34	414	60	310	45
	29.5-35	28	379	55	276	40
623G	33.25-29	26	379	55	310	45
	29.5-29	34	448	65	345	50
	29.5-35	28	414	60	310	45
627G	33.25-29	26	379	55	310	45
	29.5-29	34	414	60	448	65
	29.5-35	34	345	50	379	55
631E Series II	37.25-35	42	414	60	379	55
637E Series II	37.25-35	42	414	60	379	55

**ARTICULATED TRUCK — Radial Ply**

Model	Tire Size	Ply Rating	Pressure					
			Front		Center		Rear	
			kPa	psi	kPa	psi	kPa	psi
D25D	26.5R25	★ ★	414	60	—	—	448	65
D30D	29.5R25	★ ★	345	50	—	—	448	65
D250E Series II	20.5R25	★ ★	379	55	448	65	448	65
	23.5R25	★ ★	310	45	379	55	379	55
D300E Series II	23.5R25	★ ★	345	50	345	50	345	50
	30/65R25	★ ★	276	40	345	50	345	50
D350E Series II	26.5R25	★ ★	379	55	345	50	345	50
	29.5R25	★ ★	310	45	310	45	310	45
D400E Series II	26.5R25	★ ★	414	60	448	65	448	65
	29.5R25	★ ★	345	50	345	50	345	50

## WHEEL TRACTOR-SCRAPERS — Radial Ply

Model	Tire Size	Strength Index	Pressure											
			Michelin				Goodyear				Bridgestone			
			Front		Rear		Front		Rear		Front		Rear	
613C Series II	18.00R25	★	kPa	psi	kPa	psi	kPa	psi	kPa	psi	kPa	psi	kPa	psi
	23.5R25	★	414	60	414	60	414	60	448	65	448	65	448	65
611, 615C Series II	26.5R25	★ ★	276	40	310	45	345	50	345	50	379	55	379	55
	29.5R25	★	448	65	414	60	483	70	483	70	483	70	483	70
621G	29.5R29	★ ★	345	50	345	50	379	55	379	55	379	55	379	55
	29.5R35	★ ★	414	60	345	50	448	65	379	55	448	65	379	55
	33.25R29	★ ★	379	55	310	45	414	60	345	50	414	60	345	50
623G	29.5R29	★ ★	483	70	448	65	517	75	414	60	517	75	414	60
	29.5R35	★ ★	448	65	414	60	448	65	414	60	414	60	345	50
	33.25R29	★ ★	379	55	310	45	414	60	345	50	—	—	—	—
627G	29.5R29	★ ★	414	60	448	65	517	75	517	75	517	75	517	75
	29.5R35	★ ★	379	55	448	65	414	60	414	60	483	70	483	70
	33.25R29	★ ★	345	50	414	60	379	55	379	55	379	55	379	55
631E Series II	37.25R35	★ ★	483	70	448	65	517	75	414	60	517	75	414	60
637E Series II	37.25R35	★ ★	483	70	517	75	517	75	517	75	517	75	517	75
651E	37.5R39	★ ★	655	95	483	70	620	90	517	75	620	90	552	80
	40.5/75R39	★ ★	517	75	448	65	517	75	448	65	517	75	448	65
657E	37.5R39	★ ★	*	*	*	*	689	100	689	100	689	100	689	100
	40.5/75R39	★ ★	552	80	517	75	552	80	552	80	552	80	552	80

\*Contact Michelin.

## CONSTRUCTION &amp; MINING TRUCKS &amp; TRACTORS — Radial Ply

Model	Tire Size	Strength Index	Pressure											
			Michelin				Goodyear				Bridgestone			
			Front		Rear		Front		Rear		Front		Rear	
769D	18.00R33*	★ ★	kPa	psi	kPa	psi	kPa	psi	kPa	psi	kPa	psi	kPa	psi
771D	18.00R33*	★ ★	655	95	655	95	724	105	724	105	689	100	689	100
773D	24.00R35*	★ ★	758	110	758	110	800	116	800	116	800	116	800	116
775D	24.00R35*	★ ★	517	75	517	75	552	80	552	80	585	85	585	85
776D	27.00R49*	★ ★	586	85	655	95	620	90	620	90	655	95	655	95
777D	27.00R49*	★ ★	620	90	620	90	655	95	655	95	689	100	689	100
784B	36.00R51*	★ ★	620	90	620	90	689	100	689	100	689	100	689	100
785B	33.00R51*	★ ★	758	110	758	110	689	100	689	100	689	100	689	100
789B	37.00R57*	★ ★	724	105	724	105	689	100	689	100	689	100	689	100
793C	40.00R57*	★ ★	655	95	655	95	689	100	689	100	689	100	689	100
	44/80R57	★ ★	600	87	600	87	—	—	—	—	—	—	—	—
	46/90R57	★ ★	—	—	—	—	—	—	—	—	Consult Bridgestone			
797	55/80R63	★ ★	Consult Michelin				—	—	—	—	—	—	—	—

\*Standard tire and ply rating.



# Tires

## Standard Cold Inflation Pressures Bias and Bias Belted

- Wheel Loaders
- Log Loaders
- Integrated Tool Carriers
- Telehandlers

### WHEEL LOADERS — Bias and Bias Belted

Model	Tire Size	Ply Rating or Strength Index	Pressure			
			Front		Rear	
			kPa	psi	kPa	psi
902	12.5-18	10	241	35	172	25
906	12.5-20	10	241	35	172	25
908	14.5-20	10	276	40	241	35
914G	15.5-25	12	276	40	172	25
	15.5-25	12	241	35	172	25
924G	17.5-25	12	310	45	207	30
	20.5-25	12	241	35	172	25
928G	17.5-25	12	345	50	241	35
	20.5-25	12	241	35	172	25
938G	20.5-25	12	345	50	241	35
950G	23.5-25	16	414	60	241	35
962G	23.5-25	16	414	60	241	35
966G	26.5-25	20	448	65	241	35
972G	26.5-25	20	448	65	241	35
980G	29.5-25	22	414	60	241	35
988G	35/65-33*	30	550	80	350	51
990 Series II	41.25/70-39	34	483	70	276	40
992G	45/65-45	46	620	90	276	40
994D	50/80-57	68	689	100	585	85
	53.5/85-57	76	689	100	585	85

\*Higher ply ratings are recommended for High Lift Machines.

NOTE: Tire pressure on front tires of front end loaders may be increased up to 100 kPa (15 psi).

### SKID STEER LOADERS

Model	Tire Size	Pressure			
		Goodyear		Galaxy	
		kPa	psi	kPa	psi
216	7.00-15	379	55	—	—
	10-16.5	241	35	345	50
	31x15.50-15	172	25	—	—
226	10-16.5	241	35	345	50
	31x15.50-15	172	25	—	—
228	10-16.5	241	35	345	50
	31x15.50-15	172	25	—	—
236	8.25-15	345	50	—	—
	12-16.5	241	35	310	45
	31x15.50-15	172	25	—	—
246	12-16.5	241	35	310	45
	31x15.50-15	172	25	—	—
248	12-16.5	241	35	310	45
	31x15.50-15	172	25	—	—

### LOG LOADERS — Bias and Bias Belted

Model	Tire Size	Ply Rating	Inflation Pressure			
			Front		Rear	
			kPa	psi	kPa	psi
IT14G	15.5-25	12	310	45	207	30
	17.5-25	12	276	40	172	25
924G Versalink	17.5-25	12	310	45	241	35
	20.5-25	12	276	40	207	30
IT28G	20.5-25	12	276	40	207	30
938G	20.5-25	12	448	65	241	35
950G	23.5-25	16	414	60	241	35
966G	26.5-25	20	448	65	241	35
	23.5-25	24	586	85	241	35
980G	29.5-25	28	552	80	241	35
988G	35/65-33	30	552	80	276	40

### INTEGRATED TOOL CARRIERS — Bias and Bias Belted

Model	Tire Size	Ply Rating	Inflation Pressure			
			Front		Rear	
			kPa	psi	kPa	psi
IT14G	15.5-25	12	310	45	207	30
	17.5-25	12	241	35	172	25
924G Versalink	17.5-25	12	310	45	207	30
	20.5-25	12	241	35	172	25
IT28G	17.5-25	12	345	50	241	35
	20.5-25	12	241	35	172	25
IT38G	20.5-25	12	345	50	241	35
	20.5-25	16	483	70	241	35

### TELEHANDLERS — Bias and Bias Belted

Model	Tire Size	Ply Rating or Strength Index	Inflation Pressure			
			Front		Rear	
			kPa	psi	kPa	psi
TH62	13.0-24	12	331	48	331	48
	15.5/80-24	10	276	40	276	40
	15.5-25	12	310	45	310	45
TH82	13.0-24(ANSI)	12	379	55	379	55
	13.0-24(FEM)	12	448	65	448	65
	15.5/80-24	12	379	55	379	55
	15.5-25	12	379	55	379	55
	17.5-25	12	345	50	345	50
TH63	13.0-24	12	448	65	448	65
	15.5/80-24	12	379	55	379	55
	15.5-25(ANSI)	12	379	55	379	55
	15.5-25(FEM)	12	414	60	414	60
TH83	14.0-24	12	428	62	428	62
	17.5-25	12	379	55	379	55
TH103	14.0-24	16	552	80	552	80
	17.5-25	16	483	70	483	70

**WHEEL LOADERS — Radial Ply**

Model	Tire Size	Strength Index	Pressure							
			Michelin				Dunlop			
			Front		Rear		Front		Rear	
		kPa	psi	kPa	psi	kPa	psi	kPa	psi	
902	335/80R18 XM27	★	276	40	207	30	—	—	—	—
	335/80R18 SPT9	★	—	—	—	—	276	40	172	25
906	365/80R20 SPT9	★	—	—	—	—	276	40	172	25
	375/75R20 XM27	★	276	40	207	30	—	—	—	—
	405/70R20 SPT9	★	—	—	—	—	241	35	172	25
908	425/75R20 XM27	★	241	35	172	25	—	—	—	—
	405/70R20 SPT9	★	—	—	—	—	276	40	207	30

Model	Tire Size	Strength Index	Pressure											
			Michelin		Goodyear		Bridgestone							
			Front		Rear		Front		Rear					
		kPa	psi	kPa	psi	kPa	psi	kPa	psi	kPa	psi			
914G	15.5R25	★	241	35	172	25	—	—	—	—	414	60	276	40
	17.5R25	★	207	30	172	25	414	60	310	45	414	60	276	40
924G	17.5R25	★	345	50	172	25	414	60	310	45	414	60	276	40
	555/70R25	★	276	40	172	25	—	—	—	—	—	—	—	—
	20.5R25	★	241	35	172	25	414	60	310	45	414	60	276	40
928G	17.5R25	★	379	55	172	25	414	60	310	45	414	60	276	40
	555/70R25	★	207	30	172	25	—	—	—	—	—	—	—	—
	20.5R25	★	207	30	172	25	414	60	310	45	414	60	276	40
938G	20.5R25	★	310	45	172	25	276	40	241	35	276	40	207	30
950G	23.5R25	★	241	35	172	25	310	45	207	30	310	45	207	30
962G	23.5R25	★	276	40	172	25	345	50	207	30	345	50	207	30
966G	26.5R25	★	310	45	172	25	345	50	207	30	345	50	276	40
972G	26.5R25	★	345	50	172	25	414	50	276	40	345	50	276	40
980G	26.5R25	★	483	70	172	25	448	65	310	45	414	60	276	40
	29.5R25	★	379	55	207	30	345	50	207	30	345	50	276	40
988G	35/65R33	★	517	75	207	30	483	70	345	50	517	75	345	50
990 Series II	45/65R39	★	517	75	276	40	—	—	—	—	552	80	345	50
	40.5/75R39	★	—	—	—	—	483	70	345	50	—	—	—	—
992G	45/65R45	★	552	80	276	40	586	85	448	65	655	95	414	60
994D	55/80R57	—	Contact Michelin				—	—	—	—	758	110	517	75

NOTE: Tire pressure on front tires of front end loaders may be increased up to 100 kPa (15 psi).

**TELEHANDLERS — Radial Ply**

Model	Tire Size	Ply Rating or Strength Index	Pressure							
			Michelin		Goodyear					
			Front		Rear		Front		Rear	
		kPa	psi	kPa	psi	kPa	psi	kPa	psi	
TH62	17.5LR24	★	276	40	276	40	276	40	276	40
TH63	15.5R25	★	331	48	331	48	400	58	400	58
TH82	15.5R25	★	331	48	331	48	393	57	393	57
	445/70R24	★	317	46	317	46	—	—	—	—
	495/70R24	★	276	40	276	40	—	—	—	—
TH83	15.5R25	★	428	62	428	62	—	—	—	—
	17.5R25	★	331	48	331	48	379	55	379	55
TH103	17.5R25	★	—	—	—	—	448	65	448	65

# Tires

## Standard Cold Inflation Pressures

### Radial Ply

- Log Loaders
- Integrated Tool Carriers

#### LOG LOADERS — Radial Ply

Model	Tire Size	Strength Index	Pressure											
			Michelin				Goodyear				Bridgestone			
			Front		Rear		Front		Rear		Front		Rear	
		kPa	psi	kPa	psi	kPa	psi	kPa	psi	kPa	psi	kPa	psi	
IT14G	15.5R25	★	310	45	207	30	—	—	—	—	345	50	276	40
	17.5R25	★	241	35	172	25	414	60	310	45	345	50	276	40
924G Versalink	17.5R25	★	379	55	172	25	414	60	310	45	345	50	276	40
	555/70R25	★	241	35	172	25	—	—	—	—	—	—	—	—
	20.5R25	★	241	35	172	25	414	60	310	45	345	50	276	40
IT28G	555/70R25	★	276	40	207	30	—	—	—	—	—	—	—	—
	20.5R25	★	276	40	207	30	414	60	310	45	345	50	276	40
938G	20.5R25	★	310	45	207	30	345	50	276	40	345	50	276	40
950G	23.5R25	★	414	60	207	30	414	60	276	40	345	50	276	40
966G	26.5R25	★	414	60	207	30	414	60	276	40	414	60	276	40
980G	29.5R25	★	448	65	207	30	483	70	276	40	—	—	—	—
988G	35/65R33	★	552	80	241	35	655	95	310	45	—	—	—	—

#### INTEGRATED TOOL CARRIERS — Radial Ply

Model	Tire Size	Strength Index	Pressure											
			Michelin				Goodyear				Bridgestone			
			Front		Rear		Front		Rear		Front		Rear	
		kPa	psi	kPa	psi	kPa	psi	kPa	psi	kPa	psi	kPa	psi	
IT14G	15.5R25	★	241	35	172	25	—	—	—	—	345	50	276	40
	17.5R25	★	207	30	172	25	414	60	310	45	345	50	276	40
924G Versalink	17.5R25	★	345	50	172	25	414	60	310	45	345	50	276	40
	555/70R25	★	207	30	172	25	—	—	—	—	—	—	—	—
	20.5R25	★	241	35	172	25	414	60	310	45	345	50	276	40
IT28G	17.5R25	★	379	55	172	25	414	60	310	45	345	50	276	40
	555/70R25	★	207	30	172	25	—	—	—	—	—	—	—	—
	20.5R25	★	207	30	172	25	414	60	310	45	345	50	276	40
IT38G	20.5R25	★	241	35	172	25	345	50	241	35	345	50	276	40

Standard Cold Inflation Pressures  
Bias and Bias Belted/Radial Ply

- Underground Mining
- Articulated Trucks
- Rigid Trucks

**UNDERGROUND MINING — Bias and Bias Belted**

LOAD – HAUL – DUMP			Ply Rating	Bridgestone			
Model	Wheel Size	Tire Size		Front*		Rear*	
R1300	14.0×25	17.5×25	20	kPa 650	psi <b>94</b>	kPa 414	psi <b>60</b>
R1600	13.0×25	18.0×25	28	620	<b>90</b>	414	<b>60</b>
R1700G & R1700G SUPA14	22.0×25	26.5×25	32	600	<b>87</b>	414	<b>60</b>
R2900 & R2900 SUPA 20	25.0×25	29.5×29	34	650	<b>94</b>	414	<b>60</b>

**ARTICULATED TRUCKS**

AD45	25.0×29	29.5×29	40	650	<b>94</b>	650	<b>94</b>
AD55	28.0×33	35/65R33	—	—	—	—	—
AE40 Series II	29.5×29	29.5×R29	40	620	<b>90</b>	620	<b>90</b>

**RIGID TRUCKS**

69D Dump	13.0×33	18.0×R33	36	650	<b>94</b>	650	<b>94</b>
69D Ejector	13.0×33	18.0×R33	40	630	<b>91</b>	630	<b>91</b>
73D	15.0×35	21.0×R35	42	700	<b>102</b>	700	<b>102</b>

\*For standard loading applications.

NOTE: When tramming cycles exceed 150 m (500 ft) contact tire supplier.

**UNDERGROUND MINING — Radial Ply**

LOAD – HAUL – DUMP			Strength Index	Bridgestone			
Model	Wheel Size	Tire Size		Front*		Rear*	
R1300	14.0×25	17.5×R25	★ ★	kPa 700	psi <b>102</b>	kPa 414	psi <b>60</b>
R1600	13.0×25	18.0×R25	★ ★	675	<b>98</b>	414	<b>60</b>
R1700G & R1700G SUPA14	22.0×25	26.5×R25	★ ★	650	<b>94</b>	414	<b>60</b>
R2900	25.0×25	29.5×R29	★ ★	675	<b>98</b>	414	<b>60</b>
R2900 SUPA 20	25.0×25	29.5×R29	★ ★	620	<b>90</b>	414	<b>60</b>

**ARTICULATED TRUCKS**

AD45	25.0×29	29.5×R29	★ ★	620	<b>90</b>	620	<b>90</b>
AD55	28.0×33	35/65R33	★ ★	650	<b>94</b>	650	<b>94</b>
AE40 Series II	25.0×29	29.5×R29	★ ★	620	<b>90</b>	650	<b>94</b>

**RIGID TRUCKS**

69D Dump	13.0×33	18.0×R33	★ ★	700	<b>102</b>	700	<b>102</b>
69D Ejector	13.0×33	18.0×R33	★ ★	700	<b>102</b>	700	<b>102</b>
73D	15.0×35	21.0×R35	★ ★	700	<b>102</b>	700	<b>102</b>

\*For standard loading applications.

NOTE: When tramming cycles exceed 150 m (500 ft) contact tire supplier.

**BIAS PLY TIRES**

**RADIAL PLY TIRES**

	WEIGHT INCREASE PER TIRE		MIXING PROPORTIONS				WEIGHT INCREASE PER TIRE		MIXING PROPORTIONS			
	kg	lb	CaCl***		Water		kg	lb	CaCl***		Water	
			kg	lb	liter	gal	kg	lb	kg	lb	liter	gal
13.00-24TG	188	<b>414</b>	55	<b>122</b>	132	<b>35</b>	185	<b>407</b>	57	<b>125</b>	128	<b>34</b>
14.00-24TG	215	<b>475</b>	63	<b>140</b>	151	<b>40</b>	256	<b>565</b>	79	<b>173</b>	179	<b>47</b>
15.5-25	192	<b>423</b>	56	<b>125</b>	136	<b>36</b>	224	<b>493</b>	69	<b>151</b>	155	<b>41</b>
16.00-24TG	333	<b>735</b>	98	<b>217</b>	234	<b>62</b>	355	<b>783</b>	109	<b>240</b>	246	<b>65</b>
17.5-25	262	<b>577</b>	77	<b>170</b>	185	<b>49</b>	311	<b>686</b>	95	<b>210</b>	216	<b>57</b>
18.00-25	454	<b>1002</b>	134	<b>296</b>	322	<b>85</b>	502	<b>1107</b>	154	<b>340</b>	348	<b>92</b>
18.4-34	417	<b>919</b>	123	<b>272</b>	295	<b>78</b>	—	—	—	—	—	—
20.5-25	405	<b>892</b>	119	<b>263</b>	284	<b>75</b>	448	<b>987</b>	137	<b>303</b>	310	<b>82</b>
23.1-26	522	<b>1151</b>	154	<b>340</b>	367	<b>97</b>	—	—	—	—	—	—
23.5-25	585	<b>1291</b>	173	<b>382</b>	412	<b>109</b>	633	<b>1396</b>	194	<b>428</b>	439	<b>116</b>
24.5-32	703	<b>1549</b>	207	<b>458</b>	496	<b>131</b>	—	—	—	—	—	—
26.5-25	758	<b>1671</b>	224	<b>494</b>	533	<b>141</b>	841	<b>1853</b>	258	<b>568</b>	583	<b>154</b>
26.5-29	752	<b>1658</b>	222	<b>490</b>	530	<b>140</b>	928	<b>2045</b>	284	<b>627</b>	644	<b>170</b>
28L-26	709	<b>1563</b>	209	<b>462</b>	500	<b>132</b>	—	—	—	—	—	—
29.5-25	970	<b>2139</b>	286	<b>632</b>	685	<b>181</b>	1073	<b>2368</b>	328	<b>723</b>	745	<b>197</b>
29.5-29	1050	<b>2315</b>	310	<b>684</b>	738	<b>195</b>	1190	<b>2623</b>	365	<b>804</b>	825	<b>218</b>
29.5-35	1159	<b>2556</b>	344	<b>758</b>	821	<b>217</b>	1286	<b>2835</b>	394	<b>869</b>	892	<b>236</b>
30.5L-32	874	<b>1928</b>	258	<b>570</b>	617	<b>163</b>	—	—	—	—	—	—
33.25-35	1485	<b>3275</b>	439	<b>968</b>	1048	<b>277</b>	1592	<b>3508</b>	487	<b>1074</b>	1105	<b>292</b>
37.25-35	1712	<b>3775</b>	505	<b>1115</b>	1211	<b>320</b>	2128	<b>4692</b>	653	<b>1439</b>	1476	<b>390</b>
38-39	1870	<b>4123</b>	552	<b>1218</b>	1317	<b>348</b>	—	—	—	—	—	—
35/65-33	1339	<b>2953</b>	396	<b>873</b>	942	<b>249</b>	1430	<b>3152</b>	438	<b>967</b>	992	<b>262</b>
40/65-39	2077	<b>4580</b>	614	<b>1353</b>	1465	<b>387</b>	2194	<b>4836</b>	673	<b>1483</b>	1522	<b>402</b>
41.25/70-39	1897	<b>4183</b>	561	<b>1236</b>	1336	<b>353</b>	—	—	—	—	—	—
45/65-45	2548	<b>5617</b>	753	<b>1659</b>	1794	<b>474</b>	—	—	—	—	—	—

\*Ballast weight for bias ply tires from Goodyear data, radial ply weights from Michelin data. Contact your tire supplier for additional information. Under abnormal tire wear conditions, ballasting of rear tires may be desirable. Ballasting of front tires also should only be done where extremely rapid tire wear rates are encountered. Excessive weight will reduce machine performance.

\*\*Fillage beyond 75% of tire enclosed volume is not recommended. With liquid ballasting, inflation pressure must be checked at least once per day.

\*\*\*1.6 kg (3½ lb) Calcium Chloride per gallon water. Solution weighs 4.6 kg (10.15 lb) per gallon.

**NOTE:** When liquid ballasting telehandler tires, consult Telehandler's Operation and Maintenance Manual for requirements. Total machine mass including all attachments in operating condition, all reservoirs at full capacity and ballasted tires must not exceed certification mass listed on the ROPS certification label.

# MINING AND EARTHMOVING

## CONTENTS

Elements of production .....24-1  
 Volume measure .....24-2  
 Swell .....24-2  
 Load factor .....24-2  
 Material density .....24-2  
 Fill factor .....24-3  
 Soil density tests .....24-3  
 Figuring production on-the-job .....24-4  
 Load weighing .....24-4  
 Time studies .....24-4  
 English example .....24-4  
 Metric example .....24-5  
 Estimating production off-the-job .....24-5  
 Rolling resistance .....24-5  
 Grade resistance .....24-6  
 Total resistance .....24-6  
 Traction .....24-6  
 Altitude .....24-7  
 Job efficiency .....24-8  
 English example .....24-8  
 Metric example .....24-10  
 Systems .....24-13  
 Fuel consumption and productivity .....24-14  
 Formulas and rules of thumb .....24-15

## INTRODUCTION

This section explains the earthmoving principles used to determine machine productivity. It shows how to calculate production on-the-job or estimate production off-the-job.

Machine performance is usually measured on an hourly basis in terms of machine productivity and machine owning and operating cost. Optimum machine performance can be expressed as follows:

$$\text{Lowest cost per ton} = \frac{\text{Lowest Possible Hourly Costs}}{\text{Highest Possible Hourly Productivity}}$$

## ELEMENTS OF PRODUCTION

Production is the hourly rate at which material is moved. Production can be expressed in various units:

### Metric

- Bank Cubic Meters — BCM — bank m<sup>3</sup>
- Loose Cubic Meters — LCM — loose m<sup>3</sup>
- Compacted Cubic Meters — CCM — compacted m<sup>3</sup>

### Tonnes

### English

- Bank Cubic Yards — BCY — bank yd<sup>3</sup>
- Loose Cubic Yards — LCY — loose yd<sup>3</sup>
- Compacted Cubic Yards — CCY — compacted yd<sup>3</sup>

### Tons

For most earthmoving and material handling applications, production is calculated by multiplying the quantity of material (load) moved per cycle by the number of cycles per hour.

$$\text{Production} = \text{Load/cycle} \times \text{cycles/hour}$$

The load can be determined by

- 1) load weighing
- 2) load estimating based on machine rating
- 3) surveyed volume divided by load count

Generally, earthmoving and overburden removal for coal mines are calculated by volume (bank cubic meters or bank cubic yards). Metal mines and aggregate producers usually work in weight (tons or tonnes).

- Volume Measure   ● Swell
- Load Factor   ● Material Density

**Volume Measure** — Material volume is defined according to its state in the earthmoving process. The three measures of volume are:

BCM (BCY) — one cubic meter (yard) of material as it lies in the natural bank state.

LCM (LCY) — one cubic meter (yard) of material which has been disturbed and has swelled as a result of movement.

CCM (CCY) — one cubic meter (yard) of material which has been compacted and has become more dense as a result of compaction.

In order to estimate production, the relationships between bank measure, loose measure, and compacted measure must be known.

**Swell** — Swell is the percentage of original volume (cubic meters or cubic yards) that a material increases when it is removed from the natural state. When excavated, the material breaks up into different size particles that do not fit together, causing air pockets or voids to reduce the weight per volume. For example to hold the same weight of one cubic unit of bank material it takes 30% more volume (1.3 times) after excavation. (Swell is 30%).

$$1 + \text{Swell} = \frac{\text{Loose cubic volume for a given weight}}{\text{Bank cubic volume for the same given weight}}$$

$$\text{Bank} = \frac{\text{Loose}}{(1 + \text{Swell})}$$

$$\text{Loose} = \text{Bank} \times (1 + \text{Swell})$$

Example Problem:

If a material swells 20%, how many loose cubic meters (loose cubic yards) will it take to move 1000 bank cubic meters (1308 bank cubic yards)?

$$\begin{aligned} \text{Loose} &= \text{Bank} \times (1 + \text{Swell}) = \\ &1000 \text{ BCM} \times (1 + .2) = 1200 \text{ LCM} \\ &1308 \text{ BCY} \times (1 + .2) = 1570 \text{ LCY} \end{aligned}$$

How many bank cubic meters (yards) were moved if a total of 1000 loose cubic meters (1308 yards) have been moved? Swell is 25%.

$$\begin{aligned} \text{Bank} &= \text{Loose} \div (1 + \text{Swell}) = \\ &1000 \text{ LCM} \div (1 + .25) = 800 \text{ BCM} \\ &1308 \text{ LCY} \div (1 + .25) = 1046 \text{ BCY} \end{aligned}$$

**Load Factor** — Assume one bank cubic yard of material weighs 3000 lb. Because of material characteristics, this bank cubic yard swells 30% to 1.3 loose cubic yards when loaded, with no change in weight. If this 1.0 bank cubic yard or 1.3 loose cubic yards is compacted, its volume may be reduced to 0.8 compacted cubic yard, and the weight is still 3000 lbs.

Instead of dividing by 1 + Swell to determine bank volume, the loose volume can be multiplied by the load factor.

If the percent of material swell is known, the load factor (L.F.) may be obtained by using the following relationship:

$$\text{L.F.} = \frac{100\%}{100\% + \% \text{ swell}}$$

Load factors for various materials are listed in the Tables Section of this handbook.

To estimate the machine payload in bank cubic yards, the volume in loose cubic yards is multiplied by the load factor:

$$\text{Load (BCY)} = \text{Load (LCY)} \times \text{L.F.}$$

The ratio between compacted measure and bank measure is called shrinkage factor (S.F.):

$$\text{S.F.} = \frac{\text{Compacted cubic yards (CCY)}}{\text{Bank cubic yards (BCY)}}$$

Shrinkage factor is either estimated or obtained from job plans or specifications which show the conversion from compacted measure to bank measure. Shrinkage factor should not be confused with percentage compaction (used for specifying embankment density, such as Modified Proctor or CBR).

**Material Density** — Density is the weight per unit volume of a material. Materials have various densities depending on particle size, moisture content and variations in the material. The denser the material the more weight there is per unit of equal volume. Density estimates are provided in the Tables Section of this handbook.

$$\text{Density} = \frac{\text{Weight}}{\text{Volume}} = \frac{\text{kg (lbs)}}{\text{m}^3 \text{ (yd}^3\text{)}}$$

$$\text{Weight} = \text{Volume} \times \text{Density}$$

A given material's density changes between bank and loose. One cubic unit of loose material has less weight than one cubic unit of bank material due to air pockets and voids. To correct between bank and loose use the following equations.

$$1 + \text{Swell} = \frac{\text{kg/BCM}}{\text{kg/LCM}} \text{ or } \frac{\text{lbs/BCY}}{\text{lbs/LCY}}$$

$$\text{lbs/LCY} = \frac{\text{lb/BCY}}{(1 + \text{Swell})}$$

$$\text{lbs/BCY} = \text{lbs/LCY} \times (1 + \text{Swell})$$

**Fill Factor** — The percentage of an available volume in a body, bucket, or bowl that is actually used is expressed as the fill factor. A fill factor of 87% for a hauler body means that 13% of the rated volume is not being used to carry material. Buckets often have fill factors over 100%.

Example Problem:

A 14 cubic yard (heaped 2:1) bucket has a 105% fill factor when operating in a shot sandstone (4125 lbs/BCY and a 35% swell).

- a) What is the loose density of the material?
  - b) What is the usable volume of the bucket?
  - c) What is the bucket payload per pass in BCY?
  - d) What is the bucket payload per pass in tons?
- a)  $\text{lb/LCY} = \text{lb/BCY} \div (1 + \text{Swell}) = 4125 \div (1.35) = 3056 \text{ lb/LCY}$
  - b)  $\text{LCY} = \text{rated LCY} \times \text{fill factor} = 14 \times 1.05 = 14.7 \text{ LCY}$
  - c)  $\text{lbs/pass} = \text{volume} \times \text{density lb/LCY} = 14.7 \times 3056 = 44,923 \text{ lbs}$   
 $\text{BCY/pass} = \text{weight} \div \text{density lb/BCY} = 44,923 \div 4125 = 10.9 \text{ BCY}$   
 or bucket LCY from part b  $\div (1 + \text{Swell}) = 14.7 \div 1.35 = 10.9 \text{ BCY}$
  - d)  $\text{tons/pass} = \text{lbs} \div 2000 \text{ lbs/ton} = 44,923 \div 2000 = 22.5 \text{ tons}$

Example Problem:

Construct a 10,000 compacted cubic yard (CCY) bridge approach of dry clay with a shrinkage factor (S.F.) of 0.80. Haul unit is rated 14 loose cubic yards struck and 20 loose cubic yards heaped.

- a) How many bank yards are needed?
- b) How many loads are required?

$$\text{a) } \text{BCY} = \frac{\text{CCY}}{\text{S.F.}} = \frac{10,000}{0.80} = 12,500 \text{ BCY}$$

$$\text{b) } \text{Load (BCY)} = \text{Capacity (LCY)} \times \text{Load factor (L.F.)} = 20 \times 0.81 = 16.2 \text{ BCY/Load}$$

(L.F. of 0.81 from Tables)

$$\text{Number of loads required} = \frac{12,500 \text{ BCY}}{16.2 \text{ BCY/Load}} = 772 \text{ Loads}$$



**Soil Density Tests** — There are a number of acceptable methods that can be used to determine soil density. Some that are currently in use are:

- Nuclear density moisture gauge
- Sand cone method
- Oil method
- Balloon method
- Cylinder method

All these except the nuclear method use the following procedure:

1. Remove a soil sample from bank state.
2. Determine the volume of the hole.
3. Weigh the soil sample.
4. Calculate the density kg/BCM (lb/BCY).

The nuclear density moisture gauge is one of the most modern instruments for measuring soil density and moisture. A common radiation channel emits either neutrons or gamma rays into the soil. In determining soil density, the number of gamma rays absorbed and back scattered by soil particles is *indirectly* proportional to the soil density. When measuring moisture content, the number of moderated neutrons reflected back to the detector after colliding with hydrogen particles in the soil is *directly* proportional to the soil's moisture content.

All these methods are satisfactory and will provide accurate densities when performed correctly. Several repetitions are necessary to obtain an average.



- Load Weighing
- Time Studies
- Example (English)

**FIGURING PRODUCTION ON-THE-JOB**

**Load Weighing** — The most accurate method of determining the actual load carried is by weighing. This is normally done by weighing the haul unit one wheel or axle at a time with portable scales. Any scales of adequate capacity and accuracy can be used. While weighing, the machine should be relatively level to reduce error caused by weight transfer. Enough loads should be weighed to provide a good average. Machine weight is the sum of the individual wheel or axle weights.

The weight of the load can be determined using the empty and loaded weight of the unit.

Weight of

$$\text{load} = \text{Gross machine weight} - \text{empty weight}$$

To determine the bank cubic measure carried by a machine, the load weight is divided by the bank-state density of the material being hauled.

$$\text{BCY} = \frac{\text{Weight of load}}{\text{Bank density}}$$

**Times Studies** — To estimate production, the number of complete trips a unit makes per hour must be determined. First obtain the unit's cycle time with the help of a stop watch. Time several complete cycles to arrive at an average cycle time. By allowing the watch to run continuously, different segments such as load time, wait time, etc. can be recorded for each cycle. Knowing the individual time segments affords a good opportunity to evaluate the balance of the spread and job efficiency. The following is an example of a scraper load time study form. Numbers in the white columns are stop watch readings; numbers in the shaded columns are calculated:

Total Cycle Times (less delays)	Arrive Cut	Wait Time	Begin Load	Load Time	End Load	Begin Delay	Delay Time	End Delay
	0.00	0.30	0.30	0.60	0.90			
3.50	3.50	0.30	3.80	0.65	4.45			
4.00	7.50	0.35	7.85	0.70	8.55	9.95	1.00	10.95
4.00	12.50	0.42	12.92	0.68	13.60			

**NOTE:** All numbers are in minutes

This may be easily extended to include other segments of the cycle such as haul time, dump time, etc. Similar forms can be made for pushers, loaders, dozers, etc. *Wait Time* is the time a unit must wait for another unit so that the two can function together (haul unit waiting for pusher). *Delay Time* is any time, other than wait time, when a machine is not

performing in the work cycle (scraper waiting to cross railroad track).

To determine trips-per-hour at 100% efficiency, divide 60 minutes by the average cycle time less all wait and delay time. Cycle time may or may not include wait and/or delay time. Therefore, it is possible to figure different kinds of production: measured production, production without wait or delay, maximum production, etc. For example:

Actual Production: includes all wait and delay time.

Normal Production (without delays): includes wait time that is considered normal, but no delay time.

Maximum Production: to figure maximum (or optimum) production, both wait time and delay time are eliminated. The cycle time may be further altered by using an optimum load time.

Example (English)

A job study of a Wheel Tractor-Scraper might yield the following information:

- Average wait time = 0.28 minute
- Average load time = 0.65
- Average delay time = 0.25
- Average haul time = 4.26
- Average dump time = 0.50
- Average return time = 2.09
- Average total cycle = 8.03 minutes
- Less wait & delay time = 0.53
- Average cycle 100% eff. = 7.50 minutes

Weight of haul unit empty — 48,650 lb

Weights of haul unit loaded —

Weighing unit #1 — 93,420 lb

Weighing unit #2 — 89,770 lb

Weighing unit #3 — 88,760 lb

271,950 lb;

average = 90,650 lb

1. Average load weight = 90,650 lb – 48,650 lb = 42,000 lb

2. Bank density = 3125 lb/BCY

3. Load =  $\frac{\text{Weight of load}}{\text{Bank density}}$

$$= \frac{42,000 \text{ lb}}{3125 \text{ lb/BCY}} = 13.4 \text{ BCY}$$

4. Cycles/hr =

$$\frac{60 \text{ min/hr}}{\text{Cycle time}} = \frac{60 \text{ min/hr}}{7.50 \text{ min/cycle}} = 80 \text{ cycles/hr}$$

5. Production = Load/cycle × cycles/hr

$$\text{(less delays)} = 13.4 \text{ BCY/cycle} \times 8.0 \text{ cycles/hr} = 107.2 \text{ BCY/hr}$$

Example (Metric)

A job study of a Wheel Tractor-Scraper might yield the following information:

- Average wait time = 0.28 minute
- Average load time = 0.65
- Average delay time = 0.25
- Average haul time = 4.26
- Average dump time = 0.50
- Average return time = 2.09
- Average total cycle = 8.03 minutes
- Less wait & delay time = 0.53
- Average cycle 100% eff. = 7.50 minutes

Weight of haul unit empty — 22 070 kg

Weights of haul unit loaded —

- Weighing unit #1 — 42 375 kg
- Weighing unit #2 — 40 720 kg
- Weighing unit #3 — 40 260 kg

123 355 kg;  
 average = 41 120 kg

1. Average load weight = 41 120 kg – 22 070 kg = 19 050 kg
2. Bank density = 1854 kg/BCM
3. Load =  $\frac{\text{Weight of load}}{\text{Bank density}}$   
 $= \frac{19\,050\text{ kg}}{1854\text{ kg/BCM}} = 10.3\text{ BCM}$
4. Cycles/hr =  $\frac{60\text{ min/hr}}{\text{Cycle time}} = \frac{60\text{ min/hr}}{7.50\text{ min/cycle}} = 80\text{ cycles/hr}$
5. Production = Load/cycle × cycles/hr  
 (less delays) = 10.3 BCM/cycle × 8.0 cycles/hr = 82 BCM/hr



**ESTIMATING PRODUCTION OFF-THE-JOB**

It is often necessary to estimate production of earthmoving machines which will be selected for a job. As a guide, the remainder of the section is devoted to discussions of various factors that may affect production. Some of the figures have been rounded for easier calculation.

**Rolling Resistance (RR)** is a measure of the force that must be overcome to roll or pull a wheel over the ground. It is affected by ground conditions and load — the deeper a wheel sinks into the ground, the higher the rolling resistance. Internal friction and tire flexing also contribute to rolling resistance. Experience has shown that minimum resistance is approximately 2% (1.5% for radial tires or dual tired trucks) of the gross machine weight (on tires). Resistance due to tire penetration is approximately 1.5% of the gross machine weight for each inch of tire penetration (0.6% for each cm of tire penetration). Thus rolling resistance can be calculated using these relationships in the following manner:

- RR = 2% of GMW + 0.6% of GMW per cm tire penetration
- RR = 2% of GMW + 1.5% of GMW per inch tire penetration

It's *not* necessary for the tires to actually penetrate the road surface for rolling resistance to increase above the minimum. If the road surface flexes under load, the effect is nearly the same — the tire is always running “uphill”. Only on very hard, smooth surfaces with a well compacted base will the rolling resistance approach the minimum.

When actual penetration takes place, some variation in rolling resistance can be noted with various inflation pressures and tread patterns.

**NOTE:** When figuring “pull” requirements for track-type tractors, rolling resistance applies only to the trailed unit's *weight on wheels*. Since tracktype tractors utilize steel wheels moving on steel “roads”, a tractor's rolling resistance is relatively constant and is accounted for in the Drawbar Pull rating.

- Grade Resistance
- Total Resistance
- Traction

**Grade Resistance** is a measure of the force that must be overcome to move a machine over unfavorable grades (uphill). Grade assistance is a measure of the force that assists machine movement on favorable grades (downhill).

Grades are generally measured in percent slope, which is the ratio between vertical rise or fall and the horizontal distance in which the rise or fall occurs. For example, a 1% grade is equivalent to a 1 m (ft) rise or fall for every 100 m (ft) of horizontal distance; a rise of 4.6 m (15 ft) in 53.3 m (175 ft) equals an 8.6% grade.

$$\frac{4.6 \text{ m (rise)}}{53.3 \text{ m (horizontal distance)}} = 8.6\% \text{ grade}$$

$$\frac{15 \text{ ft (rise)}}{175 \text{ ft (horizontal distance)}} = 8.6\% \text{ grade}$$

Uphill grades are normally referred to as adverse grades and downhill grades as favorable grades. Grade resistance is usually expressed as a positive (+) percentage and grade assistance is expressed as a negative (-) percentage.

It has been found that for each 1% increment of adverse grade an additional 10 kg (20 lb) of resistance must be overcome for each metric (U.S.) ton of machine weight. This relationship is the basis for determining the Grade Resistance Factor which is expressed in kg/metric ton (lb/U.S. ton):

$$\begin{aligned} \text{Grade Resistance Factor} &= 10 \text{ kg/m ton} \times \% \text{ grade} \\ &= 20 \text{ lb/U.S. ton} \times \% \text{ grade} \end{aligned}$$

Grade resistance (assistance) is then obtained by multiplying the Grade Resistance Factor by the machine weight (GMW) in metric (U.S.) tons.

$$\text{Grade Resistance} = \text{GR Factor} \times \text{GMW in metric (U.S.) tons}$$

Grade resistance may also be calculated using percentage of gross weight. This method is based on the relationship that grade resistance is approximately equal to 1% of the gross machine weight for 1% of grade.

$$\text{Grade Resistance} = 1\% \text{ of GMW} \times \% \text{ grade}$$

Grade resistance (assistance) affects both wheel and track-type machines.

**Total Resistance** is the combined effect of rolling resistance (wheel vehicles) and grade resistance. It can be computed by summing the values of rolling resistance and grade resistance to give a resistance in kilogram (pounds) force.

$$\text{Total Resistance} = \text{Rolling Resistance} + \text{Grade Resistance}$$

Total resistance can also be represented as consisting completely of grade resistance expressed in percent grade. In other words, the rolling resistance component is viewed as a corresponding quantity of additional adverse grade resistance. Using this approach, total resistance can then be considered in terms of percent grade.

This can be done by converting the contribution of rolling resistance into a corresponding percentage of grade resistance. Since 1% of adverse grade offers a resistance of 10 kg (20 lb) for each metric or (U.S.) ton of machine weight, then each 10 kg (20 lb) of resistance per ton of machine weight can be represented as an additional 1% of adverse grade. Rolling resistance in percent grade and grade resistance in percent grade can then be summed to give Total Resistance in percent or Effective Grade. The following formulas are useful in arriving at Effective Grade.

$$\begin{aligned} \text{Rolling Resistance (\%)} &= 2\% + 0.6\% \text{ per cm tire} \\ &\quad \text{penetration} \\ &= 2\% + 1.5\% \text{ per inch tire} \\ &\quad \text{penetration} \end{aligned}$$

$$\begin{aligned} \text{Grade Resistance (\%)} &= \% \text{ grade} \\ \text{Effective Grade (\%)} &= \text{RR (\%)} + \text{GR (\%)} \end{aligned}$$

Effective grade is a useful concept when working with Rimpull-Speed-Gradeability curves, Retarder curves, Brake Performance curves, and Travel Time curves.

**Traction** — is the driving force developed by a wheel or track as it acts upon a surface. It is expressed as usable Drawbar Pull or Rimpull. The following factors affect traction: weight on the driving wheel or tracks, gripping action of the wheel or track, and ground conditions. The coefficient of traction (for any roadway) is the ratio of the maximum pull developed by the machine to the total weight on the drivers.

$$\text{Coeff. of traction} = \frac{\text{Pull}}{\text{weight on drivers}}$$

Therefore, to find the usable pull for a given machine:

$$\text{Usable pull} = \text{Coeff. of traction} \times \text{weight on drivers}$$

### Example: Track-Type Tractor

What usable drawbar pull (DBP) can a 26 800 kg (59,100 lb) Track-type Tractor exert while working on firm earth? on loose earth? (See table section for coefficient of traction.)

Answer:

Firm earth — Usable DBP =  
 $0.90 \times 26\,800 \text{ kg} = 24\,120 \text{ kg}$   
 $(0.90 \times 59,100 \text{ lb} = 53,190 \text{ lb})$   
 Loose earth — Usable DBP =  
 $0.60 \times 26\,800 \text{ kg} = 16\,080 \text{ kg}$   
 $(0.60 \times 59,100 \text{ lb} = 35,460 \text{ lb})$

If a load required 21 800 kg (48,000 lb) pull to move it, this tractor could move the load on firm earth. However, if the earth were loose, the tracks would spin.

**NOTE:** D8R through D11R Tractors may attain higher coefficients of traction due to their suspended undercarriage.

Example: Wheel Tractor-Scraper

What usable rimpull can a 621F size machine exert while working on firm earth? on loose earth? The total loaded weight distribution of this unit is:

Drive unit	Scraper unit
wheels: 23 600 kg	wheels: 21 800 kg
(52,000 lb)	(48,000 lb)

Remember, use weight on drivers only.

Answer:

Firm earth —  $0.55 \times 23\,600 \text{ kg} = 12\,980 \text{ kg}$   
 $(0.55 \times 52,000 \text{ lb} = 28,600 \text{ lb})$   
 Loose earth —  $0.45 \times 23\,600 \text{ kg} = 10\,620 \text{ kg}$   
 $(0.45 \times 52,000 \text{ lb} = 23,400 \text{ lb})$   
 On firm earth this unit can exert up to 12 980 kg (28,600 lb) rimpull without excessive slipping. However, on loose earth the drivers would slip if more than 10 620 kg (23,400 lb) rimpull were developed.



**Altitude** — Specification sheets show how much pull a machine can produce for a given gear and speed when the engine is operating at rated horsepower. When a standard machine is operated in high altitudes, the engine may require derating to maintain normal engine life. This engine deration will produce less drawbar pull or rimpull.


The Tables Section gives the altitude deration in percent of flywheel horsepower for current machines. It should be noted that some turbocharged engines can operate up to 3050 m (10,000 ft) before they require derating. Most machines are engineered to operate up to 1520 m (5000 ft) before they require deration.

The horsepower deration due to altitude must be considered in any job estimating. The amount of power deration will be reflected in the machine's gradeability and in the load, travel, and dump and load times (unless loading is independent of the machine itself).

The example job problem that follows indicates one method of accounting for altitude deration: by increasing the appropriate components of the total cycle time by a percentage equal to the percent of horsepower deration due to altitude. (i.e., if the travel time of a hauling unit is determined to be 1.00 minute at full HP, the time for the same machine derated to 90% of full HP will be 1.10 min.) This is an approximate method that yields reasonably accurate estimates up to 3000 m (10,000 feet) elevation.

Travel time for hauling units derated more than 10% should be calculated as follows using Rimpull-Speed-Gradeability charts.

1) Determine total resistance (grade plus rolling) in percent.

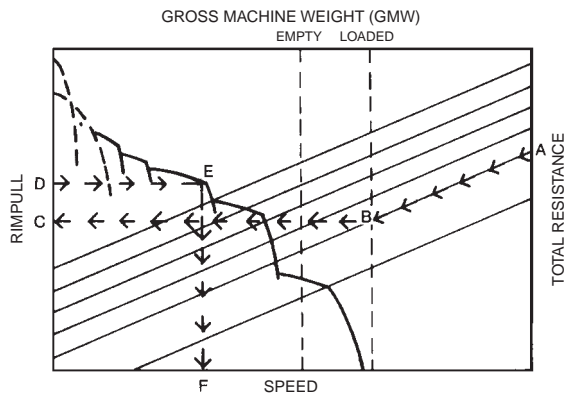

2) Beginning at point A on the chart follow the total resistance line diagonally to its intersection, B, with the vertical line corresponding to the appropriate gross machine weight. (Rated loaded and empty GMW lines are shown dotted.)

3) Using a straight-edge, establish a horizontal line to the left from point B to point C on the rimpull scale.

4) Divide the value of point C as read on the rimpull scale by the percent of total horsepower available after altitude deration from the Tables Section. This yields rimpull value D higher than point C.

- Job Efficiency
- Example Problem (English)

5) Establish a horizontal line right from point D. The farthest right intersection of this line with a curved speed range line is point E.

6) A vertical line down from point E determines point F on the speed scale.

7) Multiply speed in kmh by 16.7 (mph by 88) to obtain speed in m/min (ft/min). Travel time in minutes for a given distance in feet is determined by the formula:

$$\text{Time (min)} = \frac{\text{Distance in m (ft)}}{\text{Speed in m/min (ft/min)}}$$

The *Travel Time Graphs* in sections on Wheel Tractor-Scrapers and Construction & Mining Trucks can be used as an alternative method of calculating haul and/or return times.



Example problem (English)

A contractor is planning to put the following spread on a dam job. What is the estimated production and cost/BCY?


**Equipment:**

- 11 — 631E Series II Wheel Tractor-Scrapers
- 2 — D9N Tractors with C-dozers
- 2 — 12G Motor Graders
- 1 — 825C Tamping Foot Compactor

**Material:**

- Description — Sandy clay; damp, natural bed
- Bank Density — 3000 lb/BCY
- Load Factor — 0.80
- Shrinkage Factor — 0.85
- Traction Factor — 0.50
- Altitude — 7500 ft

**Job Layout — Haul and Return:**

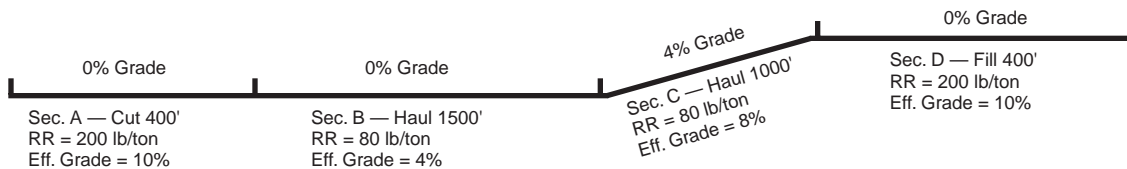

**Total Effective Grade = RR (%) ± GR (%)**

- Sec. A:** Total Effective Grade = 10% + 0% = 10%
- Sec. B:** Total Effective Grade = 4% + 0% = 4%
- Sec. C:** Total Effective Grade = 4% + 4% = 8%
- Sec. D:** Total Effective Grade = 10% + 0% = 10%

**Job Efficiency** is one of the most complex elements of estimating production since it is influenced by factors such as operator skill, minor repairs and adjustments, personnel delays, and delays caused by job layout. An approximation of efficiency, if no job data is available, is given below.

Operation	Working Hour	Efficiency Factor
Day	50 min/hr	0.83
Night	45 min/hr	0.75

These factors do not account for delays due to weather or machine downtime for maintenance and repairs. You must account for such factors based on experience and local conditions.

**1. Estimate Payload:**

Est. load (LCY) × L.F. × Bank Density = payload  
 31 LCY × 0.80 × 3000 lb/BCY = 74,400 lb payload

**2. Establish Machine Weight:**

- Empty Wt. — 88,000 lb or 44 tons
- Wt. of Load — 74,400 lb or 37.2 tons
- Total (GMW) — 162,400 lb or 81.2 tons

**3. Calculate Usable Pull (traction limitation):**

*Loaded:* (weight on driving wheels = 54%) (GMW)

Traction Factor × Wt. on driving wheels =  
 0.50 × 162,400 lb × 54% = 43,848 lbs

*Empty:* (weight on driving wheels = 69%) (GMW)

Traction Factor × Wt. on driving wheels =  
 0.50 × 88,000 lbs × 69% = 30,360 lbs

**4. Derate for Altitude:**

Check power available at 7500 ft from altitude deration table in the Tables Section.

- 631E Series II — 100%
- D9N — 100%
- 12G — 85%
- 825C — 94%

Then adjust if necessary:  
*Load Time* — controlled by D9N, at 100% power, no change.  
*Travel, Maneuver and Spread time* — 631E Series II, no change.

**5. Compare Total Resistance to Tractive Effort on haul:**

*Grade Resistance* —  
 $GR = \text{lb/ton} \times \text{tons} \times \text{adverse grade in percent}$   
 Sec. C: = 20 lb/ton  $\times$  81.2 tons  $\times$  4% grade = 6496 lb

*Rolling Resistance* —  
 $RR = \text{RR Factor (lb/ton)} \times \text{GMW (tons)}$   
 Sec. A: = 200 lb/ton  $\times$  81.2 tons = 16,240 lb  
 Sec. B: = 80 lb/ton  $\times$  81.2 tons = 6496 lb  
 Sec. C: = 80 lb/ton  $\times$  81.2 tons = 6496 lb  
 Sec. D: = 200 lb/ton  $\times$  81.2 tons = 16,240 lb

*Total Resistance* —  
 $TR = RR + GR$   
 Sec. A: = 16,240 lb + 0 = 16,240 lb  
 Sec. B: = 6496 lb + 0 = 6496 lb  
 Sec. C: = 6496 lb + 6496 lb = 12,992 lb  
 Sec. D: = 16,240 lb + 0 = 16,240 lb

Check usable pounds pull against maximum pounds pull required to move the 631E.  
 Pull usable ... 43,848 lb loaded  
 Pull required ... 16,240 lb maximum total resistance  
 Estimate travel time for haul from 631E (loaded) travel time curve; read travel time from distance and effective grade.

Travel time (from curves):  
 Sec. A: 0.60 min  
 Sec. B: 1.00  
 Sec. C: 1.20  
 Sec. D: 0.60  
 3.40 min

**NOTE:** This is an estimate only; it does not account for all the acceleration and deceleration time, therefore it is not as accurate as the information obtained from a computer program.

**6. Compare Total Resistance to Tractive Effort on return:**

*Grade Assistance* —  
 $GA = 20 \text{ lb/ton} \times \text{tons} \times \text{negative grade in percent}$   
 Sec. C: = 20 lb/ton  $\times$  44 tons  $\times$  4% grade = 3520 lbs

*Rolling Resistance* —  
 $RR = \text{RR Factor} \times \text{Empty Wt (tons)}$   
 Sec. D: = 200 lb/ton  $\times$  44 tons = 8800 lb  
 Sec. C: = 80 lb/ton  $\times$  44 tons = 3520 lb  
 Sec. B: = 80 lb/ton  $\times$  44 tons = 3520 lb  
 Sec. A: = 200 lb/ton  $\times$  44 tons = 8800 lb

*Total Resistance* —  
 $TR = RR - GA$   
 Sec. D: = 8800 lb - 0 = 8800 lb  
 Sec. C: = 3520 lb - 3520 lb = 0  
 Sec. B: = 3520 lb - 0 = 3520 lb  
 Sec. A: = 8800 lb - 0 = 8800 lb

Check usable pounds pull against maximum pounds pull required to move the 631E.  
 Pounds pull usable ... 30,360 lb empty  
 Pounds pull required ... 8800 lb  
 Estimate travel time for return from 631E empty travel time curve.

Travel time (from curves):  
 Sec. D: 0.40 min  
 Sec. C: 0.55  
 Sec. B: 0.80  
 Sec. A: 0.40  
 2.15 min

**7. Estimate Cycle Time:**

Total Travel Time (Haul plus Return) = 5.55 min  
 Adjusted for altitude: 100%  $\times$  5.55 min = 5.55 min  
 Load Time 0.7 min  
 Maneuver and Spread Time 0.7 min  
 Total Cycle Time 6.95 min

**8. Check pusher-scraper combinations:**

Pusher cycle time consists of load, boost, return and maneuver time. Where actual job data is not available, the following may be used.

Boost time = 0.10 minute  
 Return time = 40% of load time  
 Maneuver time = 0.15 minute  
 Pusher cycle time = 140% of load time + 0.25 minute  
 Pusher cycle time = 140% of 0.7 min + 0.25 minute  
 = 0.98 + 0.25 = 1.23 minute

Scraper cycle time divided by pusher cycle time indicates the number of scrapers which can be handled by each pusher.

$$\frac{6.95 \text{ min}}{1.23 \text{ min}} = 5.65$$

- Example Problem (English)
- Example Problem (Metric)

Each push tractor is capable of handling five plus scrapers. Therefore the two pushers can adequately serve the eleven scrapers.

**9. Estimate Production:**

$$\begin{aligned} \text{Cycles/hour} &= 60 \text{ min} \div \text{Total cycle time} \\ &= 60 \text{ min/hr} \div 6.95 \text{ min/cycle} \\ &= 8.6 \text{ cycles/hr} \end{aligned}$$

$$\begin{aligned} \text{Estimated load} &= \text{Heaped capacity} \times \text{L.F.} \\ &= 31 \text{ LCY} \times 0.80 \\ &= 24.8 \text{ BCY} \end{aligned}$$

$$\begin{aligned} \text{Hourly unit production} &= \text{Est. load} \times \text{cycles/hr} \\ &= 24.8 \text{ BCY} \times 8.6 \text{ cycles/hr} \\ &= 213 \text{ BCY/hr} \end{aligned}$$

$$\begin{aligned} \text{Adjusted production} &= \text{Efficiency factor} \times \text{hourly production} \\ &= 0.83 \text{ (50 min hour)} \times 213 \text{ BCY} \\ &= 177 \text{ BCY/hr} \end{aligned}$$

$$\begin{aligned} \text{Hourly fleet production} &= \text{Unit production} \times \text{No. of units} \\ &= 177 \text{ BCY/hr} \times 11 \\ &= 1947 \text{ BCY/hr} \end{aligned}$$

**10. Estimate Compaction:**

$$\begin{aligned} \text{Compaction requirement} &= \text{S.F.} \times \text{hourly fleet production} \\ &= 0.85 \times 1947 \text{ BCY/hr} \\ &= 1655 \text{ CCY/hr} \end{aligned}$$

Compaction capability (given the following):

- Compacting width, 7.4 ft (W)
- Average compacting speed, 6 mph (S)
- Compacted lift thickness, 7 in (L)
- No. of passes required, 3 (P)

$$\begin{aligned} \text{825C production} &= \\ \text{CCY/hr} &= \frac{W \times S \times L \times 16.3}{P} \quad (\text{conversion constant}) \\ &= \frac{7.4 \times 6 \times 7 \times 16.3}{3} \\ &= 1688 \text{ CCY/hr} \end{aligned}$$

Given the compaction requirement of 1655 CCY/hr, the 825C is an adequate compactor match-up for the rest of the fleet. However, any change to job layout that would increase fleet production would upset this balance.

**11. Estimate Total Hourly Cost:**

631E	@ \$65.00/hr × 11 units	\$715.00
D9N	@ 75.00/hr × 2 units	150.00
12G	@ 15.00/hr × 2 units	30.00
825C	@ 40.00/hr × 1 unit	40.00
Operators	@ 20.00/hr × 16 men	320.00

Total Hourly Owning and Operating Cost	\$1,255.00
--	------------

**12. Calculate Performance:**

$$\begin{aligned} \text{Cost per BCY} &= \frac{\text{Total cost/hr}}{\text{Production/hr}} \\ &= \frac{\$1,255.00}{1947 \text{ BCY/hr}} \\ &= 64¢ \text{ BCY} \end{aligned}$$

**NOTE:** Ton-MPH calculations should be made to judge the ability of the tractor-scraper tires to operate safely under these conditions.

**13. Other Considerations:**

If other equipment such as rippers, water wagons, discs or other miscellaneous machines are needed for the particular operation, then these machines must also be included in the cost per BCY.



Example problem (Metric)

A contractor is planning to put the following spread on a dam job. What is the estimated production and cost/BCM?


**Equipment:**

- 11 — 631E Wheel Tractor-Scrapers
- 2 — D9N Tractors with C-dozers
- 2 — 12G Motor Graders
- 1 — 825C Tamping Foot Compactor

**Material:**

- Description — Sandy clay; damp, natural bed
- Bank Density — 1770 kg/BCM
- Load Factor — 0.80
- Shrinkage Factor — 0.85
- Traction Factor — 0.50
- Altitude — 2300 meters

**Job Layout — Haul and Return:**

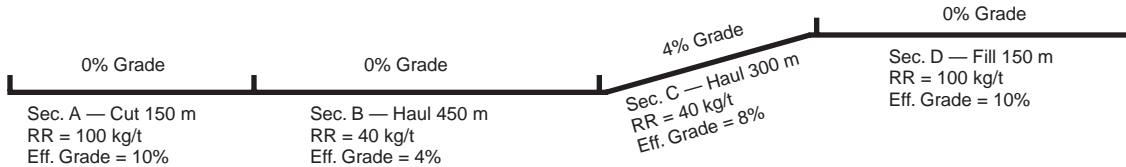

**Total Effective Grade = RR (%) ± GR (%)**

**Sec. A:** Total Effective Grade = 10% + 0% = 10%

**Sec. B:** Total Effective Grade = 4% + 0% = 4%

**Sec. C:** Total Effective Grade = 4% + 4% = 8%

**Sec. D:** Total Effective Grade = 10% + 0% = 10%

**1. Estimate Payload:**

Est. load (LCM) × L.F. × Bank Density = payload  
 24 LCM × 0.80 × 1770 kg/BCM = 34 000 kg payload

**2. Machine Weight:**

Empty Wt. — 40 000 kg or 40 metric tons  
 Wt. of Load — 34 000 kg or 34 metric tons  
 Total (GMW) — 74 000 kg or 74 metric tons

**3. Calculate Usable Pull (traction limitation):**

**Loaded:** (weight on driving wheels = 54%) (GMW)

Traction Factor × Wt. on driving wheels =  
 0.50 × 74 000 kg × 54% = 19 980 kg

**Empty:** (weight on driving wheels = 69%) (GMW)

Traction Factor × Wt. on driving wheels =  
 0.50 × 40 000 kg × 69% = 13 800 kg

**4. Derate for Altitude:**

Check power available at 2300 m from altitude deration table in the Tables Section.

631E — 100%    12G — 85%  
 D9N — 100%    825C — 94%

Then adjust if necessary:

**Load Time** — controlled by D9N, at 100% power, no change.

**Travel, Maneuver and Spread time** — 631E, no change.

**5. Compare Total Resistance to Tractive Effort on haul:**

**Grade Resistance** —

GR = 10 kg/metric ton × tons × adverse grade in percent

Sec. C: = 10 kg/metric ton × 74 metric tons × 4% grade = 2960 kg

**Rolling Resistance** —

RR = RR Factor (kg/mton) × GMW (metric tons)

Sec. A: = 100 kg/metric ton × 74 metric tons = 7400 kg

Sec. B: = 40 kg/metric ton × 74 metric tons = 2960 kg

Sec. C: = 40 kg/metric ton × 74 metric tons = 2960 kg

Sec. D: = 100 kg/metric ton × 74 metric tons = 7400 kg

**Total Resistance** —

$$TR = RR + GR$$

Sec. A: = 7400 kg + 0 = 7400 kg

Sec. B: = 2960 kg + 0 = 2960 kg

Sec. C: = 2960 kg + 2960 kg = 5920 kg

Sec. D: = 7400 kg + 0 = 7400 kg

Check usable kilogram force against maximum kilogram force required to move the 631E.

Force usable ... 19 980 kg loaded

Force required ... 7400 kg maximum total resistance

Estimate travel time for haul from 631E (loaded) travel time curve; read travel time from distance and effective grade.

Travel time (from curves):

Sec. A: 0.60 min

Sec. B: 1.00

Sec. C: 1.20

Sec. D: 0.60

3.40 min

**NOTE:** This is an estimate only; it *does not account for all the acceleration and deceleration time*, therefore it is not as accurate as the information obtained from a computer program.

**6. Compare Total Resistance to Tractive Effort on return:**

**Grade Assistance** —

GA = 10 kg/mton × metric tons × negative grade in percent

Sec. C: = 10 kg/metric ton × 40 metric ton × 4% grade = 1600 kg



*Rolling Resistance —*

$$RR = RR \text{ Factor} \times \text{Empty Wt.}$$

$$\begin{aligned} \text{Sec. D:} &= 100 \text{ kg/metric ton} \times 40 \text{ metric tons} \\ &= 4000 \text{ kg} \\ \text{Sec. C:} &= 40 \text{ kg/metric ton} \times 40 \text{ metric tons} \\ &= 1600 \text{ kg} \\ \text{Sec. B:} &= 40 \text{ kg/metric ton} \times 40 \text{ metric tons} \\ &= 1600 \text{ kg} \\ \text{Sec. A:} &= 100 \text{ kg/metric ton} \times 40 \text{ metric tons} \\ &= 4000 \text{ kg} \end{aligned}$$

*Total Resistance —*

$$TR = RR - GA$$

$$\begin{aligned} \text{Sec. D:} &= 4000 \text{ kg} - 0 = 4000 \text{ kg} \\ \text{Sec. C:} &= 1600 \text{ kg} - 0 = 1600 \text{ kg} \\ \text{Sec. B:} &= 1600 \text{ kg} - 0 = 1600 \text{ kg} \\ \text{Sec. A:} &= 4000 \text{ kg} - 0 = 4000 \text{ kg} \end{aligned}$$

Check usable kilogram force against maximum force required to move the 631E.

Kilogram force usable ... 13 800 kg empty  
 Kilogram force required ... 4000 kg

Estimate travel time for return from 631E empty travel time curve.

Travel time (from curves):

$$\begin{aligned} \text{Sec. D:} &0.40 \text{ min} \\ \text{Sec. C:} &0.55 \\ \text{Sec. B:} &0.80 \\ \text{Sec. A:} &0.40 \end{aligned}$$

$$2.15 \text{ min}$$

**7. Estimate Cycle Time:**

$$\begin{aligned} \text{Total Travel Time (Haul plus Return)} &= 5.55 \text{ min} \\ \text{Adjusted for altitude: } 100\% \times 5.55 \text{ min} &= 5.55 \text{ min} \\ \text{Load Time} &0.7 \text{ min} \\ \text{Maneuver and Spread Time} &0.7 \text{ min} \\ \hline \text{Total Cycle Time} &6.95 \text{ min} \end{aligned}$$

**8. Check pusher-scraper combinations:**

Pusher cycle time consists of load, boost, return and maneuver time. Where actual job data is not available, the following may be used.

$$\begin{aligned} \text{Boost time} &= 0.10 \text{ minute} \\ \text{Return time} &= 40\% \text{ of load time} \\ \text{Maneuver time} &= 0.15 \text{ minute} \\ \text{Pusher cycle time} &= 140\% \text{ of load time} + 0.25 \text{ minute} \\ \text{Pusher cycle time} &= 140\% \text{ of } 0.7 \text{ min} + 0.25 \text{ minute} \\ &= 0.98 + 0.25 = 1.23 \text{ minute} \end{aligned}$$

Scraper cycle time divided by pusher cycle time indicates the number of scrapers which can be handled by each pusher.

$$\frac{6.95 \text{ min}}{1.23 \text{ min}} = 5.65$$

Each push tractor is capable of handling five plus scrapers. Therefore the two pushers can adequately serve the eleven scrapers.

**9. Estimate Production:**

$$\begin{aligned} \text{Cycles/hour} &= 60 \text{ min} \div \text{Total cycle time} \\ &= 60 \text{ min/hr} \div 6.95 \text{ min/cycle} \\ &= 8.6 \text{ cycles/hr} \end{aligned}$$

$$\begin{aligned} \text{Estimated load} &= \text{Heaped capacity} \times \text{L.F.} \\ &= 24 \text{ LCM} \times 0.80 \\ &= 19.2 \text{ BCM} \end{aligned}$$

$$\begin{aligned} \text{Hourly unit production} &= \text{Est. load} \times \text{cycles/hr} \\ &= 19.2 \text{ BCM} \times 8.6 \text{ cycles/hr} \\ &= 165 \text{ BCM} \end{aligned}$$

$$\begin{aligned} \text{Adjusted production} &= \text{Efficiency factor} \times \text{hourly production} \\ &= 0.83 (50 \text{ min hour}) \times 165 \text{ BCM} \\ &= 137 \text{ BCM/hour} \end{aligned}$$

$$\begin{aligned} \text{Hourly fleet production} &= \text{Unit production} \times \text{No. of units} \\ &= 137 \text{ BCM/hr} \times 11 \text{ units} \\ &= 1507 \text{ BCM/hr} \end{aligned}$$

**10. Estimate Compaction:**

$$\begin{aligned} \text{Compaction requirement} &= \text{S.F.} \times \text{hourly fleet production} \\ &= 0.85 \times 1507 \text{ BCM/hr} \\ &= 1280 \text{ CCM/hr} \end{aligned}$$

Compaction capability (given the following):

- Compacting width, 2.26 m (W)
- Average compacting speed, 9.6 km/h (S)
- Compacted lift thickness, 18 cm (L)
- No. of passes required, 3 (P)

$$\begin{aligned} 825\text{C production} &= \\ \text{CCM/hr} &= \frac{W \times S \times L \times 10}{P} \text{ (conversion factor)} \\ &= \frac{2.26 \times 9.6 \times 18 \times 10}{3} \\ &= 1302 \end{aligned}$$

Given the compaction requirement of 1280 CCM/h, the 825C is an adequate compactor match-up for the rest of the fleet. However, any change to job layout that would increase fleet production would upset this balance.

**11. Estimate Total Hourly Cost:**

631E	@ \$65.00/hr × 11 units	\$715.00
D9N	@ 75.00/hr × 2 units	150.00
12G	@ 15.00/hr × 2 units	30.00
825C	@ 40.00/hr × 1 unit	40.00
Operators	@ 20.00/hr × 16 men	<u>320.00</u>

Total Hourly Owning and Operating Cost \$1,255.00

**12. Calculate Performance:**

$$\begin{aligned} \text{Cost per BCM} &= \frac{\text{Total cost/hr}}{\text{Production/hr}} \\ &= \frac{\$1,255.00}{1507 \text{ BCM/hr}} \\ &= 83¢/\text{BCM} \end{aligned}$$

**NOTE:** Ton-km/h calculations should be made to judge the ability of the tractor-scraper tires to operate safely under these conditions.

**13. Other Considerations:**

If other equipment such as rippers, water wagons, discs or other miscellaneous machines are needed for the particular operation, then these machines must also be included in the cost per BCM.

**SYSTEMS**


Caterpillar offers a variety of machines for different applications and jobs. Many of these separate machines function together in mining and earthmoving systems.

- Bulldozing with track-type tractors
- Load-and-Carry with wheel loaders
- Scrapers self-loading with elevator, auger, or push-pull configurations, or push-loaded by track-type tractors
- Articulated trucks loaded by excavators, track loaders or wheel loaders
- Off-highway trucks loaded by shovels, excavators or wheel loaders

**Economic Haul Distances** — Mobile equipment systems for construction or mining jobs operate in generalized economic application zones. These zones vary by machine with distance, underfoot conditions, grades, material type, production rate and operator skill. Of these factors, distance provides the best initial basis for system selection. The following table provides general rules of thumb for systems application based on distance. These haul ranges will vary by application.



**GENERAL HAUL DISTANCES FOR MOBILE SYSTEMS**

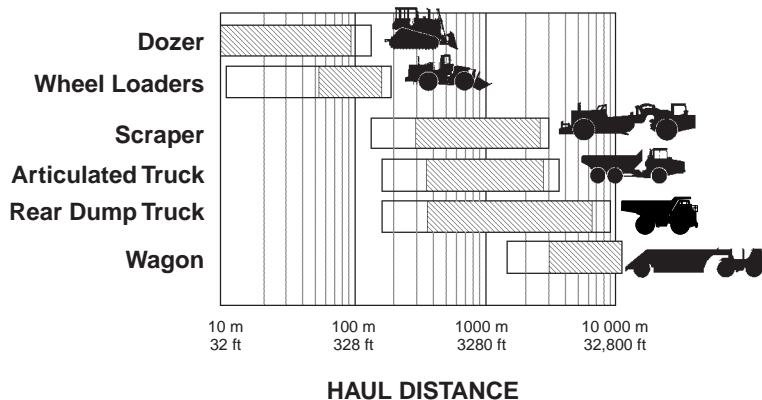

- Loading Match
- Fuel Consumption

**Loading Match** — Loading tools have a production range that varies with material, bucket configuration, target size, operator skill and load area conditions. The loader/truck matches given in the following table are with the typical number of passes and production range.

Your Cat Dealer can provide advice and estimates based on your specific conditions.

## FUEL CONSUMPTION AND PRODUCTIVITY

Fuel efficiency is the term used to relate fuel consumption and machine productivity. It is expressed in units of material moved per volume of fuel consumed. Common units are cubic meters or tonnes per liter of fuel (cubic yards or tons/gal). Determining fuel efficiency requires measuring both fuel consumption and production.

Measuring fuel consumption involves tapping into the vehicle's fuel supply system — without contaminating the fuel. The amount of fuel consumed during operation is then measured on a weight or volumetric basis.

### Caterpillar Earthmoving and Mining Systems Production/50 Min. Hr.

Tonnes	Tons	Loading Tool	Passes	Target
2270/2450	2500/2700	994D HL	7	793C
2450/2700	2700/3000	994D	5	789C
2270/2450	2500/2700	994D HL	6	789C
2450/2700	2700/3000	994D	4	785C
1450/1600	1600/1800	992G	6	785C
1540/1720	1700/1900	992G	4	777D
1180/1360	1300/1500	990	3	773D
800/1000	880/1100	988G	3	769D
730/910	800/1000	988F	3	769D
2720/2900	3000/3200	5230 ME	7	793C
2540/2720	2800/3000	5230 FS	8	793C
2630/2810	2900/3100	5230 ME	6	789C
2450/2630	2700/2900	5230 FS	6	789C
2540/2720	2800/3000	5230 ME	5	785C
2360/2540	2600/2800	5230 FS	5	785C
1900/2100	2100/2300	5130B ME	7	785C
1700/1900	1700/2100	5130B FS	7	785C
1800/2000	2000/2200	5130B ME	5	777D
1540/1810	1700/2000	5130B FS	5	777D
910/1090	1000/1200	375 ME	7	773D
730/820	800/1000	5080 FS	7	773D
730/910	800/1000	375 ME	5	769D
630/820	700/900	5080 FS	5	769D

### Caterpillar Aggregate Systems Production/50 Min. Hr.

Tonnes	Tons	Loading Tool	Passes	Target
1540/1720	1700/1900	992G	4	777D
1450/1630	1600/1800	992G	3	775D
1090/1270	1200/1400	990	4	775D
910/1180	1000/1300	990	3	773D
700/900	770/990	988G	5	773D
630/900	700/900	988F HL	5	773D
800/1000	880/1100	988G	4	771D
730/910	800/1000	988F	4	771D
540/730	600/800	980F HL	6	771D
700/900	770/990	988G	3	769D
630/820	700/900	988F	3	769D
450/630	500/700	980F HL	5	769D
1500/1800	1700/2000	5130B FS	5	777D
1270/1450	1400/1600	5130B FS	4	775D
1180/1360	1300/1500	5130B FS	3	773D
630/900	700/900	5080 FS	7	773D
730/910	800/1000	5080 FS	5	771D
630/820	700/900	5080 FS	4	769D

**FORMULAS AND RULES OF THUMB**

*Production, hourly* = Load (BCM) cycle × cycles/hr  
 = Load (BCY) cycle × cycles/hr

*Load Factor (L.F.)* =  $\frac{100\%}{100\% + \% \text{ swell}}$

*Load (bank measure)* = Loose cubic meters (LCM) × L.F.  
 = Loose cubic yards (LCY) × L.F.  
 =  $\frac{\text{Compacted cubic meters (or yards)}}{\text{Bank cubic meters (or yards)}}$

*Shrinkage Factor (S.F.)* =  $\frac{\text{Compacted cubic meters (or yards)}}{\text{Bank cubic meters (or yards)}}$

*Density* = Weight/Unit Volume

*Load (bank measure)* =  $\frac{\text{Weight of load}}{\text{Bank density}}$

*Rolling Resistance Factor*  
 = 20 kg/t × (6 kg/t/cm × cm)  
 = 40 lb/ton + (30 lb/ton/inch × inches)

*Rolling Resistance*  
 = RR Factor (kg/t) × GMW (tons)  
 = RR Factor (lb/ton) × GMW (tons)

*Rolling Resistance*  
 = 2% of GMW + 0.6% of GMW per cm tire penetration  
 = 2% of GMW + 1.5% of GMW per inch tire penetration

% Grade =  $\frac{\text{vertical change in elevation (rise)}}{\text{corresponding horizontal distance (run)}}$

*Grade Resistance Factor* = 10 kg/m ton × % grade  
 = 20 lb/ton × % grade

*Grade Resistance* = GR Factor (kg/t) × GMW (tons)  
 = GR Factor (lb/ton) × GMW (tons)

*Grade Resistance* = 1% of GMW × % grade

*Total Resistance*  
 = Rolling Resistance (kg or lb) + Grade Resistance (kg or lb)

*Total Effective Grade (%)* = RR (%) + GR (%)

*Usable pull (traction limitation)* = Coeff. of traction × weight on drivers  
 = Coeff. of traction × (Total wt × % on drivers)

*Pull required* = Rolling Resistance + Grade Resistance  
 = Total Resistance

*Total Cycle Time* = Fixed time + Variable time

*Fixed time:* See respective machine production section.

*Variable time* = Total haul time + Total return time

*Travel Time* =  $\frac{\text{Distance (m)}}{\text{Speed (m/min)}}$

=  $\frac{\text{Distance (ft)}}{\text{Speed (fpm)}}$

*Cycles per hour* =  $\frac{60 \text{ min/hr}}{\text{Total cycle time (min/cycle)}}$

*Adjusted production* = Hourly production × Efficiency factor

*No. of units required* =  $\frac{\text{Hourly production required}}{\text{Unit hourly production}}$

*No. of scrapers a pusher will load* =  $\frac{\text{Scraper cycle time}}{\text{Pusher cycle time}}$

*Pusher cycle time (min)* = 1.40 Load time (min) + 0.25 min

*Grade Horsepower* =  $\frac{\text{GMW (kg)} \times \text{Total Effective Grade} \times \text{Speed (km/h)}}{273.75}$

=  $\frac{\text{GMW (lb)} \times \text{Total Effective Grade} \times \text{Speed (mph)}}{375}$



# STOCKPILE COAL HANDLING

## CONTENTS

Introduction	25-1
Machine selection	25-1
How to equip	25-2
Production factors	25-2
Estimating hourly production	25-3
Track-Type Tractors	25-4
Wheel Tractors	25-5
Wheel Loaders	25-7
Wheel Tractor-Scrapers	25-8
Example problem	25-9

## INTRODUCTION

Efficient methods have been developed for handling and storing coal with mobile equipment. Generally, a power plant or other industrial facility which uses coal, meets its daily requirements with incoming coal shipments and will maintain an emergency stockpile or deadpile. The deadpile is designed to meet the burn requirements during any interruption of coal shipments. Interruptions may include inclement weather, carrier strikes, scheduling problems, etc.

The deadpile will contain approximately a 90 day supply of coal and is constructed by thoroughly compacting lifts, or layers, of coal approximately 15 cm (6 in) thick. Thorough compaction of the entire stockpile, including the sides, eliminates air spaces, reducing the possibility of spontaneous combustion.

Reclaiming the deadpiled coal is critical when incoming shipments are not able to satisfy the burn requirements. Four basic types of mobile equipment are available for stockpiling and reclaiming coal — track-type tractors, wheel tractors, wheel loaders, and wheel tractor-scrappers. Each type has its own specific advantages. The equipment selected must be able to meet the maximum hourly burn rate.

## MACHINE SELECTION

### Track-Type Tractors

Track-type tractors continue to be the most widely used machines for coal handling operations. Equipped with a U-shaped coal dozer, they are suitable for meeting high production requirements over dozing distances of less than 152 m (500 ft). Their

tractive capabilities and gradeability permit them to operate on the sides of the stockpile and surge pile which often prove inaccessible to other types of equipment. They can also remove snow and frost penetrated coal from the stockpile surface so that rubber-tired equipment can work efficiently.

### Wheel Tractors

These machines, with their long wheel base, low center of gravity, and articulated design, offer good stability and maneuverability. They have the ability to travel at a higher speed than the track-type tractor, moving easily from one area of operation to another, and provide greater compactive effort with fewer passes. They are capable of performing some utility functions. However, their coefficient of traction is less than that of track-type tractors. The most efficient dozing distance for the wheel tractor is usually less than 152 m (500 ft).

Coal scoops are also available for wheel tractors and may improve production under certain operating conditions.

### Wheel Loaders

As dozing and hauling distances increase, wheel loaders are able to effectively move coal in load-and-carry operations. Since coal is a relatively light material, the loaders should be equipped with larger buckets sized for coal density. Versatility and mobility allow them to perform a variety of tasks, both on and off the stockpile. They can load trucks or railcars, dig out bottom ash and boiler slag from the ash storage areas, and move railcars within the vicinity of the power plant. Generally wheel loaders are more efficient than track or wheel tractors at distances of 122 m (400 ft) or more.

### Coal Scrapers

Tandem powered coal scrapers are generally used when large volumes and long haul distances [over 152 m (500 ft)] are involved. They are able to effectively self-load coal, and have the advantage of being able to provide both high speed and large capacity; in addition, scrapers provide the greatest compactive effort. Coal scrapers are even more effective when top loading systems and drive-over reclaiming hoppers are used.

**HOW TO EQUIP**

**Counterweighting**

While larger blades or buckets allow for greater production, counterweighting is often necessary to improve the machine’s balance and handling capability. For track-type tractors, a rear counterweight is recommended. Wheel machines use various methods to add weight. For example, scoop dozers use front counterweights, and wheel machines often use tire ballast. Below is a weight comparison of the Caterpillar standard U-blade to the Coal Dozer, along with the recommended counterweight for D11R, D10R, D9R, D8R, and 834B.

**COAL STOCKPILE BLADE WEIGHT COMPARISON/  
COUNTERWEIGHTING**

Model	U-Blade		Coal Dozer/ Scoop		Counterweight	
	kg	lb	kg	lb	kg	lb
D11R	11 608	<b>25,590</b>	11 340	<b>25,000</b>	4989	<b>11,000</b>
D10R	6188	<b>13,643</b>	6440	<b>14,200</b>	2928	<b>6456</b>
D9R	4179	<b>9214</b>	4490	<b>9900</b>	3142	<b>6926</b>
D8R	2825	<b>6228</b>	3200	<b>7050</b>	2749	<b>6060</b>
834B	2994	<b>6600</b>	3630	<b>8000</b>	75% CaCl <sub>2</sub> in all tires —	
*834B with Scoop			8700	<b>19,180</b>	5360	<b>11,816</b>

Weights include blade or scoop only. The change in machine weight is determined by adding or subtracting the difference between the two blades. Counterweight or ballast may also need to be considered.

**Track Shoe Width**

Track shoes are an important consideration since shoe width determines tractive capability and compaction. Depending on the coal being stockpiled, the utility company will often have a strong preference concerning track shoe width. Basically, utilities stockpiling low rank or sub-bituminous rank lignite coal usually prefer the standard shoe width for maximum compactive effort to reduce the possibility of spontaneous combustion.

Utilities burning medium or high rank bituminous coals are not as concerned with spontaneous combustion and sometimes prefer a wider shoe that allows increased tractive capability on loose or less densely compacted coal stockpiles.

**Tires**

Many utility companies have established a tire preference for wheel machines. Normally a radial tire allows for the maximum tire print in the stockpile surface providing the best traction.


Tire pressure may be of equal importance to tire selection. Tests with hydro-inflated (liquid ballasting) tires indicate that inflation pressure of approximately 275 kPa (40 psi) improves machine performance over higher inflation pressure. Lower than 275 kPa (40 psi) is not recommended for hydro-inflated tires. (For more hydro-inflation information see the Tire section.)

**Other**

The 834B’s performance may be improved in the varying underfoot conditions of a coal stockpile with the use of a Detroit NoSPIN differential. This differential provides added tractive capability on all coal piles, particularly loose coal.

**PRODUCTION FACTORS**

1. *The effect of grade* — dozer production will increase 3% for each 1% of favorable grade and decrease 2% for each 1% of adverse grade up to grades of 10%. The graph below exemplifies this point.

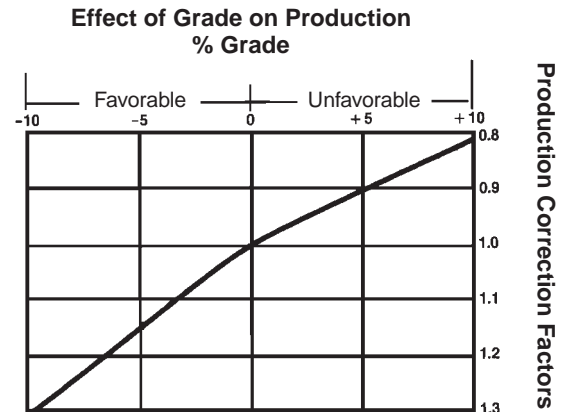

As a rule of thumb, track-type tractors can negotiate grades of about 60% in loose coal. Wheel tractor dozers can negotiate grades up to 25% on fairly well compacted coal.

2. *Slot dozing*, which consists of dozing repeatedly in the same tracks, will increase production. The deeper the slot, the greater the increase in production. Obviously this will disrupt the surface of the pile; however it does provide maximum production.

Slot Condition	Slot Depth	Increase in Production
Slight	60 cm ~ 2 ft	10%
Consistent	60 cm-1.5 m ~ 2-5 ft	25%
Very Consistent	Over 1.5 m ~ Over 5 ft	30% +

3. *Relative traction* — machines will provide greater-tractive effort as the compaction beneath them increases.

Condition	Machine	Coefficient of Traction
Well Compacted Coal	Track-type	*0.75-0.80
	Wheel	0.40-0.50
Loose Coal	Track-type	*0.60
	Wheel	0.30-0.40

\*D11R, D10R, D9R and D8R will often achieve a higher coefficient of traction due to their suspended undercarriage.

4. *Rolling Resistance* of rubber tired equipment will decrease as the compaction of the coal beneath the machines increases. Here are total rolling resistances on various surfaces.

	kg/Metric Ton	lb/U.S. Ton
● Main travel area from loading area to stockpile traveled and maintained.	29	65
● Travel over the compacted deadpile.	36	80
● Travel over thin lifts of uncompacted coal on the deadpile.	54	120
● Travel on loose piles under stacking conveyor or on a windrow.	90-136	200-300

5. *The degree of compaction required* — for medium and high rank bituminous coal, track-type tractors will normally provide ample compaction to prevent fires. For low rank coals, such as sub-bituminous and lignite, rubber tired machines, pneumatic compactors or sealing may be required to prevent fires. The following table illustrates the compaction that is possible if the coal is spread in thin lifts and the machine makes a sufficient number of passes over the entire lift surface.

Machine	kg/m <sup>3</sup>	lb/ft <sup>3</sup>	lb/yd <sup>3</sup>
Track-type Tractors	960-1160	60-72	1620-1950
Wheel Tractors	1040-1200	65-75	1750-2030
Wheel Loaders	1040-1250	65-78	1750-2110
Wheel Tractor-Scrapers	1100-1280	68-80	1840-2160

### ESTIMATING HOURLY PRODUCTION

The following graphs may be used for estimating the hourly production of machines handling mixed bituminous coal. The graphs are based on 100% machine efficiency under normal job conditions and average operator; they do not take into account adverse grades, downtime, wait time, poor traction, etc. These production estimates should be evaluated in light of individual job conditions and efficiency. Moreover, a job efficiency correction factor should be applied to the production estimate shown when using these graphs.

To estimate travel times for a specific machine refer to the performance graphs or charts in the appropriate model section of this book.


**NOTE:** Capacities and production curves on the next pages are based on bituminous coal with a density of 890 kg/m<sup>3</sup> or 1500 lb/yd<sup>3</sup> or 55 lb/ft<sup>3</sup>. For sub-bituminous coal with a density of 800 kg/m<sup>3</sup> or 1350 lb/yd<sup>3</sup> or 50 lb/ft<sup>3</sup> multiply tonnage figure by .90. For lignite with an average density of 710 kg/m<sup>3</sup> or 1200 lb/yd<sup>3</sup> or 45 lb/ft<sup>3</sup> multiply tonnage figure by .80.



**Track-Type Tractors Estimated Production with U-Blade (Coal Dozer)**

**Factors:**

- Mixed Bituminous Coal
- Storage and Reclamation
- 0% Grade
- .80 Coefficient of Traction

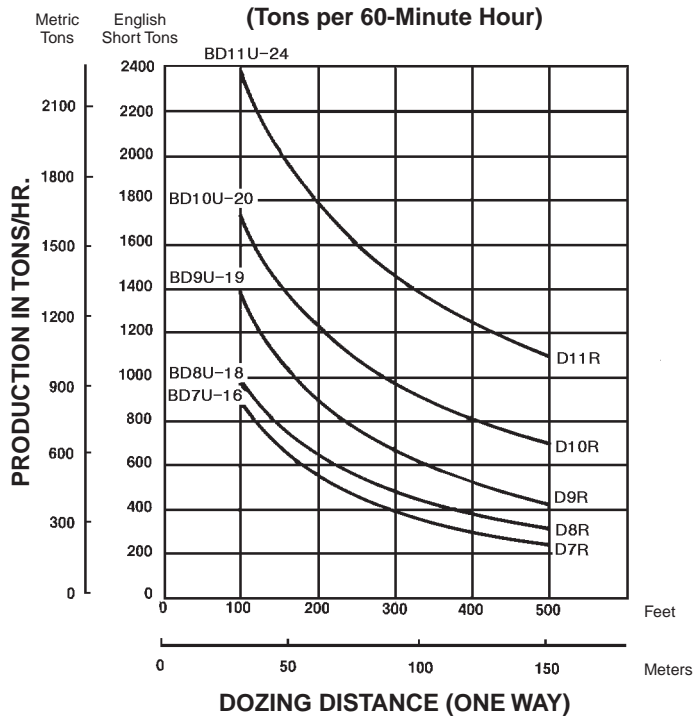

**NOTE:** This chart is based on numerous field studies made under varying job conditions. Refer to correction factors following these charts.

Tractor	U-Blade			Blade Capacities			
	Model	m	ft	Metric tons	U.S. tons	m <sup>3</sup>	yd <sup>3</sup>
D11R	BD11U-24	7.32	24'	66.7	73.5	74.9	98
D10R	BD10U-20	6.10	20'	40.85	45.0	45.9	60
D9R	BD9U-19	5.79	19'	32.6	35.9	36.5	47.8
D8R	BD8U-18	5.49	18'	19.0	21.0	21.4	28
D7R	BD7U-16	4.88	16'	14.28	15.75	16.05	21
D6R	BD6U	4.27	14'	8.84	9.75	9.9	13


Refer to Track-Type Tractor/Bulldozer section for additional special attachment specifications.

**Wheel Tractors Estimated Production  
 with U-Blade (Coal Dozer)**

**NOTE:** This chart is based on numerous field studies made under varying job conditions. Refer to correction factors following these charts.

**Factors:**

- Mixed Bituminous Coal
- Storage and Reclamation
- 0% Grade
- .80 Coefficient of Traction

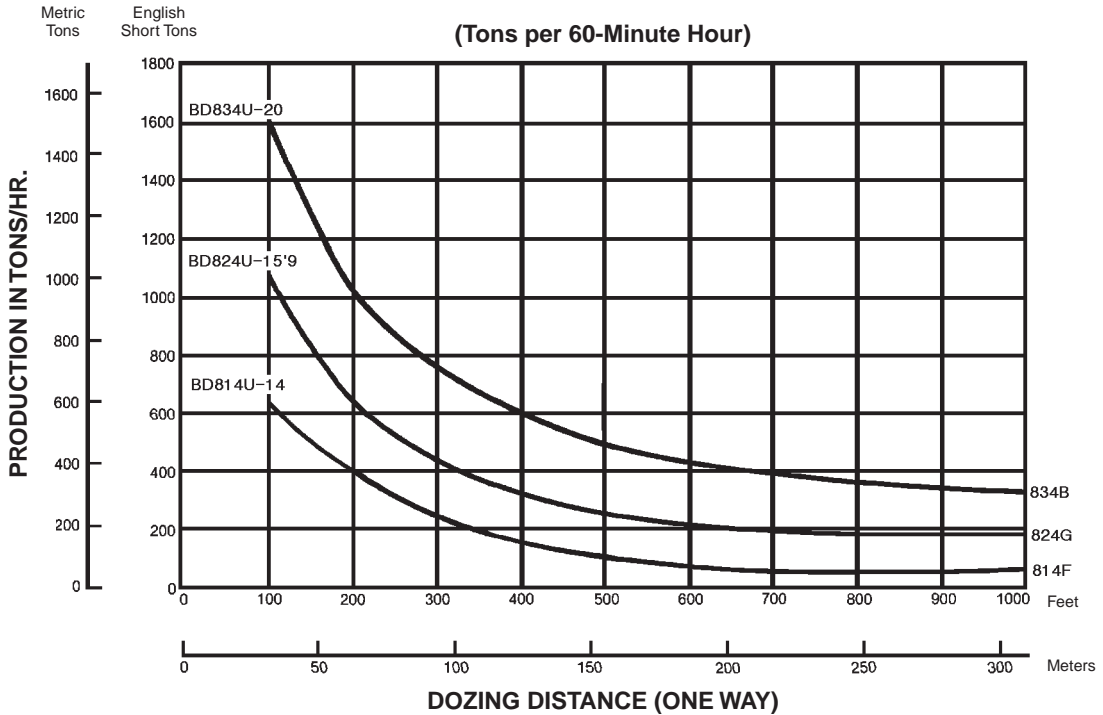

25

Tractor	U-Blade			Blade Capacities			
	Model	m	ft	Metric tons	U.S. tons	m <sup>3</sup>	yd <sup>3</sup>
834B	BD834U-20	6.17	20'3"	18.8	20.8	21.2	27.7
824G	BD824U-15'9	4.79	15'9"	14.2	15.7	16.1	21.0
814F	BD814U-14	4.32	14'2"	9.4	10.3	10.6	13.8


**NOTE:** Blade capacities in tons figured using weight of coal at 890 kg/m<sup>3</sup> (1500 lb/yd<sup>3</sup>).

Refer to Track-Type Tractor/Bulldozer section for additional special attachment specifications.

**Wheel Tractors Estimated Production with Coal Scoop**

**Factors:**

- Mixed Bituminous Coal
- Storage and Reclamation
- 0% Grade
- .80 Coefficient of Traction

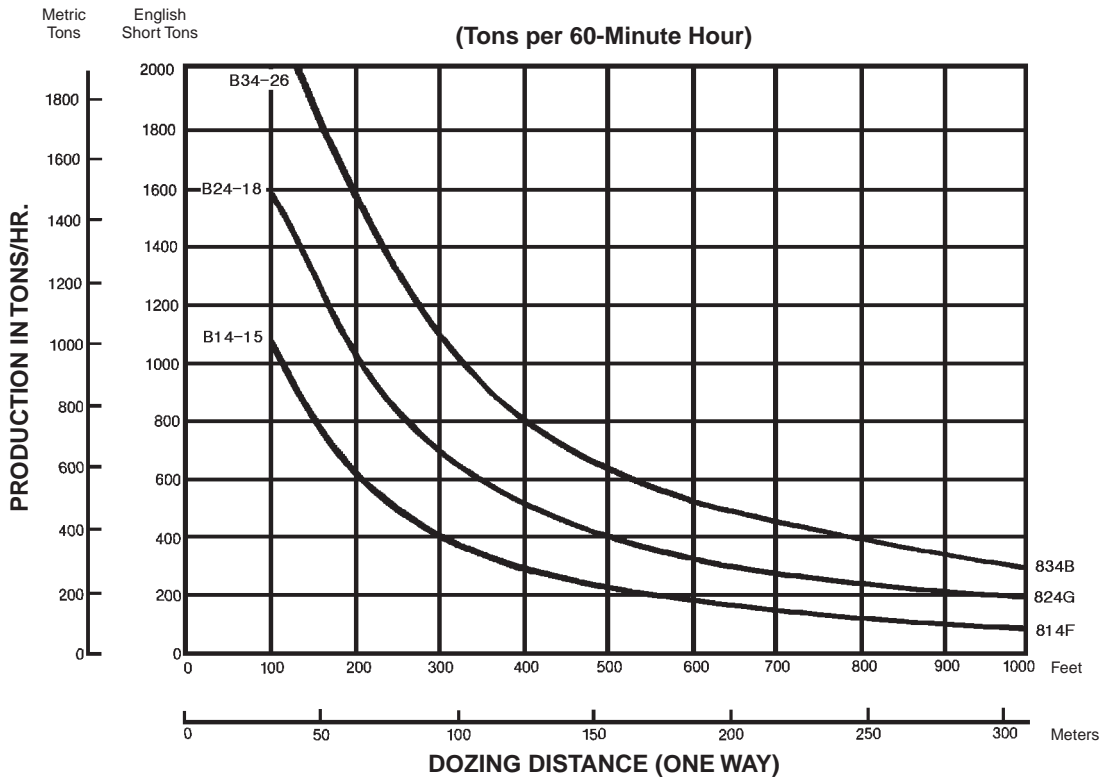


Tractor	Coal Scoop		Scoop Capacities (Lift and Carry)				Doze Capacities				
	Model	m	ft	Metric tons	U.S. tons	m <sup>3</sup>	yd <sup>3</sup>	Metric tons	U.S. tons	m <sup>3</sup>	yd <sup>3</sup>
834B	B34-26	5.3	17'4"	18.3	20.2	19.9	26	37.5	41.25	37.5	49
824G	B24-17	4.0	13'2"	12.3	13.5	13.0	17	24.5	27.0	26.0	34
814F	B14-15	3.7	12'3"	8.2	9.0	11.5	15	16.3	18.0	19.1	25

Refer to Track-Type Tractor/Bulldozer section for additional special attachment specifications.

**Wheel Loaders Estimated Production  
 with Coal Bucket**

**Factors:**

- Mixed Bituminous Coal
- Storage and Reclamation
- 0% Grade
- .80 Coefficient of Traction

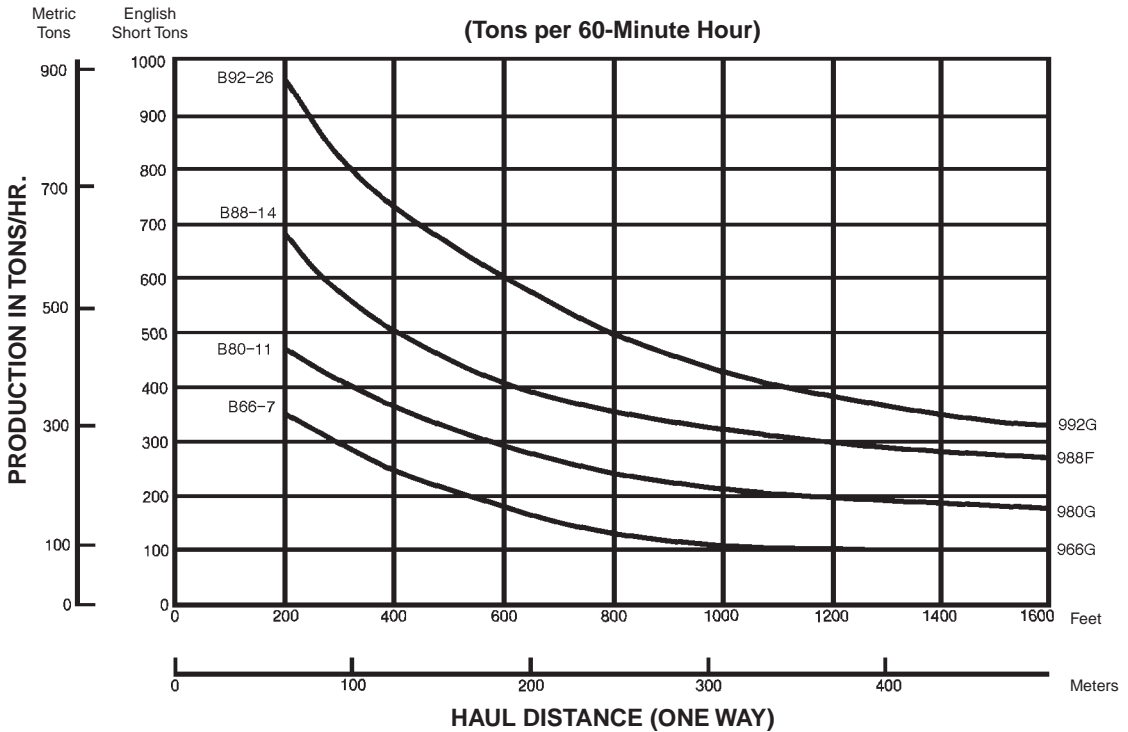

25


Loader	Coal Bucket	Bucket Capacities			
	Model	Metric tons	U.S. tons	m <sup>3</sup>	yd <sup>3</sup>
992G	B92-25	17.0	18.8	19.3	25.25
988F	B88-14	9.4	10.4	10.3	13.5
980G	B80-11	7.3	8.1	8.2	10.75
966G	B66-7	4.8	5.3	5.5	7.25

NOTE: Bucket capacities include bottom cutting edge in tons figured using weight of coal at 890 kg/m<sup>3</sup> (1500 lb/yd<sup>3</sup>).

Wheel Tractor-Scrapers Estimated Production

Factors:

- Mixed Bituminous Coal
- Storage and Reclamation
- 0% Grade
- .50 Coefficient of Traction

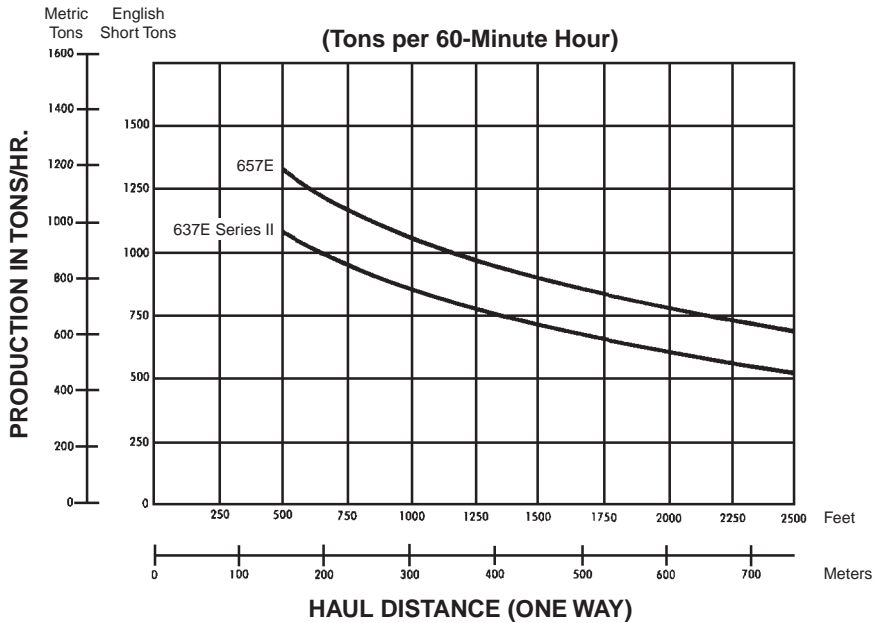

Coal Scraper	Bowl Capacities									
	Metric tons	U.S. tons	Struck		1:1		2:1		3:1	
			m <sup>3</sup>	yd <sup>3</sup>	m <sup>3</sup>	yd <sup>3</sup>	m <sup>3</sup>	yd <sup>3</sup>	m <sup>3</sup>	yd <sup>3</sup>
657E	49.9	55	45	59	56	73	50	65	47	62
637E Series II	34.5	38	31	41	38	50	34	45	37	44

Average fixed time to load, maneuver and dump:  
 657E — 1.12 min.  
 637E Series II — 1.10 min.

NOTE:

- The 657E Coal Scraper is 1049 mm (41.3") longer and bowl sides and apron are 1080 mm (42.5") higher than its earthmoving counterpart.
- The 637E Series II Coal Scraper is 762 mm (30") longer and bowl sides, apron and ejector are 915 mm (36") higher than its earthmoving counterpart.
- The rimpull, travel times, and retarder performance for the coal scrapers are the same as for the standard machines. See Wheel Tractor-Scrapers section for charts and graphs.

Example Problem

A coal-fired utility company has a coal requirement of approximately 315 metric tons (350 tons) per hour. Specify the coal handling machine that will satisfy this demand.

## Conditions:

- Lignite Coal 710 kg/m<sup>3</sup> (1200 lb/yd<sup>3</sup>)
- 90 m (300 ft) push distance
- 5% adverse grade
- 50 minute hour operation efficiency

## Solution:

Calculate the D9R's production equipped with the BD9U-19 Coal U-Blade by using the D9R production curve. Start at 90 m (300 ft) and read up to the D9R production line, then over to the left to determine its maximum hourly production of 612 metric tons (675 tons).

Since the graphs are based on a 890 kg/m<sup>3</sup> (1500 lb/yd<sup>3</sup>) coal density, this production figure has to be adjusted to reflect lignite coal:

Coal density correction factor =  $710/890$  (1200/1500) = 0.8.

Obtain the production correction factor for the 5% adverse grade from the chart: 0.9.

The correction factor for the 50 minute hour is  $50/60 = .83$ .

Now calculate the adjusted D9R hourly production using the correction factors:

$$\begin{aligned} \text{Metric} & 612 \times .8 \times .9 \times .83 = 366 \text{ tons/hour} \\ \text{English} & 675 \times .8 \times .9 \times .83 = 403 \text{ tons/hour} \end{aligned}$$

The D9R falls in the required production range. For short periods of peak power capacity, production could be increased by slot dozing.

Production for the D10R, 824G and 834B can be calculated using the same method.

**D10R**

$$\begin{aligned} \text{Metric} & 850 \times .8 \times .9 \times .83 = 508 \text{ tons/hour} \\ \text{English} & 935 \times .8 \times .9 \times .83 = 559 \text{ tons/hour} \end{aligned}$$

**824G**

$$\begin{aligned} \text{Metric} & 400 \times .8 \times .9 \times .83 = 239 \text{ tons/hour} \\ \text{English} & 440 \times .8 \times .9 \times .83 = 263 \text{ tons/hour} \end{aligned}$$

**834B**

$$\begin{aligned} \text{Metric} & 689 \times .8 \times .9 \times .83 = 412 \text{ tons/hour} \\ \text{English} & 760 \times .8 \times .9 \times .83 = 454 \text{ tons/hour} \end{aligned}$$

Therefore, the D9R or 834B could most economically satisfy the production requirements.



# LAND CLEARING

## CONTENTS

Variables affecting clearing operations . . . . .	26-1
Job surveys . . . . .	26-2
Clearing methods and equipment . . . . .	26-2
Equipment selection table . . . . .	26-3
Production estimating:	
General . . . . .	26-4
Cutting . . . . .	26-5
Piling . . . . .	26-6
Work tools . . . . .	26-8

Land clearing must be treated more as an art than a science because production rates and methods vary greatly from one area to another. This section deals with the many variables in clearing and includes methods, equipment and procedures to determine productivity rates.

## VARIABLES AFFECTING CLEARING OPERATIONS

*Vegetative Growth* — Factors affecting production and therefore cost, include the number of trees, size of trees, wood density, root systems, vines and undergrowth. These factors can be estimated by a “tree-count” as discussed under “Job Survey.”

*End Use of Land* — Since different end uses require different degrees of clearing (i.e. highways, dams, tree crops, row crops, etc.), this is one of the most important factors to consider in choosing the proper clearing method and equipment.

*Soil Conditions or Bearing Capacity* — Factors affecting clearing operations include topsoil depth, soil type, moisture content, and the presence of rocks and stones.

*Topography* — Grade and terrain factors such as steep slopes, ditches, swampy areas, boulders and even ant hills greatly affect the normal operation of some equipment.

*Rainfall and Climate* — Usually all phases of land clearing from cutting to burning are concerned to some degree with temperature changes and the amount of rainfall during the clearing operation.

*Job Specifications* — Specifications dictate the degree of clearing to be done, area size, completion dates, method of debris disposal, soil conservation and other factors which affect method and equipment selection.



**JOB SURVEYS**

Knowledge of rainfall and climate, end use of the land, and job specifications can be obtained from records, surveys, engineering studies, and written specifications. You should personally review the land to be cleared to gain other necessary and valuable information.

The survey should include a study of general topography and soil conditions. Note such problem factors as hills, rocks, or swamps which would significantly affect production or which would require special treatment.

Cruise the area to be cleared and determine the acreage of each vegetative type (i.e. upland woods, low timberlands, swamps). Make at least three tree counts at random for each vegetation type. To conduct these counts, randomly locate two points 100 meters (328 feet) apart. Count and measure vegetative growth along a straight line between these points for a width of about 5 meters (16 feet) on both sides. This gives the population of 1/10 hectare (1/4 acre).

**NOTE:**

1. Density of vegetation less than 30 cm (12 in) diameter
  - Dense — 1480 trees/hectare or more (600 trees/acre)
  - Medium — 990-1480 trees/hectare (400-600 trees/acre)
  - Light — less than 990 trees/hectare (400 trees/acre)
2. Presence of hardwoods expressed in percent
3. Presence of heavy vines
4. Average number of trees per hectare (2.47 acres) in each of the following ground level diameter size ranges:
  - Less than 30 cm (1 ft)
  - 31 cm-60 cm (1-2 ft)
  - 61 cm-90 cm (2-3 ft)
  - 91 cm-120 cm (3-4 ft)
  - 121 cm-180 cm (4-6 ft)
5. Sum of diameter of all trees per hectare (2.47 acres) above 180 cm (6 ft) in diameter at ground level.

**CLEARING METHODS AND EQUIPMENT**

*Methods for Initial Felling* — There are several methods indicating the degree of clearing for initial felling and several types of equipment for use with each method. Equipment use in different size vegetation and different size areas is summarized in the table on the next page. This information should serve only as a rough guideline in selecting equipment. The economical land area for each type of equipment will vary with the capital cost of equipment and moving cost. It is also affected by whether there are alternate uses for equipment such as using tractors for other construction work or tillage.

*Land Clearing Machines* — Job size, severity of job such as tree size, and time limit to complete will influence machine selection. Some machines, such as the D6R, D7R and D8R are more suited for this type work than others, but imagination and resourcefulness can allow the use of other types of machines in specific applications. For example, loaders are used more today in raking and piling operations than ever before.

*Operator Protection and Machine Guarding* — Daily production has been estimated to increase 20% when cab guards are used. Cabs designed specifically for clearing are available from Rome and other auxiliary equipment manufacturers.

The radiator, engine, and underside of the tractor must be well protected. Perforated hoods, screens, crankcase guards and hydraulic cylinder guards are generally recommended.

Generally speaking, lower cost clearing can be done with larger tractors if the amount of clearing involved is sufficient to merit the initial investment in the bigger machine. Because most clearing work requires frequent direction changes, a power shift transmission should be standard equipment. The direct drive transmission tractor is recommended when the tractor is used principally in constant drawbar work such as chaining or pulling a disc harrow. In most applications, a winch should also be considered on one of every three tractors in a fleet.

## EQUIPMENT SELECTION TABLE

	UPROOTING	CUTTING AT OR ABOVE GROUND LEVEL	KNOCKING TO THE GROUND	INCORPORATING INTO THE SOIL
<b>LIGHT CLEARING — Vegetation up to 5 cm (2 in) diameter</b>				
Small areas 4 hectares (10 acres)	Bulldozer blade, axes, grub hoes and mattocks	Axes, machetes, brush hooks, grub hoes and mattocks, wheel-mounted circular saws	Bulldozer blade	Moldboard plows, disc plows, disc harrows
Medium areas 40 hectares (100 acres)	Bulldozer blade	Heavy duty sickle mowers [up to 3.7 cm (1½ in) diameter] tractor-mounted circular saws, suspended rotary mowers	Bulldozer blade, rotary mowers; flail-type rotary cutters; rolling brush cutters	Moldboard plows; disc plows, disc harrows
Large areas 400 hectares (1000 acres)	Bulldozer blade, root rake, grubber, root plow, anchor chain drawn between two crawler tractors; rails	—	Rolling brush cutter; flail-type cutter; anchor chain drawn between two crawler tractors; rails	Undercutter with disc; moldboard plows; disc plows; disc harrows
<b>INTERMEDIATE CLEARING — Vegetation 5 to 20 cm (2 to 8 in) diameter</b>				
Small areas 4 hectares (10 acres)	Bulldozer blade	Axes, crosscut saws, power chain saws, wheel-mounted circular saws	Bulldozer blade	Heavy-duty disc plow; disc harrow
Medium areas 40 hectares (100 acres)	Bulldozer blade	Power chain saws, tractor-mounted circular saws, single scissor type tree shears	Bulldozer blade, rolling brush cutter [up to 12 cm (5 in) diameter], rotary mower [up to 10 cm (4 in) diameter]	Heavy-duty disc plow; disc harrow
Large areas 400 hectares (1000 acres)	Shearing blade, angling (tilted) bulldozer blade, rakes, anchor chain drawn between two crawler tractors, root plow	Shearing blade (angling or V-type)	Bulldozer blade, flail-type rotary cutter, anchor chain	Bulldozer blade with duty harrow
<b>LARGE CLEARING — Vegetation 20 cm (8 in) diameter or larger</b>				
Small areas 4 hectares (10 acres)	Bulldozer blade	Axes, crosscut saws, power chain saws	Bulldozer blade	—
Medium areas 40 hectares (100 acres)	Shearing blade, angling (tilted), knockdown beam, rakes, tree stumper	Shearing blade (angling or V-type), tree shear [up to 70 cm (26 in) softwood; 35 cm (14 in) hardwood], shearing blade — power saw combination	Bulldozer blade	—
Large areas 400 hectares (1000 acres)	Shearing blade, angling (tilted), tree pusher, rakes, tree stumper, anchor chain with ball drawn between two crawler tractors	Shearing blade (angling or V-type), shearing blade — power saw combination	Anchor chain with ball drawn between two crawler tractors. [Use dozer blade for trees over 18 cm (7 in).]	—

**NOTE:** The most economical size area for each type of equipment will vary with the relative cost of capital equipment versus labor. It is also affected by whether there are alternate uses for equipment such as using tractors for tillage.

**PRODUCTION ESTIMATING**

**GENERAL — CONSTANT SPEED OPERATIONS**

Production is the hourly clearing rate usually expressed in hectares or acres.

For many land clearing operations, production is calculated by multiplying the tractor speed by the width of cut and converting to hectares or acres per hour.

Metric system:

The base formula is:

$$\frac{\text{Width of cut (meters)} \times \text{speed (km/h)}}{10} = \text{hectares/h}$$

When an efficiency of 82.5% is used, the formula becomes:

$$\frac{\text{Width of cut (m)} \times \text{speed (km/h)} \times .825}{10} = \text{hectares/h}$$

English measure:

$$\frac{\text{Width of cut (ft)} \times \text{speed (mph)}}{43,560 \text{ (ft}^2\text{)}} = \text{acres/hr}$$

The American Society of Agricultural Engineers formula for estimating hourly production of a constant speed operation is based on 82.5% efficiency. With this efficiency, the formula becomes:

$$\frac{\text{Width of cut (ft)} \times \text{speed (mph)} \times .825}{43,560 \text{ (ft}^2\text{)}} = \text{acres/hr}$$

Width of cut is the effective working width of the equipment and may not be the same as its rated width. Working width should be measured on the job but can be estimated when necessary.


The actual machine speed can be determined by measuring the amount of time to travel a given distance. When using the metric system, the time to travel 16.7 meters or a multiple thereof, can be converted into kilometers per hour.

$$\frac{1.0}{\text{(Time in min. to travel 16.7 meters)}} = \text{speed (km/h)}$$

Since 88 ft/min. equals one mph, the lapsed time to travel 88 ft, or a multiple of 88 ft, can easily be converted into miles per hour.


$$\frac{1.0}{\text{(Time in min. to travel 88 ft)}} = \text{speed (mph)}$$

The following nomographs in both the Metric and English systems convert speed and width of cut directly into acres or hectares per hour at 82.5% efficiency without the need for calculations.

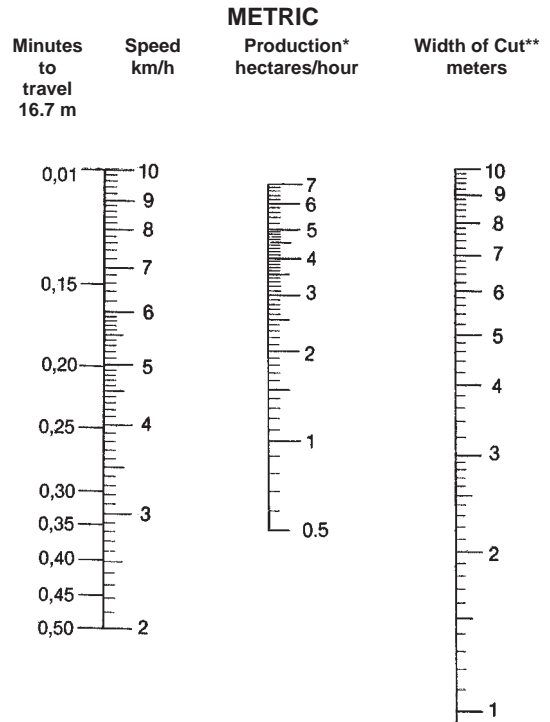

\*Based on 82.5% efficiency.

\*\*When width of cut exceeds 10 meters, use a multiple of the width of cut and increase production proportionately.

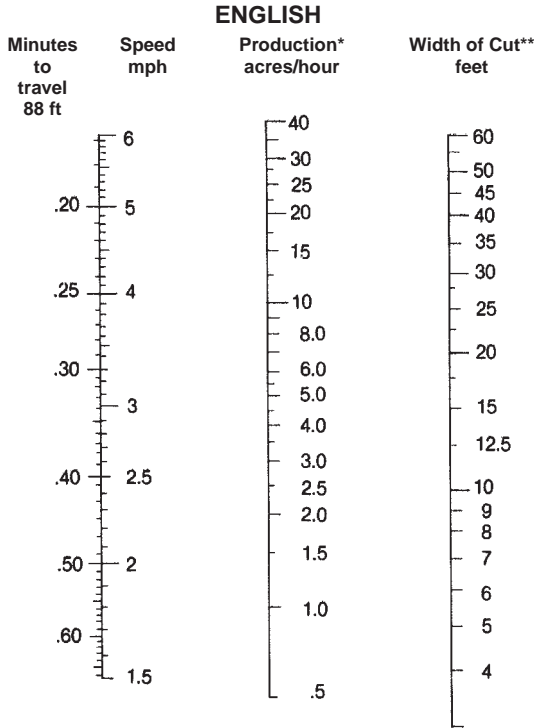

\*Based on 82.5% efficiency.

\*\*When width of cut exceeds 60 feet, use a multiple of the width of cut and increase production proportionately.

## CUTTING PRODUCTION ESTIMATING

Most land clearing operations such as bulldozing, cutting, grubbing, raking and piling are not performed at constant speed. Because off-the-job production is difficult to estimate for these operations, Rome Industries has developed formulas for estimating cutting and piling time. These formulas take into consideration variable prime mover speeds through a factor, "B", the base time for each tractor to cover one hectare (2.47 acres) of light material.

To estimate **tractor cutting time per hectare** (2.47 acres) on a specific land clearing job, apply the factors shown in the following table, together with data obtained from the job survey, in the formula:

$$T = X [A(B) + M_1N_1 + M_2N_2 + M_3N_3 + M_4N_4 + DF]$$

where

T = Time per hectare (2.47 acres) in minutes

X = Hardwood or density factor affecting total time

A = Density or vine presence factor affecting base time

B = Base time for each tractor per hectare (2.47 acres)

M = Minutes per tree in each diameter range

N = Number of trees per hectare (2.47 acres) in each diameter range obtained from field survey

D = Sum of diameter in 30 cm (1 ft) increments of all trees per hectare (2.47 acres) above 180 cm (6 ft) in diameter at ground level obtained from field survey

F = Minutes per 30 cm (1 ft) of diameter for trees above 180 cm (6 ft) in diameter.

Hardwoods affect over-all or total time as follows:  
 75-100% hardwoods: Add 30% to total time (X=1.3)  
 25-75% hardwoods: No change (X=1.0)  
 0-25% hardwoods: Subtract 30% from total time (X=0.7)

## Production Factors for Felling with Rome K/G Blades

Tractor	Base Minutes per hectare (2.47 acres) "B"	Diameter Range				Dia. above 180 cm per 30 cm (6' per foot) "F"
		30-60 cm (1-2 ft) "M <sub>1</sub> "	60-90 cm (2-3 ft) "M <sub>2</sub> "	90-120 cm (3-4 ft) "M <sub>3</sub> "	120-180 cm (4-6 ft) "M <sub>4</sub> "	
165 hp	85	0.7	3.4	6.8	—	—
230 hp	58	0.5	1.7	3.3	10.2	3.3
305 hp	45	0.2	1.3	2.2	6	1.8
405 hp	39	0.1	0.4	1.3	3	1.0

### Explanation of columns in table:

**Tractor** — Based on current model tractors (power shift when applicable) working on reasonably level terrain (below 10% grade) with good footing, no stones, average mixture of soft and hard woods. Tractor is in proper operating condition, blade is sharp, and properly adjusted.

**Base Minutes** — The base figures represent the number of minutes required for each tractor to cover a hectare (2.47 acres) of light material where no trees require splitting or other individual treatment. Time required is affected by the density of material less than 30 cm (1 ft) in diameter and the presence of vines.

- dense — 1480 trees/hectare (600 or more trees/acre): Add 100% to base time (A=2.0)
- medium — 990-1480 trees/hectare (400-600 trees/acre): No change (A=1.0)
- light — less than 990 trees/hectare (400 trees/acre): Subtract 30% from total time (A=0.7)

- Cutting
- Piling

Presence of heavy vines: Add 100% to base time (A=2.0). Very heavy vines add 300% to base time. (A=3.0)

*Dia. Range* — M<sub>1</sub> represents minutes required to cut trees from 31-60 cm (1-2 ft) in diameter at ground level.

M<sub>2</sub> same for trees 61-90 cm (2-3 ft) diameter.

M<sub>3</sub> same for trees 91-120 cm (3-4 ft) diameter.

M<sub>4</sub> same for trees 121-180 cm (4-6 ft) diameter.

*For Dia. above 180 cm (6 ft)* — The figures in this column represent size the number of minutes required per 30 cm (1 ft) of diameter for each tractor to cut trees above 180 cm (6 ft) in diameter. Thus, to fell a 240 cm (8 ft) diameter tree would require 8 × 1.8 or approximately 14.4 minutes with a D8R.

Example problem:

Calculate the felling production of a D8R with K/G Blade in these conditions: reasonably level terrain, firm ground, well drained, 85% hardwoods with heavy vines and the following average tree count per hectare (2.47 acre):

Diameter Range	Less than 30 cm (1 ft) "B"	31-60 cm (1-2 ft) "N <sub>1</sub> "	61-90 cm (2-3 ft) "N <sub>2</sub> "	91-120 cm (3-4 ft) "N <sub>3</sub> "	121-180 cm (4-6 ft) "N <sub>4</sub> "	Sum Dia's Above 180 cm (6 ft) "D"
Number of Trees	1100	35	6	6	4	488 cm (16 ft)

**Solution:**

$$\begin{aligned}
 T &= X [A(B)+M_1N_1+M_2N_2+M_3N_3+M_4N_4+DF] \\
 T &= 1.3 [2.0 (45)+0.2 (35)+1.3 (6)+2.2 (6)+6 (4)+16 (1.8)] \\
 &= 1.3 (90+7+7.8+13.2+24+28.8) \\
 &= 1.3 (170.8) \\
 &= 222 \text{ minutes/hectare (90 min/acre)}
 \end{aligned}$$



Where the job requires grubbing trees and stumps greater than 30 cm (1 ft) in diameter at the same time the trees are sheared, use the same basic procedure as defined above including the variables for the presence of hardwoods. After time per hectare (acre) in minutes has been determined, increase the over-all or total time by 25%.

Where the job requires re-entering the area (after all trees have been sheared) to remove stumps with a tilted shearing blade or stump, increase the total time by 50%.

**PILING PRODUCTION ESTIMATING**

A procedure has also been developed for estimating piling production for a tractor equipped with a K/G blade or rake.

To estimate tractor hours per hectare (acre) on a specific land clearing job, apply the factors shown in the following table with data obtained from the job survey, in the formula:

$$T = B+M_1N_1+M_2N_2+M_3N_3+M_4N_4+DF$$

where

- T = Time per hectare (2.47 acre) in minutes.
- B = Base time for each tractor per hectare (2.47 acre).
- M = Minutes per tree in each diameter range.
- N = Number of trees per hectare (2.47 acre) in each diameter range obtained from field cruise.
- D = Sum of diameter in 30 cm (1 ft) increments of all trees per hectare (2.47 acre) above 180 cm (6 ft) in diameter at ground level obtained from field cruise.
- F = Minutes per 30 cm (1 ft) of diameter for trees above 180 cm (6 ft) in diameter.

**Production Factors for Piling in Windrows\***

Tractor	Base Minutes per hectare (2.47 acres) "B"	Diameter Range				Dia. above 180 cm per 30 cm (6' per foot) "F"
		30-60 cm (1-2 ft) "M <sub>1</sub> "	60-90 cm (2-3 ft) "M <sub>2</sub> "	90-120 cm (3-4 ft) "M <sub>3</sub> "	120-180 cm (4-6 ft) "M <sub>4</sub> "	
165 hp	157	0.5	1.0	4.2	—	—
230 hp	125	0.4	0.7	2.5	5.0	—
305 hp	111	0.1	0.5	1.8	3.6	0.9
405 hp	97	0.08	0.1	1.2	2.1	0.3

\*May be used with most types of raking tools and angled shearing blade. Windrows to be spaced approximately 61 meters (200 feet) apart.

**Explanation of columns in table:**

*Tractor* — Production with tractor working alone based on current model tractors (power shift when applicable) working on reasonably level (below 10% grade) terrain with good footing, no stones, average mixture of soft and hard woods. The tractor is in proper operating condition. Decrease total time by 25-50% depending on the number and size of trees when using three or more tractors in combination.

*Base Minutes* — The base figures represent the number of minutes required for each tractor to cover a hectare (2.47 acres) of light material.

*Dia. Range* —  $M_1$  represents minutes required to pile trees from 31-60 cm (1-2 ft) diameter at ground level.

$M_2$  same for trees 61-90 cm (2-3 ft) diameter.

$M_3$  same for trees 91-120 cm (3-4 ft) diameter.

$M_4$  same for trees 121-180 cm (4-6 ft) diameter.

*For Dia. above 180 cm (6 ft)* — The figures in this column represent for each tractor size the number of minutes required per 30 cm (1 ft) of diameter to pile trees above 180 cm (6 ft) in diameter. Thus, to pile a 240 cm (8 ft) diameter tree would require  $8 \times 0.9$  or approximately 7.2 minutes with a D8R tractor.

Where the job requires piling of grubbed trees and stumps greater than 30 cm (1 ft) in diameter, use the same basic procedure defined above and then increase over-all or total time by 25%.

In dense small diameter brush with few or no large trees, or when cutting is vine entangled, reduce the base time by 30%.

Example problem:

Calculate the windrow piling production of a D7R Series II with Rake in level terrain, no grubbing, and average mixture of hardwoods and softwoods where the average tree count per hectare (2.47 acres) is:

Diameter Range	Less than 30 cm (1 ft) "B"	31-60 cm (1-2 ft) "N <sub>1</sub> "	61-90 cm (2-3 ft) "N <sub>2</sub> "	91-120 cm (3-4 ft) "N <sub>3</sub> "	121-180 cm (4-6 ft) "N <sub>4</sub> "	Sum Dia's Above 180 cm (6 ft) "D"
Number of Trees	1100	35	6	6	2	0

**Solution:**

$$\begin{aligned}
 T &= B + M_1N_1 + M_2N_2 + M_3N_3 + M_4N_4 + DF \\
 &= 125 + 0.4(35) + 0.6(6) + 2.5(6) + 5.0(2) + [DF=0] \\
 &= 42.6 \\
 &= 177.6 \text{ minutes/hectare (72 min/acre)}
 \end{aligned}$$



To find the number of machines required for each operation, use the formula:

$$\text{Hr/hectare (acre)} \times \text{number of hectares (acres)} = \text{number of machines needed}^*$$

\*Average machine production for all operation in hr/hectare (acre).

To cost estimate each method or phase of operation, use this calculation:

$$\text{Owning and Operating cost/hr} \times \text{hr/hectare (acre)} \times \text{number of hectares (acres)} = \text{cost}$$

Because of the many variables that increase or decrease production, these formulas should be considered only as guidelines in arriving at a rough production estimate. This estimate should be tempered by personal judgment based on past experience and personal knowledge of the area.

**ROME K/G BLADES Tractors Equipped with CAT C-Frame**

Tractor Model		D6M	D6R	D7R	D8K & D8R	D8L
Blade Model		KGBA5H	KGBA6H	KGBA7H	KGBA8	KGBA8L
Overall Width, Mounted	m	3.29	3.29	3.40	3.76	3.88
	ft	<b>10'9.5"</b>	<b>10'9.5"</b>	<b>11'2"</b>	<b>12'4"</b>	<b>12'9"</b>
Weight	kg	1600	1600	2364	3090	3157
	lb	<b>3520</b>	<b>3520</b>	<b>5200</b>	<b>6820</b>	<b>6960</b>

**ROME K/G BLADES Tractors Equipped with Rome C-Frame**

Tractor Model		D6M LGP	D6R LGP	D6R	D7R LGP	D7R	D7R	D8K*	D8K
Blade Model		KB5HLGP	KGB6HLGP	KGB6CH	KGB7HLGP	KGB7HTCA	KGB7H	KGB8KTC	KGB8K
Overall Width, Mounted	m	3.89	3.89	3.16	3.96	3.40	3.40	3.76	3.76
	ft	<b>12'9"</b>	<b>12'9"</b>	<b>10'4.5"</b>	<b>13'0"</b>	<b>11'2"</b>	<b>11'2"</b>	<b>12'4"</b>	<b>12'4"</b>
Weight	kg	2140	2140	2282	3770	3572	3420	5320	5160
	lb	<b>4708</b>	<b>4708</b>	<b>5030</b>	<b>8310</b>	<b>7860</b>	<b>7530</b>	<b>11,730</b>	<b>11,380</b>

\*Equipped with Caterpillar Tilt Cylinder

**BLADE RAKES**

Tractor Model & Dozer		6A	D6R 6S	6SLGP	7A	D7R 7S	7SLGP
Raking Width	m	3.3	2.62	3.3	3.72	3.18	3.66
	ft	<b>10'10"</b>	<b>8'6"</b>	<b>10'10"</b>	<b>12'3"</b>	<b>10'5"</b>	<b>12'</b>
Opening at Tooth Tips	mm	356	305	310	381	381	381
	in	<b>14"</b>	<b>12"</b>	<b>12.22"</b>	<b>15"</b>	<b>15"</b>	<b>15"</b>
Tooth Penetration	mm	432	457	406	559	559	559
	ft/in	<b>17"</b>	<b>18"</b>	<b>16"</b>	<b>1'10"</b>	<b>1'10"</b>	<b>1'10"</b>
Total Weight	kg	718	675	825	1144	1100	1119
	lb	<b>1585</b>	<b>1490</b>	<b>1820</b>	<b>2525</b>	<b>2420</b>	<b>2470</b>

**RAKES FOR WHEEL LOADERS**

Wheel Loader Model and Rake type		914G Loader Rake	924G Loader Rake	928G Loader Rake	938G Loader Rake	950G/962G Loader Rake	966G/972G Loader Rake
Raking Width	mm	2210	2486	2837	2845	3048	3353
	ft	<b>7'3"</b>	<b>8'2"</b>	<b>9'4"</b>	<b>9'4"</b>	<b>10'0"</b>	<b>11'0"</b>
Tooth Penetration	mm	762	653	914	914	965	1143
	ft	<b>2'6"</b>	<b>2'2"</b>	<b>3'0"</b>	<b>3'0"</b>	<b>3'2"</b>	<b>3'9"</b>
Opening at Tooth Tips	mm	318	310	349	298	298	330
	in	<b>12.75"</b>	<b>12.2"</b>	<b>13.8"</b>	<b>11.75"</b>	<b>11.75"</b>	<b>13"</b>
Rake Weight	kg	770	2282	1420	1450	1590	2210
	lb	<b>1700</b>	<b>1035</b>	<b>3130</b>	<b>3200</b>	<b>3500</b>	<b>4880</b>

**RAKES FOR TRACK LOADERS**

Track Loader Model and Rake type		953C Loader Rake	963B Loader Rake
Raking Width	mm	2845	2388
	ft	<b>9'4"</b>	<b>7'10"</b>
Tooth Penetration	mm	635	635
	ft	<b>2'1"</b>	<b>2'1"</b>
Opening at Tooth Tips	mm	298	330
	in	<b>11.75"</b>	<b>13"</b>
Rake Weight	kg	1450	1450
	lb	<b>3200</b>	<b>3200</b>

This listing is not all-inclusive. Contact your Caterpillar Dealer for special attachment needs.

# WASTE DISPOSAL

## CONTENTS

Introduction	27-1
Landfill methods	27-1
Equipment selection	27-2
Track-Type Tractors	
Features	27-5
Specifications	27-6
Blade specifications	27-8
Track Loaders	
Features	27-10
Specifications	27-11
Landfill buckets specifications	27-12
Landfill Compactors	
Features	27-13
Specifications	27-14
Blade specifications	27-15
Wheel Loaders	
Features	27-16
Specifications	27-17
Refuse densities	27-19
Compaction factors	27-19
Compaction comparison	27-20
Compactor production	27-20
Landfill estimating (example problems)	27-21
Ballasting	27-22

## INTRODUCTION

An increasing volume of refuse is generated by every person, commercial entity and household day after day ... 365 days a year. Disposal of this waste is a major problem worldwide. Increased governmental legislation designed to protect the environment and rising transportation and land acquisition costs have made waste disposal a significant user of earthmoving and specialty mobile equipment.

The most commonly accepted disposal method is burying refuse in a sanitary landfill. A sanitary landfill protects the environment by disposing solid waste on land in an engineered cell. Building a cell involves spreading the waste in thin layers, compacting it to the smallest practical volume, covering it with soil by the end of each working day, and compacting the cover material. Proper equipment selection and operating technique can maximize refuse and cover compaction and extend the operational landfill life.

27

## LANDFILL METHODS

There are three basic landfill methods:

In the *area* method, waste is usually deposited at the toe of the previously compacted cell and then spread and compacted. This method is attractive for landfills receiving over 450 metric tons (500 tons) of refuse per day because it reduces truck unloading congestion. Cover material is normally handled by articulated trucks or wheel tractor-scrappers from nearby borrow sites.

The *trench* method is normally found at smaller landfills where the ground water table is deep. A trench is excavated and refuse is deposited and compacted within it. Excavated material becomes the cover material. Since the trench working face is narrow, truck congestion can occur. This method is usually attractive to landfills receiving under 450 metric tons (500 tons) of refuse per day.



- Track-Type Tractors
- Landfill Compactors

The *ramp* method combines the characteristics of both area and trench designs. Refuse is dumped, spread and compacted on existing slopes and covered with material excavated directly in front of the working face. The excavated area becomes part of the next cell. This is a good way for a landfill to begin operation with a minimum of equipment expenditures.

## EQUIPMENT SELECTION

A landfill's largest single cost for daily operation is purchasing, operating and maintaining the mobile equipment. Undersized, inadequate or unreliable equipment results in breakdowns, higher operating costs and improper landfill operation.

Landfill equipment performs three distinct functions:

1. Waste handling and compaction equipment dispose of the waste. Track-type tractors, track loaders, and steel-wheeled landfill compactors are the primary machines.
2. Cover material handling machines provide daily cover requirements. If supplying cover material is a machine's sole function at a landfill, it can be selected on the basis of normal earthmoving considerations, such as material characteristics, distance to borrow areas, volume to be transported, and other basic earthmoving principles, i.e., maximizing earth movement in the least amount of time at the lowest cost per yard.
3. Support equipment includes motor graders, backhoe loaders, hydraulic excavators, water trucks, air compressors, service vehicles, water pumps, generators and any other necessary equipment.

### Track-Type Tractors

The track-type tractor is the most popular and versatile machine on a sanitary landfill. They not only spread and compact refuse and cover material, they also prepare the site, rip cover material, build haul roads, knock down trees, remove stumps, and work in virtually all weather conditions. They are well-suited for all three landfill methods (area, ramp, and trench).

The crawler tractor can achieve compaction densities of 475 to 590 kg/m<sup>3</sup> (800-1000 lb/yd<sup>3</sup>). Maximum compaction is achieved when it works on a 3:1 slope, permitting the grousers to rip and tear while pushing and compacting waste up-slope. Economic limit of cover or waste movement by a track-type tractor is normally under 90 m (300 ft).

### Track Loaders

Track loaders are highly versatile allowing them to perform many applications. Small landfills under 135 metric tons (150 tons) per day generally utilize a minimum amount of equipment. Track loaders can serve both the waste handling and cover material functions.

The track loader is an ideal machine for the trench method. Since the bucket does not extend outside the tracks, it can obtain full compaction to the trench walls. Rippers can be attached to handle frozen cover material. Compaction densities are similar to or slightly higher than the track-type tractor — 475 to 590 kg/m<sup>3</sup> (800-1000 lb/yd<sup>3</sup>). Many people believe track loaders equipped with single grouser shoes provide maximum demolition and compaction densities. Loading the bucket during compaction passes increases weight helping achieve higher densities.

Equipping track loaders with multi-purpose buckets increases their versatility in single machine applications, allowing the operator to selectively grapple items out of the working face.

Track loaders are also ideal for transfer stations. The machine's weight compacts the trash reducing volume and increases density. Wider and larger capacity buckets from Balderson Special Attachments are needed to fully utilize the capabilities of the track loader in this application.

### Landfill Compactors (Steel-Wheeled)

Landfill compactors are specialized pieces of equipment effective in spreading and compacting large volumes of waste. Compactors offer higher operational speeds than track machines. This is the recommended machine if more than one spreading and compaction machine is needed and waste does not have to be pushed more than 90 m (300 ft).

Landfill compactors over 20 410 kg (45,000 lb) operating weight achieve the highest compaction levels — from 710 to 950 kg/m<sup>3</sup> (1200-1600 lb/yd<sup>3</sup>).

Landfill compactors normally operate on slopes no steeper than 4:1 due to reduced compaction and operational safety. Compactors should not be used to excavate cover material.

- Wheel Loaders
- Wheel Tractor-Scrapers
- Articulated Trucks
- Machine Selection Factors

**Wheel Loaders**

Although not recommended as a waste handling and compaction machine, wheel loaders are used by those communities sharing a single machine which travels from landfill to landfill. Versatility and mobility are the primary wheel loader advantages. In landfills over 272 metric tons (300 tons) per day, wheel loaders will sometimes be used to perform general clean-up tasks. Wheel loaders are also popular in transfer stations to load and separate refuse. Special foam-filled tires should be considered due to the constant threat of tire puncture. However, foam filled tires will have reduced ton-mile-per hour capabilities.

Wheel loaders can achieve compaction densities of 530 to 650 kg/m<sup>3</sup> (900-1100 lb/yd<sup>3</sup>). A disadvantage of wheel loaders is that they can leave ruts in the refuse, requiring extra cover material.

**Wheel Tractor-Scrapers**

A scraper can be used to excavate trenches for site preparation, but usually performs a cover operation at a landfill and is most economical at distances over 185 m (600 ft). A scraper should be selected as if it were performing a typical earthmoving job.

Preferably, the scraper unloads the cover material close to the working face, either at the base or top. The cover material is then spread by the machine(s) working on the refuse. This reduces the possibility of tire damage from driving over the refuse. Foam filled tires are not recommended for scrapers due to the high travel speeds. Since excavating and transporting cover material is a major expense at a landfill, scrapers with work alone capability have been the most popular.

**Articulated Trucks**

Articulated trucks are versatile, highly maneuverable, all-weather haulers that can negotiate poor underfoot conditions and tight spaces normally found in landfills. In combination with a variety of loading tools, articulated trucks typically work in site preparation, cell construction, hauling cover material, and are economically effective at haul distances ranging from 0.1 km-5 km (600 ft-3 miles). In dump configuration, cover material can be dumped close to the face and spread by other machines. In ejector configuration, articulated trucks provide on-the-go dumping and can operate in soft material and

on side-slopes that would not be suitable for machines in dump configuration. In addition, Cat articulated trucks are available in a range of container handler and refuse body configurations for specialized landfill applications.

**Machine Selection Factors**

Selecting the type, size, quantity, and combination of machines required to spread, compact, and cover varying daily refuse volumes is determined by the following parameters:

1. Amount and type of waste to be handled (daily tonnage)
  2. Amount and type of soil cover to be handled
  3. Distance cover material to be transported
  4. Weather conditions
  5. Compaction requirements
  6. Landfill method utilized
  7. Supplemental tasks
  8. Budget
  9. Growth
- A. *Daily tonnage and type of waste* — Amount of waste produced by a community is the major variable in selecting the appropriate size machine. The chart serves as a guideline in sizing a landfill machine. For example, if a community generates approximately 180 metric tons (200 tons) of refuse per day, a D6 or 963 and a 816 Landfill Compactor should be considered.

**WASTE EQUIPMENT SELECTION BASED UPON POPULATION AND DAILY REFUSE TONNAGE**

Population	Metric Tons/Day	U.S. Tons/Day	Machine(s)Required
0-20,000	0-45	<b>0-50</b>	D3 or 933
20,000-60,000	45-136	<b>50-150</b>	D4 or 939 and an 816
60,000-100,000	136-226	<b>150-250</b>	D5 or D6 or 953 and 816
100,000-140,000	226-317	<b>250-350</b>	D6 or D7 or 963 and 816
140,000-200,000	317-453	<b>350-500</b>	D7 or D8 or 973 and 816
200,000-300,000	453-680	<b>500-750</b>	D8 or D9 and 826
300,000-more	680-more	<b>750-more</b>	D9, D10 and 836/variety of support equipment

**NOTE:** Daily tonnage figures are based on 2.26 kg (5 lb) of residential refuse per person per day. The amount of waste/person/day can vary depending on the community and should be adjusted to the individual community.

Type of waste to be handled will strongly influence machine selection. The major solid waste components for a community should be identified and the proper machine chosen based on the type of waste and the compaction desired. For example, if the site receives a high proportion of noncompactible heavy industrial waste (rocks, bricks, concrete, reinforcing rod, etc.) a compactor might not achieve normal compaction densities and the pushing and tractive ability of a track-type tractor may be needed. However, a small track-type tractor has more difficulty compacting bulk waste such as washing machines and telephone poles than a landfill compactor.

Waste varies from location to location, even within a community; however, the following figures are representative in the U.S.:

**Characterization of  
Domestic — Household Waste**

Component	Percent by Weight
Paper	42
Food	16
Glass	14
Metal	12
Plastics	5
Wood	5
Rubber and Leather	4
Textiles	2

**NOTE:** Moisture content can have a significant effect on weight characteristics. Field tests have indicated moisture content can vary from 10-80% during dry and wet seasons.

**B. Amount and type of cover material to be handled** — Although landfill size and type will vary, a rule of thumb for estimating needed cover material is one cubic meter (cubic yard) of cover material for every four cubic meters (or cubic yards) of in-place compacted waste. That is, about 20-25% of a sanitary landfill’s volume consists of soil used for cover (including daily and final covering). On smaller landfills, the percentage of soil could be as high as 50% to meet reasonable cover requirements.

It is important to remember that cover material also occupies landfill space reducing the volume available for refuse. For example a landfill with 1 900 000 m<sup>3</sup> (2,500,000 yd<sup>3</sup>) of total volume would provide for disposing of 1 520 000 m<sup>3</sup> (2,000,000 yd<sup>3</sup>) of refuse and allow 380 000 m<sup>3</sup> (500,000 yd<sup>3</sup>) of cover material. This example considers one cubic yard of cover for every 4 cubic yards of in place compacted waste.

The type of cover material can also be important. If the material is sandy or highly abrasive, a rubber tired wheel loader or scraper might be considered rather than a track-type unit.

**C. Distance cover material is to be transported** will have a large effect on cover equipment selection. The following economic limits or guidelines are recommended for cover material movement. The quantity of material to be moved and the time available must be considered when using these guidelines.

Track-type tractor	0-90 m	(0-300 ft)
Track loader	0-152 m	(0-500 ft)
Wheel loader	0-185 m	(0-600 ft)
Wheel tractor-scraper	over 185 m	(over 600 ft)
Articulated trucks	over 185 m	(over 600 ft)

**D. Weather conditions** — when working in inclement weather, the tractive capability of a track-type machine may be necessary for poor underfoot conditions or to rip frozen cover material.

**E. Compaction requirements** — are becoming critical as extended landfill life is sought. If high density is desired, then a compactor may be necessary.

The following pages contain features, specifications and work tools for Caterpillar’s Waste Handling machines. Additional information regarding drawbar pull/rimpull Vs groundspeed, controls, ground pressures, production estimating for these machines as well as specifications and performance information for Wheel Tractor Scrapers and Articulated Trucks can be found in their respective Performance Handbook sections.

**Features:**

- **Hinged heavy duty radiator** doors are guarded to prevent excessive trash build-up. Quick release handles allow easy access for cleaning.
- **Final drive, pivot shaft, and idler seal guarding** helps prevent wire, cable and similar material from winding around components and damaging seals.
- **Striker bars for front, rear and ripper** (all optional) keep trash from damaging fenders, fuel and hydraulic tanks or other sheet metal.
- **Lighting protection.** Front lights are mounted on top of bulldozer lift cylinders. Rear lights are ROPS mounted.
- **AMOCs Waste Handling Arrangement** radiator with 6 fins/inch (optional on D6R thru D9R).
- **Flexaire fan** is recommended option for D6R thru D10R.
- **Elevated sprocket** removes final drives from wear environment and eliminates impact loading for extended power train life.
- **Sheet metal guarding** near track and on dozer tilt hoses.
- **Fuel tank guards** keep trash from damaging fuel and hydraulic tanks or other sheet metal.
- **Heavy duty steps and grab handles** resist damage from landfill debris.
- **Trapezoidal-shaped center hole track shoes (optional)** help keep track clean during machine operation.
- **Blade trash racks (optional)** prevent blade spill-over and damage to cylinders or radiator guard.
- **75 amp alternator available on D6R, D7R, D8R, D9R, 100 amp on D10R** insures adequate current is available to maintain battery and operate accessories.
- **Elevated prescreener** to remove engine air inlet from debris environment. Larger surface area to resist plugging. Turbine precleaner is optional.
- **Cat turbine precleaner** removes large particulates from incoming air before they reach the air filter, helps extend filter life. (Optional on D6R-D10R.)
- **ROPS mounted air conditioning** helps prevent condenser core plugging. Provides full utilization of jacket water cooling system by avoiding additional heat load from radiator mounted condenser.
- **Laminated thermal shields** cover the exhaust stack inside the engine compartment, hot-side of the turbocharger, and the exhaust manifold. These shields reduce surface temperatures well below the flash point of most common combustibles encountered. (Optional on D6-D8. Standard on D9R.)
- **Chassis Guards.**
- **Sealed belly guards.**
- **Perforated engine enclosures** standard on D10R and required attachments on D6R thru D9R.
- **Carrier rollers** not recommended.



<b>MODEL</b>	<b>D6R WHA</b>		<b>D7R WHA</b>	
Flywheel Power	123 kW	<b>165 hp</b>	171 kW	<b>230 hp</b>
Operating Weight (PS)*	20 600 kg	<b>45,370 lb</b>	27 920 kg	<b>61,500 lb</b>
Engine Model		<b>3306</b>		<b>3306</b>
Rated Engine RPM		<b>1800</b>		<b>2100</b>
No. of Cylinders		<b>6</b>		<b>6</b>
Bore	121 mm	<b>4.75"</b>	121 mm	<b>4.75"</b>
Stroke	152 mm	<b>6"</b>	152 mm	<b>6"</b>
Displacement	10.5 L	<b>638 in<sup>3</sup></b>	10.5 L	<b>638 in<sup>3</sup></b>
Track Rollers (Each Side)		<b>6</b>		<b>7</b>
Width of Standard Track Shoe	560 mm	<b>1'10"</b>	560 mm	<b>1'10"</b>
Length of Track on Ground	2.62 m	<b>8'7.5"</b>	2.88 m	<b>9'5"</b>
Ground Contact Area (W/Std. Shoe)	2.94 m <sup>2</sup>	<b>4564 in<sup>2</sup></b>	3.22 m <sup>2</sup>	<b>4996 in<sup>2</sup></b>
Track Gauge	1.88 m	<b>6'2"</b>	1.98 m	<b>6'5"</b>
<b>GENERAL DIMENSIONS:</b>				
Height (Stripped Top)**	2.26 m	<b>7'5"</b>	2.56 m	<b>8'5"</b>
Height (To Top of Cab ROPS)	3.12 m	<b>10'3"</b>	3.50 m	<b>11'6"</b>
Overall Length (S Blade) (W/O Blade)	5.11 m	<b>16'9"</b>	5.82 m	<b>19'1"</b>
Width (Over Trunnion) (W/O Trunnion)	2.64 m	<b>8'8"</b>	2.87 m	<b>9'5"</b>
Ground Clearance	376 mm	<b>14.8"</b>	414 mm	<b>16"</b>
<b>Blade Types and Widths:</b>				
Straight	3.35 m	<b>11'0"</b>	3.90 m	<b>12'10"</b>
Semi-Universal	3.26 m	<b>10'8"</b>	3.69 m	<b>12'1"</b>
Universal		—	3.98 m	<b>13'0"</b>
Fuel Tank Refill Capacity	383 L	<b>101 U.S. gal</b>	488 L	<b>129 U.S. gal</b>

\*D6R Operating Weight includes lubricants, coolant, full fuel tank, hydraulic controls, 6SU/tilt, 610 mm (2'0") trash rack, 560 mm (1'10") shoes, ROPS canopy, engine enclosure, extreme service crankcase guard, fuel tank guard, hydraulic cooler, prescreener, six lights, hinged HD radiator guard, lower radiator guarding, final drive seal guards, idler seal guards, engine compartment guarding, tilt cylinder guards. WHA also available for D6R XL, XR, XL (IG) and LGP models.

D7R Operating Weight includes lubricants, coolant, full fuel tank, hydraulic controls, 7SU/tilt, 610 mm (2'0") trash rack, 560 mm (1'10") shoes, ROPS canopy, engine enclosure, extreme service crankcase guard, fuel tank guard, hydraulic cooler, prescreener, six lights, hinged HD radiator guard, lower radiator guarding, final drive seal guards, idler seal guards, engine compartment guarding, tilt cylinder guards. WHA also available for D7R XR and D7R LGP.

\*\*Height with ROPS canopy, exhaust pipe, seat or all easily removed encumbrances. Add 71.1 mm (2.8") for grouser tips on D7R.



MODEL	D8R WHA		D9R WHA		D10R WHA	
Flywheel Power	228 kW	<b>305 hp</b>	302 kW	<b>405 hp</b>	425 kW	<b>570 hp</b>
Operating Weight (PS)*	37 594 kg	<b>82,880 lb</b>	47 913 kg	<b>105,630 lb</b>	65 764 kg	<b>144,986 lb</b>
Engine Model	<b>3406C</b>		<b>3408E</b>		<b>3412</b>	
Rated Engine RPM	<b>2100</b>		<b>1900</b>		<b>1900</b>	
No. of Cylinders	<b>6</b>		<b>8</b>		<b>12</b>	
Bore	137 mm	<b>5.4"</b>	137 mm	<b>5.4"</b>	137 mm	<b>5.4"</b>
Stroke	165 mm	<b>6.5"</b>	152 mm	<b>6"</b>	152 mm	<b>6"</b>
Displacement	14.6 L	<b>893 in<sup>3</sup></b>	18 L	<b>1099 in<sup>3</sup></b>	27 L	<b>1649 in<sup>3</sup></b>
Track Rollers (Each Side)	<b>8</b>		<b>8</b>		<b>8</b>	
Width of Standard Track Shoe	560 mm	<b>1'10"</b>	610 mm	<b>2'0"</b>	610 mm	<b>2'0"</b>
Length of Track on Ground	3.21 m	<b>10'6.5"</b>	3.47 m	<b>11'5"</b>	3.88 m	<b>12'9"</b>
Ground Contact Area (W/Std. Shoe)	3.58 m <sup>2</sup>	<b>5544 in<sup>2</sup></b>	4.24 m <sup>2</sup>	<b>6569 in<sup>2</sup></b>	4.70 m <sup>2</sup>	<b>7326 in<sup>2</sup></b>
Track Gauge	2.08 m	<b>6'10"</b>	2.25 m	<b>7'5"</b>	2.55 m	<b>8'4"</b>
GENERAL DIMENSIONS:						
Height (Stripped Top)**	2.67 m	<b>8'9"</b>	3.00 m	<b>9'10"</b>	3.27 m	<b>10'9"</b>
Height (To Top of Cab ROPS)	3.51 m	<b>11'6"</b>	3.99 m	<b>13'1"</b>	4.36 m	<b>14'3"</b>
Overall Length (Blade)	6.39 m	<b>21'0"</b>	6.84 m	<b>22'5"</b>	7.76 m	<b>25'5"</b>
(W/O Blade)	4.88 m	<b>16'2"</b>	5.18 m	<b>17'0"</b>	5.59 m	<b>18'4"</b>
Width (Over Trunnion)	3.05 m	<b>10'0"</b>	3.30 m	<b>10'10"</b>	3.72 m	<b>12'2"</b>
(W/O Trunnion)	2.70 m	<b>8'8"</b>	2.93 m	<b>9'8"</b>	3.16 m	<b>10'4"</b>
Ground Clearance	585 mm	<b>1'11"</b>	585 mm	<b>1'11"</b>	615 mm	<b>2'0.2"</b>
Blade Types and Widths:						
Semi-Universal	3.94 m	<b>12'11"</b>	4.31 m	<b>14'2"</b>	—	—
Universal	4.26 m	<b>14'0"</b>	4.66 m	<b>15'3.4"</b>	5.26 m	<b>17'3"</b>
Fuel Tank Refill Capacity	625 L	<b>165 U.S. gal</b>	818 L	<b>216 U.S. gal</b>	1109 L	<b>293 U.S. gal</b>

\*Operating Weight includes lubricants, coolant, full fuel tank, hydraulic controls, and ROPS — FOPS canopy. Also included are special radiator core and ejector fan, draw-bar, engine enclosures, fuel tank guard, extreme service crankcase guard, HD hinged radiator guard, higher prescreener, front & rear striker bars and operator.

- D8R 8S blade with 762 mm (2'6") trash rack and 660 mm (2'2") track shoes.
  - D9R 9SU blade with 914 mm (3'0") trash rack and 685 mm (2'3") track shoes.
  - D10R 10SU blade with 1107 mm (3'8") trash rack and 610 mm (2'0") track shoes.
- \*\*Height with ROPS canopy, exhaust pipe, seat or all easily removed encumbrances.

<b>MODEL</b>	<b>D6R WHA</b>					
	<b>6S</b>		<b>6SU</b>		<b>PAT WHA</b>	
Type						
Blade Capacities*	8.6 m <sup>3</sup>	<b>11.2 yd<sup>3</sup></b>	11.2 m <sup>3</sup>	<b>14.6 yd<sup>3</sup></b>	3.83 m <sup>3</sup>	<b>5.0 yd<sup>3</sup></b>
Dozer Weight**	2881 kg	<b>6338 lb</b>	3026 kg	<b>6657 lb</b>	3246 kg	<b>7150 lb</b>
<b>Tractor &amp; Dozer</b>						
<b>Dimensions</b>						
Length Blade Straight	5.11 m	<b>16'9"</b>	5.30 m	<b>17'5"</b>	5.44 m	<b>17'10"</b>
Length Blade Angled	—	—	—	—	5.94 m	<b>19'6"</b>
Width Blade Angled	—	—	—	—	3288.1	<b>129.4</b>
Width C Frame Only	—	—	—	—	2.49 m	<b>8'2"</b>
<b>Blade Dimensions</b>					(inside mounted)	
Width including std. end bits	3355 mm	<b>11'0"</b>	3262 mm	<b>10'8"</b>	3619.5 mm	<b>142.5"</b>
Height	1866 mm	<b>6'1"</b>	2019 mm	<b>6'7"</b>	1207.2 mm	<b>47.5"</b>
Maximum Dig Depth	473 mm	<b>18.6"</b>	473 mm	<b>18.6"</b>	732.4 mm	<b>28.8"</b>
Ground Clearance at full raise	1104 mm	<b>3'7.5"</b>	1104 mm	<b>3'7.5"</b>	—	—
Maximum Manual Tilt	—	—	—	—	203 mm	<b>8"</b>
Maximum Pitch	—	—	—	—	—	—
Maximum Hydraulic Tilt	765 mm	<b>2'6.1"</b>	744 mm	<b>2'5.3"</b>	—	<b>6.5°</b>
Blade Angle	—	—	—	—	—	<b>25°</b>

<b>MODEL</b>	<b>D7R WHA</b>					
	<b>7S</b>		<b>7SU</b>		<b>7U</b>	
Type						
Blade Capacities*	10.9 m <sup>3</sup>	<b>14.2 yd<sup>3</sup></b>	14.0 m <sup>3</sup>	<b>18.4 yd<sup>3</sup></b>	16.8 m <sup>3</sup>	<b>22.0 yd<sup>3</sup></b>
Dozer Weight**	4028 kg	<b>8861 lb</b>	4083 kg	<b>8982 lb</b>	4402 kg	<b>9684 lb</b>
<b>Tractor &amp; Dozer</b>						
<b>Dimensions</b>						
Length Blade Straight	5813 mm	<b>19'1"</b>	6036 mm	<b>19'10"</b>	6278 mm	<b>20'7"</b>
Length Blade Angled	—	—	—	—	—	—
Width Blade Angled	—	—	—	—	—	—
Width C Frame Only	—	—	—	—	—	—
<b>Blade Dimensions</b>						
Width including std. end bits	3904 mm	<b>12'10"</b>	3690 mm	<b>12'1"</b>	3980 mm	<b>13'1"</b>
Height	1971 mm	<b>6'6"</b>	2133 mm	<b>7'0"</b>	2162 mm	<b>7'1"</b>
Maximum Dig Depth	527 mm	<b>1'8.7"</b>	527 mm	<b>1'8.7"</b>	527 mm	<b>1'8.7"</b>
Ground Clearance at full raise	1145 mm	<b>3'9.1"</b>	1145 mm	<b>3'9.1"</b>	1145 mm	<b>3'9.1"</b>
Maximum Manual Tilt	—	—	—	—	—	—
Maximum Pitch	—	—	—	—	—	—
Maximum Hydraulic Tilt	845 mm	<b>2'9.3"</b>	861 mm	<b>2'9.9"</b>	799 mm	<b>2'7.5"</b>
Blade Angle	—	—	—	—	—	—

\*Blade capacities, weights and heights include 610 mm (2'0") trash rack on D6R blades and D7R blades.

\*\*Total bulldozer arrangement includes blade with trash rack, pusharms, braces, cylinders, lines, trunnions and lift cylinder mountings.

MODEL	D8R WHA			
Type	8SU		8U	
Blade Capacities*	20.0 m <sup>3</sup>	26.1 yd <sup>3</sup>	24.8 m <sup>3</sup>	32.4 yd <sup>3</sup>
Dozer Weight**	5466 kg	12,025 lb	6313 kg	13,888 lb
<b>Tractor &amp; Dozer</b>				
<b>Dimensions</b>				
Length Blade Straight	6.39 m	21'0"	6.79 m	22'3"
Length Blade Angled	—	—	—	—
Width Blade Angled	—	—	—	—
Width C Frame Only	—	—	—	—
<b>Blade Dimensions</b>				
Width including std. end bits	3942 mm	12'11"	4262 mm	14'0"
Height	2464 mm	8'1"	2515 mm	8'3"
Maximum Dig Depth	582 mm	1'10.9"	582 mm	1'10.9"
Ground Clearance at full raise	1231 mm	4'0.5"	1231 mm	4'0.5"
Maximum Manual Tilt	—	—	—	—
Maximum Pitch	—	—	—	—
Maximum Hydraulic Tilt	951 mm	3'1.4"	1028 mm	3'4.5"
Blade Angle	—	—	—	—

MODEL	D9R WHA				D10R WHA	
Type	9SU		9U		10U	
Blade Capacities*	28.8 m <sup>3</sup>	37.6 yd <sup>3</sup>	33.5 m <sup>3</sup>	43.8 yd <sup>3</sup>	48.9 m <sup>3</sup>	63.9 yd <sup>3</sup>
Dozer Weight**	6964 kg	15,353 lb	7662 kg	16,891 lb	—	—
<b>Tractor &amp; Dozer</b>						
<b>Dimensions</b>						
Length Blade Straight	6.84 m	22'5"	7.18 m	23'7"	8.01 m	26'3"
Length Blade Angled	—	—	—	—	—	—
Width Blade Angled	—	—	—	—	—	—
Width C Frame Only	—	—	—	—	—	—
<b>Blade Dimensions</b>						
Width including std. end bits	4314 mm	14'2"	4645 mm	15'3"	5260 mm	17'3"
Height	2845 mm	9'4"	2845 mm	9'4"	3174 mm	10'5"
Maximum Dig Depth	606 mm	1'11.9"	606 mm	1'11.9"	679 mm	2'2.5"
Ground Clearance at full raise	1422 mm	4'8"	1422 mm	4'8"	1497 mm	4'10.9"
Maximum Manual Tilt	—	—	—	—	—	—
Maximum Pitch	—	—	—	—	—	—
Maximum Hydraulic Tilt	940 mm	3'1"	1014 mm	3'3.9"	1074 mm	3'6.3"
Blade Angle	—	—	—	—	—	—

\*Blade capacities, weights and heights include 762 mm (2'6") trash rack on D8R blades, 914 mm (3'0") trash rack on D9R blades, and 1067 mm (3'6") trash rack on D10R blades.  
 \*\*Total bulldozer arrangement includes blade with trash rack, pusharms, braces, cylinders, lines, trunnions and lift cylinder mountings.



**Features:**

- **Unmatched versatility** — excavates, loads, carries, covers, dozes, spreads, compacts, shreds, sorts, grapples — a true all purpose machine. Performs well as a one-machine fleet, a support machine or an all-around backup unit.
- **Demolition applications** — The Waste Handling Arrangement (963C and 973C Waste Demolition Specials) can also be used in demolition or demolition transfer stations when properly equipped with the extra guarding required for this severe environment.
- **Special guard package** protects the final drive seals, pivot shafts and idlers from debris that can wrap around and damage these components.
- **Raised precleaner** with prescreener to prevent airborne debris from clogging engine air intake.
- **Additional heavy duty guarding** helps protect sheet metal and machine components from damage in waste handling applications.
- **Improved serviceability** — swing open doors, guards and air coolers give quick access for cleaning debris and servicing.
- **Hinged, heavy duty radiator guard** with quick release “T” handles allows for easy access to clean the radiator.
- **Debris Barrier Package** protects machine from material entering engine and other compartments.
- **Lamp guard group** protects front and rear lamps with bolt on grids.
- **Optional rear striker bars** keep trash from climbing the track and damaging fenders.
- **Optional final drive abrasion guards** are available in two-piece or four-piece sections to protect the final drive case from premature wear from abrasion or gouging.
- **Optional single grouser, trapezoidal-shaped center hole track shoes** provide maximum traction. The center holes allow sprocket to punch out dirt and debris, best choice for landfill applications.
- **Optional chopper shoe track** uses cast shoes with extreme service single and diagonal grousers that chop and shred material as the machine moves and turns. Very effective for waste or demolition stations.
- **Flexxaire engine cooling fan** (optional on 973C) manually or automatically changes direction to purge accumulated debris from the radiator.



MODEL	953C WHA		963C WHA		973C WHA	
Flywheel Power	90 kW	121 hp	119 kW	160 hp	157 kW	210 hp
Operating Weight*	14 670 kg	32,350 lb	21 200 kg	46,750 lb	26 820 kg	59,140 lb
Engine Model	3116T		3116TA		3306T	
Rated Engine RPM	2200		2200		2200	
Bore	105 mm	4.13"	105 mm	4.13"	121 mm	4.75"
Stroke	127 mm	5"	127 mm	5"	152 mm	6"
No. Cylinders	6		6		6	
Displacement	6.6 L	403 in <sup>3</sup>	6.6 L	403 in <sup>3</sup>	10.5 L	638 in <sup>3</sup>
Speeds Forward,	km/h	mph	km/h	mph	km/h	mph
1st	0-9.7	0-6	0-9.5	0-5.9	0-9	0-5.6
2nd	Infinitely		Infinitely		Infinitely	
3rd	Variable		Variable		Variable	
Reverse						
1st	0-9.7	0-6	0-9.5	0-5.9	0-9	0-5.6
2nd	Infinitely		Infinitely		Infinitely	
3rd	Variable		Variable		Variable	
Hydraulic Cycle Time, Bucket Empty, in Seconds:						
Raise	6.7		6.7		6.4	
Dump	1.4		1.5		1.7	
Lower (Empty, Float Down)	3		2		2.5	
Total**	9.7		8.7		8.9	
Track Rollers (Each Side)	6		6		7	
Width of Standard Track Shoe	380 mm	15"	450 mm	17.7"	500 mm	20"
Length of Track on Ground	2.295 m	7'6"	2.454 m	8'1"	2.917 m	9'7"
Ground Contact Area (With Std. Shoe)	1.74 m <sup>2</sup>	2704 in <sup>2</sup>	2.21 m <sup>2</sup>	3425 in <sup>2</sup>	2.92 m <sup>2</sup>	4522 in <sup>2</sup>
Ground Pressure	82.4 kPa	12 psi	94 kPa	13.6 psi	90.1 kPa	13.1 psi
Ground Clearance	377 mm	14.8"	390 mm	15.4"	456 mm	17.9"
Track Gauge	1.8 m	5'11"	1.85 m	6'0.8"	2.08 m	6'10"
Width Without Bucket	2.18 m	7'2"	2.3 m	7'6.5"	2.58 m	8'6"
Fuel Tank Refill Capacity	241 L	63.8 U.S. gal	315 L	83.2 U.S. gal	415 L	110 U.S. gal
Hydraulic System Refill Capacity	104 L	27.5 U.S. gal	140 L	37 U.S. gal	159 L	42 U.S. gal

\*Includes GP landfill bucket with bolt-on adapters, long tips and segments.

\*\*Simultaneous lift/dump, dump time included in lift time.

See Wheel Loader section of this book for summary of S.A.E. Guidelines for Loader Specifications, to which Caterpillar adheres.

**GENERAL PURPOSE  
LANDFILL BUCKETS**

<b>Machine Model</b>	<b>953C*</b>		<b>963C*</b>		<b>973C*</b>	
<b>Bucket Model</b>	<b>B53-4L</b>		<b>B63-6L</b>		<b>B73-8L</b>	
Capacity, rated (Refuse)	2.7 m <sup>3</sup>	<b>3.5 yd<sup>3</sup></b>	4.2 m <sup>3</sup>	<b>5.5 yd<sup>3</sup></b>	5.58 m <sup>3</sup>	<b>7.25 yd<sup>3</sup></b>
Capacity, rated (Earth)	1.91 m <sup>3</sup>	<b>2.5 yd<sup>3</sup></b>	2.87 m <sup>3</sup>	<b>3.75 yd<sup>3</sup></b>	4.2 m <sup>3</sup>	<b>5.5 yd<sup>3</sup></b>
Width	2438 mm	<b>8'0"</b>	3033 mm	<b>9'11"</b>	3323 mm	<b>10'11"</b>
Height	1448 mm	<b>4'9"</b>	1967 mm	<b>6'5"</b>	2284 mm	<b>7'6"</b>
Depth	889 mm	<b>2'11"</b>	1585 mm	<b>5'2"</b>	1626 mm	<b>5'4"</b>
Teeth-optional	<b>8</b>		<b>8</b>		<b>8</b>	
Clearance @ 45° dump	2852 mm	<b>9'3"</b>	2769 mm	<b>9'1"</b>	2918 mm	<b>9'7"</b>
Reach @ 45° dump	810 mm	<b>2'8"</b>	1406 mm	<b>4'7"</b>	1560 mm	<b>5'1"</b>
Digging depth	132 mm	<b>5.2"</b>	124 mm	<b>4.9"</b>	114 mm	<b>4.5"</b>
Weight (approx.)	998 kg	<b>2200 lb</b>	2475 kg	<b>5460 lb</b>	2905 kg	<b>6400 lb</b>

**MULTI-PURPOSE  
LANDFILL BUCKETS**

<b>Machine Model</b>	<b>953C*</b>		<b>963C*</b>		<b>973C*</b>	
<b>Bucket Model</b>	<b>B53-3ML</b>		<b>B63-4ML</b>		<b>B73-6ML</b>	
Capacity, rated (Refuse)	2 m <sup>3</sup>	<b>2.62 yd<sup>3</sup></b>	2.7 m <sup>3</sup>	<b>3.5 yd<sup>3</sup></b>	4.4 m <sup>3</sup>	<b>5.75 yd<sup>3</sup></b>
Capacity, rated (Earth)	1.53 m <sup>3</sup>	<b>2 yd<sup>3</sup></b>	1.9 m <sup>3</sup>	<b>2.5 yd<sup>3</sup></b>	2.68 m <sup>3</sup>	<b>3.5 yd<sup>3</sup></b>
Width	2426 mm	<b>8'0"</b>	2529 mm	<b>8'4"</b>	3399 mm	<b>11'2"</b>
Height	1676 mm	<b>5'6"</b>	1905 mm	<b>6'3"</b>	1968 mm	<b>6'6"</b>
Depth	953 mm	<b>3'2"</b>	1060 mm	<b>3'6"</b>	1243 mm	<b>4'1"</b>
Teeth-optional	<b>8</b>		<b>8</b>		<b>8</b>	
Clearance @ 45° dump	2738 mm	<b>9'0"</b>	2870 mm	<b>9'5"</b>	3121 mm	<b>10'3"</b>
Reach @ 45° dump	806 mm	<b>2'8"</b>	1013 mm	<b>3'4"</b>	1220 mm	<b>4'0"</b>
Digging depth	229 mm	<b>9"</b>	203 mm	<b>8"</b>	211 mm	<b>8.3"</b>
Weight (approx.)	1615 kg	<b>3565 lb</b>	2109 kg	<b>4650 lb</b>	2765 kg	<b>6100 lb</b>

\*Standard GP or MP buckets with added trash rack also available.

**Landfill Compactors Features:**

- **Choice of Chopper Blades or PLUS TIPS ...**  
Chopper blades alternate in a staggered-chevron design for maximum coverage and density. PLUS TIPS are standard on 836G — optional on 816F and 826G.
- **Cat designed and manufactured power train ...** for optimum match, performance and efficiency. Responsive Cat diesel Engine. Single-lever planetary power shift. All-wheel drive.
- **Center-point articulation ...** excellent maneuverability. Front and rear drums track, so material is chopped and compacted twice each pass.
- **Protective guarding ...** helps keep trash from damaging machine components.
- **Caterpillar landfill blades** spread refuse and cover material ... built strong to handle the wide range of refuse encountered in landfills.
- **Operator comfort and convenience ...** sound suppressed cab with pressurized and filtered air circulation system. Adjustable suspension seat. Electronic Monitoring System and gauge package is standard. Optional air conditioner available.
- **Striker bars ...** standard on 826G, 836 and 816F, prevents refuse from being carried over the rear wheels.

# Waste Disposal Landfill Compactors

## Specifications ● Rimpull



MODEL	816F		826G		836G	
Flywheel Power	164 kW	220 hp	235 kW	315 hp	358 kW	480 hp
Operating Weight*	22 780 kg	50,115 lb	33 350 kg	73,370 lb	49 790 kg	109,760 lb
Engine Model	3306 DITA		3406C DITA		3456 DITA	
Rated Engine RPM	2200		2100		1900	
No. Cylinders	6		6		6	
Displacement	10.5 L	638 in <sup>3</sup>	14.6 L	893 in <sup>3</sup>	15.8 L	964 in <sup>3</sup>
Speeds:						
Forward	4		2		2	
Reverse	4		2		2	
Clearance Turning Circle with Blade	12.8 m	42'2"	14.69 m	48'2"	18.26 m	59'10"
Fuel Tank Refill Capacity	446 L	117.8 U.S. gal	630 L	166.5 U.S. gal	795 L	210 U.S. gal
WHEELS:	CHOPPER		CHOPPER		PLUS-TIPS	
Each Drum Width	1.02 m	3'4"	1.2 m	3'11"	1.4 m	4'7"
Diameters, over Blade Tips	1.6 m	5'3"	1.83 m	6'0"	—	—
Drum only	1.3 m	4'3"	1.53 m	5'0"	1.49 m	5'8"
Blade Tips per Wheel	20		24		35	
Blade Length	348 mm	13.7"	419 mm	16.5"	294 mm	11.6"
Blade Height	152 mm	6"	152 mm	6"	165 mm	6.5"
Blade Thickness/Width	22 mm	0.87"	28.6 mm	1.125"	150 mm	5.9"
PLUS TIPS per Wheel	20		25		35	
Width of Two Pass Coverage	4.5 m	14'9"	4.78 m	15'8"	5.67 m	18'7"
GENERAL DIMENSIONS:						
Height (to top of ROPS)	3.45 m	11'4"	3.82 m	12'7"	4.17 m	13'8"
Height (stripped top)**	2.5 m	8'3"	2.74 m	9'0"	3.2 m	10'6"
Wheel Base	3.35 m	11'0"	3.7 m	12'2"	4.55 m	14'11"
Overall Length with Dozer	7.79 m	25'7"	8.42 m	27'7"	10.18 m	33'5"
Width over Drums	3.33 m	10'11"	3.8 m	12'6"	4.28 m	14'1"
Ground clearance	532 mm	1'9"	505 mm	1'8"	596 mm	23.5"
LANDFILL BULLDOZER:						
Width	3.65 m	12'0"	4.5 m	14'9"	5.19 m	17'0"
Height***	1.91 m	6'3"	1.9 m	6'3"	2.22 m	7'3"




\*Operating Weight includes coolant, bulldozer, hydraulics, ROPS cab, full fuel tank, and operator.

\*\*Height (stripped top) — without ROPS cab, exhaust, seat back or other easily removed encumbrances.

\*\*\*To top of trash screen.

### KEY

- 1 – 1st Gear
- 2 – 2nd Gear
- 3 – 3rd Gear
- 4 – 4th Gear

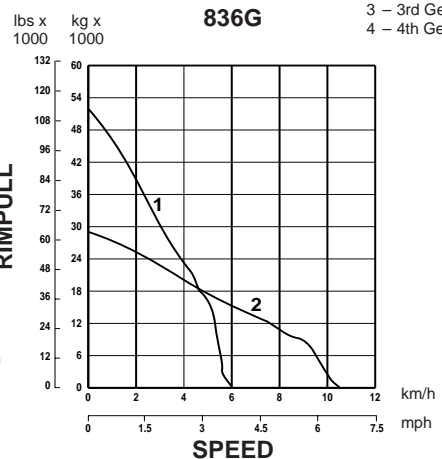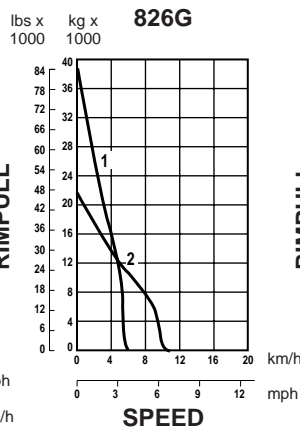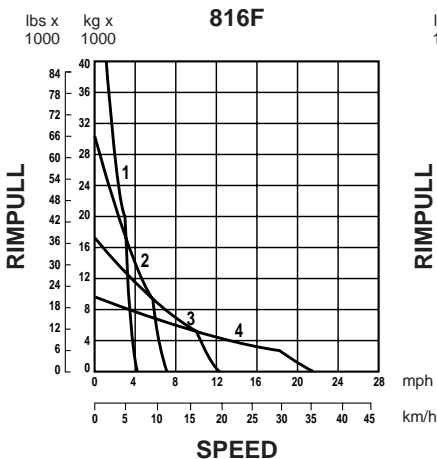

MODEL	816F		826G		836G	
Type	Land Fill Spreading		Land Fill Spreading		147-4425 Straight	
Capacity**						
Earth	2.9 m <sup>3</sup>	<b>3.79 yd<sup>3</sup></b>	3.68 m <sup>3</sup>	<b>4.81 yd<sup>3</sup></b>	5 m <sup>3</sup>	<b>6.66 yd<sup>3</sup></b>
Refuse	10.48 m <sup>3</sup>	<b>13.70 yd<sup>3</sup></b>	12.74 m <sup>3</sup>	<b>16.66 yd<sup>3</sup></b>	19.8 m <sup>3</sup>	<b>25.9 yd<sup>3</sup></b>
Weight, Dozer*	2107 kg	<b>4645 lb</b>	2739 kg	<b>6038 lb</b>	3400 kg	<b>7650 lb</b>
General Dimensions: (Tractor & Dozer)						
Length	7.79 m	<b>25'7"</b>	8.38 m	<b>27'6"</b>	10.18 m	<b>33'4"</b>
Width	3.65 m	<b>12'0"</b>	4.5 m	<b>14'9"</b>	5.19 m	<b>17'0"</b>
Blade Dimensions:						
Width, End Bits	3.65 m	<b>12'0"</b>	4.5 m	<b>14'9"</b>	5.19 m	<b>17'0"</b>
Height, Trash Rack	1915 mm	<b>6'3"</b>	1935 mm	<b>6'4"</b>	2220 mm	<b>7'3"</b>

\*Total Bulldozer Arrangement.

\*\*Blade capacities determined by SAE recommended practice J1265.

U-BLADE	816F		826G		836G	
Model:	BD816UL-12		BD826UL-14		177-3549	
Type	U-Blade		U-Blade		U-Blade	
Blade:						
Capacity (Refuse)	11.9 m <sup>3</sup>	<b>15.5 yd<sup>3</sup></b>	16.7 m <sup>3</sup>	<b>21.9 yd<sup>3</sup></b>	25.8 m <sup>3</sup>	<b>33.7 yd<sup>3</sup></b>
(Earth)	8.3 m <sup>3</sup>	<b>10.8 yd<sup>3</sup></b>	12.2 m <sup>3</sup>	<b>16 yd<sup>3</sup></b>	9.6 m <sup>3</sup>	<b>12.5 yd<sup>3</sup></b>
Length (Cutting Width)	3658 mm	<b>12'0"</b>	4369 mm	<b>14'4"</b>	5.32 mm	<b>17'4"</b>
Height	1857 mm	<b>6'1.1"</b>	2007 mm	<b>6'7"</b>	2.23 mm	<b>7'3"</b>
Weight, Installed (Without Hydraulics)	1630 kg	<b>3600 lb</b>	2550 kg	<b>5620 lb</b>	3730 kg	<b>8400 lb</b>

27

W-BLADE	816F		826G	
Model:	BD816WL-12		BD826WL-14	
Replaces "S" Blade				
Blade:				
Capacity (Refuse)	11.9 m <sup>3</sup>	<b>15.5 yd<sup>3</sup></b>	16.8 m <sup>3</sup>	<b>22.0 yd<sup>3</sup></b>
(Dirt)	6.9 m <sup>3</sup>	<b>9 yd<sup>3</sup></b>	—	—
Length (Cutting Width)	3658 mm	<b>12'0"</b>	4420 mm	<b>14'6"</b>
Moldboard Height	1857 mm	<b>6'1.1"</b>	2057 mm	<b>6'9"</b>
Weight, Installed (Without Hydraulics)	2320 kg	<b>5120 lb</b>	3345 kg	<b>7375 lb</b>

TILT STRAIGHT BLADE	816F		826G	
Model:	BDI816SL-12'T		BDI826SL-14'8" T	
Blade:				
Capacity (Refuse)	10.7 m <sup>3</sup>	<b>14 yd<sup>3</sup></b>	13 m <sup>3</sup>	<b>17 yd<sup>3</sup></b>
Length (Cutting Width)	3647 mm	<b>11'11.6"</b>	4375 mm	<b>14'4.3"</b>
Weight, Installed	2340 kg	<b>5150 lb</b>	3470 kg	<b>7650 lb</b>

### Features:

Caterpillar Waste Handling Wheel Loaders are equipped with the features and protection required in a demanding waste handling environment. These Caterpillar designed and built machines feature the following advantages:

- **Exceptional productivity** with fast cycle times for maximum production day-in day-out whether dozing, loading, stacking, or load and carry.
- **Protected work environment** enhances operator comfort, convenience and productivity.
- **Modified front frames** – (Standard on the 980G WHA) provide large cutouts that allows debris to fall out rather than packing and also provide easy access if cleaning is necessary.
- **Standard front drive guard and axle seal guards** (except 980G) protect from wire, string, strapping and other debris from wrapping and causing damage.
- **Front light guards** protect the lights from debris falling over the bucket spill plate.
- **Hinged crankcase and power train guards** help protect the engine and power train. The hinged design provides easy access for cleaning. (Powered guards available on some models.)
- **Standard waste application cooling system.** The improved, trash-resistant, multi-row module (IMRM) radiator, hood and engine enclosures work as a system to keep the radiator and engine compartment free of debris.
- **Trash resistant IMRM radiator** has six fins per inch (25.4 mm) and in-line tubes that resist plugging by allowing debris to pass through the core.
- **Hinged radiator prescreener** (966G & 972G) eliminates debris larger than what the radiator core will pass.
- **Hinged grill** (966G & 972G) allows access to hydraulic oil cooler and air conditioning condenser, which swing out for easy cleaning.

### Recommended Waste Handling Options

- **Powered crankcase and power train guards** raise and lower at the flip of a switch allowing fast, easy and frequent cleanings.
- **High lift arrangement** increases bucket hinge pin height offering increased stacking and stockpiling capability. A critical feature when incoming volumes exceed conveyor capacity or floor space.
- **Traction control system (TCS)** option for 938G/IT38G provides maximum traction in slippery conditions. TCS electronically senses and limits wheel slip at each wheel independently.
- **Limited-slip differential** limits tire slip on both front and rear axles. Increases traction and reduces tire wear and scuffing in wet or dry conditions. Provides an alternative to the No SPIN differential which is not recommended due to increased tire wear, turning interference and poor tracking on dry surfaces.
- **Tire options:**
  - L-5 bias hard rock lug
  - L-5 slick
  - RL-5K Goodyear radials
  - XMINE Michelin radials (varies by model)
  - Foam-filled
- **Hitch guards** help protect components in hitch area from damage.
- **Other guarding and options** are available. Contact your Caterpillar Dealer for information.

**Work Tools**

- **Refuse bucket** has excellent dozing and stock-piling capability. Large spill plate helps protect the machine from debris falling over the top of the bucket. Available in pin-on or quick coupler configurations.
- **Pallet forks** are ideal for handling refuse destined for further recycling or stacking refuse in landfills for covering.

- **Multi-purpose bucket** has the capability to clamp and sort large objects, doze cover material or other light dozing chores.
- **Quick coupler** increases versatility by allowing a single machine to utilize a wide variety of work tools in a host of applications.



MODEL	<b>938G WHA IT38G WHA</b>		<b>950G WHA</b>		<b>962G WHA IT62G WHA</b>	
Flywheel Power	119 kW	<b>160 hp</b>	134 kW	<b>180 hp</b>	149 kW	<b>200 hp</b>
Peak Power	128 kW	<b>172 hp</b>	147 kW	<b>197 hp</b>	154 kW	<b>207 hp</b>
Engine Model	<b>3126DITA</b>		<b>3126DITA</b>		<b>3126DITA</b>	
Rated Engine RPM	<b>2200</b>		<b>2200</b>		<b>2200</b>	
Bore	110 mm	<b>4.3"</b>	110 mm	<b>4.3"</b>	110 mm	<b>4.3"</b>
Stroke	127 mm	<b>5"</b>	127 mm	<b>5"</b>	127 mm	<b>5"</b>
No. Cylinders	<b>6</b>		<b>6</b>		<b>6</b>	
Displacement	7.2 L	<b>439 in<sup>3</sup></b>	7.2 L	<b>439 in<sup>3</sup></b>	7.2 L	<b>439 in<sup>3</sup></b>
Speeds Forward	km/h	<b>mph</b>	km/h	<b>mph</b>	km/h	<b>mph</b>
1st	7.6	<b>4.7</b>	6.9	<b>4.3</b>	6.9	<b>4.3</b>
2nd	13.9	<b>8.6</b>	12.7	<b>7.9</b>	12.7	<b>7.9</b>
3rd	23.9	<b>14.8</b>	22.3	<b>13.9</b>	22.3	<b>13.9</b>
4th	39.2	<b>24.3</b>	37.0	<b>23.0</b>	37.0	<b>23.0</b>
Speeds Reverse						
1st	7.6	<b>4.7</b>	7.6	<b>4.7</b>	7.6	<b>4.7</b>
2nd	13.9	<b>8.6</b>	13.9	<b>8.7</b>	13.9	<b>8.7</b>
3rd	39.2	<b>24.3</b>	24.5	<b>15.3</b>	24.5	<b>15.3</b>
4th	—		40.5	<b>25.3</b>	40.5	<b>25.3</b>
Hydraulic Cycle Time*						
Rated Load in Bucket:	<b>Seconds</b>		<b>Seconds</b>		<b>Seconds</b>	
Raise	<b>6.0</b>		<b>6.3</b>		<b>6.3</b>	
Dump	<b>1.4</b>		<b>2.2</b>		<b>2.2</b>	
Lower (empty, float down)	<b>2.8</b>		<b>2.2</b>		<b>2.2</b>	
Total	<b>10.2</b>		<b>10.7</b>		<b>10.7</b>	
Tread Width**	2.02 m	<b>6'8"</b>	2.14 m	<b>7'0"</b>	2.14 m	<b>7'0"</b>
Width Over Tires**	2.60 m	<b>8'6"</b>	2.89 m	<b>9'6"</b>	2.89 m	<b>9'6"</b>
Ground Clearance**	400 mm	<b>16"</b>	400 mm	<b>16"</b>	400 mm	<b>16"</b>
Fuel Tank Capacity	254 L	<b>67 U.S. gal</b>	295 L	<b>78 U.S. gal</b>	295 L	<b>78 U.S. gal</b>
Hydraulic Tank Capacity	90 L	<b>23.8 U.S. gal</b>	153 L	<b>40.4 U.S. gal</b>	88 L	<b>23.2 U.S. gal</b>
Hinge Pin Height						
Full Lift Std.	3.85 m	<b>12'7"</b>	3.98 m	<b>13'1"</b>	4.17 m	<b>13'8"</b>
High Lift w/L-5 tires	4.20 m	<b>13'9"</b>	4.54 m	<b>14'11"</b>	—	
Operating weight up to:	15 290 kg	<b>33,720 lb</b>	21 430 kg	<b>47,260 lb</b>	19 070 kg	<b>42,050 lb</b>

\*With standard lift arms.  
\*\*With standard tires.





MODEL	966G WHA		972G WHA		980G WHA	
Flywheel Power	175 kW	<b>235 hp</b>	198 kW	<b>265 hp</b>	224 kW	<b>300 hp</b>
Peak Power	189 kW	<b>253 hp</b>	205 kW	<b>275 hp</b>	236 kW	<b>317 hp</b>
Engine Model	<b>3306DITA</b>		<b>3306DITA</b>		<b>3406DITA</b>	
Rated Engine RPM	<b>2200</b>		<b>2200</b>		<b>2100</b>	
Bore	121 mm	<b>4.75"</b>	121 mm	<b>4.75"</b>	137 mm	<b>5.4"</b>
Stroke	152 mm	<b>6"</b>	152 mm	<b>6"</b>	165 mm	<b>6.5"</b>
No. Cylinders	<b>6</b>		<b>6</b>		<b>6</b>	
Displacement	10.5 L	<b>638 in<sup>3</sup></b>	10.5 L	<b>638 in<sup>3</sup></b>	14.6 L	<b>893 in<sup>3</sup></b>
Speeds Forward	km/h	<b>mph</b>	km/h	<b>mph</b>	km/h	<b>mph</b>
1st	7.2	<b>4.1</b>	7.2	<b>4.5</b>	7.0	<b>4.3</b>
2nd	12.6	<b>7.8</b>	12.5	<b>7.8</b>	12.3	<b>7.7</b>
3rd	21.7	<b>13.5</b>	21.5	<b>13.3</b>	21.6	<b>13.4</b>
4th	37.3	<b>23.1</b>	37.0	<b>22.9</b>	37.4	<b>23.2</b>
Speeds Reverse						
1st	8.2	<b>5.1</b>	8.2	<b>5.1</b>	8.0	<b>5.0</b>
2nd	14.3	<b>8.9</b>	14.2	<b>8.8</b>	14.0	<b>8.8</b>
3rd	24.6	<b>15.3</b>	24.4	<b>15.1</b>	24.6	<b>15.3</b>
4th	42.3	<b>26.2</b>	41.9	<b>26.0</b>	42.8	<b>26.6</b>
Hydraulic Cycle Time*						
Rated Load in Bucket:	<b>Seconds</b>		<b>Seconds</b>		<b>Seconds</b>	
Raise	<b>6.6</b>		<b>6.6</b>		<b>6.0</b>	
Dump	<b>1.3</b>		<b>1.6</b>		<b>2.0</b>	
Lower (empty, float down)	<b>1.8</b>		<b>1.8</b>		<b>3.4</b>	
Total	<b>9.7</b>		<b>10.0</b>		<b>11.4</b>	
Tread Width**	2.23 m	<b>7'4"</b>	2.23 m	<b>7'4"</b>	2.44 m	<b>8'0"</b>
Width Over Tires**	2.97 m	<b>9'9"</b>	2.96 m	<b>9'9"</b>	3.25 m	<b>10'8"</b>
Ground Clearance**	430 mm	<b>17"</b>	430 mm	<b>17"</b>	453 mm	<b>18"</b>
Fuel Tank Capacity	410 L	<b>108.3 U.S. gal</b>	410 L	<b>108 U.S. gal</b>	470 L	<b>124 U.S. gal</b>
Hydraulic Tank Capacity	207 L	<b>54.7 U.S. gal</b>	140 L	<b>37 U.S. gal</b>	208 L	<b>55 U.S. gal</b>
Hinge Pin Height						
Full Lift Std.	4.23 m	<b>13'10"</b>	4.44 m	<b>14'7"</b>	4.51 m	<b>14'9"</b>
High Lift w/L-5 tires	—		—		4.73 m	<b>15'6"</b>
Operating weight up to:	27 810 kg	<b>61,320 lb</b>	25 360 kg	<b>55,920 lb</b>	30 060 kg	<b>66,280 lb</b>

\*With standard lift arms.

\*\*With standard tires.

**REFUSE DENSITIES**


Generally, loose residential and commercial refuse weighs 150-180 kg/m<sup>3</sup> (250-300 lb/yd<sup>3</sup>). A refuse collection vehicle will increase this density to 237-415 kg/m<sup>3</sup> (400-700 lb/yd<sup>3</sup>). In-place landfill density can vary from 355-890 kg/m<sup>3</sup> (600-1500 lb/yd<sup>3</sup>), depending on the compactive effort applied to the refuse. Landfill sites that accept a high percentage of demolition waste can have densities up to 1485 kg/m<sup>3</sup> (2500 lb/yd<sup>3</sup>). Cover material will generally raise fill densities 60-120 kg/m<sup>3</sup> (100-200 lb/yd<sup>3</sup>) over the figures given above.

	Weight of Refuse	
	kg/m <sup>3</sup>	lb/yd <sup>3</sup>
Loose Refuse:	150-180	250-300
Packer Truck:	237-415	400-700
Fill Density:	355-890	600-1500
Refuse and Cover:	415-1009	700-1700


**FACTORS GOVERNING COMPACTION**

Assuming equal machine weight, regardless of the type of machine, the following factors (1-4) affect compaction:

1. Refuse Layer Thickness — The depth of each compacted layer is perhaps the single most important controllable factor influencing density. To obtain maximum density, waste should be spread and compacted in layers **not exceeding a depth of 610 mm (2 ft)**. Thicker layers will reduce the density that a machine can develop in a given number of passes. (Density figures shown do not include cover material.)

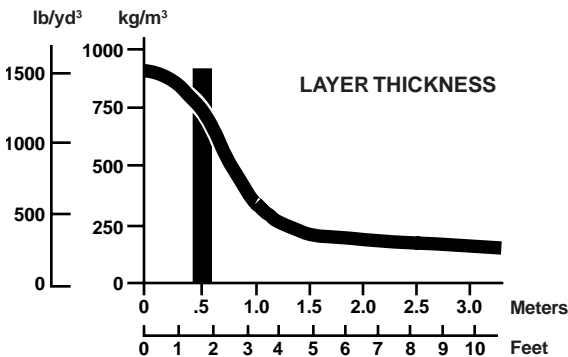

2. Number of passes made over the refuse also affects density. Regardless of the type of machine used, the unit should make 3-4 passes to achieve optimum density. The following graph illustrates that more than four passes result in little additional compactive effort. The added expense of additional passes is not justified by the incremental increase in density.

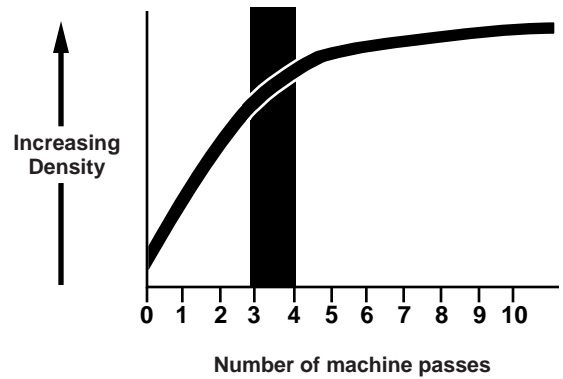

3. Slope — Maximum compactive effort by a track-type unit is achieved by working the waste on a slope of 3:1. Track-type machines achieve higher densities by grinding and shredding the refuse into smaller pieces as they climb a slope.


Just the opposite is true for landfill compactors, the flatter the slope the better. This is because the weight of the landfill compactor is more efficiently utilized and concentrated when working on a flat surface. Landfill compactors that are used on slight slopes achieve a higher compaction density due to shearing stress that aids shredding and better blending of material.

4. Moisture Content — has been shown to have a significant effect on compacted density. It is believed that water tends to weaken the bridging characteristics of refuse, particularly paper such as large pieces of cardboard, etc., thereby allowing tighter consolidation. The water may also act as a lubricant — much as it does for soils. A minimum amount of moisture can increase refuse compaction density by 10%.

The optimum moisture content for maximum compaction of household refuse appears to be around 50% by weight. Field tests show actual moisture contents varying from 10-80% during dry and wet seasons. Although higher moisture content can provide higher in-place densities, the chance of leachate formation also increases.

**COMPACTION COMPARISON ESTIMATE**

The following graph may be used as a rule of thumb for the compactive ranges of various types of landfill machines if proper operating technique is employed.

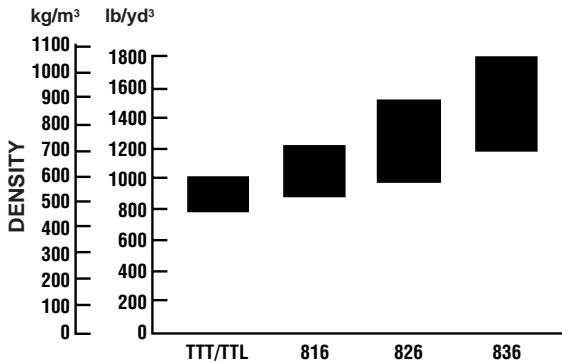

**EXAMPLE OF INCREASED COMPACTION ON POTENTIAL LANDFILL LIFE**

Landfill refuse capacity	1 530 000 m <sup>3</sup> ( <b>2,000,000 yd<sup>3</sup></b> )
Operating days	260
Daily volume	365 metric tons ( <b>400 tons</b> )
Yearly volume	94 328 metric tons ( <b>104,000 tons</b> )

Compaction	Landfill Life	Gain
590 kg/m <sup>3</sup> <b>1000 lb/yd<sup>3</sup></b>	9.6 years	0
710 kg/m <sup>3</sup> <b>1200 lb/yd<sup>3</sup></b>	11.5 years	1.9 years
830 kg/m <sup>3</sup> <b>1400 lb/yd<sup>3</sup></b>	13.4 years	3.8 years
950 kg/m <sup>3</sup> <b>1600 lb/yd<sup>3</sup></b>	15.3 years	5.7 years
1070 kg/m <sup>3</sup> <b>1800 lb/yd<sup>3</sup></b>	17.2 years	7.6 years

In this example, each 120 kg (200 lb) increase in refuse density results in an additional 1.9 years of landfill life. Also this example is exclusive of cover requirements.

**COMPACTOR PRODUCTION GUIDELINES**

Model	Tons/Day		Tons/Hr	
	Metric	U.S.	Metric	U.S.
836	1016	1000	127	125
826G	813	800	102	100
816F	508	500	63.5	62.5

All models are pushing refuse 61 m (200 ft) spreading and making 3 to 4 passes to compact. A pass is defined as a machine traveling over refuse one time in one direction.

- F. *Landfill method utilized* — impacts the equipment needed. The area method, which is generally suited for flat or gradual sloping surfaces will get maximum compaction effort with a compactor. The trench method may require a track loader due to its excavating and tractive capabilities.
- G. *Supplemental tasks* — should be reviewed before selecting a landfill machine. Will the machine be required for site clearing, maintaining access roads, excavating, etc.? Auxiliary duties may require additional machine capability and/or attachments. If versatility is the key consideration, a track-type machine again becomes the logical choice.
- H. *Budget* — Smaller landfill operations with limited budgets may have to consider single machine versatility ahead of specialized machines or multiple units.
- I. *Growth* — Future increases in refuse volume must be considered to properly size machines.

**LANDFILL ESTIMATING**

Example Problem #1

A professional engineer has developed a small, rural sanitary landfill master plan. The local legislative regulatory agency has approved the plan and site.

Assume:

Topography: flat

Land availability:

area has several suitable sites at nominal price

Population served: 30,000

Projected population in 3 years: 40,000

Current daily refuse volume: ?

Type of refuse: mostly household, some commercial

Operation: propose 8 hours/day, 5½ days/week

Present equipment: none — new site

What would your comments and recommendations be on the following?:

- a. Probable amount of refuse generated daily?
- b. Type of machine for the proposed SLF?
- c. Size of machine for the proposed SLF?

Solution

- a. At three year projected population — 2.26 kg/day (5 lb/day) per person × 40,000 people = 90.4 metric tons (100 tons) daily.
- b. Track loader — excavating ability, single machine application based on tonnage requirements.
- c. 953C handle current refuse, and has extra capacity for future growth. Small compactor if additional compaction is required.

Example Problem #2

Existing sanitary landfill has been in operation for several years.

Assume:

Type of operation: area fill

Cover material: suitable material within 90 m (300 ft).

Current daily refuse volume: 500 metric tons (550 tons)

Anticipated daily refuse volume in 3 years: 680 metric tons (750 tons)

Type of refuse: household, commercial, large amount of brush and building demolition debris

Land availability: limited, very expensive

Available Refuse Volume: 3 249 125 m<sup>3</sup> (4,250,000 yd<sup>3</sup>)

Operation: 8 hours/days, 5½ days/week

Present equipment: D8 (3 years old)

What would your comments and recommendations be on the following:

- What range of in-place densities could be expected using a track-type tractor; a Cat steel-wheeled landfill compactor?
- What effect does machine selection have on site life?
- What are the advantages and limitations of steel-wheeled landfill compactors?
- What are the advantages and limitations of track-type units?
- How many machines should be used on the site?
- What type should they be?
- What size should they be?

Solution

- The Track-Type Tractor will achieve 475 to 595 kg/m<sup>3</sup> (800 to 1000 lb/yd<sup>3</sup>) in-place density. The Cat steel-wheeled landfill compactor will achieve 595 to 830 kg/m<sup>3</sup> (1000 to 1400 lb/yd<sup>3</sup>) in-place density.
- There are 3 249 125 m<sup>3</sup> (4,250,000 yd<sup>3</sup>) available. 500 metric tons (550 tons) per day is how many m<sup>3</sup> (yd<sup>3</sup>)? Assume a minimum density of 475 kg/m<sup>3</sup> (800 lb/yd<sup>3</sup>).

$$500 \text{ metric tons/day} \times \frac{1000 \text{ kg/metric ton}}{475 \text{ kg/m}^3} = 1052 \text{ m}^3/\text{day}$$

$$550 \text{ tons/day} \times \frac{2000 \text{ lb/ton}}{800 \text{ lb/yd}^3} = 1375 \text{ yd}^3/\text{day}$$

$$5.5 \text{ days/week} \times 52 \text{ weeks/year} = 286 \text{ days/year}$$

$$\text{Yearly volume: } 1052 \times 286 = 300\,872 \text{ m}^3$$

$$1375 \times 286 = 393,250 \text{ yd}^3$$

Landfill life at this density:

$$\frac{3\,250\,000 \text{ m}^3}{300\,872 \text{ m}^3/\text{year}} = \frac{4,250,000 \text{ yd}^3}{393,250 \text{ yd}^3/\text{year}} = 10.8 \text{ years}$$

Similar calculations are performed to generate the following tables.

500 METRIC TONS/DAY (550 TONS/DAY)		
kg/m <sup>3</sup>	Density	Landfill Life (years)
	lb/yd <sup>3</sup>	
475	800	10.8
595	1000	13.5
715	1200	16.2
835	1400	18.9
950	1600	21.6

680 METRIC TONS/DAY (750 TONS/DAY)		
kg/m <sup>3</sup>	Density	Landfill Life (years)
	lb/yd <sup>3</sup>	
475	800	7.9
595	1000	9.9
715	1200	11.9
835	1400	13.9
950	1600	15.9

From the tables we determine that a track-type tractor, at 500 metric tons per day (550 tons/day), will provide 13.5 landfill life years at 595 kg/m<sup>3</sup> (1000 lb/yd<sup>3</sup>). Compaction will extend that life 5.4 years to 18.9 years at 835 kg/m<sup>3</sup> (1400 lb/yd<sup>3</sup>).

Proper compaction techniques are necessary to achieve the higher refuse densities and increase landfill life.

- c. Advantages: Provides highest compaction densities extending landfill life.  
Limitations: Specialty unit designed to spread and compact — does not excavate virgin material economically, but can handle stockpile cover material.
- d. Advantages: most versatile unit, well suited to site preparation, finishing and access road construction and maintenance; all weather machines with excellent tractive ability.  
Limitation: compaction — cannot achieve the in-place refuse densities of the specialized landfill compactors.
- e. Minimum of two. Additional equipment would depend on supplemental tasks.
- f. Track-type tractor — for earthmoving and refuse spreading work; steel-wheeled compactor-quantity of refuse and land cost would justify.
- g. D8 — keeping existing unit; D9 — when new tractor is necessary; 826G — with large amount of demolition debris and brush and projected increase in tonnage would justify 826G over 816F.

**(Note:** Ballasting the wheels on Caterpillar Landfill Compactors to increase machine weight and achieve higher compaction densities is not recommended. Landfills are high rimpull applications. Ballasting the wheels will significantly increase machine weight but decrease overall performance when traveling on the fill. Also, wheels are not necessarily air tight or leak proof.)

# TABLES

## SWELL — VOIDS — LOAD FACTORS

SWELL (%)	VOIDS (%)	LOAD FACTOR
5	4.8	.952
10	9.1	.909
15	13.0	.870
20	16.7	.833
25	20.0	.800
30	23.1	.769
35	25.9	.741
40	28.6	.714
45	31.0	.690
50	33.3	.667
55	35.5	.645
60	37.5	.625
65	39.4	.606
70	41.2	.588
75	42.9	.571
80	44.4	.556
85	45.9	.541
90	47.4	.526
95	48.7	.513
100	50.0	.500

## BUCKET FILL FACTORS

Material	Fill Factor
<b>Loose Material</b>	
Mixed Moist Aggregates	95-100%
Uniform Aggregates up to 3 mm (1/8")	95-100
3 mm-9 mm (1/8"-3/8")	90-95
12 mm-20 mm (1/2"-3/4")	85-90
24 mm (1") and over	85-90
<b>Blasted Rock</b>	
Well Blasted	80-95%
Average Blasted	75-90
Poorly Blasted	60-75
<b>Other</b>	
Rock Dirt Mixtures	100-120%
Moist Loam	100-110
Soil, Boulders, Roots	80-100
Cemented Materials	85-95

**NOTE:** Loader bucket fill factors are affected by bucket penetration, breakout force, rackback angle, bucket profile and ground engaging tools such as bucket teeth or bolt-on replaceable cutting edges.

**NOTE:** For bucket fill factors for hydraulic excavators, see bucket payloads in the hydraulic excavator section.

## TYPICAL ROLLING RESISTANCE FACTORS

Various tire sizes and inflation pressures will greatly reduce or increase the rolling resistance. The values in this table are approximate, particularly for the track and track + tire machines. These values can be used for estimating purposes when specific performance information on particular equipment and given soil conditions is not available. See Mining and Earthmoving Section for more detail.

UNDERFOOTING	ROLLING RESISTANCE, PERCENT*			
	Tires Bias	Tires Radial	Track **	Track +Tires
A very hard, smooth roadway, concrete, cold asphalt or dirt surface, no penetration or flexing . . . . .	1.5%*	1.2%	0%	1.0%
A hard, smooth, stabilized surfaced roadway without penetration under load, watered, maintained . . . . .	2.0%	1.7%	0%	1.2%
A firm, smooth, rolling roadway with dirt or light surfacing, flexing slightly under load or undulating, maintained fairly regularly, watered . . . . .	3.0%	2.5%	0%	1.8%
A dirt roadway, rutted or flexing under load, little maintenance, no water, 25 mm (1") tire penetration or flexing . . . . .	4.0%	4.0%	0%	2.4%
A dirt roadway, rutted or flexing under load, little maintenance, no water, 50 mm (2") tire penetration or flexing . . . . .	5.0%	5.0%	0%	3.0%
Rutted dirt roadway, soft under travel, no maintenance, no stabilization, 100 mm (4") tire penetration or flexing . . . . .	8.0%	8.0%	0%	4.8%
Loose sand or gravel . . . . .	10.0%	10.0%	2%	7.0%
Rutted dirt roadway, soft under travel, no maintenance, no stabilization, 200 mm (8") tire penetration and flexing . . . . .	14.0%	14.0%	5%	10.0%
Very soft, muddy, rutted roadway, 300 mm (12") tire penetration, no flexing . . . . .	20.0%	20.0%	8%	15.0%

\*Percent of combined machine weight.

\*\*Assumes drag load has been subtracted to give Drawbar Pull for good to moderate conditions. Some resistance added for very soft conditions.

## ANGLE OF REPOSE OF VARIOUS MATERIALS

MATERIAL	ANGLE BETWEEN HORIZONTAL AND SLOPE OF HEAPED PILE	
	Ratio	Degrees
Coal, industrial . . . . .	1.4:1—1.3:1	35-38
Common earth, Dry . . . . .	2.8:1—1.0:1	20-45
Moist . . . . .	2.1:1—1.0:1	25-45
Wet . . . . .	2.1:1—1.7:1	25-30
Gravel, Round to angular . . . . .	1.7:1—0.9:1	30-50
Sand & clay . . . . .	2.8:1—1.4:1	20-35
Sand, Dry . . . . .	2.8:1—1.7:1	20-30
Moist . . . . .	1.8:1—1.0:1	30-45
Wet . . . . .	2.8:1—1.0:1	20-45

# Tables

## ROUND REINFORCED CONCRETE PIPE APPROXIMATE WEIGHT PER FOOT

INSIDE DIAMETER		WEIGHT PER FT.	
mm	ft/in	kg	lb
305	12"	42	93
380	15"	58	127
460	18"	76	168
530	1'9"	97	214
610	2'0"	120	265
685	2'3"	146	322
760	2'6"	174	384
840	2'9"	205	452
915	3'0"	238	524
1070	3'6"	311	686
1220	4'0"	393	867
1370	4'6"	485	1069
1525	5'0"	588	1295
1675	5'6"	699	1542
1830	6'0"	821	1811
1980	6'6"	952	2100
2135	7'0"	1093	2409
2285	7'6"	1242	2740
2440	8'0"	1402	3090
2590	8'6"	1578	3480
2740	9'0"	1753	3865

NOTE: Table courtesy of American Concrete Pipe Assn.

## COEFFICIENT OF TRACTION FACTORS

MATERIAL	TRACTION FACTORS	
	Rubber Tires	Tracks
Concrete	.90	.45
Clay loam, dry	.55	.90
Clay loam, wet	.45	.70
Rutted clay loam	.40	.70
Dry sand	.20	.30
Wet sand	.40	.50
Quarry pit	.65	.55
Gravel road		
(loose not hard)	.36	.50
Packed snow	.20	.27
Ice	.12	.12
Semi-skeleton shoes		
Firm earth	.55	.90
Loose earth	.45	.60
Coal, stockpiled	.45	.60

NOTE: The elevated sprocket design Track-type Tractors (D11N, D10N, D9N and D8N), with their suspended undercarriage, provide up to 15% more efficient tractive effort than rigid tracked Track-type Tractors.

## SPEED CONVERSION

km/h Equivalents in m/min				MPH Equivalents in FPM			
km/h	m/min	km/h	m/min	mph	fpm	mph	fpm
1	16.7	21	350.0	1	88	21	1848
2	33.3	22	366.7	2	176	22	1936
3	50.0	23	383.3	3	264	23	2024
4	66.7	24	400.0	4	352	24	2112
5	83.3	25	416.7	5	440	25	2200
6	100.0	26	433.3	6	528	26	2288
7	116.7	27	450.0	7	616	27	2376
8	133.3	28	466.7	8	704	28	2464
9	150.0	29	483.3	9	792	29	2552
10	166.7	30	500.0	10	880	30	2640
11	183.3	31	516.7	11	968	31	2728
12	200.0	32	533.3	12	1056	32	2816
13	216.7	33	550.0	13	1144	33	2904
14	233.3	34	566.7	14	1232	34	2992
15	250.0	35	583.3	15	1320	35	3080
16	266.7	36	600.0	16	1408	36	3168
17	283.3	37	616.7	17	1496	37	3256
18	300.0	38	633.3	18	1584	38	3344
19	316.7	39	650.0	19	1672	39	3432
20	333.3	40	666.7	20	1760	40	3520

NOTE: Since 1 km/h equals 16.7 m/min (1000 ÷ 60), to interpolate add 1.67 m/min for each 0.1 km/h.

NOTE: Since 1 mph equals 88 fpm (5280 ÷ 60), to interpolate add 8.8 fpm for every 0.1 mph.

1 mph = 26.9 m/min.

## BEARING POWERS

MATERIAL	BEARING POWER			
	Bar	lb/in <sup>2</sup>	Metric t/m <sup>2</sup>	U.S. tons/ft <sup>2</sup>
Rock (semi-shattered)	4.8	70	50	5
Rock (solid)	24.1	350	240	24
Clay, dry	3.8	55	40	4
medium dry	1.9	27	20	2
soft	1.0	14	10	1
Gravel, cemented	7.6	110	80	8
Sand, compact dry	3.8	55	40	4
clean dry	1.9	27	20	2
Quicksand & alluvial soil	0.5	7	5	0.5

## AGRICULTURAL COMMODITIES CONVERSION FACTORS

	lb	kg	Metric Ton
1 Bushel of Corn*	56	25.40	0.02540
1 Bushel of Soybean*	60	27.22	0.02721
1 Bushel of Oats*	32	14.51	0.01451
1 Bushel of Wheat*	60	27.22	0.02721
1 Bale of Cotton	478	216.81	0.21681

1 metric ton of Corn	39.37 Bushels*
1 metric ton of Soybean	36.75 Bushels*
1 metric ton of Oats	68.92 Bushels*
1 metric ton of Wheat	36.75 Bushels*
1 metric ton of Cotton	4.61 Bales

\*Bushel is a volume measurement, 1 Bushel = 35.24 liters = 9.31 U.S. Gallons. In the agricultural mercantile exchange, the Bushel is widely used for grains as weight. For the above weights, the market assumes a standard density for each type of grain.

### CURVE SUPERELEVATION IN PERCENT GRADE, TO PROVIDE NO LATERAL TIRE FORCE

Negotiating curves can generate high lateral tire forces. These forces contribute to high tire wear and ply separation. Superelevating the curve helps eliminate these forces. The amount of superelevation depends on the curve's radius and the speed at which it is negotiated.

The following table is a guide for providing the superelevation necessary to eliminate lateral forces.

Superelevated turns present a danger when slippery. For this reason, curves superelevated over 10% should be used with caution. Unless the proper speed is maintained, matching the elevation of the curve, a vehicle may slide off of the lower edge of the roadway. Superelevated curves should be maintained in good tractive conditions.

TURN RADIUS		Speed	Speed	Speed	Speed	Speed	Speed	Speed	Speed
m	ft	16 km/h 10 mph	24 km/h 15 mph	32 km/h 20 mph	40 km/h 25 mph	48 km/h 30 mph	56 km/h 35 mph	64 km/h 40 mph	72 km/h 45 mph
15.2	<b>50</b>	13%	30%	—	—	—	—	—	—
30.5	<b>100</b>	7%	15%	27%	—	—	—	—	—
45.7	<b>150</b>	4%	10%	18%	28%	—	—	—	—
61.0	<b>200</b>	3%	8%	13%	21%	30%	—	—	—
91.5	<b>300</b>	2%	5%	9%	14%	20%	27%	—	—
152.4	<b>500</b>	1%	3%	5%	8%	12%	16%	21%	27%
213.4	<b>700</b>	1%	2%	4%	6%	9%	12%	15%	19%
304.9	<b>1000</b>	1%	2%	3%	4%	6%	8%	11%	14%

### MAXIMUM SPEED ON CURVES FOR VARIOUS SUPERELEVATION GRADES WITH A 0.20 LATERAL COEFFICIENT OF TRACTION

Another approach to superelevated curves is to determine the safe speed for negotiating a turn at a certain lateral tire force. In general, a 20% lateral coefficient of traction is safe for all but slippery conditions. The following table shows maximum speed with various superelevations to maintain a 0.20 lateral coefficient of traction.

TURN RADIUS		Flat Curve		5% Super-elevation		10% Super-elevation	
m	ft	km/h	mph	km/h	mph	km/h	mph
7.6	<b>25</b>	14	<b>9</b>	16	<b>10</b>	17	<b>11</b>
15.2	<b>50</b>	20	<b>12</b>	22	<b>14</b>	24	<b>15</b>
30.5	<b>100</b>	28	<b>17</b>	31	<b>19</b>	34	<b>21</b>
45.7	<b>150</b>	34	<b>21</b>	38	<b>24</b>	42	<b>26</b>
61.0	<b>200</b>	39	<b>24</b>	44	<b>27</b>	48	<b>30</b>
91.5	<b>300</b>	48	<b>30</b>	54	<b>34</b>	59	<b>37</b>
152	<b>500</b>	62	<b>39</b>	70	<b>43</b>	76	<b>47</b>
213	<b>700</b>	74	<b>46</b>	—	—	—	—

A transition "spiral" may be necessary at higher speeds when entering or departing from a superelevated turn.



# Tables

WEIGHT* OF MATERIALS	LOOSE		BANK		LOAD FACTORS
	kg/m <sup>3</sup>	lb/yd <sup>3</sup>	kg/m <sup>3</sup>	lb/yd <sup>3</sup>	
Basalt	1960	3300	2970	5000	.67
Bauxite, Kaolin	1420	2400	1900	3200	.75
Caliche	1250	2100	2260	3800	.55
Carnotite, uranium ore	1630	2750	2200	3700	.74
Cinders	560	950	860	1450	.66
Clay — Natural bed	1660	2800	2020	3400	.82
Dry	1480	2500	1840	3100	.81
Wet	1660	2800	2080	3500	.80
Clay & gravel — Dry	1420	2400	1660	2800	.85
Wet	1540	2600	1840	3100	.85
Coal — Anthracite, Raw	1190	2000	1600	2700	.74
Washed	1100	1850			.74
Ash, Bituminous Coal	530-650	900-1100	590-890	1000-1500	.93
Bituminous, Raw	950	1600	1280	2150	.74
Washed	830	1400			.74
Decomposed rock —					
75% Rock, 25% Earth	1960	3300	2790	4700	.70
50% Rock, 50% Earth	1720	2900	2280	3850	.75
25% Rock, 75% Earth	1570	2650	1960	3300	.80
Earth — Dry packed	1510	2550	1900	3200	.80
Wet excavated	1600	2700	2020	3400	.79
Loam	1250	2100	1540	2600	.81
Granite — Broken	1660	2800	2730	4600	.61
Gravel — Pitrun	1930	3250	2170	3650	.89
Dry	1510	2550	1690	2850	.89
Dry 6-50 mm (1/4"-2")	1690	2850	1900	3200	.89
Wet 6-50 mm (1/4"-2")	2020	3400	2260	3800	.89
Gypsum — Broken	1810	3050	3170	5350	.57
Crushed	1600	2700	2790	4700	.57
Hematite, iron ore, high grade	1810-2450	4000-5400	2130-2900	4700-6400	.85
Limestone — Broken	1540	2600	2610	4400	.59
Crushed	1540	2600	—	—	—
Magnetite, iron ore	2790	4700	3260	5500	.85
Pyrite, iron ore	2580	4350	3030	5100	.85
Sand — Dry, loose	1420	2400	1600	2700	.89
Damp	1690	2850	1900	3200	.89
Wet	1840	3100	2080	3500	.89
Sand & clay — Loose	1600	2700	2020	3400	.79
Compacted	2400	4050			
Sand & gravel — Dry	1720	2900	1930	3250	.89
Wet	2020	3400	2230	3750	.91
Sandstone	1510	2550	2520	4250	.60
Shale	1250	2100	1660	2800	.75
Slag — Broken	1750	2950	2940	4950	.60
Snow — Dry	130	220			
Wet	520	860			
Stone — Crushed	1600	2700	2670	4500	.60
Taconite	1630-1900	3600-4200	2360-2700	5200-6100	.58
Top Soil	950	1600	1370	2300	.70
Taprock — Broken	1750	2950	2610	4400	.67
Wood Chips**	—	—	—	—	—

\*Varies with moisture content, grain size, degree of compaction, etc. Tests must be made to determine exact material characteristics.

\*\*Weights of commercially important wood species can be found in the last pages of the Logging & Forest Products section. To obtain wood weights use the following equations: lb/yd<sup>3</sup> = (lb/ft<sup>3</sup>) × .4 × 27  
kg/m<sup>3</sup> = (kg/m<sup>3</sup>) × .4

ALTITUDE DERATION

PERCENT FLYWHEEL HORSEPOWER\*  
AVAILABLE AT SPECIFIED ALTITUDES

MODEL	0-760 m (0-2500')	760-1500 m (2500-5000')	1500-2300 m (5000-7500')	2300-3000 m (7500-10,000')	3000-3800 m (10,000-12,500')	3800-4600 m (12,500-15,000')
D3C Series III	100	100	100	100	96	88
D3C XL Series III	100	100	100	100	96	88
D3C LGP Series III	100	100	100	100	96	88
D4C Series III	100	100	97	88	81	74
D4C XL Series III	100	100	97	88	81	74
D4C LGP Series III	100	100	97	88	81	74
D5C Series III	100	100	100	100	**	**
D5C XL Series III	100	100	100	100	**	**
D5C LGP Series III	100	100	100	100	**	**
D5M XL & LGP	100	100	100	100	100	100
D5E	100	100	94	87	80	73
D6M XL & LGP	100	100	100	99	91	84
D6D	100*	100*	100*	100*	94*	87*
D6G	100	100	100	100	94	87
D6R	100*	100*	100*	100	94	87
D6R (DIFF STR)	100	100	100	100	100	95
D6R XL	100	100	100	100	94	87
D6R XR	100	100	100	100	94	87
D6R LGP	100	100	100	100	94	87
D6R LGP (DIFF STR)	100	100	100	100	95	87
D7G	100*	100*	100*	94	86	80
D7R	100*	100*	100*	93*	86*	79*
D7R (DIFF STR)	100	100	95	88	81	75
D7R XR	100	100	100	93	86	79
D7R LGP	100	100	100	93	86	79
D7R LGP (DIFF STR)	100	100	95	88	81	75
D8R	100	100	100	100	94	87
D8R LGP	100	100	100	100	94	87
D9R	100	100	100	95	87	79
D10R	100	100	100	100	98	90
D11R/D11R CD	100	100	100	93	86	80
D4E SR	100	100	100	94	87	80
D6E SR	100	100	100	100	94	87
Challenger 35	100	100	100	100	89	82
Challenger 45	100	100	94	86	80	74
Challenger 55	100	100	100	90	82	76
Challenger 65E	100	100	***	***	***	***
Challenger 75E	100	100	***	***	***	***
Challenger 85E	100	100	***	***	***	***
Challenger 95E	100	100	***	***	***	***
Lexion 450	**	**	**	**	**	**
Lexion 460/465	**	**	**	**	**	**
Lexion 470	**	**	**	**	**	**
Lexion 480/485	**	**	**	**	**	**

\*Refer to "Captive Vehicle Engine Fuel Specifications" microfiche at your local dealer.

\*\*Information not available at time of printing.

\*\*\*Electronically controlled engine, no deration at higher altitudes.

# Tables

## ALTITUDE DERATION (Continued)

MODEL	0-760 m (0-2500')	760-1500 m (2500-5000')	1500-2300 m (5000-7500')	2300-3000 m (7500-10,000')	3000-3800 m (10,000-12,500')	3800-4600 m (12,500-15,000')
120H NA	100	100	100	100	100	95
120H NA-VHPO	100	100	100	100	100	100
120H STD	100	100	100	100	100	100
120H ES	100	100	100	100	100	100
120H ES-SSO	100	100	100	100	100	100
135H NA	100	100	100	100	95	88
135H NA-VHPO	100	100	100	100	100	98
135H STD	100	100	100	100	100	98
12H NA	100	100	100	100	100	100
12H STD	100	89	83	77	71	65
12H ES	100	100	100	100	100	100
12H ES-SSO	100	100	100	100	100	100
140H NA	100	100	100	100	98	91
140H NA-VHPO	100	100	100	96	88	82
140H STD	100	100	100	100	97	89
140H ES	100	100	100	96	88	82
140H ES-SSO	100	100	100	97	90	83
143H NA	100	100	100	92	85	79
143H NA-SSO	100	100	100	97	90	83
160H NA	100	100	100	98	91	84
160H NA-VHPO	100	100	100	100	97	89
160H STD	100	100	100	97	89	82
160H ES	100	100	100	100	97	89
160H ES-SSO	100	100	100	100	97	90
160H NA	100	100	100	100	93	85
14H GL	100	100	100	98	91	84
14H GL-SSO	100	100	100	99	91	84
16H GL	100	100	100	100	100	100
24H GL	100	100	100	100	93	85
216	**	**	**	**	**	**
226	**	**	**	**	**	**
236	**	**	**	**	**	**
246	**	**	**	**	**	**
301.5	95	89	81	71	NA	NA
301.6	95	89	81	71	NA	NA
301.8	95	89	81	71	NA	NA
302.5	95	89	81	71	NA	NA
303.5	95	89	81	71	NA	NA
304.5	95	89	81	71	NA	NA
307B (4M40)	100	100	**	**	**	**
311B	100	100	90	87	83	**
312B/312B L (3064 T)	100	100	90	87	83	**
312B/312B L (3054 T)	99	97	95	91	NA	NA
313B CR	100	100	**	**	**	**
315B (3046 T)	100	100	90	87	83	**
315B L (3046 T)	100	100	90	87	83	**
315B L (3054 T)	99	97	95	91	NA	NA

\*Refer to "Captive Vehicle Engine Fuel Specifications" microfiche at your local dealer.

\*\*Information not available at time of printing.

VHPO — Variable Horsepower Option

SSO — Sound Suppression Option

## ALTITUDE DERATION (Continued)

MODEL	0-760 m (0-2500')	760-1500 m (2500-5000')	1500-2300 m (5000-7500')	2300-3000 m (7500-10,000')	3000-3800 m (10,000-12,500')	3800-4600 m (12,500-15,000')
318B L/318B LN (3046 T)	100	100	90	87	83	**
M312	99	97	95	91	NA	NA
M315	99	97	95	91	NA	NA
M318	100	100	100	100	100	93
M320	100	100	100	100	100	93
320C	100	100	90	87	83	**
320C L	100	100	90	87	83	**
320C N	100	100	90	87	83	**
322B	100	100	100	100	100	97
322B L	100	100	100	100	100	97
322B LN	100	100	100	100	100	97
325B	100	100	100	100	94	87
325B L	100	100	100	100	94	87
325B LN	100	100	100	100	94	87
330B	100	100	100	100	95	92
330B L	100	100	100	100	95	92
330B LN	100	100	100	100	95	92
345B Series II	100	100	100	100	93	93
365B L	100	100	100	86	86	86
375	100	100	100	93	86	78
5080	100	100	100	93	86	78
5110B	100	100	100	100	93	85
5130B◀	100	100	100	100	93	86
5230◀	100	100	100	93	86	79
416C (Turbo normalized)	99	97	95	91	NA	NA
416C (Turbo)	99	97	95	91	NA	NA
426C (Turbo)	99	97	95	91	NA	NA
436C (Turbo)	99	97	95	91	NA	NA
428C	95	89	81	71	NA	NA
428C (Turbo)	99	97	95	91	NA	NA
438C (Turbo)	99	97	95	91	NA	NA
446B (Turbo)	100	100	97	91	83	77
515/525	100*	100*	100	100	94	86
528B Cable	100*	100*	100	100	100	93
D4H TSK Series II	100	100	100	100	94	87
517	100	100	100	99	95	87
527	100	100	100	100	99	91
561M	100	100	100	94	86	80
572R	100*	100*	100*	94	86	80
583R	100	100	100	100	94	87
589	100	100	94	87	80	73

\*Refer to "Captive Vehicle Engine Fuel Specifications" microfiche at your local dealer.

\*\*Information not available at time of printing.

◀EUI engine — Automatic altitude deration.

# Tables

## ALTITUDE DERATION (Continued)

MODEL	0-760 m (0-2500')	760-1500 m (2500-5000')	1500-2300 m (5000-7500')	2300-3000 m (7500-10,000')	3000-3800 m (10,000-12,500')	3800-4600 m (12,500-15,000')
611	**	**	**	**	**	**
621G	100	100	94	87	80	74
631E Series II	100	100	96	88	82	75
651E	100	100	100	95	87	80
627G Tractor	100*	100*	100*	96	89	82
Scraper	100*	100*	100*	92	85	79*
637E Series II Tractor	100	100	96	88	83	76
Scraper	100*	100*	100	95	87	80
657E Tractor	100	100	100	94	88	81
Scraper	100	100	100	95	90	84
613C Series II	100	100	100	100	95	87
615C Series II	100*	100*	95	88	81	74
623G	100	100	94	87	80	74
769D◀	100	100	100	93	88	82
771D◀	100	100	100	93	88	82
773D◀	100	100	100	100	93	85
775D◀	100	100	100	100	93	85
777D◀	100	100	100	100	93	87
785C*◀	100	100	100	93	86	80
789C*◀	100	100	100	93	86	80
793C*◀	100	100	100	100	100	93
776D◀	100	100	100	100	93	87
784C◀	100	100	100	93	86	80
D25D	100	100	100	100	100	95
D30D	100	100	95	88	81	75
D250E Series II	100	100	100	100	100	95
D300E Series II	100	100	95	88	81	75
D350E Series II	100	100	100	100	99	91
D400E Series II	100	100	100	96	88	82
814F	100*	100*	100	100	97	94
824G	100	100	100	97	89	82
834G	100	100	100	95	85	75
844	100	100	100	100	92	85
854G	100	100	100	100	93	87
815B	100*	100*	100	100	97	94
825G	100	100	100	97	89	82
816F	100	100	100	100	97	94
826G	100	100	100	97	89	82
836G	100	100	100	95	85	75

\*Refer to "Captive Vehicle Engine Fuel Specifications" microfiche at your local dealer.

\*\*Insufficient data.

◀EUI engine — Automatic altitude deration.

## ALTITUDE DERATION (Continued)

MODEL	0-760 m (0-2500')	760-1500 m (2500-5000')	1500-2300 m (5000-7500')	2300-3000 m (7500-10,000')	3000-3800 m (10,000-12,500')	3800-4600 m (12,500-15,000')
902	95	89	81	71	NA	NA
906	95	89	81	71	NA	NA
908	99	97	95	91	NA	NA
914G	99	97	95	91	NA	NA
924F	100	100	100	100	97	89
928G	100	100	100	100	92	85
930T	100	100	94	87	80	73
938G	100	100	100	100	100	97
950G	100	100	100	100	100	100
962G	100	100	100	100	100	90
966G	100	100	92	85	78	71
972G	100	100	92	84	77	70
980G	100	100	100	100	96	88
988G	100	100	100	95	85	75
990 Series II	100	100	100	100	92	85
992G	100	100	100	100	93	87
994D	100	100	100	100	**	**
933C	100	100	100	100	96	88
939C	100	100	100	100	*	*
953C	100	100	100	100	100	100
963C	100	100	100	100	100	100
973C	100	100	100	100	100	98
IT14G	99	97	95	91	NA	NA
IT24F	100	100	100	100	100	93
IT28G	100	100	100	100	92	85
IT38G	100	100	100	100	100	97
IT62G	100	100	100	100	100	90
TH62	99	97	95	91	NA	NA
TH63	99	97	95	91	NA	NA
TH82	99	97	95	91	NA	NA
TH83	99	97	95	91	NA	NA
TH103	99	97	95	91	NA	NA
PM-465	100	100	100	*	*	*
PM-565B	100	100	100	*	*	*
RR-250B	100	100	100	100	100	100
SS-250B	100	100	100	100	100	100
RM-350B	100	100	100	*	*	*
AP-200B	100	100-90	90-83	83-73	73-62	62-52
AP-800C	99	97	95	91	NA	NA
AP-1000B	100	100	100-97	97-93	93-89	89-83
AP-650B	100	100	100	97-93	93-89	89-83
AP-1050B	100	100	100-97	97-93	93-89	89-83
AP-1055B	100	100	100-97	97-93	93-89	89-83

\*Information not available at time of printing.

\*\*Automatically derates 3%/300 m (1000 ft) above 3000 m (10,000 ft).


# Tables

## ALTITUDE DERATION (Continued)

MODEL	0-760 m (0-2500')	760-1500 m (2500-5000')	1500-2300 m (5000-7500')	2300-3000 m (7500-10,000')	3000-3800 m (10,000-12,500')	3800-4600 m (12,500-15,000')
BG-210B	99	97	95	91	NA	NA
BG-230	99	97	95	91	NA	NA
BG-240C	100	100	100-97	97-93	93-89	89-83
BG-260C	100	100	100-97	97-93	93-89	89-83
BG-225C	99	97	95	91	NA	NA
BG-245C	100	100	100-97	97-93	93-89	89-83
BG-2455C	100	100	100-97	97-93	93-89	89-83
BG-730	100	100	100-97	97-93	93-89	89-83
BG-650	99	97	95	91	NA	NA
CS-323C	95	89	81	71	NA	NA
CS-431C	99	97	95	91	NA	NA
CS-433C	99	97	95	91	NA	NA
CS-531D	*	*	*	*	*	*
CS-533D	100	100	100-97	97-93	93-89	89-83
CS-563D	100	100	100-97	97-93	93-89	89-83
CS-583D	100	100	100-97	97-93	93-89	89-83
CP-323C	100	100-90	90-83	83-73	73-62	62-52
CP-433C	100	100	100-97	97-93	93-89	89-83
CP-533D	100	100	100-97	97-93	93-89	89-83
CP-563D	100	100	100-97	97-93	93-89	89-83
CB-214D	100	100	100-97	97-93	93-89	89-83
CB-224D	100	100	100-97	97-93	93-89	89-83
CB-334D	95	90	82	72	62	51
CB-335D	95	90	82	72	62	51
CB-434C	95	89	81	71	NA	NA
CB-534C	99	97	95	91	NA	NA
CB-544	95	89	81	71	NA	NA
CB-634C	100	100	100-97	97-93	93-89	89-83
CB-535B	99	97	95	91	NA	NA
CB-545B	95	89	81	71	NA	NA
PS-150B	95	89	81	71	NA	NA
PS-200B	99	97	95	91	NA	NA
PS-360B	99	97	95	91	NA	NA
PF-300B	99	97	95	91	NA	NA
PS-300B	99	97	95	91	NA	NA
PS-500	100	100	100-97	97-93	93-89	89-83
R1300	*	*	*	*	*	*
R1600	*	*	*	*	*	*
R1700G	*	*	*	*	*	*
R2900	*	*	*	*	*	*
AE40 Series II	*	*	*	*	*	*
AD45	*	*	*	*	*	*
AD55	*	*	*	*	*	*
69D	*	*	*	*	*	*
73D	*	*	*	*	*	*

\*Insufficient data.

**GRADE COMPARISON CHART  
DEGREES — PERCENT — SLOPE**

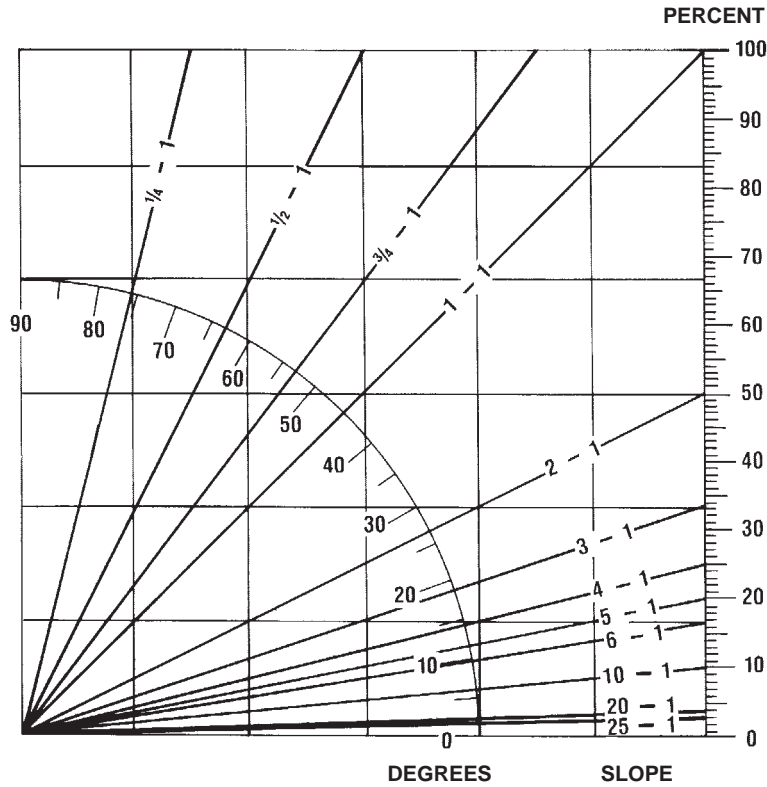

**GRADE IN DEGREES  
AND PERCENTS**

DEGREES	PERCENT
1	1.8
2	3.5
3	5.2
4	7.0
5	8.8
6	10.5
7	12.3
8	14.0
9	15.8
10	17.6
11	19.4
12	21.3
13	23.1
14	24.9
15	26.8
16	28.7
17	30.6
18	32.5
19	34.4
20	36.4
21	38.4
22	40.4
23	42.4
24	44.5
25	46.6
26	48.8
27	51.0
28	53.2
29	55.4
30	57.7
31	60.0
32	62.5
33	64.9
34	67.4
35	70.0
36	72.7
37	75.4
38	78.1
39	81.0
40	83.9
41	86.9
42	90.0
43	93.3
44	96.6
45	100.0



# Tables


## CONVERSION FACTORS

Multiply Metric Unit	By	To Obtain English Unit	Multiply English Unit	By	To Obtain Metric Unit
kilometer (km)	.6214	mile	mile, statute (m)	1.609	kilometer
meter (m)	1.0936	yard	yard (yd)	.9144	meter
meter (m)	3.28	foot	foot (ft)	.3048	meter
centimeter (cm)	.0328	foot	inch (in)	25.4	millimeter
millimeter (mm)	.03937	inch	sq mile (mile <sup>2</sup> )	2.590	sq kilometer
sq kilometer (km <sup>2</sup> )	.3861	square mile	acre	.4047	hectare
hectare (ha)	2.471	acre	sq foot (ft <sup>2</sup> )	.0929	sq meter
sq meter (m <sup>2</sup> )	10.764	square foot	sq inch (in <sup>2</sup> )	.000645	sq meter
sq meter (m <sup>2</sup> )	1550	square inch	cu yard (yd <sup>3</sup> )	.7645	cu meter
sq centimeter (cm <sup>2</sup> )	.1550	square inch	cu inch (in <sup>3</sup> )	16.387	cu centimeter
cu centimeter (cm <sup>3</sup> )	.061	cubic inch	cu foot (ft <sup>3</sup> )	.0283	cu meter
cu meter (m <sup>3</sup> )	1.308	cubic yard	cu inch (in <sup>3</sup> )	.0164	liter
liter (L)	61.02	cubic inch	cubic yard (yd <sup>3</sup> )	764.55	liter
liter (L)	.001308	cubic yard	mph	1.61	km/h
km/h	.621	mph	Ton — mph	1.459	tkm/h
liter (L)	.2642	U.S. gallon	U.S. gallon (US Gal)	3.785	liter
liter (L)	.22	Imperial gallon	U.S. gallon	.833	Imperial gallon
metric ton (t)	.984	long ton	long ton (lg ton)	1.016	metric ton
metric ton (t)	1.102	short ton	short ton (sh ton)	.907	metric ton
kilogram (kg)	2.205	pound, avdp.	pound (lb)	.4536	kilogram
gram (g or gr)	.0353	ounce, avdp.	ounce (oz)	28.35	gram
kilonewton (kN)	225	pound (force)	pound (lb) (force)	.00445	kilonewton
newton (N)	.225	pound (force)	pound (lb) (force)	4.45	newton
cu centimeter (cm <sup>3</sup> )	.0338	fluid ounce	fluid oz (fl oz)	29.57	cu centimeter
kilograms/cu meter	1.686	pounds/cu yd	lb/cu ft (lb/ft <sup>3</sup> )	16.018	kg/cu meter
kilograms/cu meter	.062	pounds/cu ft	lb/cu yd (lb/yd <sup>3</sup> )	.5933	kg/cu meter
kilograms/sq cm (kg/cm <sup>2</sup> )	14.225	pounds/sq in	pounds/sq. in.	.0703	kilogram/sq cm
kilocalorie (kcal)	3.968	Btu	psi	.0689	bar
kilogram-meter (kg•m)	7.233	foot-pound	psi	6.89	kilopascal
meter-kilogram (m•kg)	7.233	pound-foot	Btu	.2520	kilogram-calorie
metric horsepower (CV)	.9863	hp	foot-pound (ft-lb)	.1383	kilogram-meter
kilowatt (kW)	1.341	hp	horsepower (hp)	1.014	metric horsepower
kilopascal (kPa)	.145	psi	horsepower (hp)	.7457	kilowatt
bar	14.5	psi	pounds/cu yd	.0005928	tons/m <sup>3</sup>
tons/m <sup>3</sup>	1692	pounds/cu yd	pounds (No. 2 diesel fuel)	.1413	U.S. gallon
decaliter	.283	bushel	bushel	3.524	decaliter

NOTE: Some of the above factors have been rounded for convenience. For exact conversion factors please consult International System of Units (SI) table.

### Temperature conversion

#### Degree C



#### Degree F

$$^{\circ}\text{C} = (^{\circ}\text{F} - 32) \div 1.8$$

$$^{\circ}\text{F} = (\text{C} \times 1.8) + 32$$

**METRIC UNIT EQUIVALENTS**

---

1 km	=	1000 m
1 m	=	100 cm
1 cm	=	10 mm
1 km <sup>2</sup>	=	100 ha
1 ha	=	10,000 m <sup>2</sup>
1 m <sup>2</sup>	=	10,000 cm <sup>2</sup>
1 cm <sup>2</sup>	=	100 mm <sup>2</sup>
1 m <sup>3</sup>	=	1000 liters
1 liter	=	1000 cm <sup>3</sup>
1 metric ton	=	1000 kg
1 quintal	=	100 kg
1 N	=	0.10197 kg•m/s <sup>2</sup>
1 kg	=	1000 g
1 g	=	1000 mg
1 bar	=	14.504 psi
1 cal	=	427 kg•m
	=	0.0016 cv•h
	=	0.00116 kw•h
torque unit		
1 CV	=	75 kg•m/s
1 kg/cm <sup>2</sup>	=	0.97 atmosph.

---

**ENGLISH UNIT EQUIVALENTS**

---

1 mile	=	1760 yd
1 yd	=	3 ft
1 ft	=	12 in
1 sq mile	=	640 acres
1 acre	=	43,560 sq ft
1 sq ft	=	144 sq in
1 cu ft	=	7.48 gal liq
1 gal	=	231 cu in
	=	4 quarts liq
1 quart	=	32 fl oz
1 fl oz	=	1.80 cu in
1 sh ton	=	2000 lb
1 lg ton	=	2240 lb
1 lb	=	16 oz, avdp
1 Btu	=	778 ft lb
	=	0.000393 hph
	=	0.000293 kwh
1 mechanical hp	=	550 ft-lb/sec
1 atmosph.	=	14.7 lb/in <sup>2</sup>

---

**POWER UNIT EQUIVALENTS**

---

kW	=	Kilowatt
hp	=	Mechanical Horsepower
CV	=	Cheval Vapeur (Steam Horsepower)
		French Designation For <b>Metric</b> Horsepower
PS	=	Pferdestärke (Horsepower)
		German Designation For <b>Metric</b> Horsepower
1 hp	=	1.014 CV = 1.014 PS
	=	0.7457 kW
1 PS	=	1 CV = 0.986 hp
	=	0.7355 kW
1 kW	=	1.341 hp
	=	1.36 CV
	=	1.36 PS

---

# Tables

Machine Model	Engine Model	Machine Model	Engine Model	Machine Model	Engine Model
<b>Track-Type Tractors</b>		<b>Motor Graders</b>		<b>Front Shovels</b>	
D3C Series III	3046	120H NA	3116 T	5080	3406 TA
D3C XL Series III	3046	120H NA (VHP)	3116 TA	5130B	3508 (EUI) TA
D3C LGP Series III	3046	120H STD	3116 TA	5230	3516 (EUI) TA
D4C Series III	3046	120H ES	3116 TA	<b>Backhoe Loaders</b>	
D4C XL Series III	3046	135H NA	3116 T	416C	3054 T
D4C LGP Series III	3046	135H NA (VHP)	3116 TA	426C	3054 T
D5C Series III	3046 T	135H STD	3116 TA	436C	3054 T
D5C XL Series III	3046 T	12H NA	3306 T	446B	3114 T
D5C LGP Series III	3046 T	12H STD	3306	428C	3054
D5M XL	3116 T	12H ES	3306 T	438C	3054 T
D5M LGP	3116 T	140H NA	3306 T	<b>Forest Products</b>	
D5E	3306	140H STD	3306 T	<b>Wheel Skidders</b>	
D6M XL	3116 T	140H ES	3306 T	525B	3126 TA
D6M LGP	3116 T	143H NA	3306 T	535B	3126 TA
D6G	3306 T	160H NA	3306 T	545	3306 TA
D6R	3306 T	160H NA (VHP)	3306 TA	<b>Track Skidders</b>	
D6R XL	3306 T	160H STD	3306 T	517	3304 T
D6R XL (IG)	3306 T	160H ES	3306 TA	527	3304 T
D6R XR	3306 T	163H NA	3306 TA	<b>Harvesters</b>	
D6R LGP	3306 T	14H	3306 TA	550	3126 TA
D7G	3306 T	16H	3406 TA	570	3126 TA
D7R	3306 TA	24H	3412E TA	580	3126 TA
D7R XR	3306 TA	<b>Skid Steer Loaders</b>		<b>Forwarders</b>	
D7R LGP	3306 TA	216	3034	554	3054 TA
D8R	3406C TA	226	3034	574	3126 TA
D8R LGP	3406C TA	228	3034	<b>Knuckleboom Loaders</b>	
D9R	3408E TA	236	3034	539	3126 TA
D10R	3412 TA	246	3034 T	<b>Pipelayers</b>	
D11R/D11R CD	3508B TA	248	3034 T	561M	3116 T
<b>Agricultural Equipment</b>		<b>Excavators</b>		572R	3306 TA
D4E SR	3304 T	301.5	3003	583R	3406C TA
D6G SR	3306 T	301.6	3033	589	3408 TA
Challenger 35	3116 ATAAC	301.8	3033	<b>Wheel Tractor-Scrapers</b>	
Challenger 45	3116 ATAAC	302.5	3013	613C Series II	3116 T
Challenger 55	3126 ATAAC	303.5	3013	615C Series II	3306 TA
Challenger 65E	3176C ATAAC	304.5	3024	623G	3406E TA
Challenger 75E	3176C ATAAC	307B/307B SB	Mitsubishi 4M40EI	611	3306 T
Challenger 85E	3196 ATAAC	311B	3064 T	621G	3406E TA
Challenger 95E	3196 ATAAC	312B/312B L	3064 T*	631E Series II	3408E TA
Lexion 450	3126 ATAAC	312B/312B L	3054 T***	651E	3412E TA
Lexion 460/465	3126 ATAAC	315B/315B L	3046 T*	627G Tractor	3406E TA
Lexion 470	3126C ATAAC	315B L	3054 TA***	627G Scraper	3306 T
Lexion 480/485	3176C ATAAC	317B L/317B LN	3046 T***	637E Series II Tractor	3408E TA
<b>Waste Handling Arrangements</b>		318B L/318B LN	3046 T	637E Series II Scraper	3306 TA
D6R WHA	3306 T	M312	3054 T	657E Tractor	3412E TA
D7R WHA	3306 TA	M315	3054 TA	657E Scraper	3408E TA
D8R WHA	3406C TA	M318	3116 T	<b>Pipelayers</b>	
D9R WHA	3408E TA	M320	3116 T	561M	3116 T
D10R WHA	3412 TA	320C/320C L/320C LN/320C S	3066 T	572R	3306 TA
953C WHA	3116 T	322B	3116 T*	583R	3406C TA
963C WHA	3116 TA	322B L/322B LN	3116 TA	589	3408 TA
973C WHA	3306 T	325B/325B L/325B LN	3116 TA	<b>Wheel Tractor-Scrapers</b>	
		330B/330B L/330B LN	3306 TA	613C Series II	3116 T
		345B/345B L Series II	3176C ATAAC	615C Series II	3306 TA
		365B L	3196 ATAAC	623G	3406E TA
		375/375 L	3406C ATAAC	611	3306 T
		5110B	3412 TA	621G	3406E TA
		5130B	3508 (EUI) TA	631E Series II	3408E TA
		5230	3516 (EUI) TA	651E	3412E TA

\*Japan Sourced.  
 \*\*Belgium Sourced.  
 \*\*\*France Sourced.

IG — Intermediate Gauge  
 VHP — Variable Horsepower

Machine Model	Engine Model	Machine Model	Engine Model	Machine Model	Engine Model
<b>Construction &amp; Mining Trucks</b>		<b>Track Loaders</b>		<b>Compactors</b>	
769D	3408E TA	933C	3046	<b>Single Drum, Smooth</b>	
771D	3408E TA	939C	3046 T	CS-323C	3054
773D	3412E TA	953C	3116 T	CS-431C	3054 T
775D	3412E TA	963C	3116 TA	CS-433C	3054 T
777D	3508B (EUI) TA	973C	3306 T	CS-531D	3116 T
785C	3512 (EUI) TA	<b>Integrated Toolcarriers</b>		CS-533D	3116 T
789C	3516 (EUI) TA	IT14G	3054 T	CS-563D	3116 T
793C	3516B (EUI) TA	IT28G	3056 T	CS-583D	3116 T
797	3524B (EUI) TA	IT38G	3126 TA	<b>Single Drum, Padded</b>	
<b>Construction &amp; Mining Tractors</b>		IT62G	3126 TA	CP-323C	3054
776D	3508B (EUI) TA	<b>Telehandlers</b>		CP-433C	3054 T
784C	3512 (EUI) TA	TH62	3054 T	CP-533D	3116 T
<b>Articulated Trucks</b>		TH63	3054 T	CP-563D	3116 T
D25D	3306 TA	TH82	3054 T	<b>Double Drum and Combi</b>	
D30D	3306 TA	TH83	3054 T	CB-214D	3013
725	3176C ATAAC	TH103	3054 T	CB-224D	3013
730	3196C ATAAC	<b>Paving Products</b>		CB-225D	3013
D350E Series II	3406 TA	<b>Cold Planers</b>		CB-334D	3014
D400E Series II	3406 TA	PM-465	3406C TA	CB-335D	3014
<b>Wheel Tractors</b>		PM-565B	3408E TA	CB-434C	3054
814F	3306 TA	<b>Reclaimer/Stabilizers</b>		CB-534C	3054 T
824G	3406C TA	RR-250B	3406C TA	CB-535B	3054 T
834G	3456 TA	SS-250B	3406C TA	CB-544	3054
844	3412E TA	RM-350B	3406D TA	CB-545	3054
854G	3508B TA	<b>Asphalt Pavers</b>		CB-634C	3116 T
<b>Soil Compactors</b>		AP-200B	Hatz 2M40L	<b>Pneumatic Tire-Asphalt</b>	
815F	3306 TA	AP-800C	3054 T	PS-150B	3054 T
825G	3406C TA	AP-900B	3116T	PS-200B	3054 T
<b>Landfill Compactors</b>		AP-1000B	3116 TA	PF-290B/PS-360B	3054 T
816F	3306 TA	AP-650B	3054 TA	PS-360B	3054 T
826G	3406C TA	AP-1050B	3116 T	PF-300B	3054 T
836G	3456 TA	AP-1055B	3116 TA	PS-300B	3054 T
<b>Wheel Loaders</b>		BG-210B	3054 T	PS-500	3208 T
902	3024	BG-230	3054 T	<b>Underground Mining</b>	
906	3034	BG-240C	3116T	R1300	3306 TA
908	3054 T	BG-260C	3116 TA	R1600	3176C ATAAC
914G	3054 T	BG-225C	3054 T	R1700G/R1700G SUPA 14	3176C ATAAC
924G	3056 T	BG-245C	3116 TA	R2900/R2900 SUPA 20	3406E ATAAC
928G	3116 T	BG-2455C	3116 TA	AE40 Series II	3408E TA
938G	3126 TA	<b>Road Wideners</b>		AD45	3408E TA
950G	3126 TA	BG-730	3116 T	AD55	3456 ATAAC
962G	3126 TA	<b>Windrow Elevators</b>		69D	3408E TA
966G	3306 TA	BG-650	3054 T	73D	3412E TA
972G	3306 TA				
980G	3406 TA				
988G	3456 TA				
990 Series II	3412E TA				
992G	3508B TA				
994D	3516B TA				

## Tables

Engine Model and (Cylinders)	Machine	Aspiration	Fuel Injection System	Bore × Stroke		Displacement	
				mm	in	L	in <sup>3</sup>
3003 (3)	301.5, 301.6, 301.8	NA	DI	75 × 72	2.95 × 2.83	0.95	58.2
3013 (3)	302.5, 303.5, CB-214D, CB-224D, CB-225D	NA	DI	75 × 72	2.95 × 3.54	1.50	91.3
3014 (4)	CB-334D, CB-335D	NA	DI	75 × 72	2.95 × 3.54	2.0	122
Hatz 2M41L (2)	AP200B	NA	DI	102 × 105	4 × 4.13	1.716	105
3024 (4)	902, 304.5	NA	DI	84 × 100	3.31 × 3.94	2.22	135
Mitsubishi 4M40EI (4)	307B, 307B SB	NA	DI	95 × 100	3.7 × 3.94	2.84	173
3034 (4)	906, 216, 226, 228, 236	NA	DI	97 × 100	3.32 × 3.94	2.95	180
	246, 248	T					
3054 (I-4)	428C, CB-544, CB-434C, CB-545, CS-323C, CP-323C, PS-150B	NA	DI	100 × 127	3.94 × 5.0	4.0	243
	416C, 426C, (428C), 436C, 438C, 312B L**, AP-800C, BG-210B, BG-225C, BG-650, 908, 914G, IT14G, PS-200B, PS-360B, PF-300B, PF-290B, PS-300B, CS-431C, CS-433C, CP-433C, CB-534C, CB-535B, TH62, TH63, TH82, TH83, TH103	T (optional)					
	M312, M315, AP-650B, 315B L**, 554	TA					
3064 (I-4)	311B, 312B*, 313B CR	T	DI	105 × 127	4.1 × 5.0	4.4	268
3114 (I-4)	446B	T	DI	105 × 127	4.13 × 5.0	4.4	268
3046 (I-6)	D3C Series III, D3C XL Series III, D3C LGP Series III, D4C Series III, 933C, D4C XL Series III, D4C LGP Series III	NA	DI	94 × 120	3.7 × 4.7	5.0	305
	D5C Series III, D5C XL Series III, D5C LGP Series III, 315B/315B L*, 939C, 317B L**, 318B L, 318B LN	T	DI				

\*Japan sourced.

\*\*France sourced.

DI — Direct Injection

NA — Naturally Aspirated

T — Turbocharged

**NOTE:** Materials and specifications subject to change without notice. Component commonality of Cat Engines for all applications does not imply complete interchangeability. Contact your Caterpillar Dealer for specific information.

Engine Model and (Cylinders)	Machine	Aspiration	Fuel Injection System	Bore × Stroke		Displacement	
				mm	in	L	in <sup>3</sup>
3056 (I-6)	924G	T	DI	100 × 127	3.94 × 5.0	6.0	365
3066 (I-6)	320C, 320C L, 320C LN, 320C S	T	DI	102 × 130	4.0 × 5.1	6.4	391
3116 (I-6)	M318, M320, 613C Series II, 928G, 953C, IT28G, AP-1050B, BG-730, CS-533D, CS-531D, CS-563D, CS-583D, CB-634C, CP-533D, CP-563D, 322B, 120H NA, 135H NA, D5M, D6M, 561M, BG-240C, AP-900B	T	DI	105 × 127	4.13 × 5.0	6.6	402
	BG-260C, BG-245C, AP-1055B, 120H NA***, 135H***, 120H STD, 135H STD, 120H ES, 322B/322B LN, 325B, 325B L, 325B LN, 963C, BG-2455C, AP-1000B	TA	DI				
	Challenger 35, Challenger 45	ATAAC	DI				
3304 (I-4)	D4E SR, 527, 517	T	DI	121 × 152	4.75 × 6	7	425
3126 (I-6)	525B, 535B, 550, 570, 580, 574, 539, 938G, IT38G, 950G, 962G, IT62G	TA	DI	110 × 127	4.33 × 5.0	7.2	442
	Challenger 55, Lexion 450, Lexion 460/465, Lexion 470	ATAAC					
3176 (I-6)	Challenger 65E, Challenger 75E, R1700G, R1600, 345B, 345B L, Lexion 480/485, 725	ATAAC	DI	125 × 140	4.92 × 5.5	10.2	629
3208 (V-8)	PS-500	NA	DI	114 × 127	4.5 × 5	10.4	636

\*Japan sourced.

\*\*Belgium sourced.

\*\*\*With VHP option.

PC — Precombustion

DI — Direct Injection

T — Turbocharged

TA — Turbocharged and Aftercooled

T ATAAC — Turbocharged and Air/Air Aftercooled

NA — Naturally Aspirated

**NOTE:** Materials and specifications subject to change without notice. Component commonality of Cat Engines for all applications does not imply complete interchangeability. Contact your Caterpillar Dealer for specific information.

## Tables

Engine Model and (Cylinders)	Machine	Aspiration	Fuel Injection System	Bore × Stroke		Displacement	
				mm	in	L	in <sup>3</sup>
3306 (I-6)	D5E, 12H STD	NA	DI	121 × 152	4.75 × 6	10.5	638
	D6R XL, D6R XR, D6R, D6R LGP, D6R WHA, D6G, D6G SR, D7G, 12H NA, 140H NA, 143H NA, 160H NA, 140H STD, 160H STD, 12H ES, 140H ES, 611, 627G Sc., 973C	T	DI				
	D7R, D7R XR, D7R LGP, 637E Series II Sc., R1300, 615C Series II, D25D, D30D, 330B, 330B L, 330B LN, 814F, 815F, 816F, 572R, 160H NA*, 163H NA, 966G, 972G, 160H ES, 14H, 545B	TA	DI				
		T ATAAC	DI				
3196 (I-6)	Challenger 85E, Challenger 95E, 730	T ATAAC	DI	130 × 150	5.1 × 5.9	12	732
3406 (I-6)	365B L	T	DI	137 × 165	5.4 × 6.5	14.6	893
	PM-465, 621G, 623G, 627G Tr., D350E Series II, D400E Series II, RR-250B, SS-250B, RM-350B, 16H, 583R, 824G, 825G, 826G, D8R, D8R LGP, D8R WHA, 980G	TA	DI				
	375, 375 L, 5080, R2900	T ATAAC	DI				
3456 (I-6)	988G, 834G, 836G, AD55	ATAAC	DI	140 × 171	5.5 × 6.75	15.8	966
3408 (V-8)	D9R, D9R WHA, 589, 631E-II, 637E-II Tr., 657E Sc., 771D, 769D, PM-565B, AD40, 69D, AD45	TA	DI	137 × 152	5.4 × 6	18	1099
		T ATAAC					
3412 (V-12)	D10R, D10R WHA, 651E, 657E Tr., 773D, 775D, 990, 24H, 73D, 844, 5110B	TA	DI	137 × 152	5.4 × 6	27	1649
3508 (V-8)	D11R, 777D, 776D, 5130B, 992G, 854G	TA	DI	170 × 190	6.7 × 7.5	34.5	2105
3512 (V-12)	785C, 784C	TA	DI	170 × 190	6.7 × 7.5	51.8	3158
3516 (V-16)	789C, 793C, 994D, 5230	TA	DI	170 × 190	6.7 × 7.5	69.1	4211
3524 (V-24)	797	TA	DI	170 × 215	6.7 × 8.5	117	7130

\*With VHP option.

PC — Precombustion  
DI — Direct Injection  
T — Turbocharged

TA — Turbocharged and Aftercooled  
T ATAAC — Turbocharged and Air/Air Aftercooled  
NA — Naturally Aspirated

**NOTE:** Materials and specifications subject to change without notice. Component commonality of Cat Engines for all applications does not imply complete interchangeability. Contact your Caterpillar Dealer for specific information.

	SECTION	page
<b>Abrasiveness ratings</b> (undercarriage) . . . . .	<b>22</b>	33
<b>Agricultural commodities conversion factors</b> . . . . .	<b>28</b>	2
<b>Agricultural Equipment</b> . . . . .	<b>2</b>	1-22
Depreciation and repair costs . . . . .	<b>22</b>	10
Former Models . . . . .	<b>21</b>	19
Horsepower ratings . . . . .	<b>2</b>	12
<b>Altitude:</b>		
Deration table . . . . .	<b>28</b>	5
Discussion of . . . . .	<b>24</b>	7
<b>Angle blades</b> (Challenger) . . . . .	<b>2</b>	18
<b>Angle of repose</b> (materials table) . . . . .	<b>28</b>	1
<b>Angling “A” blade</b> , description of . . . . .	<b>1</b>	30
<b>Articulated Dump Trucks</b> . . . . .	<b>11</b>	1-26
Former models . . . . .	<b>21</b>	39
Ground Pressure . . . . .	<b>11</b>	5
Special Arrangements . . . . .	<b>11</b>	4
<b>Asphalt Pavers</b> . . . . .	<b>17</b>	11
<b>Attachment</b> (see Work Tools)		
<b>Augers</b> . . . . .	<b>4</b>	12
<b>Backhoe Loaders</b> . . . . .	<b>6</b>	1-30
Digging forces . . . . .	<b>6</b>	6
Former models . . . . .	<b>21</b>	31
<b>Ballast:</b>		
Fillage table (Tires) . . . . .	<b>23</b>	32
Landfill Compactors . . . . .	<b>27</b>	22
Wheel Tractors . . . . .	<b>12</b>	6
<b>Barber-Greene:</b>		
Asphalt Pavers . . . . .	<b>17</b>	14
Road Wideners . . . . .	<b>17</b>	19
Windrow Elevators . . . . .	<b>17</b>	20
<b>Bearing powers</b> (materials table) . . . . .	<b>28</b>	2
<b>Belt selection</b> (Ag Tractors) . . . . .	<b>2</b>	17
<b>Bias ply tires</b> , definition of . . . . .	<b>23</b>	2
<b>Blades</b> , description of . . . . .	<b>1</b>	29
<b>Brake Performance Curves:</b>		
Construction & Mining Trucks/Tractors . . . . .	<b>10</b>	11
Use of:		
Construction & Mining Trucks/Tractors . . . . .	<b>10</b>	8
<b>Brooms</b> . . . . .	<b>4</b>	25



	SECTION	page
<b>Bucket capacities:</b>		
Backhoe Loaders . . . . .	6	21
Excavators . . . . .	5	105
Definition of . . . . .	5	93
Ditch cleaning . . . . .	5	131
Front shovels . . . . .	5	181
Long reach . . . . .	5	129
Integrated Toolcarriers . . . . .	15	5
Telescopic Material Handlers . . . . .	16	13
Track Loaders . . . . .	14	4
Skid Steer Loaders . . . . .	4	4
Underground Mining . . . . .	18	4
Wheel Loaders . . . . .	13	7
<b>Bucket fill factors (materials table) . . . . .</b>	<b>28</b>	<b>1</b>
Excavators . . . . .	5	126
Front shovels . . . . .	5	181
Track Loaders . . . . .	14	17
Wheel Loaders . . . . .	13	46
<b>Bucket payload:</b>		
Excavators . . . . .	5	126
Track Loaders . . . . .	14	17
Wheel Loaders . . . . .	13	46
<b>Bucket selection:</b>		
Excavators . . . . .	5	94
Integrated Toolcarriers . . . . .	15	13
Telescopic Material Handlers . . . . .	16	13
Underground Mining . . . . .	18	5
Wheel Loaders . . . . .	13	51
<b>Bulldozers . . . . .</b>	<b>1</b>	<b>27-48</b>
Blade options (summary) . . . . .	1	28
Blade selection . . . . .	1	29
Blade Specifications . . . . .	1	33, 46
	<b>12</b>	<b>8, 16</b>
Correction factors . . . . .	1	45
Dimension drawing . . . . .	1	32
SAE Blade Capacity Definition . . . . .	1	32
Waste disposal . . . . .	27	15
<b>Cable &amp; ferrule sizes (Winches) . . . . .</b>	<b>1</b>	<b>70</b>
<b>Coal handling dozers/scoops/buckets . . . . .</b>	<b>1</b>	<b>47</b>
Production estimating . . . . .	25	4
<b>Code identification (Tires) . . . . .</b>	<b>23</b>	<b>4</b>
<b>Cold inflation pressures (Tires) . . . . .</b>	<b>23</b>	<b>23</b>

	SECTION	page
<b>Cold Planers</b> . . . . .	<b>17</b>	1
Applications . . . . .	<b>17</b>	5
Former models . . . . .	<b>21</b>	47
Skid Steer Loaders attachment . . . . .	<b>4</b>	15
Use by project type . . . . .	<b>17</b>	6
<b>Cold planing fundamentals</b> . . . . .	<b>17</b>	4
<b>Compaction:</b>		
Comparison (Waste Disposal) . . . . .	<b>27</b>	20
Factors (Waste Disposal) . . . . .	<b>27</b>	19
Fundamentals:		
Landfill . . . . .	<b>27</b>	20
Soil . . . . .	<b>12</b>	13
Production . . . . .	<b>27</b>	20
<b>Compactors:</b>		
Former models . . . . .	<b>21</b>	41, 52
Landfill . . . . .	<b>27</b>	13
Pneumatic tire . . . . .	<b>17</b>	28
Soil . . . . .	<b>12</b>	11
Application zones . . . . .	<b>12</b>	14
Vibratory . . . . .	<b>17</b>	22
<b>Concrete Crushers</b> . . . . .	<b>19</b>	18-19
Applications . . . . .	<b>19</b>	18
Features . . . . .	<b>19</b>	18
Matching guide . . . . .	<b>19</b>	18
Specifications . . . . .	<b>19</b>	19
<b>Concrete Pulverizers</b> . . . . .	<b>19</b>	16-17
Applications . . . . .	<b>19</b>	16
Features . . . . .	<b>19</b>	16
Matching guide . . . . .	<b>19</b>	16
Specifications . . . . .	<b>19</b>	17
<b>Conversion factors, Agricultural Commodities</b> . . . . .	<b>28</b>	2
Metric-English/English-Metric . . . . .	<b>28</b>	12
<b>Construction &amp; Mining Trucks/Tractors</b> . . . . .	<b>10</b>	1-46
Former Models . . . . .	<b>21</b>	38
Power Train Efficiencies, Mechanical . . . . .	<b>10</b>	9
<b>Counterweights:</b>		
Stockpile Coal Handling . . . . .	<b>25</b>	2
Wheel Tractors . . . . .	<b>12</b>	6
<b>Curl and Crowd Forces:</b>		
Excavators . . . . .	<b>5</b>	93
Front Shovels . . . . .	<b>5</b>	179
<b>Curve superelevation table</b> . . . . .	<b>28</b>	3
<b>Cushion “C” blade, description of</b> . . . . .	<b>1</b>	30

	SECTION	page
<b>Cycle times:</b>		
Articulated/Construction & Mining Trucks . . . . .	10	8
Excavators . . . . .	5	154
Front Shovels . . . . .	5	182
Track Loaders . . . . .	14	16
Wheel Loaders . . . . .	13	45
Wheel Tractor-Scrapers . . . . .	9	11, 73
<b>Delay time</b> (figuring production) . . . . .	24	4
<b>Delivered price</b> (O & O) . . . . .	22	10
<b>Demolition Arrangements</b> (Excavators) . . . . .	5	133
<b>Demolition Shears</b> . . . . .	19	13
<b>Depreciation, discussion of</b> (O & O) . . . . .	22	5
<b>Ditch Cleaning Excavators</b> . . . . .	5	131
<b>Dozing tools</b> , descriptions of . . . . .	1	29
<b>Drawbar pull and tillage discussion</b> (Ag Tractors) . . . . .	2	20
<b>Drawbar pull forward:</b>		
Direct drive:		
Agricultural Tractors . . . . .	2	14
Track-Type Tractors . . . . .	1	19
Power shift:		
Landfill Compactors . . . . .	27	14
Pipelayers . . . . .	8	5
Soil Compactors . . . . .	12	12
Track Skidders . . . . .	7	21
Track-Type Tractors . . . . .	1	12
Wheel Tractors . . . . .	12	4
<b>Engines</b> . . . . .	20	1-24
Design data . . . . .	20	2
Rating explanation . . . . .	20	2
Used in Caterpillar Products . . . . .	28	14
<b>English unit equivalents</b> . . . . .	28	13
<b>Equipment selection:</b>		
Land Clearing . . . . .	26	2
Stockpile Coal Handling . . . . .	25	1
Waste Disposal . . . . .	27	2
<b>Estimating:</b>		
Draft or drawbar pull (Agricultural Tractors) . . . . .	2	21
Form (O & O) . . . . .	22	2
Landfill (Waste Disposal) . . . . .	27	20
Operating Costs (O & O) . . . . .	22	12
Owning Costs (O & O) . . . . .	22	5
Pipe laying . . . . .	8	7
Tire life . . . . .	22	29
Undercarriage costs (O & O) . . . . .	22	33

	SECTION	page
<b>Estimating Production:</b>		
Asphalt Pavers . . . . .	17	18
Bulldozers . . . . .	1	41
Cold Planers . . . . .	17	3
Compactor production (waste disposal) . . . . .	27	20
Elements of production . . . . .	2	20
Excavators . . . . .	5	157
Front shovels . . . . .	5	184
Trenching . . . . .	5	161
Hydraulic hammers . . . . .	19	10
Land Clearing . . . . .	26	4
Mining and Earthmoving . . . . .	24	4
Motor Graders . . . . .	3	14
Pneumatic Tire Compactors . . . . .	17	33
Ripping . . . . .	1	59
Production graphs . . . . .	1	67
Seismic velocity charts . . . . .	1	62
Road Reclaimer/Soil Stabilizer . . . . .	17	9
Soil Compactors . . . . .	12	15
Stockpile Coal Handling . . . . .	25	3
Tillage . . . . .	2	20
Towed Scrapers . . . . .	1	75
Track Loaders . . . . .	14	17
Trees per acre/hectare . . . . .	7	74
Vibratory Compactors . . . . .	17	30
Waste Disposal . . . . .	27	20
Wheel Loaders . . . . .	13	78
Wheel Tractor-Scrapers . . . . .	9	60
<b>Excavators . . . . .</b>	<b>5</b>	<b>1-210</b>
Attachment summary . . . . .	5	153
Curl & crowd forces . . . . .	5	93
Front shovels . . . . .	5	179
Demolition arrangements . . . . .	5	133
Ditch cleaning . . . . .	5	131
Former models . . . . .	21	24
Front shovels . . . . .	5	169
Long reach . . . . .	5	129
Major component weights . . . . .	5	29
Long reach . . . . .	5	129
Material handling arrangements . . . . .	5	188
Quick Coupler . . . . .	5	146
Shoe selection . . . . .	5	143
Front shovels . . . . .	5	178
Stick/bucket combinations . . . . .	5	141
<b>Extreme slope operation . . . . .</b>	<b>1</b>	<b>22</b>
<b>Fill factor (discussion of) . . . . .</b>	<b>24</b>	<b>3</b>
<b>Filters (O &amp; O) . . . . .</b>	<b>22</b>	<b>22</b>
<b>Fire Pump Engines . . . . .</b>	<b>20</b>	<b>9</b>

	SECTION	page
<b>Fixed times</b> (hauling units)		
Articulated/Construction & Mining Trucks . . . . .	10	8
Wheel Tractor-Scrapers . . . . .	9	11
<b>Forestry Machines</b> . . . . .	7	26
<b>Forest Products</b> . . . . .	7	1-76
Cut-to-Length . . . . .	7	1-12
Methodology . . . . .	7	2
Millyard . . . . .	7	32-60
Tables . . . . .	7	69-76
Whole tree . . . . .	7	15-32
Work Tools . . . . .	7	61-68
<b>Former Models</b> . . . . .	21	1-54
<b>Formulas &amp; rules of thumb</b> (Earthmoving) . . . . .	24	15
<b>Forwarders</b> . . . . .	7	8
<b>Front Shovels</b> (Excavators) . . . . .	5	169
<b>Fuel consumption:</b>		
Machine productivity . . . . .	24	14
Tables (O & O) . . . . .	22	13
<b>Generator Sets:</b>		
Diesel . . . . .	20	12
Gaseous Fueled . . . . .	20	15
Marine . . . . .	20	20
Olympian . . . . .	20	14
<b>Goodyear:</b>		
Tire life (estimating system) . . . . .	22	32
<b>Grade:</b>		
Comparison chart/degrees & percent . . . . .	28	11
Resistance (discussion of) . . . . .	24	6
<b>Grapples</b> . . . . .	7	17, 23
SAE definition . . . . .	7	16
<b>Ground pressures:</b>		
Articulated Trucks . . . . .	11	5
Excavators . . . . .	5	143
Front shovels . . . . .	5	178
Forwarders . . . . .	7	12
Harvesters . . . . .	7	5
Soil Compactors . . . . .	12	17
Track Loaders (LGP) . . . . .	14	2
Track-Type Tractors . . . . .	1	21
<b>Harvesters</b> . . . . .	7	2
<b>Heel Boom Grapples</b> . . . . .	7	65
<b>Hydraulic controls</b> . . . . .	1	23-26
<b>Hydraulic hammers</b> . . . . .	19	1-12
Applications . . . . .	19	2
Features . . . . .	19	1
Production tables . . . . .	19	10
Selection guide . . . . .	19	8
Specifications . . . . .	19	5

	<b>SECTION</b>	page
<b>Hydromechanical Work Tools</b> .....	<b>19</b>	1-24
	<b>4</b>	12-26
Augers .....	<b>4</b>	12
Brooms .....	<b>4</b>	25
Cold Planers .....	<b>4</b>	15
Concrete Crushers .....	<b>19</b>	18
Concrete Pulverizers .....	<b>19</b>	16
Hydraulic Hammers .....	<b>19</b>	1
Landscape Rakes .....	<b>4</b>	19
Landscape Tillers .....	<b>4</b>	17
Mobile Shears .....	<b>19</b>	13
Trenchers .....	<b>4</b>	21
Vibratory Compactors .....	<b>4</b>	23
<b>Impact Ratings (undercarriage)</b> .....	<b>22</b>	33
<b>Industrial Engines:</b>		
Diesel .....	<b>20</b>	3
Gaseous Fueled .....	<b>20</b>	10
<b>Index</b> .....	<b>29</b>	1-18
<b>Integrated Toolcarriers</b> .....	<b>15</b>	1-20
Former models .....	<b>21</b>	46
Tools (attachments) .....	<b>15</b>	4
<b>Interest, Insurance &amp; Taxes (O &amp; O)</b> .....	<b>22</b>	11
<b>Introduction</b> .....		1-3
<b>Job:</b>		
Efficiency/layout (estimating production) .....	<b>24</b>	8
Survey (Land Clearing) .....	<b>26</b>	2
<b>“K/G” blade, description of</b> .....	<b>1</b>	31
Production factors .....	<b>26</b>	5
<b>Knuckleboom loaders</b> .....	<b>7</b>	29
<b>Land Clearing</b> .....	<b>26</b>	1-8
Clearing methods & equipment .....	<b>26</b>	2
Variables affecting operations .....	<b>26</b>	1
<b>Landfill:</b>		
Blades .....	<b>1</b>	46
	<b>27</b>	8, 15
Description of .....	<b>1</b>	31
Compactors .....	<b>27</b>	13
Equipment selection .....	<b>27</b>	2
Estimating (Waste Disposal) .....	<b>27</b>	20
Methods (Waste Disposal) .....	<b>27</b>	1
Production estimating .....	<b>27</b>	20
Refuse densities .....	<b>27</b>	19

	SECTION	page
<b>Landscape Rakes</b> .....	<b>4</b>	19
<b>Landscape Tillers</b> .....	<b>4</b>	17
<b>Lifting capacity:</b>		
Backhoe Loaders .....	<b>6</b>	22
Excavators .....	<b>5</b>	62
Material handling arrangements .....	<b>5</b>	188
Log Loaders .....	<b>7</b>	43
Pipelayers .....	<b>8</b>	3
Skid Steer Loaders .....	<b>4</b>	4
Telescopic Material Handlers .....	<b>16</b>	3
<b>Liquid ballasting (Tires)</b> .....	<b>23</b>	32
<b>Loading/hauling systems</b> .....	<b>24</b>	13
<b>Load factor</b> (discussion of) .....	<b>24</b>	2
<b>Load weighing</b> (figuring production) .....	<b>24</b>	4
<b>Log:</b>		
Comparison of log rules .....	<b>7</b>	74
Forestry machines .....	<b>7</b>	26
Former models .....	<b>21</b>	32
Loaders .....	<b>7</b>	32
Logging/lumber forks .....	<b>7</b>	67
Rule of thumb conversions .....	<b>7</b>	75
Units of measurement .....	<b>7</b>	75
Volume tables .....	<b>7</b>	69
<b>Long Reach Excavators</b> .....	<b>5</b>	129
<b>Lube oils and grease fittings (O &amp; O)</b> .....	<b>22</b>	22
<b>Machine dimensions:</b>		
Backhoe Loaders .....	<b>6</b>	28
Excavators .....	<b>5</b>	17
Demolition Arrangements .....	<b>5</b>	135
Ditch cleaning .....	<b>5</b>	131
Front shovels .....	<b>5</b>	177
Long reach .....	<b>5</b>	129
Forest machines .....	<b>7</b>	27
Forwarders .....	<b>7</b>	10
Harvesters .....	<b>7</b>	4
Integrated Toolcarriers .....	<b>15</b>	9
Knuckleboom Loaders .....	<b>7</b>	31
Skid Steer Loaders .....	<b>4</b>	10
Track Loaders .....	<b>14</b>	12
Track-Type Tractors .....	<b>1</b>	3
Wheel Loaders .....	<b>13</b>	37

	SECTION	page
<b>Machine selection:</b>		
Cold Planers . . . . .	17	4
Excavators . . . . .	5	140
Harvesting Heads . . . . .	7	64
Integrated Toolcarriers . . . . .	15	14
Land Clearing . . . . .	26	2
Pipelayers . . . . .	8	7
Stockpile Coal Handling . . . . .	25	1
Track Loaders . . . . .	14	15
Waste Disposal . . . . .	27	2
Wheel Loaders . . . . .	13	45
Wheel Tractors . . . . .	12	6
<b>Marine Generator Sets . . . . .</b>	<b>20</b>	<b>20</b>
<b>Marine Propulsion Engines, rating levels . . . . .</b>	<b>20</b>	<b>17</b>
<b>Material density (discussion of) . . . . .</b>	<b>24</b>	<b>2</b>
<b>Material handling arrangements:</b>		
Excavators . . . . .	5	188
Integrated Toolcarriers . . . . .	15	8, 11, 16
<b>Metric unit equivalents . . . . .</b>	<b>28</b>	<b>13</b>
<b>Mining and Earthmoving . . . . .</b>	<b>24</b>	<b>1-16</b>
Elements of production . . . . .	24	1
Formulas and rules of thumb . . . . .	24	15
Loading match . . . . .	24	14
Systems . . . . .	24	13
<b>Mobile Shears . . . . .</b>	<b>19</b>	<b>13-15</b>
Applications . . . . .	19	13
Capability tables . . . . .	19	13
Features . . . . .	19	13
Matching guide . . . . .	19	15
Specifications . . . . .	19	14
<b>Motor Graders . . . . .</b>	<b>3</b>	<b>1-20</b>
Former models . . . . .	21	22
Front mounted scarifiers . . . . .	3	12
Rippers/Scarifiers . . . . .	3	13
<b>Nomenclature . . . . .</b>		<b>8-14</b>
<b>Nomographs:</b>		
Land Clearing . . . . .	26	4
Track Loaders . . . . .	14	19
Trenching (Excavators) . . . . .	5	163
Wheel Loaders . . . . .	13	49



	SECTION	page
<b>Operator and machine protection</b> . . . . .		5
<b>Owning &amp; Operating Costs (O &amp; O)</b> . . . . .	<b>22</b>	1-56
Agricultural tractor depreciation and repair . . . . .	<b>22</b>	10
Estimating form . . . . .	<b>22</b>	2
Example I: Track-Type Tractor . . . . .	<b>22</b>	44
Example II: Wheel Loader . . . . .	<b>22</b>	46
O & O form with example figures . . . . .	<b>22</b>	47
Operator's hourly wage . . . . .	<b>22</b>	44
Ownership period guide . . . . .	<b>22</b>	6
Residual value at replacement . . . . .	<b>22</b>	10
Special wear items . . . . .	<b>22</b>	44
Value recovered through work . . . . .	<b>22</b>	11
<b>Pallet forks</b> . . . . .	<b>15</b>	7, 10, 17
	<b>16</b>	3, 11, 12
<b>Parts replacement warning</b> . . . . .		7
<b>Paving Products</b> . . . . .	<b>17</b>	1-34
Former models . . . . .	<b>21</b>	47
<b>Performance data:</b>		
Backhoe Loaders . . . . .	<b>6</b>	6
Integrated Toolcarriers . . . . .	<b>15</b>	5
Skid Steer Loaders . . . . .	<b>4</b>	4
Telescopic Material Handlers . . . . .	<b>16</b>	3
Track Loaders . . . . .	<b>14</b>	4
Wheel Loaders . . . . .	<b>13</b>	7
Winches . . . . .	<b>1</b>	73
<b>Pipelayers</b> . . . . .	<b>8</b>	1-8
Application . . . . .	<b>8</b>	7
Extreme slope operation . . . . .	<b>1</b>	22
Former models . . . . .	<b>21</b>	32
Hook speeds . . . . .	<b>8</b>	6
<b>Pneumatic Tire Compactors</b> . . . . .	<b>17</b>	21
<b>Power Angling &amp; Tilt blade, description of</b> . . . . .	<b>1</b>	30
<b>Power unit equivalents</b> . . . . .	<b>28</b>	13
<b>Preface</b> . . . . .		4
<b>Production estimating; see estimating production</b>		
<b>Quick estimators (O &amp; O)</b> . . . . .	<b>22</b>	50
<b>Radial ply tires, definition of</b> . . . . .	<b>23</b>	3
<b>Rake blades, description of</b> . . . . .	<b>1</b>	31
<b>Rakes (Land Clearing)</b> . . . . .	<b>26</b>	8

	SECTION	page
<b>Range dimensions (diagrams):</b>		
Backhoe Loaders . . . . .	6	6
Excavators . . . . .	5	35, 174
Demolition Arrangements . . . . .	5	136
Ditch cleaning . . . . .	5	131
Front shovels . . . . .	5	173
Long reach . . . . .	5	129
Material handling arrangements . . . . .	5	188
Forwarders . . . . .	7	11
Knuckleboom Loaders . . . . .	7	31
Log Loaders . . . . .	7	43
Telescopic Material Handlers . . . . .	16	3
<b>Reclaimers/Stabilizer Mixers . . . . .</b>	<b>17</b>	<b>7</b>
<b>Refuse densities . . . . .</b>	<b>27</b>	<b>19</b>
<b>Repair reserve (O &amp; O) . . . . .</b>	<b>22</b>	<b>35</b>
<b>Retarder Curves:</b>		
Articulated Dump Trucks . . . . .	11	9
Use of . . . . .	9	11
Wheel Tractor-Scrapers . . . . .	9	23
<b>Rimpull-speed-gradeability curves:</b>		
Articulated Dump Trucks . . . . .	11	8
Construction & Mining Trucks/Tractors . . . . .	10	10
Landfill Compactors . . . . .	27	14
Soil Compactors . . . . .	12	12
Track Skidders . . . . .	7	21
Use of . . . . .	9	8
Wheel Tractor-Scrapers . . . . .	9	13
Wheel Tractors . . . . .	12	4
<b>Rippers/Scarifiers . . . . .</b>	<b>1</b>	<b>49</b>
	<b>3</b>	<b>13</b>
	<b>14</b>	<b>14</b>
Dimension drawings . . . . .	1	50
Forces, definition of . . . . .	1	50
Tip selection . . . . .	1	59
<b>Rolling resistance:</b>		
Discussion of (estimating production) . . . . .	24	5
Factors table . . . . .	28	1
<b>Rome blades . . . . .</b>	<b>1</b>	<b>31</b>
	<b>26</b>	<b>8</b>

	SECTION	page
SAE (Society of Automotive Engineers) Guidelines:		
Breakout Force		
Loaders, Track and Wheel . . . . .	13	43
Bucket Capacity		
Excavators . . . . .	5	93
Track Loaders . . . . .	14	15
Wheel Loaders . . . . .	13	45
Bulldozer Blade Capacity . . . . .	1	32
Curl and Crowd Forces:		
Excavators . . . . .	5	93
Front Shovels . . . . .	5	179
Tipping Conditions:		
Excavators . . . . .	5	60
Loaders, Track and Wheel . . . . .	13	44
<b>Scarifiers . . . . .</b>	<b>3</b>	<b>12</b>
<b>Seismic velocity charts (rippers) . . . . .</b>	<b>1</b>	<b>62</b>
<b>Semi-Universal "SU" blade:</b>		
Description of . . . . .	1	29
Production estimating chart . . . . .	1	43
<b>Shipping dimensions, see machine dimensions</b>		
<b>Skidders (Track &amp; Wheel) . . . . .</b>	<b>7</b>	<b>14-24</b>
Former models . . . . .	21	30
<b>Skid Steer Loaders . . . . .</b>	<b>4</b>	<b>1-26</b>
<b>Soil Compactors . . . . .</b>	<b>12</b>	<b>11-16</b>
Types & application zones . . . . .	12	14
<b>Soil density testing . . . . .</b>	<b>24</b>	<b>3</b>
<b>Specifications:</b>		
Agricultural Tractors . . . . .	2	6
Articulated Dump Trucks . . . . .	11	2
Asphalt Pavers . . . . .	17	11
Backhoe Loaders . . . . .	6	2
Bulldozers:		
Challenger Tractors . . . . .	2	18
Landfill Compactors . . . . .	27	15
Soil Compactors . . . . .	12	16
Track-Type Tractors . . . . .	1	33, 46
Waste Handling Track-Type Tractors . . . . .	27	8
Wheel Tractors . . . . .	12	8
Cold Planers . . . . .	17	2
Compactors:		
Landfill . . . . .	27	14
Pneumatic Tire . . . . .	17	28
Soil . . . . .	12	12
Vibratory . . . . .	17	22
Concrete Crushers . . . . .	19	19
Concrete Pulverizers . . . . .	19	17
Construction & Mining Tractors . . . . .	10	6
Construction & Mining Trucks . . . . .	10	2

	SECTION	page
Engines:		
Generator Sets . . . . .	20	12
Industrial . . . . .	20	3
Marine Generator Sets . . . . .	20	20
Marine Propulsion . . . . .	20	17
Truck . . . . .	20	22
Underground Mining . . . . .	20	7
Excavators . . . . .	5	2, 171
Front Shovels . . . . .	5	170
Forwarders . . . . .	7	9
Harvesters . . . . .	7	3
Harvesting Heads . . . . .	7	62
Hitches (Ag Tractors) . . . . .	2	19
Hydraulic Controls . . . . .	1	23
Hydraulic Hammers . . . . .	19	5
Integrated Toolcarriers . . . . .	15	2
Knuckleboom Loaders . . . . .	7	30
Lexion Combines . . . . .	2	9
Mobile Shears . . . . .	19	14
Motor Graders:		
ES Versions . . . . .	3	11
Global Versions . . . . .	3	10
NA Versions . . . . .	3	8
Standard Versions . . . . .	3	6
Pipelayers . . . . .	8	2
Rippers, Ripper/Scarifiers:		
Motor Graders . . . . .	3	13
Track Loaders . . . . .	14	14
Track-Type Tractors . . . . .	1	53
Reclaimers/Stabilizers . . . . .	17	8
Skid Steer Loaders . . . . .	4	2
Soil Compactors . . . . .	12	12
Super Rural Tractors . . . . .	2	11
Telescopic Material Handlers . . . . .	16	1
Track Skidders . . . . .	7	21
Track Loaders . . . . .	14	2
Track-Type Tractors . . . . .	1	3
Underground Mining, LHD . . . . .	18	2
Trucks . . . . .	18	6
Versatile Flotation System Trailers (VFS) . . . . .	2	8
Waste Handling:		
Compactors . . . . .	27	14
Track Loaders (WHA) . . . . .	27	11
Track-Type Tractors (WHA) . . . . .	27	6
Wheel Loaders (WHA) . . . . .	27	17
Wheel Loaders . . . . .	13	2
Wheel Skidders . . . . .	7	16

	SECTION	page
Wheel Tractor-Scrapers:		
Auger scrapers . . . . .	9	5
Elevating scrapers . . . . .	9	4
Standard scrapers . . . . .	9	2
Tandem powered & Push-Pull . . . . .	9	3
Wheel Tractors . . . . .	12	2
Winches . . . . .	1	70
Windrow Elevators . . . . .	17	20
<b>Speed conversion table . . . . .</b>	<b>28</b>	<b>2</b>
<b>Stabilizer/Mixers . . . . .</b>	<b>17</b>	<b>7</b>
<b>Stockpile Coal Handling . . . . .</b>	<b>25</b>	<b>1-10</b>
<b>Straight "S" blade:</b>		
Description of . . . . .	1	30
Production estimating chart . . . . .	1	44
<b>Swell (discussion of) . . . . .</b>	<b>24</b>	<b>2</b>
<b>Swell-voids-load factors table . . . . .</b>	<b>28</b>	<b>1</b>
<b>Tables . . . . .</b>	<b>28</b>	<b>1-18</b>
<b>Telescopic Material Handlers . . . . .</b>	<b>16</b>	<b>1-14</b>
Attachments . . . . .	16	12
Dimensions . . . . .	16	11
Performance data . . . . .	16	3
Specifications . . . . .	16	1
Tire Selection . . . . .	16	11
<b>Temperature conversion . . . . .</b>	<b>28</b>	<b>12</b>
<b>Time studies (figuring production) . . . . .</b>	<b>24</b>	<b>4</b>
<b>Tire Load Worksheet (Motor Graders) . . . . .</b>	<b>23</b>	<b>21</b>
<b>Tire &amp; Rim Association ratings . . . . .</b>	<b>23</b>	<b>21</b>
<b>Tires . . . . .</b>	<b>23</b>	<b>1-32</b>
Code identification . . . . .	23	4
Cold inflation pressures . . . . .	23	23
Construction (bias & radial ply) . . . . .	23	2
ISO load index speed symbol . . . . .	23	20
Life estimator curves (O & O) . . . . .	22	29
Goodyear life estimating system . . . . .	22	32
Liquid Ballasting . . . . .	23	32
	12	6
Manufactures designation . . . . .	23	5
Radial tire identification . . . . .	23	7
Selection & maintenance:		
Discussion of application/guide . . . . .	23	1, 21
Wheel Tractors . . . . .	12	6
Size nomenclature . . . . .	23	3
Specifications:		
Construction & Mining Trucks/Tractors . . . . .	10	7
Wheel Tractor-Scrapers . . . . .	9	7
Tire Load Worksheet (Motor Graders) . . . . .	23	21
Ton-miles per hour:		
Charts . . . . .	23	10
Method of rating/definitions . . . . .	23	8
Types — Load & carry/Transport/Work . . . . .	23	3

	<b>SECTION</b>	page
<b>Total resistance</b> (estimating production) . . . . .	<b>24</b>	6
<b>Towed Scrapers</b> . . . . .	<b>1</b>	75-78
Former models . . . . .	<b>21</b>	37
<b>Track Loaders</b> . . . . .	<b>14</b>	1-24
Former models . . . . .	<b>21</b>	44
Rippers/Scarifiers . . . . .	<b>14</b>	14
SAE ratings (discussion of) . . . . .	<b>14</b>	15
Waste Handling . . . . .	<b>27</b>	10
<b>Track spacing guide</b> (Challenger tractors) . . . . .	<b>2</b>	16
<b>Track Skidders</b> . . . . .	<b>7</b>	20
<b>Track-Type Tractors</b> . . . . .	<b>1</b>	1-26
Blade selection . . . . .	<b>1</b>	29
Extreme slope operation . . . . .	<b>1</b>	22
Former models . . . . .	<b>21</b>	1
<b>Traction</b> (estimating production) . . . . .	<b>24</b>	6
Coefficient factors:		
Coal stockpile (table) . . . . .	<b>25</b>	3
Materials table . . . . .	<b>28</b>	2
<b>Travel speeds - direct drive:</b>		
Agricultural Tractors . . . . .	<b>2</b>	13
Lexion Combines . . . . .	<b>2</b>	13
Track-Type Tractors . . . . .	<b>1</b>	19
<b>Travel speeds — power shift:</b>		
Landfill Compactors . . . . .	<b>27</b>	14
Motor Graders . . . . .	<b>3</b>	12
Pipelayers . . . . .	<b>8</b>	6
Soil Compactors . . . . .	<b>12</b>	12
Track Skidders . . . . .	<b>7</b>	22
Track-Type Tractors . . . . .	<b>1</b>	18
Wheel Tractors . . . . .	<b>12</b>	4
<b>Travel time charts:</b>		
Articulated Dump Trucks . . . . .	<b>11</b>	10
Construction & Mining Trucks/Tractors . . . . .	<b>10</b>	13
Track Loaders . . . . .	<b>14</b>	21
Use of . . . . .	<b>9</b>	10
Wheel Loaders . . . . .	<b>13</b>	56
Wheel Tractor-Scrapers . . . . .	<b>9</b>	14
<b>Tree cutters &amp; pushers</b> . . . . .	<b>26</b>	8
<b>Trees per acre/hectare</b> (estimating production) . . . . .	<b>7</b>	74
<b>Truck Engines</b> . . . . .	<b>20</b>	22
<b>Two-Way dozer</b> (description) . . . . .	<b>1</b>	31

	SECTION	page
<b>Undercarriage</b> (basic factors & condition multipliers) . . . . .	<b>22</b>	34
<b>Underground Mining Diesel Engines</b> . . . . .	<b>20</b>	7
<b>Underground Mining</b> (Elphinstone) . . . . .	<b>18</b>	1-10
Bucket capacities . . . . .	<b>18</b>	4
Dimensions & capacities (LHD) . . . . .	<b>18</b>	4
Trucks. . . . .	<b>18</b>	6
Former Models . . . . .	<b>21</b>	54
Loading/hauling systems . . . . .	<b>18</b>	10
Specifications, LHD . . . . .	<b>18</b>	2
Trucks. . . . .	<b>18</b>	6
<b>Unit equivalents — English, Metric, Power</b> . . . . .	<b>28</b>	13
<b>Universal “U” blade:</b>		
Coal dozer (production estimating chart) . . . . .	<b>25</b>	4
Description of . . . . .	<b>1</b>	29
Earthmoving (production estimating chart) . . . . .	<b>1</b>	42
<b>V-Tree Cutter blade</b> , description of . . . . .	<b>1</b>	31
<b>Variable radius “VR” blade</b> (description of) . . . . .	<b>1</b>	30
Capacities . . . . .	<b>1</b>	46
<b>Versatile Flotation System</b> (description of) . . . . .	<b>2</b>	4
<b>Vibratory Compactors</b> (paving) . . . . .	<b>17</b>	21
<b>Vibratory Compactors</b> (work Tool) . . . . .	<b>4</b>	23
<b>Vital Information Management System (VIMS)</b> . . . . .	<b>5</b>	181
<b>Volume Measure</b> (discussion of) . . . . .	<b>24</b>	2
<b>W-Landfill blade</b> . . . . .	<b>27</b>	15
<b>Wait time</b> (figuring production) . . . . .	<b>24</b>	4
<b>Waste Handling</b> . . . . .	<b>27</b>	1-22
Compactors (Landfill) . . . . .	<b>27</b>	13
Refuse densities . . . . .	<b>27</b>	19
Track Loaders . . . . .	<b>27</b>	10
Track-Type Tractors . . . . .	<b>27</b>	5
Wheel Loaders. . . . .	<b>27</b>	16
<b>Weights:</b>		
Commercially important wood . . . . .	<b>7</b>	71
Materials . . . . .	<b>28</b>	4
Stabilization/reclamation . . . . .	<b>17</b>	10
Round reinforced concrete pipe . . . . .	<b>28</b>	2

	SECTION	page
<b>Wheel Loaders</b> . . . . .	<b>13</b>	1-80
Former models. . . . .	<b>21</b>	42
SAE ratings, discussion of . . . . .	<b>13</b>	43
Waste Handling. . . . .	<b>27</b>	16
<b>Wheel Skidders</b> . . . . .	<b>7</b>	15
<b>Wheel Tractor-Scrapers</b> . . . . .	<b>9</b>	1-74
Former models. . . . .	<b>21</b>	33
Push loading times (fixed), typical. . . . .	<b>9</b>	11
<b>Wheel Tractors</b> . . . . .	<b>12</b>	1-10
Former models. . . . .	<b>21</b>	41
<b>Winches</b> . . . . .	<b>1</b>	69-74
<b>Windrow Elevators</b> . . . . .	<b>17</b>	20
<b>Woodchip dozers and scoops</b> . . . . .	<b>1</b>	47
	<b>12</b>	9
	<b>7</b>	66
<b>Work Tools (Options)</b>		
Backhoe Loaders . . . . .	<b>6</b>	29
Blades . . . . .	<b>1</b>	28
Dozers & scoops. . . . .	<b>1</b>	46
	<b>7</b>	66
	<b>12</b>	8, 16, 20
	<b>27</b>	8, 12, 15,
Excavators. . . . .	<b>5</b>	153
Forest Products . . . . .	<b>7</b>	61
Grapples . . . . .	<b>7</b>	16, 18
Hydromechanical work tools . . . . .	<b>19</b>	1-24
Integrated Toolcarriers . . . . .	<b>15</b>	4
Land Clearing . . . . .	<b>26</b>	8
Log and lumber forks . . . . .	<b>7</b>	67
Motor Graders . . . . .	<b>3</b>	19
Reclaimers/Stabilizers . . . . .	<b>17</b>	8
Skid Steer Loaders . . . . .	<b>4</b>	11
Telescopic Material Handlers . . . . .	<b>16</b>	12
Track Loaders . . . . .	<b>14</b>	24
<b>“Z” factor (undercarriage)</b> . . . . .	<b>22</b>	33



